Christian DiPietrantonio
ME M311: Computational Methods to Viscous Flows
February 16, 2026

Computer Assignment 01: Numerical and Analytical Solutions to Parabolic Partial Differential Equations: prerequisite for solving boundary layer problems

1. Description of the Problem

Given the following second order linear parabolic partial differential equation (PDE):

$$\frac{\partial u}{\partial x} - 2\frac{\partial^2 u}{\partial y^2} = 2 \tag{1}$$

With boundary conditions: $u\,(x,0) = 0$, $u\,(x,1) = 0$, and initial condition: $u(0,y) = 0$, our objectives were to:

1. Derive the analytical solution of the parabolic equation with its given initial and boundary conditions.
2. Use the Crank-Nicolson scheme and central difference scheme to discretize the equation (using either a finite-volume or a finite-difference based method).
3. Find the numerical solution of the parabolic equation and compare it with the analytical solution using LU decomposition as the linear system solver.

The results of these objectives will be of use for further projects, as parabolic partial differential equations like the one above can be used to describe heat conduction and viscous boundary layers.

2. Derivation of the Analytical Solution

As mentioned in the supplemental materials, the equation $\frac{\partial u}{\partial x} - 2\frac{\partial^2 u}{\partial y^2} = 2$ is inhomogenous, therefore to solve it one must use superposition in addition to the conventional separation of variables technique. The solution, u is expressed as $u(x,y) = v(x,y) + f(y)$, and the original equation is re-written as:

$$\frac{\partial v}{\partial x} - 2\frac{\partial^2 v}{\partial y^2} - 2\frac{\partial^2 f}{\partial y^2} = 2 \tag{2}$$

By setting $\frac{\partial^2 f}{\partial y^2} = -1$, the equation above can be re-written as:

$$\frac{\partial v}{\partial x} - 2\frac{\partial^2 v}{\partial y^2} = 0 \tag{3}$$

The separation of variables technique can now be used to solve the equation above. To start, one can assume that $v(x,y) = X(x)Y(y)$, therefore:

$$X'(x)Y(y) - 2X(x)Y''(y) = 0 \tag{4}$$

Dividing both sides by $X(x)Y(y)$, and rearranging gives:

$$\frac{X'(x)}{X(x)} = 2\frac{Y''(y)}{Y(y)} = -\lambda \tag{5}$$

The equation above can then be separated into two ordinary differential equations:

$$X'(x) + \lambda X(x) = 0 \tag{6}$$

$$Y''(y) + \frac{\lambda}{2}Y(y) = 0 \tag{7}$$

From $u(x,0) = 0$, $f(0) = 0$ and $v(x,0) = 0$. From $u(x,1) = 0$, $f(1) = 0$ and $v(x,1) = 0$. Finally, from $u(0,y) = 0$, $v(0,y) = -f(y)$. Therefore, the boundary conditions for $Y(y)$ are $Y(0) = 0$ and $Y(1) = 0$. Now, define $\alpha^2 = \frac{\lambda}{2}$, therefore the equation for $Y(y)$ can be re-written as:

$$Y''(y) + \alpha^2 Y(y) = 0 \tag{8}$$

The general solution to which is:

$$Y(y) = A\cos(\alpha y) + B\sin(\alpha y) \tag{9}$$

Applying the boundary condition $Y(0) = 0$ gives $A = 0$. Therefore, $Y(y) = B\sin(\alpha y)$. Applying the boundary condition $Y(1) = 0$ gives $Y(1) = B\sin(\alpha) = 0$. For a non-trivial solution, we need:

$$\sin(\alpha) = 0 \implies \alpha = n\pi, \quad n = 1, 2, 3, ... \tag{10}$$

Therefore:

$$Y_n(y) = B_n \sin(n\pi y) \tag{11}$$

Recall that $\alpha^2 = \frac{\lambda}{2}$, therefore $\lambda_n = 2(n\pi)^2$. Thus, we can write:

$$X'(x) + 2(n\pi)^2 X(x) = 0 \tag{12}$$

The general solution to which is:

$$X_n(x) = A_n e^{-2(n\pi)^2 x} \tag{13}$$

Therefore, the solution to the homogenous equation is:

$$v(x,y) = \sum_{n=1}^{\infty} A_n e^{-2(n\pi)^2 x} \sin(n\pi y) \tag{14}$$

From $\frac{\partial^2 f}{\partial y^2} = -1$ and the boundary conditions $f(0) = 0$ and $f(1) = 0$, $f(y) = \frac{y}{2}(1-y)$. Again, at $u(0,y) = 0$, $v(0,y) = -f(y)$. Therefore:

$$\sum_{n=1}^{\infty} A_n \sin(n\pi y) = -\frac{y}{2}(1-y) \tag{15}$$

We can regonize this as a Fourier sine series on the interval $[0, 1]$, therefore:

$$A_n = -2\int_0^1 \frac{y}{2}(1-y)\sin(n\pi y)dy = -\int_0^1 y(1-y)\sin(n\pi y)dy \tag{16}$$

Evaluating this integral gives:

$$A_n = \frac{2\left((-1)^n - 1\right)}{(n\pi)^3} \tag{17}$$

For even values of n, $A_n = 0$. For odd values of n, $A_n = -\frac{4}{(n\pi)^3}$. Thus, we have:

$$v(x,y) = \sum_{n=1,3,5,\ldots}^{\infty} -\frac{4}{(n\pi)^3} e^{-2x(n\pi)^2}\sin(n\pi y) \tag{18}$$

And finally, the the analytical solution of the parabolic equation can be expressed as:

$$\boxed{u(x,y) = \sum_{n=1,3,5,\ldots}^{\infty} -\frac{4}{(n\pi)^3} e^{-2x(n\pi)^2}\sin(n\pi y) + \frac{y}{2}(1-y)} \tag{19}$$

3. Description of the Numerical Method

To discretize Equation 1, the entire equation is integrated over the specified x interval, Δx, and the control volume, V:

$$\iiint\limits_V \left(\int_x^{x+\Delta x} \frac{\partial u}{\partial x}\, dx\right) dV = \int_x^{x+\Delta x} \left(\iiint\limits_V \left(2\frac{\partial^2 u}{\partial y^2} + 2\right) dV\right) dx \tag{20}$$

For the left-hand side, integrating over x gives:

$$\iiint\limits_V \left(u(x+\Delta x) - u(x)\right) dV = \left(u(x+\Delta x) - u(x)\right)\Delta y = \Delta y\left({u_i}^{n+1} - {u_i}^{n}\right) \tag{21}$$

On the right-hand side, the divergence theorem is used to convert the integral over the control volume into a surface integral:

$$\oiint\limits_A \left(2\frac{\partial u}{\partial y}\hat{n}_y\right) dA + 2\Delta y \tag{22}$$

After evaluating the surface integral, the derivative is discretized using a central-difference scheme:

$$2\left(\frac{u_{i+1} - u_i}{\Delta y}\right) - 2\left(\frac{u_i - u_{i-1}}{\Delta y}\right) + 2\Delta y \tag{23}$$

Thus, the right-hand side reduces to:

$$\int_x^{x+\Delta x} \left(2\left(\frac{u_{i+1} - u_i}{\Delta y}\right) - 2\left(\frac{u_i - u_{i-1}}{\Delta y}\right) + 2\Delta y\right) dx \tag{24}$$

Next, the integration $\int_x^{x+\Delta x} u\,dx$ is approximated using:

$$\int_x^{x+\Delta x} u dx = \left(\theta u^n + (1-\theta)u^{n+1}\right)\Delta x \tag{25}$$

For the Crank-Nicholson scheme ($\theta = 0.5$), Equation 24 becomes:

$$\frac{\Delta x}{\Delta y}\left(\left({u_{i+1}}^n + {u_{i+1}}^{n+1}\right) - 2\left({u_i}^n + {u_i}^{n+1}\right) + \left({u_{i-1}}^n + {u_{i-1}}^{n+1}\right)\right) + 2\Delta y\Delta x \tag{26}$$

Finally, by equating the left and right-hand sides and dividing both by Δy, the following discretized governing equation for any interior cell $i = 1, 2, ..., N-2$, is obtained:

$$\boxed{{u_i}^{n+1} - {u_i}^n = \frac{\Delta x}{\Delta y^2}\left(\left({u_{i+1}}^n + {u_{i+1}}^{n+1}\right) - 2\left({u_i}^n + {u_i}^{n+1}\right) + \left({u_{i-1}}^n + {u_{i-1}}^{n+1}\right)\right) + 2\Delta x} \tag{27}$$

For the boundary at $y = 0$, where $u(x, 0) = 0$, the discretized governing equation (using a ghost node and assuming the cell ID for the first cell is $i = 0$) is:

$$\boxed{{u_0}^{n+1} - {u_0}^n = \frac{\Delta x}{\Delta y^2}\left(\left({u_1}^n + {u_1}^{n+1}\right) - 3\left({u_0}^n + {u_0}^{n+1}\right)\right) + 2\Delta x} \tag{28}$$

For the boundary at $y = 1$, where $u(x, 1) = 0$, the discretized governing equation (using a ghost node and assuming the cell ID for the last cell is $i = N-1$) is:

$$\boxed{{u_{N-1}}^{n+1} - {u_{N-1}}^n = \frac{\Delta x}{\Delta y^2}\left(\left({u_{N-2}}^n + {u_{N-2}}^{n+1}\right) - 3\left({u_{N-1}}^n + {u_{N-1}}^{n+1}\right)\right) + 2\Delta x} \tag{29}$$

We can now program the numerical solver shown in Appendix A (using LU decomposition as the linear system solver) to solve the discretized governing equations above and compare the results with the analytical solution derived in the previous section.

4. Presentation of Results

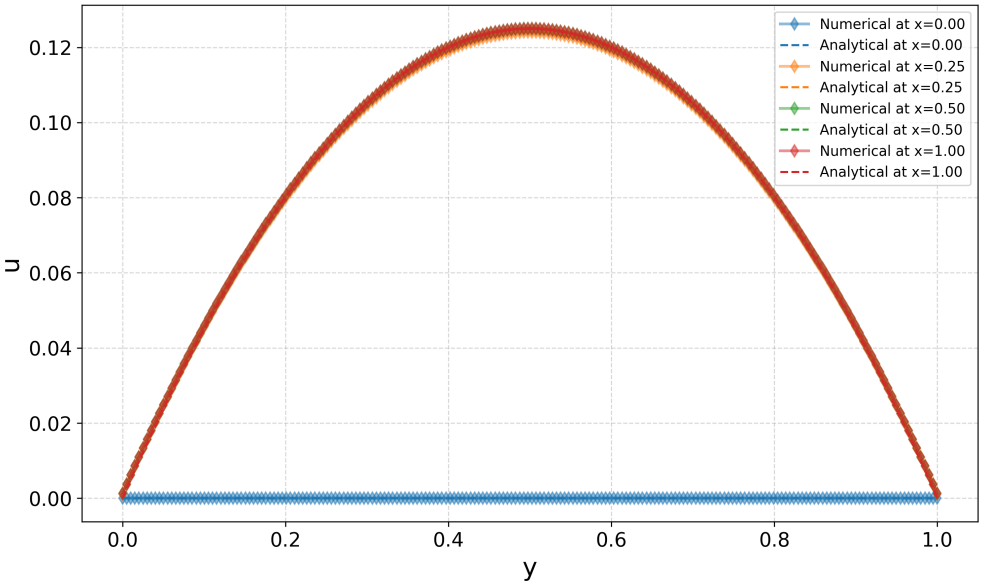

Figure 1: Numerical and analytical solution profiles at selected x-locations.

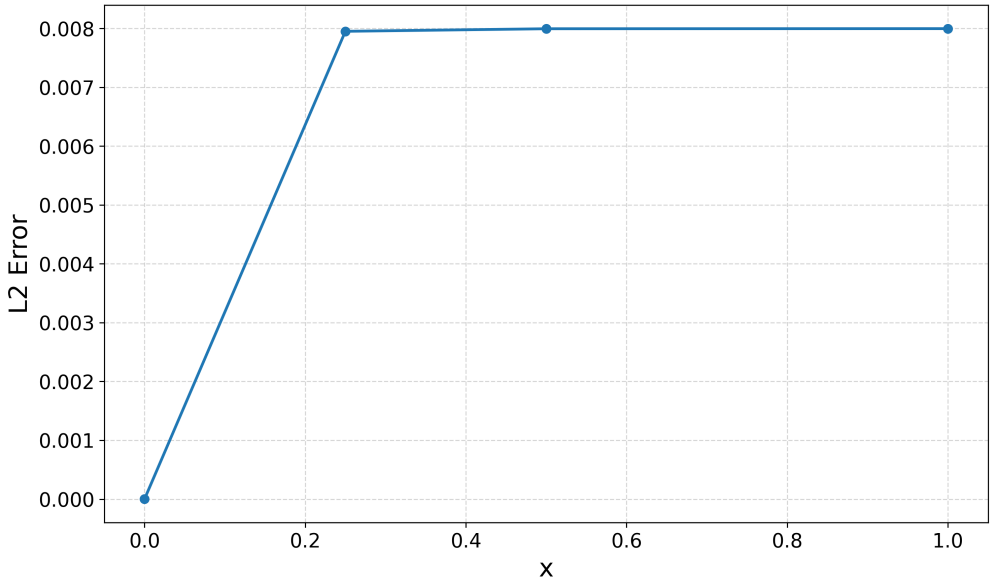

Figure 2: L2 error between numerical and analytical solutions at selected x-locations.

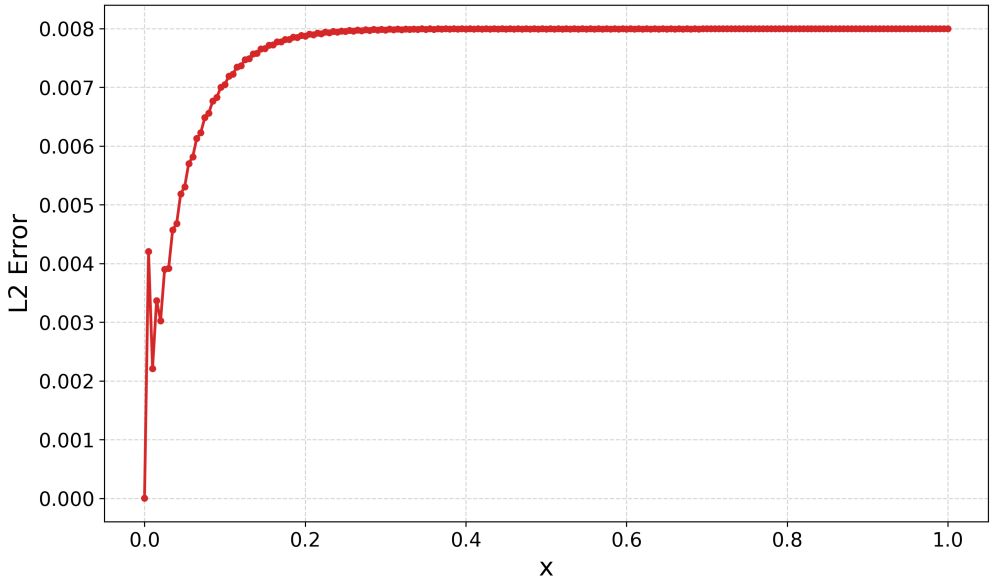

Figure 3: L2 error between numerical and analytical solutions at every x-location.

5. Discussion of Results

5.1. General description

TBD

5.2. Accuracy and stability

We include both error at the selected x-locations (FIGURE 2) (for direct comparison with the plotted profiles) and the error at every x-step FIGURE 3 (to demonstrate stability of the Crank Nicholson scheme).

Numerical and analytical profiles at different x locations lie directly on top of one another, making the two nearly indistinguishable from the numerical curves. The error plots in figures 2 and 3 quantify this agreement and show that the numerical solution closely matches the analytical solution accross the entire domain.

A. Copy of Program Listing

```
# Christian DiPietrantonio
# ME M311: Computational Methods to Viscous Flows
# Computer Assignment 01
# 02/16/2026

import numpy as np
import matplotlib.pyplot as plt
from scipy.linalg import lu_factor, lu_solve

# ----------------------------------------------------------------------
# 1. Parameters and Mesh Sizing
# ----------------------------------------------------------------------

def set_parameters():
    params = {}

    # Domain in y
    params["y_min"] = 0
    params["y_max"] = 1
    params["N"]     = 200  # Number of cells (finite volume method)
    params["dy"]    = (params["y_max"] - params["y_min"]) / params["
       N"]  # Cell size in y

    # Stepping in x
    params["x_max"] = 1.0 # Final x
    params["Nx"]    = 200 # Number of steps in x
    params["dx"]    = params["x_max"] / params["Nx"] # Step size in
       x

    # Source term
    params["S"] = 2.0

    # y-array for plotting and analytical solution evaluation
    params["y"] = np.linspace(params["y_min"], params["y_max"],
       params["N"])

    # Initial condition u(y,0) = 0
    u0 = np.zeros(params["N"])

    return params, u0

# ----------------------------------------------------------------------
# 2. Build Matrices
# ----------------------------------------------------------------------

def build_matrices(params):
```

```
    N = params["N"]
    dx = params["dx"]
    dy = params["dy"]

    r = dx / dy**2

    A = np.zeros((N, N))
    B = np.zeros((N, N))

    # ----- Bottom Boundary: i = 0, u(x,0) = 0 ---------------------
    #LHS
    A[0, 0] = 1 + 3*r
    A[0, 1] = -r

    #RHS
    B[0, 0] = 1 - 3*r
    B[0, 1] = r

    # ----- Interior Cells: i = 1,..., N-2 -------------------------
    for i in range(1, N-1):
        #LHS
        A[i, i-1] = -r
        A[i, i]   = 1 + 2*r
        A[i, i+1] = -r

        #RHS
        B[i, i-1] = r
        B[i, i]   = 1 - 2*r
        B[i, i+1] = r

    # ----- Top Boundary: i = N-1, u(x,1) = 0 ----------------------
    #LHS
    A[N-1, N-2] = -r
    A[N-1, N-1] = 1 + 3*r

    #RHS
    B[N-1, N-2] = r
    B[N-1, N-1] = 1 - 3*r

    return A, B

# ---------------------------------------------------------------------
# 3. Build RHS vector for a given u^n
# ---------------------------------------------------------------------

def build_rhs(u_n, params, B):
    dx = params["dx"]
```

```
    S  = params["S"]
    N  = params["N"]

    rhs = B @ u_n

    # Add source term contribution
    rhs += S * dx * np.ones(N)

    return rhs

# ---------------------------------------------------------------------
# 4. Step in x using LU decomposition
# ---------------------------------------------------------------------

def step_in_x(params, u0):
    A, B = build_matrices(params)

    # LU factorization of A
    lu, piv = lu_factor(A)

    u = u0.copy()
    N = params["N"]
    Nx = params["Nx"]

    # Initialize storage for x-location and solution profiles
    x_vals = np.zeros(Nx + 1)
    u_store = np.zeros((Nx + 1, N))

    for n in range(Nx + 1):
        x_now = n * params["dx"]
        x_vals[n] = x_now
        u_store[n, :] = u.copy()

        # Break after storing solution at final x-location to avoid
           an extra solve
        if n == Nx:
            break

        rhs = build_rhs(u, params, B)
        u = lu_solve((lu, piv), rhs)

    return x_vals, u_store

# ---------------------------------------------------------------------
# 5. Post processing
# ---------------------------------------------------------------------

```

```python
def analytical_solution(x, y, n_terms=100):
    """Compute the analytical solution (Eq. 19) of the parabolic PDE """

    u_exact = 0.5 * y * (1 - y)

    for k in range(n_terms):
        n = 2*k + 1
        A_n = -4 / (n * np.pi)**3
        decay = np.exp(-2 * x * (n * np.pi)**2)
        u_exact += A_n * decay * np.sin(n * np.pi * y)

    return u_exact

def post_process(params, x_vals, u_store):
    y = params["y"]

    x_targets = [0.0, 0.25, 0.5, 1.0]

    errors       =[]
    x_error_vals = []

    # Plot 1: Numerical vs Analytical Solutions at selected x locations
    plt.figure(figsize=(10, 6))

    colors = ['tab:blue', 'tab:orange', 'tab:green', 'tab:red']

    for i, x_target in enumerate(x_targets):
        idx = np.argmin(np.abs(x_vals - x_target))
        x_now = x_vals[idx]
        u_num = u_store[idx, :]
        u_exact = analytical_solution(x_now, y)

        error = np.linalg.norm(u_num - u_exact, ord=2)
        errors.append(error)
        x_error_vals.append(x_now)

        plt.plot(y, u_num, '-d', color=colors[i], alpha=0.5, label=f'Numerical at x={x_now:.2f}', linewidth=2, markersize=6)
        plt.plot(y, u_exact, '--', color=colors[i], label=f'Analytical at x={x_now:.2f}', linewidth=1.5)

    plt.xlabel('y', fontsize=18)
    plt.ylabel('u', fontsize=18)
    plt.xticks(fontsize=14)
    plt.yticks(fontsize=14)
```

```
    plt.grid(True, linestyle='--',alpha=0.5)
    plt.legend()
    plt.tight_layout()
    plt.savefig('profiles_comparison.png', dpi=300, bbox_inches='
        tight')

    # Plot 2: Error vs x
    plt.figure(figsize=(10, 6))
    plt.plot(x_error_vals, errors, '-o', color = 'tab:blue',
        linewidth=2, markersize=6)
    plt.xlabel('x', fontsize=18)
    plt.ylabel('L2 Error', fontsize=18)
    plt.xticks(fontsize=14)
    plt.yticks(fontsize=14)
    plt.grid(True, linestyle='--', alpha=0.5)
    plt.tight_layout()
    plt.savefig('error_vs_x.png', dpi=300, bbox_inches='tight')

    # Plot 3: Error vs x for every step (to demonstrate stability)
    all_errors = []

    for n in range(len(x_vals)):
        u_num = u_store[n, :]
        u_exact = analytical_solution(x_vals[n], y)
        all_errors.append(np.linalg.norm(u_num - u_exact, ord=2))

    plt.figure(figsize=(10, 6))
    plt.plot(x_vals, all_errors, '-o', color='tab:red', linewidth=2,
        markersize=4)
    plt.xlabel('x', fontsize=18)
    plt.ylabel('L2 Error', fontsize=18)
    plt.xticks(fontsize=14)
    plt.yticks(fontsize=14)
    plt.grid(True, linestyle='--', alpha=0.5)
    plt.tight_layout()
    plt.savefig('error_vs_x_all.png', dpi=300, bbox_inches='tight')

# ---------------------------------------------------------------------
# 5. Main Driver
# ---------------------------------------------------------------------

def main():
    params, u0 = set_parameters()
    x_vals, u_store = step_in_x(params, u0)
    post_process(params, x_vals, u_store)

if __name__ == "__main__":
```

```
224     main()
```

B. Other Calculations

MATRIX FORM OF GOVERNING EQUATIONS, $r = \frac{\Delta x}{\Delta y^2}$:
BOTTOM BC:

$$(1+3r)u_0^{n+1} - ru_1^{n+1} = (1-3r)u_0^n + ru_1^n + 2\Delta x \tag{30}$$

INTERIOR CELLS:

$$-ru_{i-1}^{n+1} + (1+2r)u_i^{n+1} - ru_{i+1}^{n+1} = ru_{i-1}^n + (1-2r)u_i^n + ru_{i+1}^n + 2\Delta x \tag{31}$$

TOP BC:

$$-ru_{N-2}^{n+1} + (1+3r)u_{N-1}^{n+1} = ru_{N-2}^n + (1-3r)u_{N-1}^n + 2\Delta x \tag{32}$$