


— three independent loops — GN affine (proposed)

(a) arbitrary target (2.0, 2.6, 1.1)



(b) standard QPSK target ( $\pi, \pi, \pi/2$ )

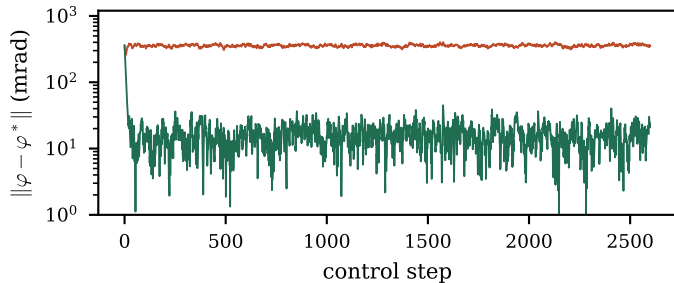