



Title of the Final Year Undergraduate Project

An undergraduate project report submitted to the

Department of Electrical and Information Engineering
Faculty of Engineering
University of Ruhuna
Sri Lanka

in partial fulfillment of the requirements for the

**Degree of the Bachelor of the Science of Engineering
Honours**

by

R. Rathnaweera	-	RU/E/2005/004
A. Abekon	-	RU/E/2005/005
B. Bandara	-	RU/E/2005/006
C. Kankalu	-	RU/E/2005/007

.....
Prof. A.B.C. Dee
(Supervisor)

.....
Prof. A.B.C. Dee
(Co-Supervisor)

Abstract

Abstract goes here.

Acknowledgments

Acknowledgments goes here.

Contents

Abstract	ii
Acknowledgements	iii
Contents	v
List of Figures	vi
List of Tables	vii
Acronyms	viii
1 Introduction	ix
1.1 Background	ix
1.2 Problem Statement	x
1.3 Objectives and Scope	x
1.3.1 Objectives	x
1.3.2 Scope	x
1.4 Literature Review	x
1.4.1 Classification Architectures	xi
1.4.2 Segmentation Architectures	xi
1.4.3 Unified Architectures	xi
1.4.4 Explainability Approaches	1
1.5 Methodology	1
1.6 Time Plan and Resources Required	1
2 Implementation of the LC-KSVD Approach	2
2.1 Mathematical Framework	2
2.2 Back-Projecting Class-Discriminative Atoms	2
2.3 Deriving Explainability through Segmentation Masks	3
3 Implementation of the Evaluation Framework	4
3.1 Project Proposal	4
3.2 Project Progress	4
3.3 End Exam	4
4 Report	5
4.1 Contents	5
4.1.1 Introduction - The First Chapter	6
4.1.2 Other Chapters	6

4.1.3	Conclusions - The Last Chapter	6
4.1.4	Appendices	6
4.1.5	Bibliography	6
4.2	Format	6
4.2.1	Documents	7
4.2.2	Page	7
4.2.3	Font	7
4.2.4	Paragraph	7
4.2.5	Equations	7
4.2.6	Figures	7
4.2.7	Tables	8
4.2.8	Bullets and Numbering	8
4.2.9	Numbering	8
4.2.10	Bullets	9
4.2.11	Description	9
4.2.12	Mixed	9
4.3	Notes on Writing	9
5	Conclusion	10
A	Essential English Grammar - A Handout	11
A.1	Simple Present Tense	11
A.2	Perfect Tense	11
A.3	Past Past Perfect Tense	11
A.4	Passive Voice	11
A.5	Technical Writing Fundamentals	11
A.6	Proof Reading	11
B	Graphical Interpretation of Data	12
B.1	Data Analysis	12
B.1.1	Statistical Analysis	12
B.1.2	Empirical Analysis	12
B.2	The X vs Y vs Z	12
	APPENDIX	13
	Bibliography	13

List of Figures

4.1 Off-grid PV system.	8
---------------------------------	---

List of Tables

4.1	This is an example for a table in latex.	8
-----	--	---

Acronyms

AC - Alternating Current
DC - Direct Current
LV - Low Voltage
MV - Medium Voltage

Chapter 1

Introduction

Developing a unified architectural pipeline capable of simultaneous multi-class abnormality classification and grounded localization addresses two of the most critical imperatives in clinical AI: diagnostic accuracy and explainability. Specifically, utilizing dense pixel-level segmentation as the mechanism for localization forces the architecture to provide voxel-level visual evidence for its diagnostic claims. This ensures that the model is held accountable and its reasoning aligns with clinical diagnosis.

1.1 Background

The transition from 2D projectional radiography to volumetric CT represents a paradigm shift in medical image analysis. For Lung disease diagnosis, Chest X-rays (CXR) are commonly used as the first imaging test due to its low cost and low radiation exposure. However, their diagnostic sensitivity is limited by their two-dimensional nature, which causes anatomical superposition, allowing visualization of only about 70% of the lung volume[1]. While CT produces high resolution slices that reveal fine structural details, studies show that 2D measurements are highly sensitive to the patient’s orientation and the specific slice chosen, leading to high inter-observer variability[4].

CXR also, has historically benefited from the availability of massive, radiologist-annotated datasets, while the analysis of 3D chest CT volumes has been severely constrained by a lack of such data. However, the recent introduction of large-scale, text-paired datasets has facilitated the development of state-of-the-art vision-language foundation models tailored specifically for volumetric imaging. (ReXGroundingCT, RadGenome-Chest CT, RAD-ChestCT)

Furthermore, the high-dimensional spatial data processing required for 3D CT analysis introduces significant computational complexity due to the sheer volume of voxels in a single CT scan. This demands architectures that can manage memory efficiency without sacrificing contextual awareness. Beyond these deep learning approaches, the Label Consistent K-SVD (LC-KSVD) algorithm offers a viable approach for interpretable 3D CT analysis. LC-KSVD is a dictionary learning algorithm that incorporates label information directly into the dictionary construction process, making it inherently discriminative and well-suited for multi-abnormality tasks.

1.2 Problem Statement

The clinical utility of Deep Learning-based approaches is hindered by a lack of interpretability. While tools like Grad-CAM provide visual heatmaps highlighting important regions in an input image by analyzing gradients from the final convolutional layer. These post-hoc explanations are often insufficient for medical professionals who require a granular understanding of the model’s decision making process. In high stakes environments, a model that produces a diagnosis without transparency in its reasoning is difficult to integrate into standard workflows, as it lacks the accountability necessary for legal and ethical compliance.

1.3 Objectives and Scope

1.3.1 Objectives

- Objective 1
- Objective 2
- ..

1.3.2 Scope

- Scope 1
- Scope 2
- ..

1.4 Literature Review

The landscape of 3D CT analysis is currently divided into three primary architectural paradigms:

- classification-based models that prioritize diagnostic labels
- segmentation-based models that prioritize boundary precision
- dual architectures designed for grounded localization

State-of-the-Art (SotA) 3D CT AI models are predominantly specialized in either classification or segmentation. However, recent systems, particularly in 2025 and 2026, are moving toward multi-task learning or foundation models that can perform both diagnosis and voxel-level segmentation simultaneously.

The efficacy of these models is increasingly evaluated on large-scale, multi-institutional benchmarks such as CT-RATE, FLARE 2024-2025 and MSWAL, which provide the complexity necessary to test generalizability across diverse patient populations and scanner manufacturers.

1.4.1 Classification Architectures

Classification-based models for 3D CT have shifted away from 3D Convolutional Neural Networks (CNNs) such as 3D U-Net, 3D ResNet and DenseNet pipelines, toward Vision Transformers (ViTs) and self-supervised encoders. These models are designed to identify the presence of one or more abnormalities within a full volumetric scan. The benchmark for this paradigm is the CT-RATE dataset, which introduced the first public large-scale 3D medical imaging dataset with paired textual reports, enabling the development of Contrastive Language-Image Pretraining for Computed Tomography (CT-CLIP).

(About CT-CLIP) Recent benchmarks such as Merlin and DINOv3 have further challenged the necessity of domain-specific pretraining.

Merlin is a vision-language foundation model exclusively pre-trained on abdominal CT scans. Despite its training, Merlin has consistently demonstrated exceptional zero-shot performance on chest CT classification tasks, even when it was restricted to a linear probe, significantly outperforming models like CT-CLIP, M3FM, and CT-FM that were explicitly trained on thoracic data, by an average of 12.3% in Area Under the Receiver Operating Characteristic Curve (AUROC). Specifically, in cross-domain retrieval tasks, Merlin surpassed CT-CLIP by 24.7%. DINOv3, a self-supervised ViT pretrained on over 1.7 billion natural images, outperform specialized medical models like CT-Net and CT-CLIP across all metrics on several classification tasks due to its ability to capture fine-grained textural features.

1.4.2 Segmentation Architectures

The prevailing SotA for supervised volumetric segmentation remains variations of the 3D U-Net, such as nnU-Net, which utilizes an adaptive framework to optimize preprocessing and architecture for specific datasets. However, the field has recently shifted toward foundation models capable of universal segmentation such as SegVol and SAM-Med3D. The SegVol model is the first 3D foundation model specifically designed for universal volumetric medical image segmentation. Similarly, SAM-Med3D adapts the Segment Anything Model (SAM) for 3D medical data.

Recent evaluations published at the Machine Learning for Healthcare (MLHC) Conference in 2025, which specifically utilized the ReXGroundingCT dataset, revealed that the current SotA text-prompted segmentation models that demonstrate near-perfect performance in general computer vision tasks struggle with the nuanced clinical descriptions and ill-defined boundaries of chest CT abnormalities.

1.4.3 Unified Architectures

Recent models have been designed to integrate abnormality detection, segmentation, and multimodal chain-of-thought reasoning, enabling pixel-level localization, structured report generation, and physician-like diagnostic inference in a single framework. BiomedParse, and its production-ready, version MedImageParse developed by Microsoft, are foundation models designed to parse 3D medical images. Other notable models include Citrus-V, MTMed3D and MedVista3D, where each architecture incorporates a multi-task learning (MTL) framework.

1.4.4 Explainability Approaches

Grad-CAM

Seg-Grad-CAM

Hires-CAM

1.5 Methodology

1.6 Time Plan and Resources Required

Chapter 2

Implementation of the LC-KSVD Approach

2.1 Mathematical Framework

The LC-KSVD algorithm solves an optimization problem that balances reconstruction accuracy with label consistency and classification error. Given a set of image patches P , the goal is to learn a dictionary D and sparse coefficients X that minimize the following objective:

$$\min_{D, X, A, W} \|P - DX\|_F^2 + \alpha \|Q - AX\|_F^2 + \beta \|H - WX\|_F^2 \quad \text{s.t.} \quad \forall i, \|x_i\|_0 \leq T$$

The first term $\|P - DX\|_F^2$ is the standard K-SVD reconstruction error. The second term $\|Q - AX\|_F^2$ introduces the "discriminative sparse-code error," where Q is a label-consistent constraint matrix that encourages patches from the same class to activate the same dictionary atoms. The third term $\|H - WX\|_F^2$ is the classification error, where W is a linear classifier matrix.

This formulation ensures that the dictionary atoms are not just representative of the image data but are also class-specific. In 3D CT multi-abnormality segmentation, this allows the model to learn distinct "sub-dictionaries" for each abnormality, facilitating easier classification of individual voxels.

2.2 Back-Projecting Class-Discriminative Atoms

The unique intuition we propose in our approach is to generate spatial contribution maps through back-projection. Because each atom in the dictionary D is associated with a specific class label through the matrix Q , the model can theoretically "explain" its decision for a test patch by examining which atoms were used in its sparse representation.

To generate a spatial contribution map for a class c , the algorithm identifies all atoms d_k that have been assigned to that class. For a query voxel or patch with sparse coefficients x , the contribution C_c is calculated as the partial reconstruction:

$$C_c = \sum_{k \in \text{Class } c} d_k x_k$$

This process should theoretically back-project the class-specific features into the original voxel space, creating a map that highlights the regions contributing to the detection of a specific abnormality. For class-discriminative atoms operating on raw voxel-space inputs, the back-projection is an exact, closed-form spatial attribution.

2.3 Deriving Explainability through Segmentation Masks

To evaluate the clinical accuracy of LC-KSVD, these contribution maps are converted into binary segmentation masks for comparison with ground truth annotations. This conversion can be achieved through various thresholding methods.

Grad-CAM’s approximation has two sources of imprecision — the gradient itself is a local linear approximation of a non-linear function, and the spatial upsampling from the coarse feature map to input resolution introduces further interpolation error. LC-KSVD’s contribution map has only one source of imprecision: the thresholding step you apply to binarize it into a mask. The map itself — before thresholding — is exact given the sparse code and the dictionary.

Unlike the passive Grad-CAM approach, atom back-projection is generative. The atoms are what the model actually used to reconstruct and classify the signal. There’s no proxy involved. The localization evidence is produced by the same computation that produced the classification, not by a separate post-hoc analysis run afterwards.

Chapter 3

Implementation of the Evaluation Framework

3.1 Project Proposal

3.2 Project Progress

3.3 End Exam

Chapter 4

Report

All groups should submit a complete but fairly concise report on the project. This very same document is also written in the format expected by the DEIE under UGPs [?].

4.1 Contents

Report should contains the following.

- Title Page
- Abstract
- Preface
- Acknowledgments
- Table of Content
- Acronyms (optional)
- List of Tables
- List of Figures
- Chapters
 - Introduction
 - Other Chapters
 - ...
 - Conclusions
- Appendices
- Bibliography

4.1.1 Introduction - The First Chapter

The Chapter 1, "Introduction" may include similar to following contents.

- Background
- Problem Statement
- Objectives and Scope
- Methodology
- Time Plan and Required Resources

4.1.2 Other Chapters

Must be well organized to systematically provide essential information regarding the project [? ? ?].

4.1.3 Conclusions - The Last Chapter

Final chapter of the report usually contains the summary of results and logical conclusions together with the suggestions for future developments.

4.1.4 Appendices

An appendix is a section at the end of a book which includes supplementary information which may be of interest or use to the reader. Appendices are also used to support the qualifications of the author, and to increase the credibility of the publication [?].

4.1.5 Bibliography

Important points to remember on Bibliography.

- You may use alternative name References.
- List down all bibliography items.
- Each bibliography must be referred to in the text at appropriate places.
- refer bibliography by using number.
At present 457 out of best 500 super computers use operating systems of Linux family [2].

4.2 Format

- Every formatting aspect must have a very good reason.
- All formatting aspects must be perfectly consistent through out the report.

4.2.1 Documents

Divided into chapters, chapters are numbered using arabic letters (1, 2, 3,..), each chapter starts at a new page Chapters can be devied into sections (eg. for chapter 1 sections 1.1, 1.2, 1.3 ..). Sections can be divided into subsections (eg. 1.1.1, 1.1.2, 1.1.3, ..). Subsections are also can be divided into sub-subsections but do not use numbering [?].

Subsubsection

This way you may have subsubsections.

4.2.2 Page

A4, Portrait, all margins 1 inch, Gutter 0.25in, Header 0.25in, Footer 0.25in, Single Sided

Numbered consecutively starting from the first page of the main text through to the end of the report. Use small roman letters (i, ii, iii, iv) starting with the Preface (except Title Page and Abstract).

4.2.3 Font

Text: Times New Roman, Normal,12pt

Other effects such as underline, italic, .. can be used as appropriate.

4.2.4 Paragraph

Single Line Spacing, Justified, First line indented by 0.5in (except the first paragraph of the chapter)

4.2.5 Equations

All equations must be centered and aligned when multi-line. Number them right justified as (Chapter Number.Equation Number).

When necessary cite equations as for example Eq.(4.1) and Eq.(4.2).

$$H_c = \frac{1}{2n} \sum_{l=0}^n (-1)^l (n-l)^{p-2} \sum_{l_1+\dots+l_p=l} \prod_{i=1}^p \binom{n_i}{l_i} \cdot [(n-l) - (n_i - l_i)]^{n_i-l_i} \cdot \left[(n-l)^2 - \sum_{j=1}^p (n_i - l_i)^2 \right]. \quad (4.1)$$

$$y = mx + c_1 + mx^2 + c_2 \quad (4.2)$$

4.2.6 Figures

Figures (graphs, block diagrams, .. etc) are independent objects by nature i.e. figures should be self explanatory and understood by readers. Each figure must be numbered

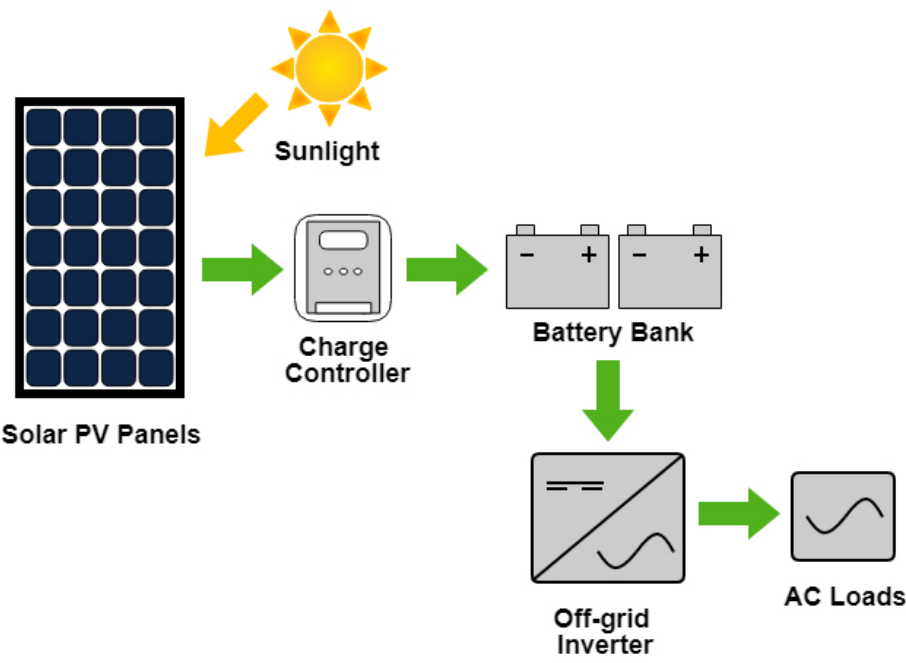


Figure 4.1: Off-grid PV system.

Table 4.1: This is an example for a table in latex.

Name	Age	Tel
Marasinghe X.Y.	22	0777-150-150
Singhemara X.Y.	33	0777-250-250

as Figure ChapterNumber.FigureNumber, cited and have a caption. Also should appear after citation. Good practice is to put figures in top or bottom of the page. Cite figures in the text as Figure 4.1.

4.2.7 Tables

Tables also are independent objects by nature. Each table must be numbered as Table ChapterNumber. TableNumber, cited and have a caption. Also should appear after citation. Good practice is to put tables in top or bottom of the page. Cite tables in the text as Table 4.1.

4.2.8 Bullets and Numbering

4.2.9 Numbering

- 1. Level 1
- 2. Level 1
 - (a) Level2

- (b) Level 2
 - i. Level 3
 - ii. Level 3
- 3. Level 1

4.2.10 Bullets

- Level 1
- Level 1
 - Level2
 - Level 2
 - * Level 3
 - * Level 3
- Level 1

4.2.11 Description

Step 1 Open a text editor such as Emacs.

Step 2 Close WYSIWYG editors

Step 3 Goto Step 1.

4.2.12 Mixed

- 1. Level 1
- 2. Level 1
 - Level2
 - Level 2
 - (a) Level 3
 - (b) Level 3
- 3. Level 1

4.3 Notes on Writing

- Simplest possible English.
- Simple Present Tense (Passive Voice): Explain the project
- Present Perfect Tense (Passive Voice): Explain experiments
- Past Perfect Tense: Use only if you can not live without.
- Consistency (e.g. symbols used, format, ..)

Chapter 5

Conclusion

Appendix A

Essential English Grammar - A Handout

The Appendices are numbered as A, B,.. and so on. Sections and Subsections of the appendix then would be A.1, A.1.1, A.2 etc.

A.1 Simple Present Tense

A.2 Perfect Tense

A.3 Past Past Perfect Tense

A.4 Passive Voice

A.5 Technical Writing Fundamentals

A.6 Proof Reading

Appendix B

Graphical Interpretation of Data

The graphical interpretation given below shows the relationship between x and y is acceptable to the purpose of the project

B.1 Data Analysis

B.1.1 Statistical Analysis

B.1.2 Empirical Analysis

B.2 The X vs Y vs Z

Bibliography