

Winning Space Race with Data Science

Craig Kent 09/29/2023



Outline

- Executive Summary
- Introduction
- Methodology
- Results
- Conclusion
- Appendix

Executive Summary

- Summary of methodologies
 - Data Collection Using SpaceX API
 - Data Collection through Web Scraping
 - Data Wrangling
 - Exploratory Data Analysis using SQL
 - EDA DataViz using Python Pandas and Matplotlib
 - Launch Sites Analysis with Folium Interactive Visual Analytics and Ploty Dash
 - Machine Learning Landing Prediction
- Summary of all results
 - EDA
 - Interactive Visual Analytics and Dashboards
 - Predictive Analysis

Introduction

Project background and context

SpaceX advertises Falcon 9 rocket launches on its website, with a cost of 62 million dollars; other providers cost upward of 165 million dollars each, much of the savings is because SpaceX can reuse the first stage. Therefore if we can determine if the first stage will land, we can determine the cost of a launch. This information can be used if an alternate company wants to bid against SpaceX for a rocket launch.

Problems you want to find answers

In this capstone, we will predict if the Falcon 9 first stage will land successfully. SpaceX advertises Falcon 9 rocket launches on its website, with a cost of 62 million dollars; other providers cost upward of 165 million dollars each, much of the savings is because SpaceX can reuse the first stage. Therefore if we can determine if the first stage will land, we can determine the cost of a launch. This information can be used if an alternate company wants to bid against SpaceX for a rocket launch.




Methodology

Executive Summary

- Data collection methodology:
 - Describes how data sets were collected
- Perform data wrangling
 - Describes how data were processed
- Perform exploratory data analysis (EDA) using visualization and SQL
- Perform interactive visual analytics using Folium and Plotly Dash
- Perform predictive analysis using classification models
 - How to build, tune, evaluate classification models


Data Collection

SpaceX Data Request Flowchart

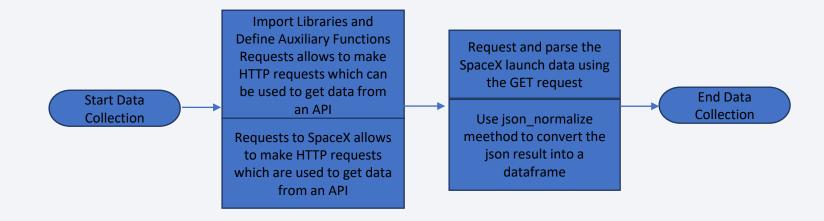


Data Collection – SpaceX API

- The flowchart to the right shows using SpaceX's RESTful API and a get request to parse the data. The from a Json dataset converting the data into a Pandas data frame.
- GitHub URL of the completed SpaceX API calls notebook: https://github.com/ckent123/Data-Science/blob/main/jupyter-labs-spacex-data-collection-api.ipynb

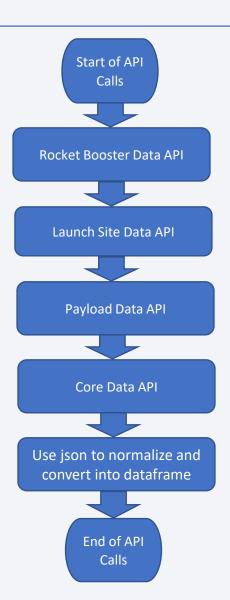


Data Collection - Scraping

- To the right is a flowchart showing Web Scraping to get data on launch records from Wikipedia
- GitHub URL of the completed web scraping notebook: https://github.com/ckent123
 /Data-Science/blob/main/jupyterlabs-webscraping.ipynb

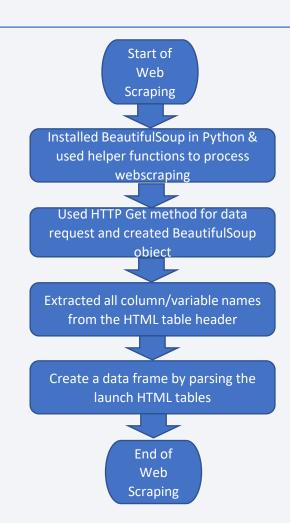

Data Wrangling

- Dealt with missing values in the LandingPad column by having none values represent when landing pads were not used. Calculated the mean for the PayloadMass using the mean() function. Used the mean and the replace() function to replace non-numeric values in the data with the mean that was calculated.
- GitHub URL of completed data wrangling related notebooks: https://github.com/ckent123/Data- Science/blob/main/jupyter-labs-spacex-data-collection-api.ipynb



EDA with Data Visualization

Charts Used:

- FlightNumber vs. PayloadMass To show if payload affected the success of the launches as more launches occurred over time.
- FlightNumber vs LaunchSite To show if location was a factor in the success of each launch.
- Payload Vs. Launch Site To show if the combination of location and payload had an affect on the success of the launch.
- Payload vs. Orbit To show if achieving a certain orbit was affected by payload.
- GitHub URL of completed EDA with data visualization notebook: https://github.com/ckent123/Data-Science/blob/main/jupyter-labs-eda-dataviz.ipynb.jupyter-lite.ipynb

EDA with SQL

• SQL queries performed:

- Displayed the names of the unique launch sites in the space mission using Distinct statement.
- Displayed 5 records where launch sites begin with the string 'CCA' using limit clause.
- Displayed the total payload mass carried by boosters launched by NASA (CRS) using sum function and group by clause.
- Displayed average payload mass carried by booster version F9 v1.1 average function.
- Listed the date when the first successful landing outcome in ground pad was achieved by using min function.
- Listed the names of the boosters which have success in drone ship and have payload mass greater than 4000 but less than 6000
- Listed the total number of successful and failure mission outcomes by using trim and count functions and group by clause.
- Listed the names of the booster_versions which have carried the maximum payload mass using a sub query.
- Listed the records which will display the month names, failure landing_outcomes in drone ship ,booster versions, launch_site for the months in year 2015.
- Rank the count of landing outcomes (such as Failure (drone ship) or Success (ground pad)) between the date 2010-06-04 and 2017-03-20, in descending order.
- GitHub URL of completed EDA with SQL notebook: https://github.com/ckent123/Data-Science/blob/main/jupyter-labs-eda-sql-coursera-sqllite.ipynb

Build an Interactive Map with Folium

- Folium Map Objects:
 - Circle to highlight specific coordinates
 - Marker to show successful(green) and failed(red) launches by color
 - Mouse Position to explore the maps for coordinate information
 - PolyLine to show distances between points
- GitHub URL of completed interactive map with Folium map: https://github.com/ckent123/Data-
 https://github.com/ckent123/Data-
 Science/blob/main/lab_jupyter-launch_site-location.jupyterlite.ipynb

Build a Dashboard with Plotly Dash

- Summarize what plots/graphs and interactions you have added to a dashboard
- Explain why you added those plots and interactions
- Add the GitHub URL of your completed Plotly Dash lab, as an external reference and peer-review purpose

Predictive Analysis (Classification)

- Summarize how you built, evaluated, improved, and found the best performing classification model
- You need present your model development process using key phrases and flowchart
- Add the GitHub URL of your completed predictive analysis lab, as an external reference and peer-review purpose


Results

- Exploratory data analysis results
- Interactive analytics demo in screenshots
- Predictive analysis results




Flight Number vs. Launch Site

Number vs. Launch Site

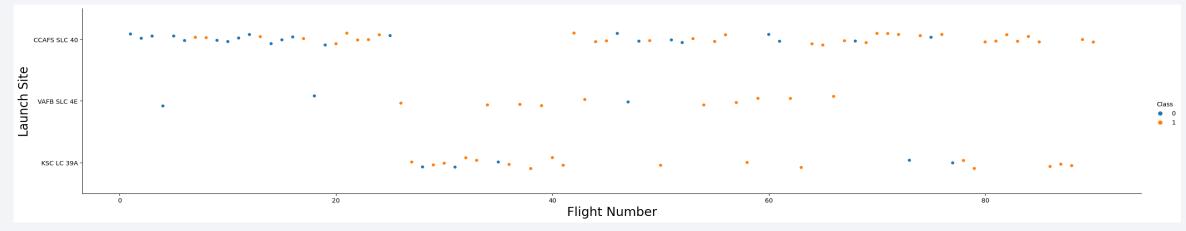


Scatter plot with explanations

With each flight that is completed no matter what site had the launch, the success of each flight goes up.

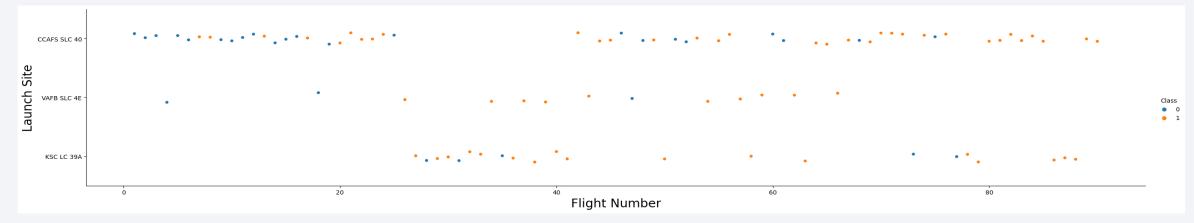


Payload vs. Launch Site

Payload vs. Launch Site

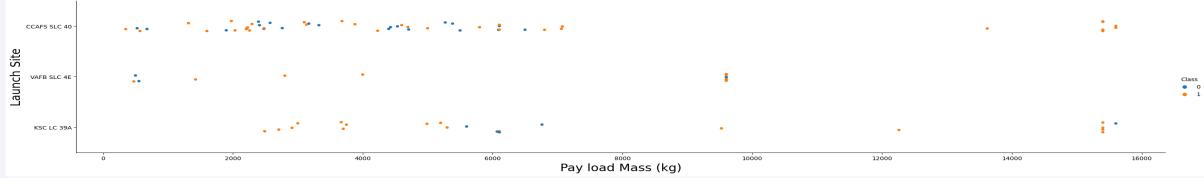

Scatter plot with explanations

If you observe Payload Vs. Launch Site scatter point chart you will find for the VAFB-SLC launch site there are no rockets launched for heavy payload mass(greater than 10000).

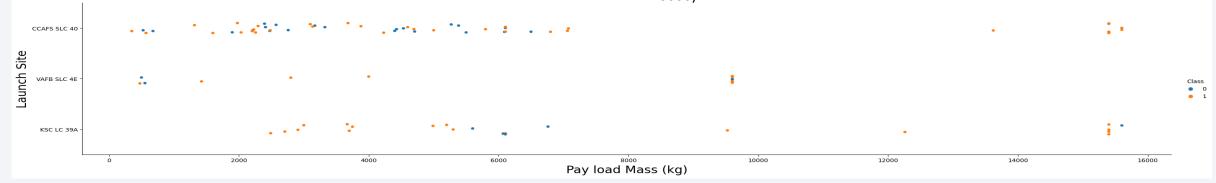



Success Rate vs. Orbit Type

 Success rate of each orbit type




You should see that in the LEO orbit the Success appears related to the number of flights; on the other hand, there seems to be no relationship between flight number when in GTO orbit.

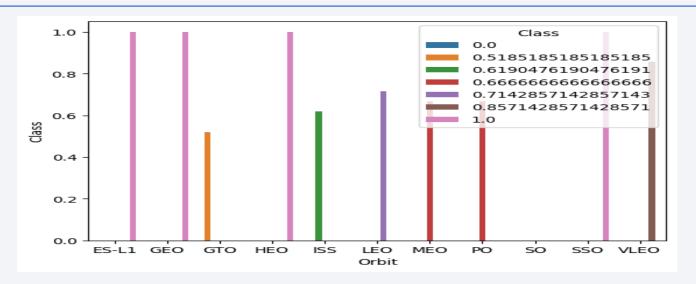

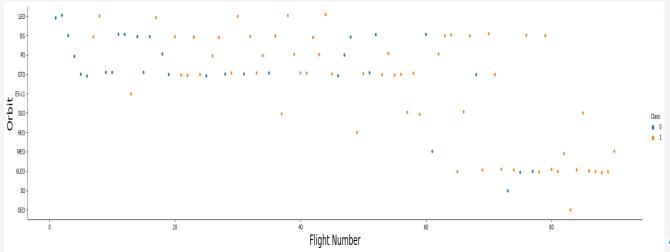


Flight Number vs. Orbit Type

 Scatter point of Flight number vs. Orbit type

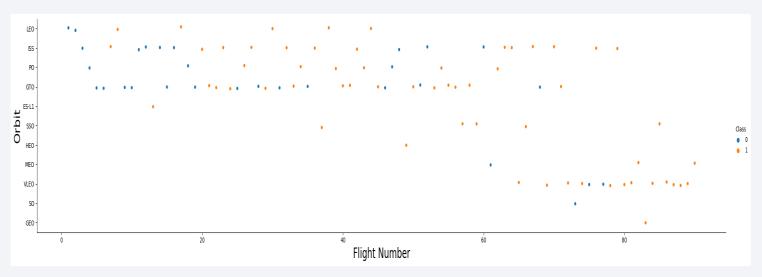

Scatter plot with explanations

You should see that in the LEO orbit the Success appears related to the number of flights; on the other hand, there seems to be no relationship between flight number when in GTO orbit.

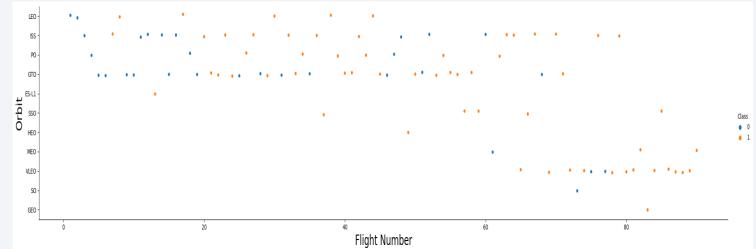



Payload vs. Orbit Type

 Scatter point of payload vs. orbit type

 Scatter plot with explanations

> The successful landings are showing in the orbits of ISS, LEO and Polar. And the data shows there isn't a statistical difference with the GTO orbit. There isn't a lot of data on the other orbits.

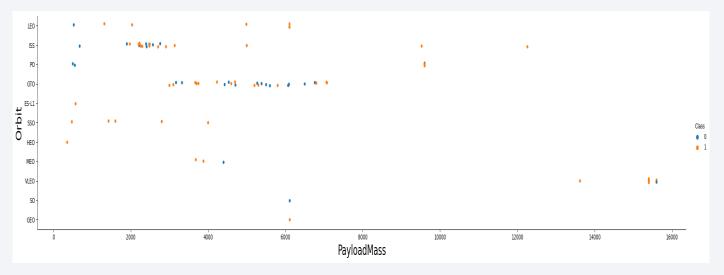


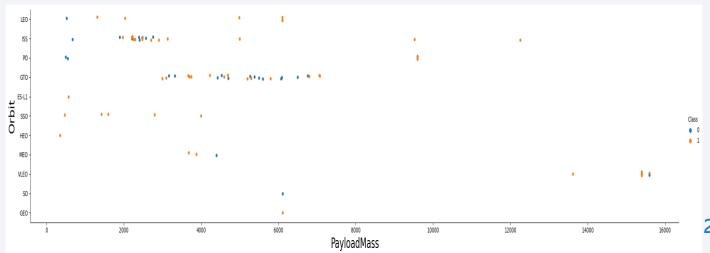

Launch Success Yearly Trend

• Line chart of yearly average success rate

The line chart shows an increasing success rate starting in 2013 through 2020.

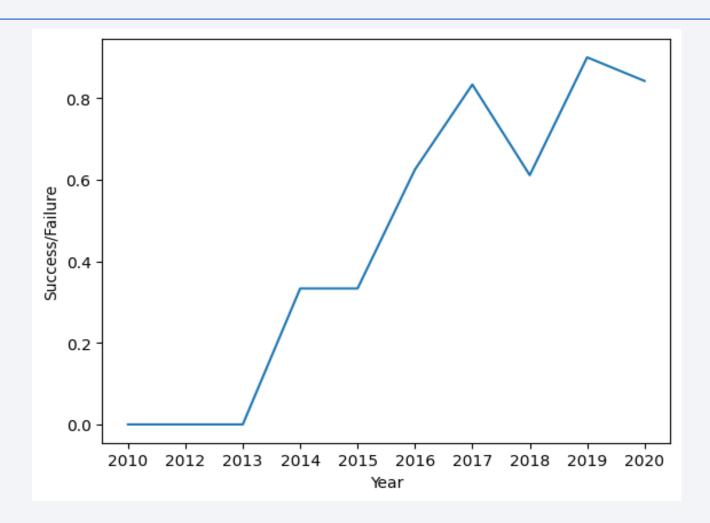

All Launch Site Names

 Find the names of the unique launch sites Launch_Site CCAFS LC-40 VAFB SLC-4E KSC LC-39A CCAFS SLC-40

 The query uses a distinct statement on the Launch_site field to show only the unique data for each site.

%sql select distinct Launch_Site from spacextable

Launch Site Names Begin with 'CCA'

 Find 5 records where launch sites begin with `CCA`

 Used select * to show all fields in record. And used the "like" wildcard operator to show only records that begin with "CCA".

Date	Time (UTC)	Booster_Ve rsion	Launch_Sit e	Payload	PAYLOAD_ MASSKG	Orbit	Customer	Mission_O utcome	Landing_O utcome
2010-04-06	18:45:00	F9 v1.0 B0003	CCAFS LC- 40	Dragon Spacecraft Qualificatio n Unit	0	LEO	SpaceX	Success	Failure (parachute)
2010-08-12	15:43:00	F9 v1.0 B0004	CCAFS LC- 40	Dragon demo flight C1, two CubeSats, barrel of Brouere cheese	0	LEO (ISS)	NASA (COTS) NRO	Success	Failure (parachute)
2012-05-22	07:44:00	F9 v1.0 B0005	CCAFS LC- 40	Dragon demo flight C2	525	LEO (ISS)	NASA (COTS)	Success	No attempt
2012-08-10	00:35:00	F9 v1.0 B0006	CCAFS LC- 40	SpaceX CRS-1	500	LEO (ISS)	NASA (CRS)	Success	No attempt
2013-01-03	15:10:00	F9 v1.0 B0007	CCAFS LC- 40	SpaceX CRS-2	677	LEO (ISS)	NASA (CRS)	Success	No attempt

%sql select * from spacextable where Launch_Site like 'CCA%' limit 5

Total Payload Mass

Calculate the total payload carried by boosters from NASA

%sql select customer, sum(PAYLOAD_MASS__KG_) as total_payload from spacextable where customer = 'NASA (CRS)' group by 1

Present your query result with a short explanation here

total_payload	Customer
45596	NASA (CRS)

"Payload_Mass__KG_" field to get total payload. It wasn't needed but there is a group by on the "customer" field. This could help for totaling more than one customer.

Average Payload Mass by F9 v1.1

Calculate the average payload mass carried by booster version F9 v1.1

%sql select Booster_Version, avg(PAYLOAD_MASS__KG_) as average_payload from spacextable where Booster_Version = 'F9 v1.1' group by 1

Present your query result with a short explanation here

Booster_Version average_payload F9 v1.1 2928.4

Filtered for only 'F9 v1.1' boosters then used the "avg" function on the "Payload_Mass__KG_" field to get total payload. It wasn't needed but there is a group by on the "Booster_Version" field. This could help for totaling more than one Booster.

First Successful Ground Landing Date

• Find the dates of the first successful landing outcome on ground pad

2015-12-22

Present your query result with a short explanation here

%sql select min(date) as date from spacextable where landing_outcome = 'Success (ground pad)'

Filtered for only 'Success (ground pad)' from landing_outcome then used the "min" function on the "date" field to get the first date.

Successful Drone Ship Landing with Payload between 4000 and 6000

 List the names of boosters which have successfully landed on drone ship and had payload mass greater than 4000 but less than 6000

Booster Version

F9 FT B1022

F9 FT B1026

F9 FT B1021.2

F9 FT B1031.2

• Present your query result with a short explanation here

%sql select booster_version from spacextable where landing_outcome = 'Success (drone ship)' and PAYLOAD_MASS__KG_ between 4000 and 6000

Filtered for 'Success (drone ship)' from landing_outcome and used the between clause for "PAYLOAD_MASS__KG_ ".

Total Number of Successful and Failure Mission Outcomes

Calculate the total number of successful and failure mission outcomes

%sql select trim(mission_outcome) as mission_outcome, count(mission_outcome) as outcome_count from spacextable group by 1

• Present your query result with a short explanation here

outcome_count	mission_outcome
1	Failure (in flight)
99	Success
1	Success (payload status unclear)

Used the trim function to help with grouping. Aliased "mission_outcome" field for presentation purpose.

Boosters Carried Maximum Payload

 List the names of the booster which have carried the maximum payload mass F9 B5 B1048.4
F9 B5 B1048.5
F9 B5 B1049.4
F9 B5 B1049.5
F9 B5 B1049.7
F9 B5 B1051.3
F9 B5 B1051.4
F9 B5 B1056.4
F9 B5 B1058.3
F9 B5 B1060.2
F9 B5 B1060.3

Used a sub query to capture maximum payload. Then joined that sub query to the "spacxtable" table to use as criteria for max payload for each booster version

 Present your query result with a short explanation here

```
%sql select a.booster_version\
from spacextable a,\
    (select max(PAYLOAD_MASS__KG_) as max_payload\
    from spacextable) b\
where a.PAYLOAD_MASS__KG_ = b.max_payload\
order by 1
```

2015 Launch Records

 List the failed landing_outcomes in drone ship, their booster versions, and launch site names for in year 2015

month	Landing_Outcome	Booster_Version	Launch_Site
10	Failure (drone ship)	F9 v1.1 B1012	CCAFS LC-40
04	Failure (drone ship)	F9 v1.1 B1015	CCAFS LC-40

Present your query result with a short explanation here

Used the "substr" function to get the month number. Used the between operator for the date range. Used the "like" wildcard for landing outcomes %sql select substr(date,6,2) as month,\
Landing_Outcome,\
Booster_Version,\
Launch_Site\
from spacextable\
where date between '2015-01-01' and '2015-12-31'\
and Landing_Outcome like '%drone ship%'\
and Landing_Outcome like '%Failure%'

Rank Landing Outcomes Between 2010-06-04 and 2017-03-20


- Rank the count of landing outcomes (such as Failure (drone ship) or Success (ground pad)) between the date 2010-06-04 and 2017-03-20, in descending order
- Used trim function to help with grouping. Used the count statement for landing outcome. Used the between function for date range. Used the order clause for descending order.

landing_outcome	outcome_counts
No attempt	10
Success (ground pad)	5
Success (drone ship)	5
Failure (drone ship)	5
Controlled (ocean)	3
Uncontrolled (ocean)	2
Precluded (drone ship)	1
Failure (parachute)	1

%sql select trim(a.landing_outcome) as landing_outcome,\
 count(a.landing_outcome) outcome_counts\
from spacextable a\
where date between '2010-06-04' and '2017-03-20'\
group by 1\
order by 2 desc




SpaceX Launch Sites

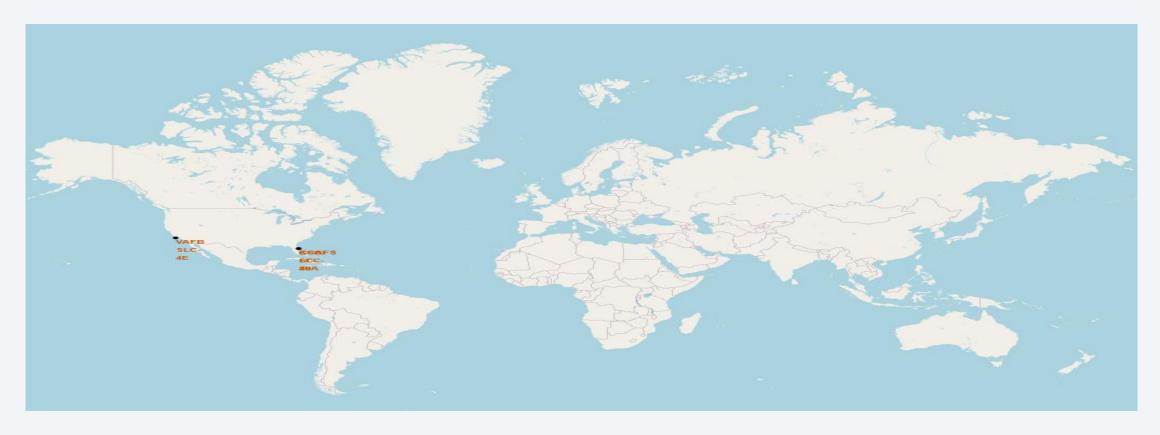


Launch Sites are all in the US. There are three, two in Florida and one in California. All are on the coast.

Maps of Launch Sites Showing Results

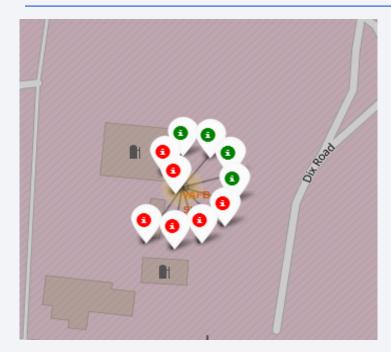

VAFB California

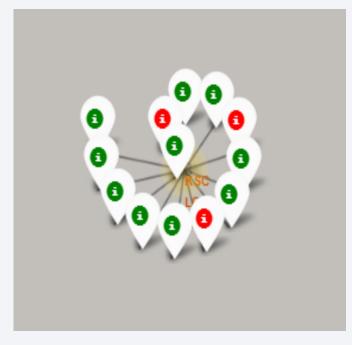

KSC Florida





CCAFS LC & SLC Florida

Green = Success

Red = Failed

• KSC site shows the most successes. But the flight numbers should also be considered.

Most Successful Launch Site: KSC LC-39-A


 KSC LC-39-A is approximately 6.63km from the coast. And approximately 0.69km from the train tracks.

 It seems that this launch site may be easily accessible, but yet relatively close to the coastline.






Launch Site Successes

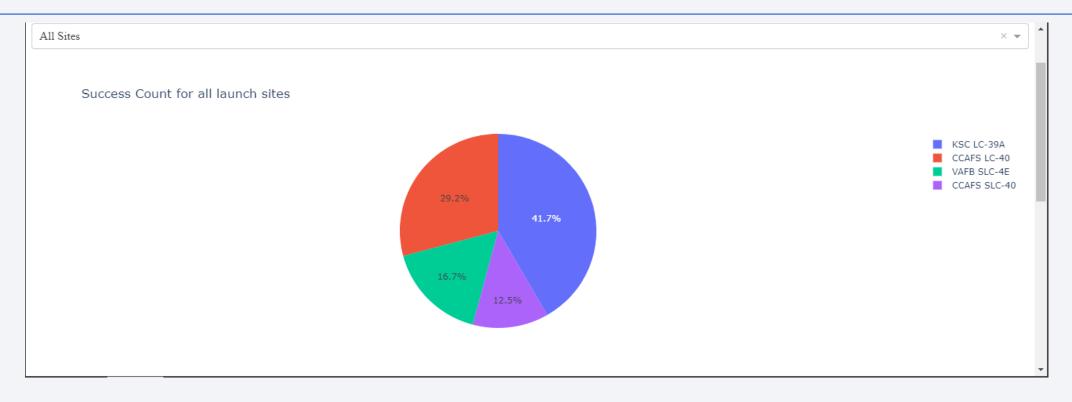

• The KSC LC-39A has the most success out of all the lunch sites as shown in the pie chart above. Although the flight number should be considered as well.


Most Successful Launch Site Chart

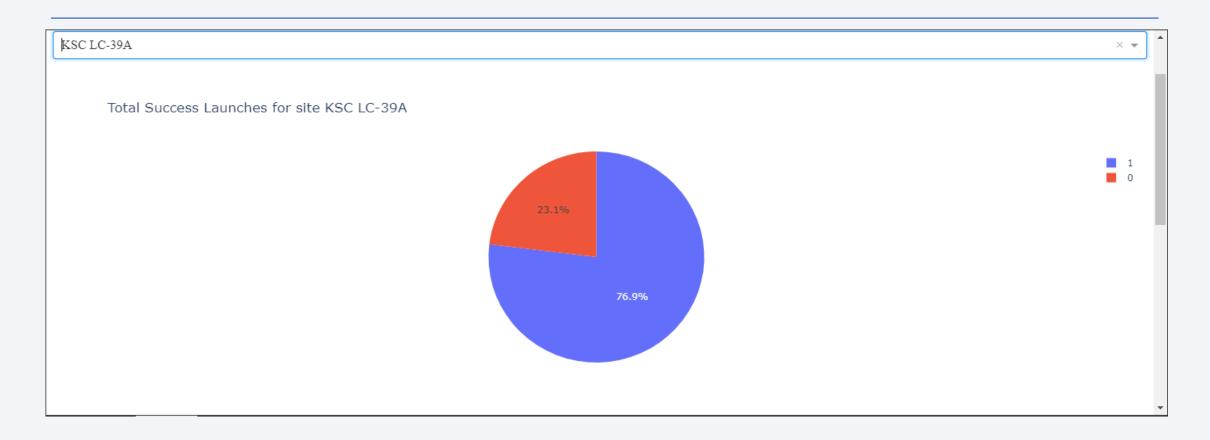


• It shows that just over ¾ of the time lunches are successful at this site.

Payload vs. Launch Outcome


 The first plot graph shows that most of the successful lunches were with the FT booster. The second graph shows that when the payload is over 5000Kg that the FT and B4 boosters where the only ones that could lift the payload and that the success ratio dropped.

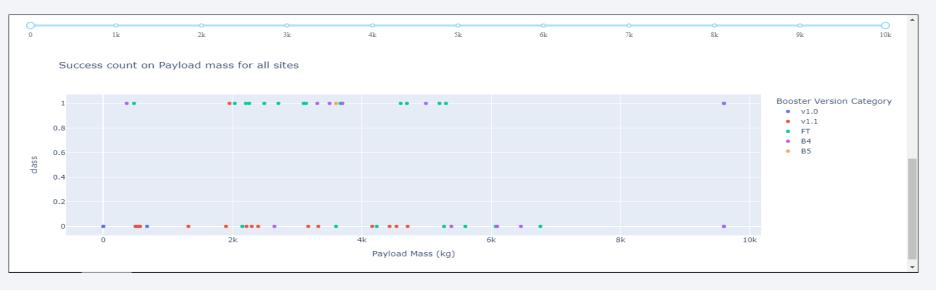

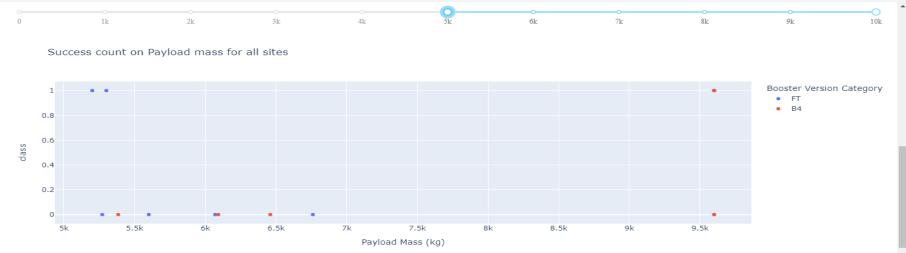




Classification Accuracy



As shown in the table above, all methods / Classification performed equally.

Confusion Matrix

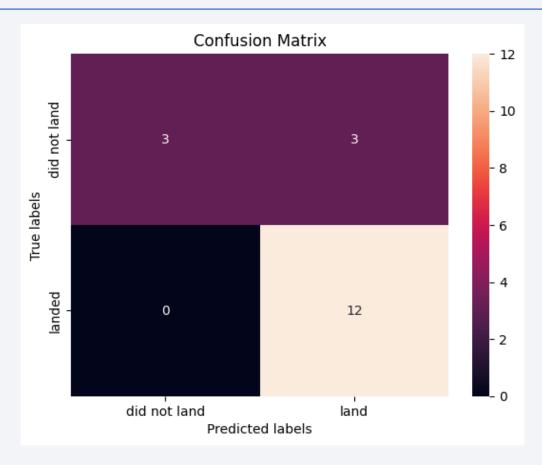

• There was false positives but the confusion matrix is the same for all four classifications.

Conclusions

- The most overall conclusion that can be made is the most obvious one. The success rate of the launches and landings have increased from 2013 through 2020.
- The lighter the payload the more successful the launches.
- The launches that strived for certain orbits were more successful. (SSO, ES-L1, GEO & HEO)
- All the predictive models seemed to have the same degree of accuracy.

Appendix

• GitHub link: https://github.com/ckent123/Data-Science/blob/main/ds capstone coursera.pdf

