



| Feature | | | Scenario | | | | Step | | | |
|---|----------|---|----------|---|---|----|------|---|---|--|
| Name | Duration | T | P | F | S | T | P | F | S | |
| GitHub Create Repo Endpoint Scenarios | 3.203 s | 2 | 0 | 2 | 0 | 12 | 8 | 2 | 2 | |
| List Organization repositories Endpoint Scenarios | 5.830 s | 8 | 8 | 0 | 0 | 36 | 36 | 0 | 0 | |

| Tag | | Scei | nario | | Feature | | | |
|------------------|---|------|-------|---|---------|---|---|---|
| Name | T | P | F | S | T | P | F | S |
| @json | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @deserialization | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @smoke | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 |
| @negative | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 |

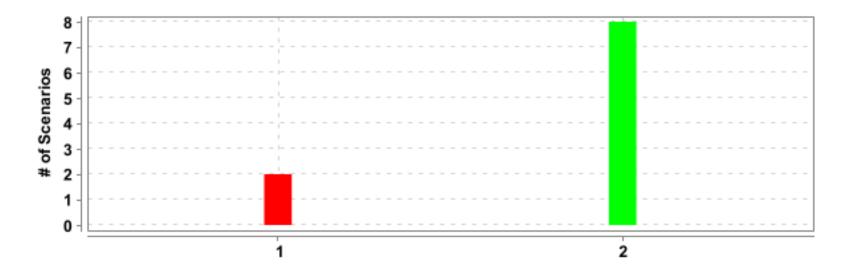


| # | Feature Name | T | P | F | S | Duration |
|---|---|---|---|---|---|----------|
| 1 | GitHub Create Repo Endpoint Scenarios | 2 | 0 | 2 | 0 | 3.203 s |
| 2 | List Organization repositories Endpoint Scenarios | 8 | 8 | 0 | 0 | 5.830 s |

SCENARIOS SUMMARY -- 5 --

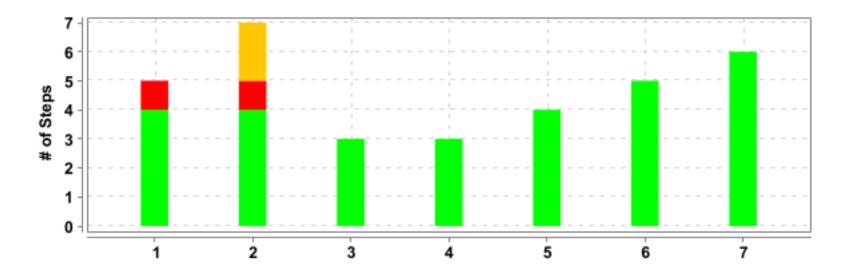

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|--|--|---|---|---|---|----------|
| 1 | GitHub Create Repo Endpoint Scenarios | Create organization repository | 5 | 4 | 1 | 0 | 2.362 s |
| 2 | GitHub Create Repo Endpoint Scenarios | Create organization repository | 7 | 4 | 1 | 2 | 0.828 s |
| 3 | List Organization repositories Endpoint Scenarios | Fetch all the public repos for valid org | 3 | 3 | 0 | 0 | 0.751 s |
| 4 | List Organization repositories Endpoint Scenarios | Fetch all the public repos for inavlid org | 3 | 3 | 0 | 0 | 0.514 s |
| 5 | List Organization repositories Endpoint Scenarios | Fetch all the public repos for valid org with token | 4 | 4 | 0 | 0 | 0.737 s |
| 6 | List Organization repositories Endpoint Scenarios | Fetch all the private repos for valid org with token | 5 | 5 | 0 | 0 | 0.623 s |
| 7 | List Organization repositories Endpoint Scenarios | Fetch all the public repos for valid org with per page | 6 | 6 | 0 | 0 | 0.745 s |


SCENARIOS SUMMARY -- 6 --

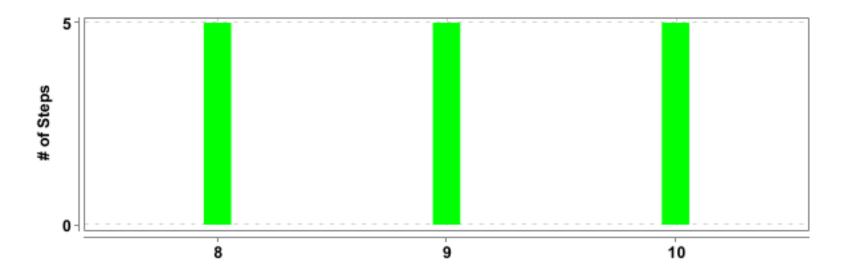


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|---|--|---|---|---|---|----------|
| 8 | List Organization repositories Endpoint Scenarios | Fetch all the public repos for valid org with per page | 5 | 5 | 0 | 0 | 1.033 s |
| 9 | List Organization repositories Endpoint Scenarios | Fetch all the public repos for valid org with per page | 5 | 5 | 0 | 0 | 0.950 s |
| 10 | List Organization repositories Endpoint Scenarios | Fetch all the public repos for valid org with per page | 5 | 5 | 0 | 0 | 0.452 s |

DETAILED SECTION -- 7 --

GitHub Create Repo Endpoint Scenarios

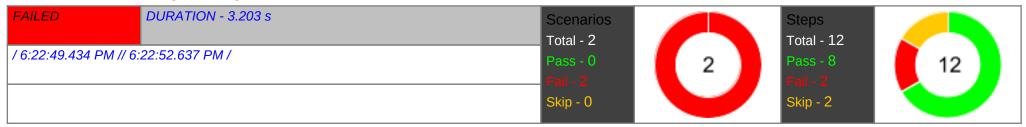


Create organization repository

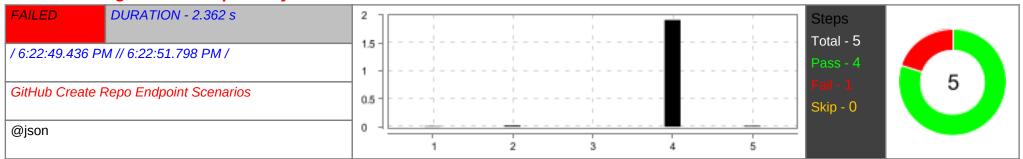

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given path param "orgName" with value "ckjavahelpmate" | PASSED | 0.009 s |
| 2 | And body param from file "createRepo.json" | PASSED | 0.020 s |
| 3 | And header param "Authorization" with value "Bearer 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" | PASSED | 0.001 s |
| 4 | When I do POST request with URL "orgs/{orgName}/repos" | PASSED | 1.911 s |
| 5 | Then I validate the status code is 201 | FAILED | 0.016 s |
| | java.lang.AssertionError: 1 expectation failed. Expected status code <201> but was <422>. at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrapNoCoerce.callConstructor(ConstructorSite.java:108) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallConstructor(CallSiteArray.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:263) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:512) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) | | |
| | at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) | | |
| | at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:125) | | |
| | at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:139) | | |
| | at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:696) | | |
| | at io.restassured.internal.ResponseSpecificationImpl.this\$2\$validateResponseIfRequired(ResponseSpecificationImpl.groovy) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) | | |
| | at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite. | | |
| | java:198) | | |
| | at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:62) | | |
| | at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallCurrent(CallSiteArray.java:49) | | |
| | at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:171) | | |
| | at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) | | |
| | at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:135) | | |
| | at io.restassured.specification.ResponseSpecification\$statusCode\$2.callCurrent(Unknown Source) | | |
| | at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallCurrent(CallSiteArray.java:49) | | |
| | at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:171) | | |
| | at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) | | |
| | at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:143) | | |
| | at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89) | | |
| | at com.stepdefinitions.GitHubGetListOfOrnganizationReposStepDefinition. | | |
| | iValidateTheStatusCodeIs(GitHubGetListOfOrnganizationReposStepDefinition.java:77) | | |
| | at ?.I validate the status code is 201(file:///D:/SeleniumNew/framework/Rest_Assured_02_BDD_Framework/src/test/ | | |
| | resources/features/GitHubCreateRepo.feature:11) | | |
| | * Not displayable characters are replaced by '?'. | | |

Create organization repository

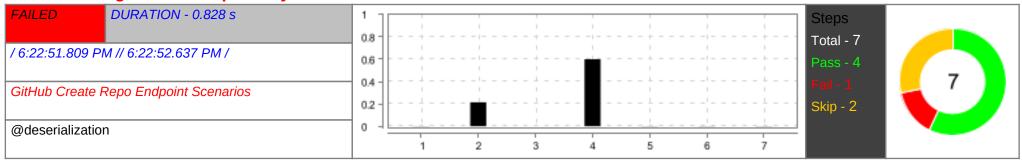


| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | Given path param "orgName" with value "ckjavahelpmate" | PASSED | 0.001 s |
| 2 | And body param input keys "name,description,private" and values "DemoRepo-09,Deserialization repo-05,true" | PASSED | 0.214 s |
| 3 | And header param "Authorization" with value "Bearer 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" | PASSED | 0.000 s |
| 4 | When I do POST request with URL "orgs/{orgName}/repos" | PASSED | 0.600 s |
| 5 | Then I validate the status code is 201 | FAILED | 0.002 s |
| | java.lang.AssertionError: 1 expectation failed. Expected status code <201> but was <422>. at java.base/jdk.internal.reflect.NativeConstructorAccessor/mpl.newInstance(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessor/mpl.newInstance(NativeConstructorAccessor/mpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessor/mpl.newInstance(DelegatingConstructorAccessor/mpl.java:77) at java.base/java.lang.reflect.Constructor.newInstance(Vinticaller(Constructor.java:490) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.ResponseSpecificationImplsHamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:512) at io.restassured.internal.ResponseSpecificationImplsHamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:512) at io.restassured.internal.ResponseSpecificationImpl.validateResponselfRequired(ResponseSpecificationImpl.groovy:696) at io.restassured.internal.ResponseSpecificationImpl.thisS25validateResponselfRequired(ResponseSpecificationImpl.groovy:696) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:43) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(PalionDipetMetaMethodSite.java:43) at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.dolnvoke(PlainObjectMetaMethodSite.java:43) at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.dolnvoke(PlainObjectMetaMethodSite.java:43) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:185) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:143) at io.restassured.internal.ResponseSpecificationImpl.status | | |
| 6 | Then I validate the "name" is "DemoRepo-09" | SKIPPED | 0.001 s |
| 7 | Then I validate create repo response keys "name,description,private" and values "DemoRepo-09,Descrialization repo-05,true" | SKIPPED | 0.001 s |

List Organization repositories Endpoint Scenarios


| DURATION - 5.830 s | Scenarios | | Steps | |
|-----------------------|-----------|-----------------------------|-----------------------------|---|
| | Total - 8 | | Total - 36 | |
| 1 // 6:22:58.491 PM / | Pass - 8 | 8 | Pass - 36 | 36 |
| | Fail - 0 | | Fail - 0 | |
| | Skip - 0 | | Skip - 0 | |
| 7 | | Total - 8 Pass - 8 Fail - 0 | Total - 8 Pass - 8 Fail - 0 | Total - 8 Pass - 8 Fail - 0 Scentifies Total - 8 Pass - 8 Fail - 0 |

Fetch all the public repos for valid org

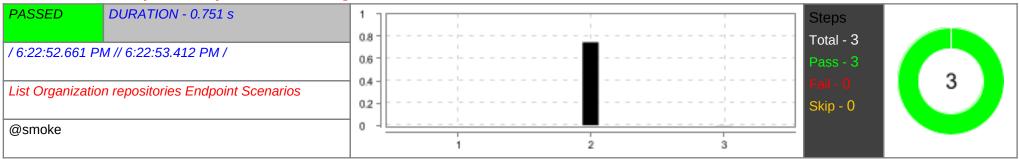


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given path param "orgName" with value "ckjavahelpmate" | PASSED | 0.000 s |
| 2 | When I do GET request with URL "orgs/{orgName}/repos" | PASSED | 0.747 s |
| 3 | Then I validate the status code is 200 | PASSED | 0.001 s |

Fetch all the public repos for inavlid org

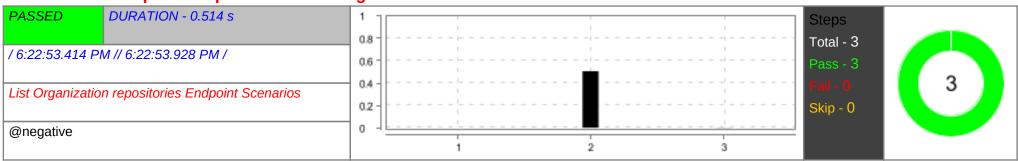


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given path param "orgName" with value "abcd" | PASSED | 0.000 s |
| 2 | When I do GET request with URL "orgs/{orgName}/repos" | PASSED | 0.506 s |
| 3 | Then I validate the status code is 404 | PASSED | 0.002 s |

Fetch all the public repos for valid org with token

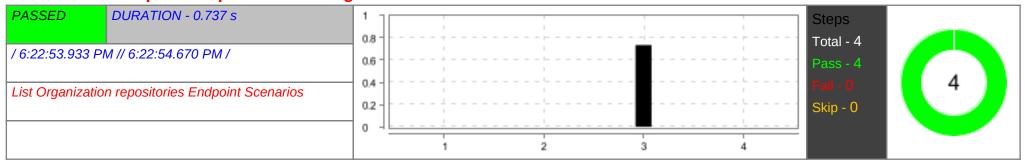

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given path param "orgName" with value "ckjavahelpmate" | PASSED | 0.000 s |
| 2 | And header param "Authorization" with value "Bearer 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" | PASSED | 0.000 s |
| 3 | When I do GET request with URL "orgs/{orgName}/repos" | PASSED | 0.735 s |
| 4 | Then I validate the status code is 200 | PASSED | 0.000 s |

Fetch all the private repos for valid org with token

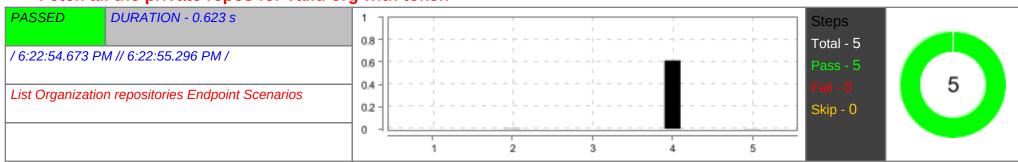


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given path param "orgName" with value "ckjavahelpmate" | PASSED | 0.000 s |
| 2 | And query param "type" with value "private" | PASSED | 0.003 s |
| 3 | And header param "Authorization" with value "Bearer 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" | PASSED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 4 | When I do GET request with URL "orgs/{orgName}/repos" | PASSED | 0.614 s |
| 5 | Then I validate the status code is 200 | PASSED | 0.001 s |


-- 12 --

Fetch all the public repos for valid org with per page

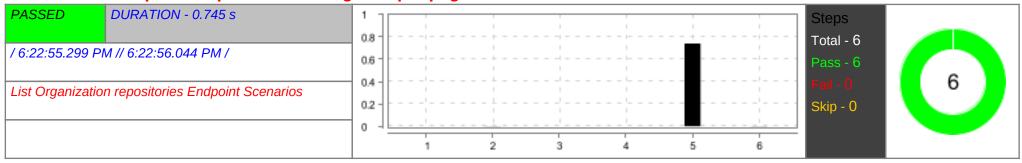

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given path param "orgName" with value "ckjavahelpmate" | PASSED | 0.000 s |
| 2 | And query param "per_page" with value "10" | PASSED | 0.001 s |
| 3 | And query param "page" with value "1" | PASSED | 0.000 s |
| 4 | And header param "Authorization" with value "Bearer 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" | PASSED | 0.000 s |
| 5 | When I do GET request with URL "orgs/{orgName}/repos" | PASSED | 0.740 s |
| 6 | Then I validate the status code is 200 | PASSED | 0.001 s |


Fetch all the public repos for valid org with per page

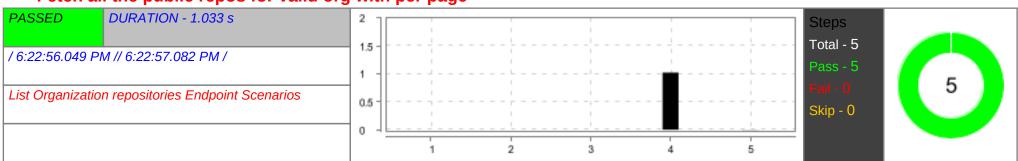

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given path param "orgName" with value "ckjavahelpmate" | PASSED | 0.000 s |
| 2 | And query param "type" with value "public" | PASSED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 3 | And header param "authorization" with value "Bearer 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" | PASSED | 0.000 s |
| 4 | When I do GET request with URL "orgs/{orgName}/repos" | PASSED | 1.023 s |
| 5 | Then I validate the status code is 200 | PASSED | 0.004 s |

Fetch all the public repos for valid org with per page

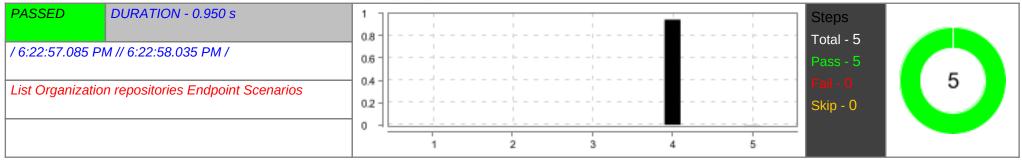

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given path param "orgName" with value "ckjavahelpmate" | PASSED | 0.000 s |
| 2 | And query param "type" with value "private" | PASSED | 0.000 s |
| 3 | And header param "authorization" with value "Bearer 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" | PASSED | 0.000 s |
| 4 | When I do GET request with URL "orgs/{orgName}/repos" | PASSED | 0.946 s |
| 5 | Then I validate the status code is 200 | PASSED | 0.001 s |

Fetch all the public repos for valid org with per page

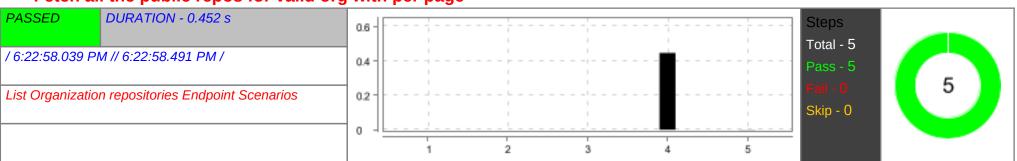

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given path param "orgName" with value "abcd" | PASSED | 0.000 s |
| 2 | And query param "type" with value "public" | PASSED | 0.000 s |

DETAILED SECTION -- 14 --

| ; | # Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 3 | And header param "authorization" with value "Bearer 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" | PASSED | 0.000 s |
| 4 | When I do GET request with URL "orgs/{orgName}/repos" | PASSED | 0.447 s |
| 5 | Then I validate the status code is 404 | PASSED | 0.001 s |