

Onboarding Guide

TecDoc Web Service (TecDoc Pegasus 3.0 API)

Data Manager Catalogue Solutions

Version 3.0

25/01/2022

Public

Change history

Source version	Target version	Date	Name	Comment
3.0	3.0	25.01.2022	Koroleva, Svetlana	1. The order of the sections has been changed. 2. Added section: 8. TecDoc Web Service: general use cases 3. Changed the description in sections: 1 - 7 4. Applied a new template with the current corporate identity.
2.0	2.1	31.07.2019	Liebsch, Sebastian	Removed Point 4.1.2 as the Test Client now supports API Key Input
1.9	2.0	26.06.2019	Liebsch, Sebastian	Some adjustments + Point 3 + Point 4 + Point 4.1.2 + Point 4.1.3 + Point 4.2.3 + Point 5 + Point 6 + Point 6.1 + Point 8 + Point 9 + Point 10
1.8	1.9	09.11.2018	Liebsch, Sebastian	Minor adjustments
1.7	1.8	09.10.2018	Liebsch, Sebastian	Added Application Logic (Point 3.1.2 + 3.2.3)
1.6	1.7	06.08.2018	Liebsch, Sebastian	Added getAutoCompleteSuggestions (Point 5.1)
1.5	1.6	20.07.2018	Liebsch, Sebastian	Added VRM look-up ES (Point 4)
1.4	1.5	03.07.2018	Liebsch, Sebastian	Added Authentication Scenarios (Point 3)
1.3	1.4	22.06.2018	Liebsch, Sebastian	Updated Point 6
1.2	1.3	19.06.2018	Liebsch, Sebastian	Consolidated Point 5 and Point 6
1.1	1.2	01.06.2018	Liebsch, Sebastian	Minor corrections and improvements
1.0	1.1	25.05.2018	Liebsch, Sebastian	Minor corrections and improvements
1.0	1.0	22.05.2018	Liebsch, Sebastian	Initial creation

Distribution list

Role/Roles	Name	Telephone	E-mail
Catalogue Solutions Technical Consultants			DataManagerTrade.Projects@tecalliance.net
Product Owner	Liebsch, Sebastian	+49 89 321216 8077	Sebastian.Liebsch@tecalliance.net



Table of Contents

1	Online documentation and Endpoints	6
1.1	Overview.....	6
1.2	Online Documentation overview.....	6
1.2.1	Home.....	6
1.2.2	Service Overview	6
1.2.3	Service Index.....	6
1.2.4	Examples	7
1.2.5	Test Client.....	7
2	Data Entities and Localization	8
2.1	Catalogue Data	8
2.2	Reference Data	8
2.3	Localization.....	8
3	Authentication and Authorization	10
3.1	API Key.....	10
3.2	IP-Whitelisting.....	10
3.3	Application logic.....	11
3.3.1	Application as a proxy.....	11
3.3.2	Application authorizes the dynamic IP addresses of the end users	11
3.3.3	Application generates the dynamic API Keys for the end users	12
4	Digital Assets (documents, icons, images, logos)	14
4.1	Product and vehicle images, documents, brand logos	14
4.1.1	Retrieving a complete document URL in TecDoc Methods	14
4.1.2	Generating document URL.....	14

4.2	Digital Assets to Data Supplier status.....	15
5	TecDoc main methods	16
5.1	Get product brands (getBrands).....	16
5.2	Get product information (getArticles)	16
5.3	Get description for the search query (getAutoCompleteSuggestions)	16
5.4	Get vehicle information (getLinkageTargets)	16
5.5	Generate dynamic API Keys (addDynamicAPIKey)	17
5.6	TecDoc Vehicle Identification.....	17
5.6.1	VIN Filter (getVehiclesByVIN)	17
5.6.2	VRM Lookups (getVehiclesByKeyNumberPlates)	17
6	Default TecDoc Account Configuration	19
6.1	Authentication and Authorization.....	19
6.2	Catalogue Data	19
6.3	Reference Data	19
7	“TecAlliance TecDoc Inside” Signet	20
8	TecDoc Web Service: general use cases	21
8.1	Vehicle manufacturer → model series → vehicles with technical details and images	21
8.2	Product brands + logos.....	25
8.3	Search Tree: Assembly groups → Articles with details and images for a specific assembly groups	26
8.4	Vehicle manufacturers and vehicles for a particular product (article).....	30
8.5	Search articles for a specific number	33
9	TecDoc Web Service in combination with other TecAlliance solutions	36
9.1	RMI 4.0 API – ServiceVT_VehicleTree: TecDoc Typeld for RMI Typeld.....	36
9.2	RMI 4.0 API – ServiceVT_VehicleTree: RMI Typeld for TecDoc Typeld.....	36
9.3	RMI 4.0 API – ServiceBasket_Prices: TecDoc GenArtId for RMI ItemMpld.....	36



9.4 RMI 4.0 API – ServiceBasket_Prices: TecDoc GenArtId for RMI ItemMpld	36
9.5 TecDoc Pegasus 3.0 API: TecDoc Typeld / RMI Typeld	37

10 Glossary	38
--------------------	-----------

Description

This document gives you an overview about the TecDoc Pegasus 3.0 API (also known as TecDoc Web Service).

1 Online documentation and Endpoints

1.1 Overview

The most used TecDoc Web Service URLs (including endpoints, WSDL, function description):

<https://webservice.tecalliance.services/>

Available Endpoints/WSDLs:

- SOAP (Document Literal Bare, Document Literal Wrapped)
- JSON (Document Literal Bare, Document Literal Wrapped)

Online documentation with additional Endpoints/WSDLs, example implementation, Test client is available at the link below:

<https://webservice.tecalliance.services/pegasus-3-0/info/>

1.2 Online Documentation overview

1.2.1 Home

Here you get a summary about the product itself and it also lists important links, please see the listing below – you should have a look at those at least once:

- **Important URLs:**
Provides you additional information about endpoints, WSDL, etc
- **Functions Guide:**
Provides you the sequence of calls of TecDoc Web Service
- **Example implementation:**
Interactive implementation of the sequence of calls provided in the Functions Guide
- **Useful information:**
Provides various data, for example Key Table values, which are needed for various TecDoc Web Service functions

1.2.2 Service Overview

Here you get a summary about the available protocols / formats of the TecDoc Web Services. Currently we offer SOAP and JSON.

1.2.3 Service Index

Detailed information about the Web Services' functions:

- Function description



- Request Parameters
- Response Parameters

1.2.4 Examples

Code Examples for JSON and SOAP:

- Basic Calls
- Simple Arrays
- Complex Arrays

Available in:

- C#
- JAVA
- JavaScript
- PHP

1.2.5 Test Client

Send requests directly via the browser to the TecDoc Web Service.

2 Data Entities and Localization

There are two data entities available in TecDoc: Catalogue Data and Reference Data. Both are market-specific, so you need to specify which target market you want to address by setting the affected CountryCode as request parameter.

2.1 Catalogue Data

Refers to article, product data; available information depends on data provided to TecAlliance by Data Suppliers.
Example:

<https://gist.github.com/ta-sli/3c70f3e26dd918e163c617d58f11a6ba>

2.2 Reference Data

Refers to vehicle data; available information depends on data researched by TecAlliance.
Example:

<https://gist.github.com/ta-sli/b8e8ec0a1932f4ecc8ed7e9ad6992b88>

2.3 Localization

Catalogue and Reference data is available (Timestamp: 2022-01) in these languages:

ISO Code	Language
de	German
en	English (GB)
fr	French
it	Italian
es	Spanish
nl	Dutch
da	Danish
sv	Swedish
no	Norwegian
fi	Finnish
hu	Hungarian
pt	Portuguese
ru	Russian
sk	Slovak
cs	Czech
pl	Polish
el	Greek
ro	Romanian



tr	Turkish
hr	Croatian
sr	Serbian
zh	Chinese
bg	Bulgarian
lv	Latvian
lt	Lithuanian
et	Estonian
sl	Slovenian
qa	English (USA)
qb	English (AUS)
is	Icelandic
qc	Brazilian Portuguese
ja	Japanese
ar	Arabic
he	Hebrew
qd	Spanish (MEX)
th	Thai (Thailand)
ko	Korean
ms	Malay
uk	Ukrainian
vi	Vietnamese

3 Authentication and Authorization

The TecDoc Pegasus Web Service requires a ProviderId (request parameter <provider>) for a successful authentication on the TecAlliance system. Additionally, you need to authorize your ProviderId's requests: Either by IP-Address/CIDR notation whitelisting (currently only for IPv4) or API Key.

First time you get your ProviderId a static API Key is being generated and delivered to you – it's the default authentication/authorization method. However, if IP-Whitelisting Authentication is preferred, please send the static IP address(es) of your application host(s) to your TecAlliance technical contact.

3.1 API Key

Authentication/Authorization by the specified API Key.

- Example for passing the API Key in URL:
`https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLW.soapEndpoint?api_key=YOUR_API_KEY_HERE`
- Example for passing over the API Key in the HTTP header:
`curl -H 'X-API-Key: YOUR_API_KEY_HERE' 'https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLW.soapEndpoint'`
- Example for passing over the API Key by HTTP Basic Authentication:
`curl 'https://YOUR_API_KEY_HERE@webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLW.soapEndpoint'`

Instead of **YOUR_API_KEY_HERE** should be specified your API Key.

The same approach of API key passing is used for other TecDoc Web Service SOAP and JSON endpoints.


3.2 IP-Whitelisting

Only supports IPv4 requests – IPv6 clients will receive an “Access denied” error. IP-Whitelisting also supports CIDR notation.

3.3 Application logic


3.3.1 Application as a proxy.

Your application work as a proxy server. All the data will be delivered to the end user by your proxy server. Your proxy handles the requests from end users to the TecDoc Pegasus API:

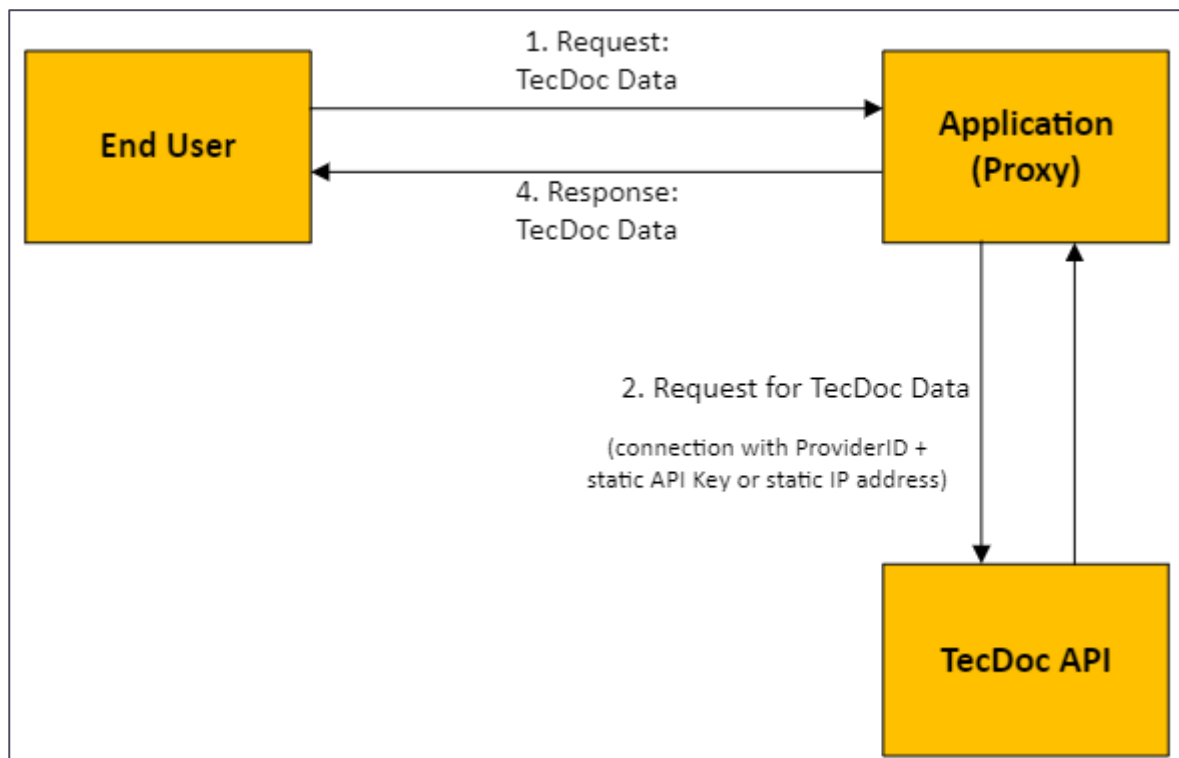

3.3.2 Application authorizes the dynamic IP addresses of the end users

Your application temporarily authorizes the dynamic IP addresses of clients for your ProviderId. In this case, you can use the **addDynamicAddress** function on your application host:

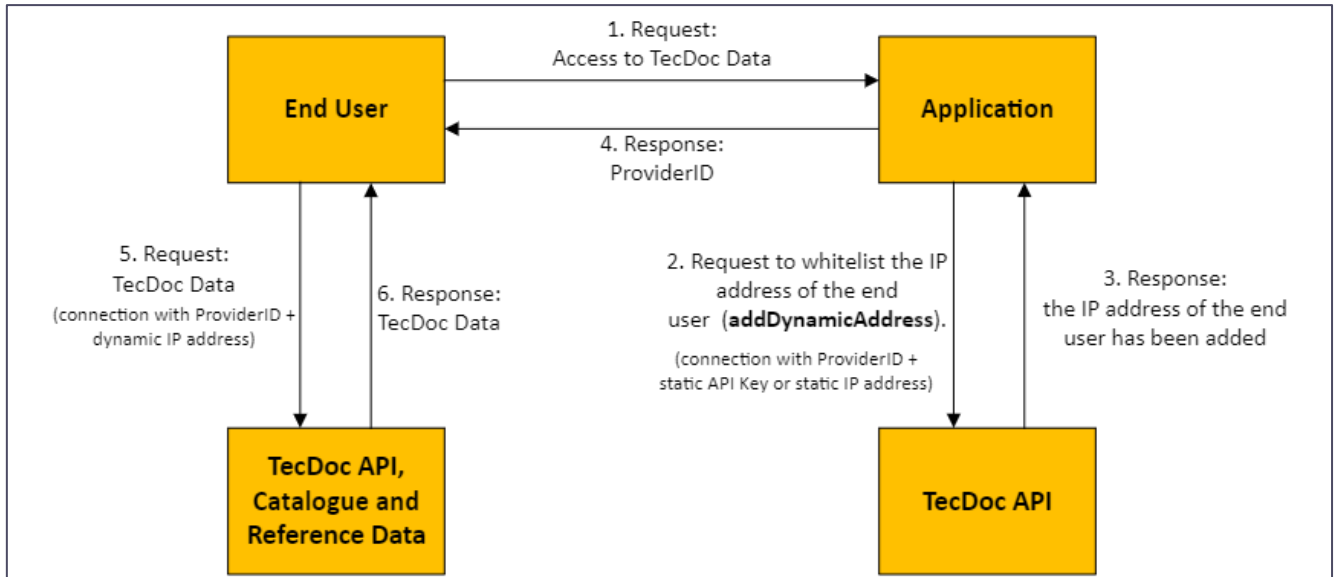


In order to provide your end users access to documents/images you need to temporarily authorize their dynamic IP addresses for your ProviderId. This is done by calling function **addDynamicAddress** on your application host. It's recommended to limit dynamic IP authorization to a maximum of 1 hour.

- <https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLB.soapEndpoint?doc>
→ addDynamicAddress → Detail

3.3.3 Application generates the dynamic API Keys for the end users

Your application temporarily generate the dynamic API keys for your ProviderId. In this case, you can use the **addDynamicAPIKey** function on your application host:

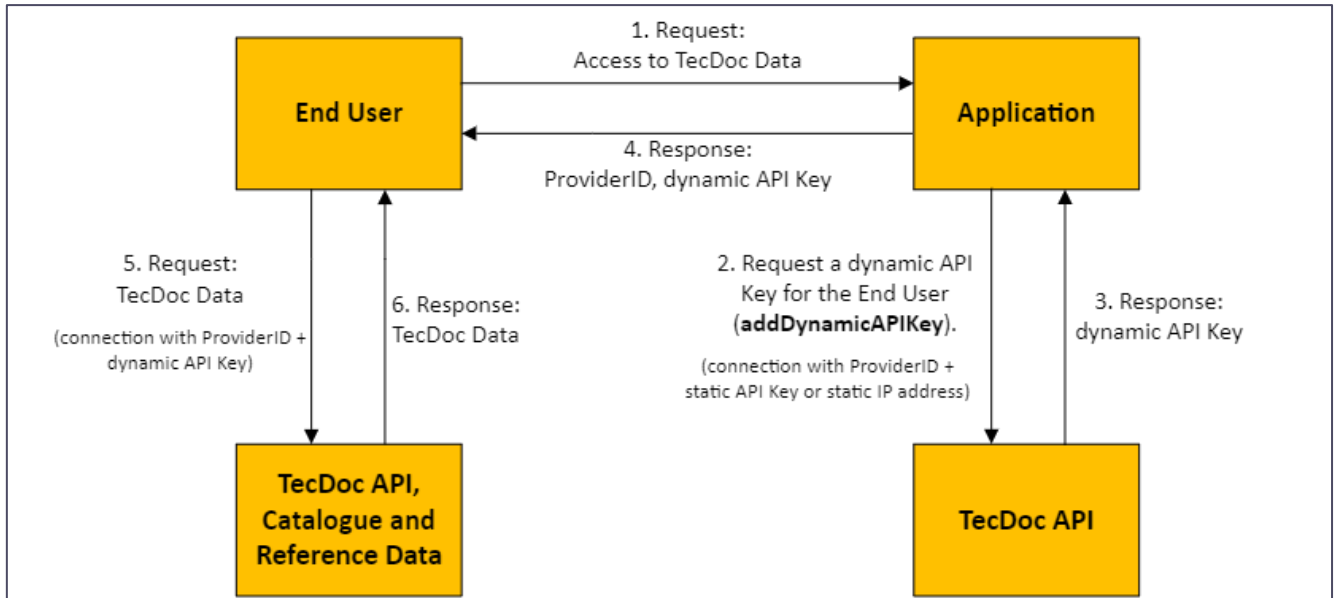

The function **addDynamicAPIKey** generates dynamic API Keys for your end users, valid to a maximum of 24 hours.

- <https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLB.soapEndpoint?doc>
→ addDynamicAPIKey → Detail

4 Digital Assets (documents, icons, images, logos)

4.1 Product and vehicle images, documents, brand logos

There are two main ways to get document/image URL for logos, articles, vehicles:

1. Retrieving a complete document URL in TecDoc Methods
2. Generating document URL

Below two options are considered.

4.1.1 Retrieving a complete document URL in TecDoc Methods

Brand logos

The **getBrands** method with parameter *includeDataSupplierLogo = true* or *includeAll = true* is used to get the complete url for the brand logo:

- <https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLB.soapEndpoint?doc>
→ getBrands → Detail

Article documents/images

The **getArticles** method with parameter *includeImages = true/includePDFs = true* or *includeAll = true* is used to get the complete url for article documents/images:

- <https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLB.soapEndpoint?doc>
→ getArticles → Detail

Vehicle images

The **getLinkageTargets** method is used to get the complete url for vehicle images:

- <https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLB.soapEndpoint?doc>
→ getLinkageTargets → Detail

Note: the vehicle images via getLinkageTargets must always be authorized via an API key / whitelisting

4.1.2 Generating document URL

A general approach to generating URLs for an image/document:

- ➔ https://webservice.tecalliance.services/pegasus-3-0/documents/<provider_id>/<doc_id>/<doc_size>?api_key=<Your_API_Key>

Where:

- **<provider_id>** – Your providerId.



- **<doc_id>** – document identifier. A document Id is responded by functions like **getDirectArticlesByIds7** (docId), **getVehicleByIds4** (vehicleDocId), getAmBrands (brandLogId). Those could be displayed in your application by passing over the **vehicleDocId** into the URL schema mentioned below.

docId has the additional identifiers docFileName, docFileType, docType, docURL, thumbDocId.

- **<doc_size>** – document size. Has the following values:
 - 0 – large picture
 - 1 – thumbnail picture
- **<Your_API_Key>** – if you use API Key authentication, you must specify the API key.

Below is an example:

https://webservice.tecalliance.services/pegasus-3-0/documents/22136/7200000/0?api_key=2BeBXg6C3XW1JMoSKek

4.2 Digital Assets to Data Supplier status

In the TecDoc data, there is a type of Data Supplier status: premier and certified. These two icons are available via links:

- <https://digital-assets.tecalliance.services/static/pds-badge-tecdoc.svg>
- <https://digital-assets.tecalliance.services/static/cds-badge-tecdoc.svg>

The status itself is available in the TecDoc Web Service method – **getBrands**.

5 TecDoc main methods

5.1 Get product brands (getBrands)

To get brand information (available brands, addresses, logos) the function **getBrands** can be used.

- <https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLB.soapEndpoint?doc>
→ getBrands → Detail

5.2 Get product information (getArticles)

To get all article data of the TecDoc database (optional filtering possible) use function **getArticles**, below a documentation of all possible request parameters:

- <https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLB.soapEndpoint?doc>
→ getArticles → Detail
- returns document URLs instead of documentIds:
<https://digital-assets.tecalliance.services/images/50/11c9534e207aa0a56f1158bf1a0a40e46a3f738a.jpg>

5.3 Get description for the search query (getAutoCompleteSuggestions)

To get search query strings as input for **getArticles** **<searchQuery>** (to be used with **<searchType>** set to **99**) you can use function **getAutoCompleteSuggestions**. It returns article and vehicle manufacturer descriptions as well as assembly groups that match your requested string.

- <https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLB.soapEndpoint?doc>
→ getAutoCompleteSuggestions → Detail

5.4 Get vehicle information (getLinkageTargets)

To get all reference data of the TecDoc database (optional filtering possible) use function **getLinkageTargets**, below a documentation of all possible request parameters:



- <https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLB.soapEndpoint?doc>
→ getLinkageTargets → Detail

5.5 Generate dynamic API Keys (addDynamicAPIKey)

Generates dynamic API Keys, valid to a maximum of 24 hours.

- <https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLB.soapEndpoint?doc>
→ addDynamicAPIKey → Detail

5.6 TecDoc Vehicle Identification

Please note that TecDoc Vehicle Identification (VIN Filter and VRM Lookups) requires additional license.

5.6.1 VIN Filter (getVehiclesByVIN)

The **getVehiclesByVIN** method is used for the VIN Filter.

- <https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLB.soapEndpoint?doc>
→ getVehiclesByVIN → Detail

5.6.2 VRM Lookups (getVehiclesByKeyNumberPlates)

The **getVehiclesByKeyNumberPlates** method is used for the VRM Lookups.

- <https://webservice.tecalliance.services/pegasus-3-0/services/TecdocToCatDLB.soapEndpoint?doc>
→ getVehiclesByKeyNumberPlates → Detail

Country	Use Case	keySystemType	Comment
AT	National Code	6	
AU	VRM	75	Add. credentials required
BR	VRM	100	Add. credentials required
CH	Type Permit Number	4	
DE	KBA Number	20	
DK (Autig.dk members)	VRM	55	Add. credentials required
DK (all the others)	VRM	92	Add. credentials required

Country	Use Case	keySystemType	Comment
DK	VRM	95	Add. credentials required
ES	VRM	99	Add. credentials required
FI	VRM	95	Add. credentials required
FR	Type Mine Number	2	
FR	Type Mine Number	21	
FR	VRM	50	Add. credentials required
GB	VRM	99	Add. credentials required
IE	VRM	99	Add. credentials required
IT	VRM	50	Add. credentials required
IT	VRM	51	Add. credentials required
IS	VRM	10	
MT	VRM	99	Add. credentials required
NL	VRM	1	
NO	VRM	95	Add. credentials required
NZ	VRM	75	Add. credentials required
PT	VRM	50	Add. credentials required
SE	VRM	95	Add. credentials required



6 Default TecDoc Account Configuration

6.1 Authentication and Authorization

ProviderId + Static API Key

6.2 Catalogue Data

These Data Suppliers are configured for your ProviderId in case you haven't specified your Catalogue Data requirements at the beginning of the Project Phase yet; the Catalogue Data available depends on your licensed markets (CountryCodes).

BrandId	Brand
72	HERTH+BUSS ELPARTS
94	METZGER
101	FEBI BILSTEIN
268	JP GROUP
4346	VIKA
4938	FAST
4944	OREX

6.3 Reference Data

You have access to all Reference Data, the data available depends on your licensed markets (CountryCodes).

7 “TecAlliance TecDoc Inside” Signet

Please bear in mind that you are contractually obliged to implement the copyright notice "TecAlliance TecDoc Inside" as well as a "TecAlliance TecDoc Inside" signet on the homepage of your application. The copyright notices in different languages are available at: <https://www.tecalliance.net/copyright-note/>

You have received the “TecAlliance TecDoc Inside” Signets as part of your onboarding from a Technical Consultant.

See also General Terms & Conditions, Points 2.1.3 and 2.3.2.



8 TecDoc Web Service: general use cases

The general use cases with examples are listed below. Please note that in all examples you need to specify your providerId instead of <ProviderId>, country code (linkageTargetCountry, countryCode, country, articleCountry), language (lang).

8.1 Vehicle manufacturer → model series → vehicles with technical details and images

Step 1. Get a list of vehicle manufacturers:

Function: **getLinkageTargets**

Requested parameters: *includeMfrFacets = true*
linkageTargetType:

'P': Vehicle Type (Passenger + Motorcycle + LCV)
'V': Passenger Car
'L': LCV
'B': Motorcycle
'O': CV Type (Commercial Vehicle + Tractor)
'C': Commercial Vehicle
'T': Tractor
'M': Engine
'A': Axle
'K': CV Body Type
'H': HMD Vehicle

Request	Response
<pre>{ "getLinkageTargets": { "provider": ProviderId, "linkageTargetCountry": "DE", "lang": "en", "linkageTargetType": "P", "perPage": 0, "page": 1, "includeMfrFacets": true } }</pre>	<pre>{ "total": 40028, "linkageTargets": [], "mfrFacets": { "total": 289, "counts": [{ "id": 2, "name": "ALFA ROMEO", "count": 486 }, { "id": 3, "name": "AUTO UNION", "count": 23 }] } }</pre>

	<pre>{ "id": 5, "name": "AUDI", "count": 1907 },</pre>
--	--

Step 2. Get a list of vehicle model series:

Function: **getLinkageTargets**

Requested parameters: *includeVehicleModelSeriesFacets = true*

linkageTargetType:

'P': Vehicle Type (Passenger + Motorcycle + LCV)

'V': Passenger Car

'L': LCV

'B': Motorcycle

'O': CV Type (Commercial Vehicle + Tractor)

'C': Commercial Vehicle

'T': Tractor

'M': Engine

'A': Axle

'K': CV Body Type

'H': HMD Vehicle

mfrIds – id (vehicle manufacturer id) from the previous response

Request	Response
<pre>{ "getLinkageTargets": { "provider": ProviderId, "linkageTargetCountry": "DE", "lang": "en", "linkageTargetType": "P", "mfrIds": 5, "perPage": 0, "page": 1, "includeVehicleModelSeriesFacets": true } }</pre>	<pre>{ "total": 1907, "linkageTargets": [], "vehicleModelSeriesFacets": { "total": 117, "counts": [{ "id": 1, "name": "80 B4 Saloon (8C2)", "count": 17 }, { "id": 6, "name": "80 B4 Avant (8C5)", "count": 15 }, { "id": 10, "name": "100 C2 Saloon (431, 433, 434)", "count": 6 }] } }</pre>



	<pre> }, { "id": 13, "name": "100 C3 Saloon (443, 444)", "count": 30 }, </pre>
--	--

Step 3. Get vehicles for a specific vehicle manufacturer and model series:

Function: **getLinkageTargets**

Requested parameters: *linkageTargetType*:

'P': Vehicle Type (Passenger + Motorcycle + LCV)
'V': Passenger Car
'L': LCV
'B': Motorcycle
'O': CV Type (Commercial Vehicle + Tractor)
'C': Commercial Vehicle
'T': Tractor
'M': Engine
'A': Axle
'K': CV Body Type
'H': HMD Vehicle

mfrIds – id (vehicle manufacturer id) from the previous response

vehicleModelSeriesIds – id (vehicle model series id) from the previous response

Request	Response
<pre> { "getLinkageTargets": { "provider": ProviderId, "linkageTargetCountry": "DE", "lang": "en", "linkageTargetType": "P", "mfrIds": 5, "vehicleModelSeriesIds": 13, "perPage": 100, "page": 1 } } </pre>	<pre> { "total": 30, "linkageTargets": [{ "linkageTargetId": 1309, "linkageTargetType": "P", "subLinkageTargetType": "V", "description": "1.8", "mfrId": 5, "mfrName": "AUDI", "mfrShortName": "AUDI", "vehicleModelSeriesId": 13, "vehicleModelSeriesName": "100 C3 Saloon (443, 444)", "beginYearMonth": "1986-02", "endYearMonth": "1988-07", "rmiTypeId": 1166, "vehicleImages": [</pre>

	<pre> "imageURL50": "https://webservice.tecalliance.services/digital-assets-proxy/tecdoc/1asshosKLBp_7lOhbpuRb1HCjKjYMMsw-dA4l-SIVhVpHtYQOWnpnKDewllrXdRA4albFysDTxP3tcu7ktPhYh6rYFWdnEUGJjRLlJpQCGQOJhYM1Kt_8P6bydg_1EO9Wi1JbpM3RmCbsxrvlyvwtF3WLSqcVgmnXTjd", "imageURL100": "https://webservice.tecalliance.services/digital-assets-proxy/tecdoc/rziC3uPcJGxe35nAVs5Gpfhli4VDUbayJvL3nobbqEldBV7t3RwSFJS5JdGTihUIGCJ5blvdld69Kj9gvMJ59zKoLTEOUTRtk9eeCCmD-7YZ4zvjuWl3cyW8f0iaUasIA7XN3glJnoy56pP6oX3G72klKMvR8xtKJ8dxGw", "imageURL200": "https://webservice.tecalliance.services/digital-assets-proxy/tecdoc/xWnxjnsqJQw32gexp8aNf-zWxnCfilAQ5SSQJRakckULBRL2pX-6StTKP_p_2WlkjrZheQlcig6MiD87z_WfPPXCwUS3PWHsfLhakm_D8n2SgyZdPj1Z9xbpLqsf-1KLT0CufJlJiUc4JlbzaZ6CJx1ocxm5YkxMuDHHA", "imageURL400": "https://webservice.tecalliance.services/digital-assets-proxy/tecdoc/5ACIs2w95k9WgkYSCKoQ3bhJrtOmztGn8oYhMxaHnt43sCoOdEq-C1EpDJbwAWx65TRFbS-lj99NzHqeHnzlFbgw0pGeWNvY-KNEUCCMUPM4EDqnsV1hZ5p10qzoX0Uoxn9miVxLVIHWW3zeRT6m40lmi33W8ikZF81d1w", "imageURL800": "https://webservice.tecalliance.services/digital-assets-proxy/tecdoc/D_ZcSZnU5t7z0ycS-aAD6YuVVGxqtab3pIXjKEISQ-I7zE6ulfbjkFilUqfo5JGHHJiTDiDL5yK8OX8CA8VSgB60MoWv5dLMYpObobVNTICCV8kiTdXI-FYq-kpXQWifBlncnFwPSWz0yYckls8i_IV8uWu71wNSH_yWkw" }], "bbaNumbers": ["0588363"], "fuelMixtureFormationTypeKey": 26, "fuelMixtureFormationType": "Intake Manifold Injection/ Carburettor", "driveTypeKey": 1, "driveType": "Front-Wheel Drive", "bodyStyleKey": 27, "bodyStyle": "Saloon", "valves": 2, "fuelTypeKey": 1, "fuelType": "Petrol", "engineTypeKey": 1, "engineType": "Petrol Engine", "horsePowerFrom": 88, "horsePowerTo": 88, "kiloWattsFrom": 65, "kiloWattsTo": 65, "cylinders": 4, "capacityCC": 1781, "capacityLiters": 1.8, "engines": [{ </pre>
--	---



	<pre> "id": 326, "code": "SH" }] }, </pre>
--	--

8.2 Product brands + logos

Get brands with logos and addresses:

Function: **getBrands**

Requested parameters: *includeAll = true*

Request	Response
<pre> { "getBrands": { "articleCountry": "DE", "lang": "en", "provider": ProviderId, "includeAll": true } } </pre>	<pre> { "data": { "array": [{ "dataSupplierId": 72, "mfrName": "HERTH+BUSS ELPARTS", "addressDetails": [{ "addressName": "Address (General)", "addressType": 1, "city": "Heusenstamm", "email": "info@herthundbuss.com", "fax": "06104/65075", "name": "HERTH+BUSS ELPARTS", "name2": "HERTH+BUSS Fahrzeugteile GmbH & Co KG", "phone": "06104/608-0", "street": "DieselstraÙe 2-4", "wwwURL": "www.herthundbuss.com", "zip": "63150", "zipCountryCodeISO": "DE" }], "dataSupplierLogo": { "imageURL100": "https://digital- assets.tecalliance.services/images/100/e6bd99f166af3ed799fa32b640 f03cf6dd952234.jpg", "imageURL200": "https://digital- assets.tecalliance.services/images/200/e6bd99f166af3ed799fa32b640 f03cf6dd952234.jpg", </pre>

	<pre> "imageUrl400": "https://digital- assets.tecalliance.services/images/400/e6bd99f166af3ed799fa32b640 f03cf6dd952234.jpg", "imageUrl800": "https://digital- assets.tecalliance.services/images/800/e6bd99f166af3ed799fa32b640 f03cf6dd952234.jpg" } }] }, </pre>
--	--

8.3 Search Tree: Assembly groups → Articles with details and images for a specific assembly groups

Step 1. Get a list of assembly groups:

Function: **getArticles**

Requested parameters: *assemblyGroupFacetOptions*

assemblyGroupType:

'P': Passenger Car/LCV (w/o Motorcycle)

'B': Motorcycle

'O': Commercial Vehicle

'M': Engine

'A': Axle

'U': Universal

enabled: true

includeCompleteTree: true

perPage: 0

page: 1

Optional parameters (if you want to get a search tree for a specific vehicle ID):

linkageTargetType:

'P': Vehicle Type (Passenger + Motorcycle + LCV)

'V': Passenger Car

'L': LCV

'B': Motorcycle

'O': CV Type (Commercial Vehicle + Tractor)

'C': Commercial Vehicle

'T': Tractor

'M': Engine

'A': Axle



'K': CV Body Type
linkageTargetId – *carId* (*linkageTargetId* from *getLinkageTargets*, or *carId* from *getVehicleIdsByCriteria* response)

Request	Response
<pre>{ "getArticles": { "articleCountry": "DE", "provider": ProviderId, "lang": "en", "perPage": 0, "page": 1, "assemblyGroupFacetOptions": { "enabled": true, "assemblyGroupType": "P", "includeCompleteTree": true } } }</pre>	<pre>{ "totalMatchingArticles": 6943670, "maxAllowedPage": 1, "articles": [], "status": 200, "assemblyGroupFacets": { "total": 1188, "counts": [{ "assemblyGroupId": 100385, "assemblyGroupName": "Accelerator Cable/Linkage", "assemblyGroupType": "P", "parentNodeId": 100383, "count": 9100 }, { "assemblyGroupId": 102802, "assemblyGroupName": "Accelerator Cable/Linkages", "assemblyGroupType": "P", "parentNodeId": 102793, "count": 2174 }, { "assemblyGroupId": 102801, "assemblyGroupName": "Accelerator Pedal", "assemblyGroupType": "P", "parentNodeId": 102793, "count": 2103 }] } }</pre>

Step 2. Get articles for a specific assembly group:

Function: **getArticles**

Requested parameters: *assemblyGroupNodeIds* – *assemblyGroupNodeIds* from the previous *getArticles* response.
includeAll: true

Optional parameters (if you want to get a search tree for a specific vehicle ID):

linkageTargetType:

'P': Vehicle Type (Passenger + Motorcycle + LCV)

'V': Passenger Car

'L': LCV

'B': Motorcycle

'O': CV Type (Commercial Vehicle + Tractor)

'C': Commercial Vehicle

'T': Tractor

'M': Engine

'A': Axle

'K': CV Body Type

linkageTargetId – carId (*linkageTargetId* from *getLinkageTargets*, or *carId* from *getVehicleIdsByCriteria* response)

Request	Response
<pre>{ "getArticles": { "articleCountry": "DE", "provider": ProviderId, "assemblyGroupNodeIds": 102801, "lang": "en", "perPage": 100, "page": 1, "includeAll": true } }</pre>	<pre>{ "totalMatchingArticles": 2103, "maxAllowedPage": 22, "articles": [{ "dataSupplierId": 72, "articleNumber": "51277323", "mfrId": 635, "mfrName": "HERTH+BUSS ELPARTS", "misc": { "articleStatusId": 1, "articleStatusDescription": "Normal", "articleStatusValidFromDate": 20211120, "quantityPerPackage": 1, "quantityPerPartPerPackage": 0, "isSelfServicePacking": false, "hasMandatoryMaterialCertification": false, "isRemanufacturedPart": false, "isAccessory": false, "batchSize1": 0, "batchSize2": 0 }, "genericArticles": [{ "genericArticleId": 9193, "genericArticleDescription": "Cable Repair Set, accelerator pedal sensor", "legacyArticleId": 446521824 }] }] }</pre>



	<pre> }], "articleText": [], "gtins": ["4026736446376"], "tradeNumbers": ["RepCon"], "oemNumbers": [{ "articleNumber": "736 4107 110 00", "mfrId": 36, "mfrName": "FORD" }, { "articleNumber": "8E0 971 934", "mfrId": 253, "mfrName": "VAG" }], "replacesArticles": [], "replacedByArticles": [], "articleCriteria": [{ "criteriald": 122, "criteriaDescription": "Manufacturer Restriction", "criteriaAbbrDescription": "for manufacturer", "criteriaType": "A", "rawValue": "Ford", "formattedValue": "Ford", "immediateDisplay": false, "isMandatory": false, "isInterval": false }, { "criteriald": 1504, "criteriaDescription": "SVHC", "criteriaAbbrDescription": "SVHC", "criteriaType": "K", "rawValue": "2", "formattedValue": "No SVHC present!", "immediateDisplay": false, "isMandatory": false, "isInterval": false }], "linkages": [], </pre>
--	---

	<pre> "pdfs": [], "images": [{ "imageURL50": "https://digital- assets.tecalliance.services/images/50/477856640a06ba5b5b56 b5187ca59843b30453fa.jpg", "imageURL100": "https://digital- assets.tecalliance.services/images/100/477856640a06ba5b5b5 6b5187ca59843b30453fa.jpg", "imageURL200": "https://digital- assets.tecalliance.services/images/200/477856640a06ba5b5b5 6b5187ca59843b30453fa.jpg", "imageURL400": "https://digital- assets.tecalliance.services/images/400/477856640a06ba5b5b5 6b5187ca59843b30453fa.jpg", "imageURL800": "https://digital- assets.tecalliance.services/images/800/477856640a06ba5b5b5 6b5187ca59843b30453fa.jpg", "fileName": "51277323.JPG", "typeDescription": "Article Picture", "typeKey": 1, "headerDescription": "Photo", "headerKey": 1 }, </pre>
--	--

8.4 Vehicle manufacturers and vehicles for a particular product (article)

Step 1. Get a list of vehicle manufacturers for a specific article:

Function: **getArticleLinkedAllLinkingTargetManufacturer2**

Requested parameters: *articleId* – *legacyArticleId* from the *getArticles* response.

linkingTargetType:

'P': Vehicle Type (Passenger + Motorcycle + LCV)

'V': Passenger Car

'L': LCV

'B': Motorcycle

'O': CV Type (Commercial Vehicle + Tractor)

'C': Commercial Vehicle

'T': Tractor

'M': Engine

'A': Axle

'K': CV Body Type



Request	Response
<pre>{ "getArticleLinkedAllLinkingTargetManufacturer2": { "articleCountry": "DE", "articleId": 446521824, "country": "DE", "linkingTargetType": "P", "provider": ProviderId } }</pre>	<pre>{ "data": { "array": [{ "manuld": 5, "manuName": "AUDI" }, { "manuld": 36, "manuName": "FORD" }, { "manuld": 121, "manuName": "VW" }] }, "status": 200 }</pre>

Step 2. Get a list of vehicles for a specific article:

Function:

getArticleLinkedAllLinkingTarget4

Requested parameters: *articleId* – *legacyArticleId* from the *getArticles* response.

linkingTargetType:

'P': Vehicle Type (Passenger + Motorcycle + LCV)

'V': Passenger Car

'L': LCV

'B': Motorcycle

'O': CV Type (Commercial Vehicle + Tractor)

'C': Commercial Vehicle

'T': Tractor

'M': Engine

'A': Axle

'K': CV Body Type

Optional parameter (if you want to get vehicles for a specific vehicle manufacturer):

linkingTargetManuld – *manuld* from the previous response.

Request	Response
{	{

<pre>"getArticleLinkedAllLinkingTarget4": { "articleCountry": "DE", "articleId": 446521824, "country": "DE", "lang": "en", "linkingTargetManuId": 5, "linkingTargetType": "P", "provider": ProviderId }</pre>	<pre>"data": { "array": [{ "articleLinkages": { "array": [{ "articleLinkId": 832107059, "linked": true, "linkingTargetId": 33251, "linkingTargetType": "P" }, { "articleLinkId": 832106828, "linked": true, "linkingTargetId": 26581, "linkingTargetType": "P" }, { "articleLinkId": 832106433, "linked": true, "linkingTargetId": 17172, "linkingTargetType": "P" }] } }] }</pre>
---	--

Step 3. Get all article and vehicle information for specified TecDoc vehicleId and TecDoc articleId:

Function:

getArticleLinkedAllLinkingTargetsByIds3

Requested parameters: *articleId* – *legacyArticleId* from the previous *getArticles* response

articleLinkId – *articleLinkId* from the previous *getArticleLinkedAllLinkingTarget4* response

linkingTargetId – *linkingTargetId* from the previous *getArticleLinkedAllLinkingTarget4* response

linkingTargetType:

'P': Vehicle Type (Passenger + Motorcycle + LCV)

'V': Passenger Car

'L': LCV

'B': Motorcycle

'O': CV Type (Commercial Vehicle + Tractor)

'C': Commercial Vehicle

'T': Tractor

'M': Engine



'A': Axle
'K': CV Body Type

Request	Response
<pre>{ "getArticleLinkedAllLinkingTargetsByIds3": { "articleCountry": "DE", "articleId": 446521824, "immediateAttributs": true, "lang": "en", "linkedArticlePairs": { "array": [{ "articleLinkId": 832107059, "linkingTargetId": 33251 }] }, "linkingTargetType": "P", "provider": ProviderId } }</pre>	<pre>{ "data": { "array": [{ "articleLinkId": 832107059, "linkedArticleImmediateAttributs": "", "linkedVehicles": { "array": [{ "carDesc": "1.2 TSI", "carId": 33251, "constructionType": "Hatchback", "cylinderCapacity": 1197, "linkingTargetType": "P", "manuDesc": "AUDI", "manuId": 5, "modelDesc": "A3 (8P1)", "modelId": 4955, "powerHpFrom": 105, "powerHpTo": 105, "powerKwFrom": 77, "powerKwTo": 77, "yearOfConstructionFrom": 201004, "yearOfConstructionTo": 201208 }] }, "linkingTargetId": 33251 }] }, "status": 200 }</pre>

8.5 Search articles for a specific number

Function: **getArticles**

Requested parameters: *searchQuery* – article search or a part of article (prefix/suffix)

searchType:

0: Article Number (DEFAULT) – IAM article number

1: OE Number – OE article number that references the IAM article

2: Trade Number – trade number from data supplier.

3: Comparable Number – comparable articles that can replace each other from different data suppliers

4: Replacement Number – article number that replaces another article from one data supplier

5: Replaced Number – article number that is replaced by another article from one data supplier

6: EAN Number – EAN number

7: Criteria Number – criteria number

10: Any Number – searching for any number 0 - 7

99: Free Text – search for free text including article numbers, article text etc.

searchMatchType:

exact: Exact Match (DEFAULT)

prefix: Prefix Match

suffix: Suffix Match

prefix_or_suffix: Prefix or Suffix Matching

Request	Response
<pre>{ "getArticles": { "articleCountry": "DE", "provider": ProviderId, "searchQuery": "51277162", "searchType": 0, "assemblyGroupNodeIds": 102801, "lang": "en", "perPage": 100, "page": 1, "includeAll": true } }</pre>	<pre>{ "totalMatchingArticles": 1, "maxAllowedPage": 1, "articles": [{ "dataSupplierId": 72, "articleNumber": "51277162", "mfrId": 635, "mfrName": "HERTH+BUSS ELPARTS", "misc": { "articleStatusId": 1, "articleStatusDescription": "Normal", "articleStatusValidFromDate": 20211120, "quantityPerPackage": 1, "quantityPerPartPerPackage": 0, "isSelfServicePacking": false, "hasMandatoryMaterialCertification": false, "isRemanufacturedPart": false, "isAccessory": false, </pre>




	<pre>"batchSize1": 0, "batchSize2": 0 }, "genericArticles": [{ "genericArticleId": 9193, "genericArticleDescription": "Cable Repair Set, accelerator pedal sensor", "legacyArticleId": 703888410 }],</pre>
--	--

9 TecDoc Web Service in combination with other TecAlliance solutions


In case you licensed the **Repair & Maintenance Information (RMI)** and you want to work with data that you got from TecDoc Web Service within the RMI 4.0 API you simply have to do a translation via one of these RMI Web Service methods:

9.1 **RMI 4.0 API – ServiceVT_VehicleTree:** TecDoc Typeld for RMI Typeld




- GetVtTcdMakeIdByAdcMakeId
- GetVtTcdRangeIdByAdcRangeId
- GetVtTcdTypeAndClassByAdcTypeId

9.2 **RMI 4.0 API – ServiceVT_VehicleTree:** RMI Typeld for TecDoc Typeld




- GetVtAdcMakeIdByTcdMakeId
- GetVtAdcRangeIdByTcdRangeId
- GetVtAdcTypeIdByTcdTypeAndClass

9.3 **RMI 4.0 API – ServiceBasket_Prices:** TecDoc GenArtId for RMI ItemMpId



- GetItemMpIdForGenArt

9.4 **RMI 4.0 API – ServiceBasket_Prices:** TecDoc GenArtId for RMI ItemMpId



- GetGenArtsForItemMpIds
- GetGenArtsForWorkIds



9.5 TecDoc Pegasus 3.0 API: TecDoc Typeld / RMI Typeld

Please bear in mind that Provider 33000 needs to be replaced by your ProviderId! RMI Typeld is returned by functions `getVehicleByIds`, `getVehicleIdsByKTypeNumber`, `getLinkageTargets`.

Request

```
1. {  
2.   "getVehicleIdsByKTypeNumber": {  
3.     "carType": "P",  
4.     "countriesCarSelection": "DE",  
5.     "lang": "en",  
6.     "provider": 33000,  
7.     "typeNumber": 1321  
8.   }  
9. }
```

Response

```
1. {  
2.   "data": {  
3.     "array": [  
4.       {  
5.         "carId": 1321,  
6.         "carName": "AUDI 100 (44, 44Q, C3) 2.0 D",  
7.         "firstCountry": "DE",  
8.         "kTypeNumber": 1321,  
9.         "rmiTypeId": 1177  
10.      }  
11.    ]  
12.  },  
13.  "status": 200  
14. }
```

10 Glossary

Term	Explanation
TecDoc GenArt, GenCritNo/Value	GenArt (Generic Article): Description of a „Product / Spare Part Group“, e. g. „Brake Disc“. In combination with GenCrit (Generic Criteria Number and Value), e. g. „left, front“ you get the same information as provided by the ItemMpld (Item Mount Position)
TecDoc Web Service	Independent automotive aftermarket article data; also provides Vehicle register mark look-up and vehicle identification number look-up
RMI ItemMpld	The mount position of an item, e. g. “Brake disc, front, left”
RMI Web Service	information system for repair and maintenance information
VIN	Vehicle Identification Number
VRM	Vehicle Registration Mark