

Untrusted Authors, Trusted Answers

A Calculus of Fidelity-Graded Translations

Christoph Kirsch

University of Salzburg, Austria

Czech Technical University, Prague, Czechia

ck@cs.uni-salzburg.at

Abstract

To answer a question about a program, move the program to where the question is decidable. Every such move is a translation, and every translation is a place to be wrong. We study translation as a *graph* — many languages, a few reasoning targets, independently built routes of honestly different trustworthiness — and give it a calculus: pairs of languages close commuting squares that are *directional* (exactness is the identity-embedding special case of over-approximation), checkable per program, and composable, a route’s contract being the componentwise meet of its hops’ contracts — assurance class, direction, kept observables, measured cost. One asymmetry organizes trust: witness-carrying answers are self-certifying by replay at the source; universal answers are where grades, independent branches, and re-checked certificates earn their cost. The compositional core, lax telescope included, is mechanized in Lean 4.

hurdy-gurdy implements the calculus as *two planes* meeting in one registry. The *use* plane reads declarations and produces evidence-carrying answers; its builders and its intended player are both LLMs, untrusted by construction. The *evolution* plane grows the graph: unmet questions are recorded as demand, pairs are *recommended by evidence* and registered by humans, and a ratchet keeps every prior verdict standing. *Answers never write; growth never answers*. Run indefinitely, the loop converges on every reducibly decidable question, at fidelity that only rises. We measure the July 2026 snapshot — per-construct conjoined coverage, dual-route branch agreement for two ISAs, source-level witness replay, certified unreachable re-validated by a formally verified checker, escape rates for the gate itself — and report the defects the architecture caught in its own authors’ work.

1 Introduction

To answer a question about a program, move the program to where the question is decidable. A C program’s reachability question becomes a bit-vector model-checking problem; a Python function’s assertion becomes a linear-arithmetic query; a chemical reaction network’s coverability question becomes an SMT unrolling. Every such move is a translation, and every translation is a place to be wrong. The classical responses are to *prove* the translator once and for all [16, 18],

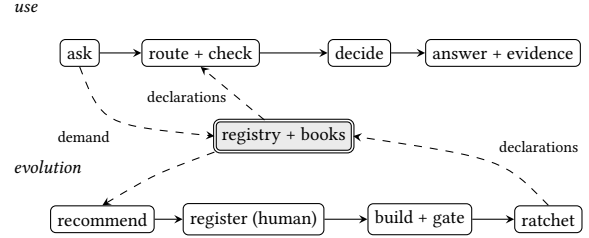


Figure 1. The two planes, meeting in one data structure. The use plane reads the registry’s declarations and produces evidence-carrying answers; the evolution plane turns recorded demand into new declarations, gated and ratcheted, with registration a human act. *Answers never write; growth never answers.*

or to *validate* each of its runs [19, 26, 30]. Both are statements about a single edge.¹

This paper is about the *graph*: several source languages, a few solver-facing targets, more than one way to get from here to there — and, crucially, edges of *honestly different* trustworthiness. A rule-for-rule logic translator is foreseeable from its specification; an optimizing C compiler is only pinned; two translators derived independently from a prose manual and a formal model are neither proved — but their independence is itself a resource. A theory of the graph must let each edge say what it actually guarantees, compose those statements honestly, and let weak edges corroborate one another into strong routes. Its stance is that of distributed systems: a translator is a component that fails, and failure is *contained* — by declared loss, decidable checks, and independent routes — not prevented by universal proof.

Two directions, two planes. This work is as much an experiment about *who can build and use* such a system as about the system itself, and its two directions are the platform’s two planes (Figure 1). On the *use* plane, LLMs are *supported*: the intended player is an LLM that chooses questions and routes but can take no unchecked step — every move is deterministic, graded, cross-checked, and, for witness-carrying answers, self-certifying at the source (a first controlled experiment: §6.8). On the *evolution* plane, LLMs are *utilized*: every pair was implemented by an independent LLM agent from a

¹Code, evidence, and the Lean mechanization: <https://github.com/cksystems/hurdy-gurdy> — this version is tag arxiv.2.

one-page brief, largely unsupervised, with the architecture’s cross-checks as the only semantic gate (§6.6 reports what the gate caught) — and the plane is instrumented end to end: unanswerable questions are diagnosed and recorded as demand, pairs are *recommended by evidence* before a human registers them, and the ratchet (Proposition 5.2) keeps every prior verdict standing (§5.3). Run indefinitely, this loop is a semi-algorithm for answerability: in the limit it reaches every *reducibly decidable* question, at fidelity that only rises — and it is not an oracle: undecidability, the adequacy floor, and the finite supply of independent semantic anchors stand at every graph size (Sections 2 and 8).

Provenance disclaimer. All of HURDY-GURDY — framework, interpreters, pairs, solver plumbing, evaluation harness, Lean mechanization — is LLM-generated code (Claude Opus and Claude Fable agents), and most of this paper’s text is LLM-generated too; no human reviewed either for semantic correctness. The human contribution is the architecture: the calculus, the contracts, and the decisions about what to build and claim. Every quantitative claim in Section 6 regenerates from the artifact by one script, and the mechanization’s axiom audit re-runs at every build — the reader need not trust the writers, human or otherwise, beyond what the thesis itself requires.

This paper. The unit is the *pair* (Section 3): two languages, a pure translator, shared pure interpreters, and a pure *target-to-source interpreter* carrying target behaviors back to source vocabulary. These close a commuting square that is *directional* — exactness is the identity-embedding special case of over-approximation — and *decidable per program*: run both sides, compare under the declared projection, and a failure names its step and observable. Squares paste (under a one-line congruence condition on what carry-backs may read), and composition is told once: a pair’s *contract* — assurance class, direction, kept observables, measured cost — composes along a route by the componentwise meet, the weakest hop on every axis at once (Section 3.5). Two mechanisms move trust where the meet says it cannot go — per-run re-establishment by inline checking, and corroboration by independently derived branches whose declared semantic artifacts are disjoint — and one asymmetry caps the story: existential answers are self-certifying by replay (Theorem 3.17), while universal answers are exactly where grades, branches, and certificates earn their cost (Theorem 3.18). Section 4 describes the platform — 13 languages, 15 registered pairs (13 in the evaluated snapshot), two reasoning hubs — Section 5 its economy and books, and Section 6 measures both.

Contributions.

- A calculus of directional, fidelity-graded translation pairs: per-program decidable squares with localization, pasting under an explicit support condition, exactness as the identity-embedding case (Proposition 3.10), and

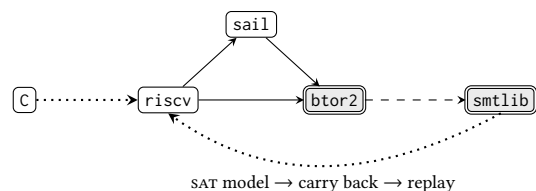


Figure 2. One run down the spine. The question travels $C \rightarrow \text{RISC-V} \rightarrow \text{BTOR2} \rightarrow \text{SMT-LIB}$ (RISC-V reaching BTOR2 twice, the manual-derived and Sail-derived branches whose agreement corroborates both); a SAT model is carried back hop by hop and *replayed* in the source-side interpreter — the answer’s evidence, not the solver’s say-so (Theorem 3.17).

universal transfer across over-approximation (Proposition 3.11).

- The contract algebra: composition as one component-wise meet across assurance, direction, loss, and cost — its logical coordinates (class and direction) mechanized in Lean 4 with the rest of the compositional core, lax telescope included (§3.8); loss composes by declared keep-sets, cost by measurement.
- The existential/universal asymmetry as an architectural principle, with its end-to-end theorems (§3.7).
- The two-plane architecture and its economy: demand books, evidence-backed recommendation, human-valved registration, and the ratchet — the untrusted-generator stance extended from building pairs to choosing them (§5.3).
- A measured, LLM-built instantiation: conjoined coverage, dual ISA branches with disjoint decision stacks, a compliance-derived benchmark, witness replay, certified unreachable at up-to-megabyte scale under a formally verified checker, gate escape rates, a first LLM-player experiment, and the defects caught (Sections 4 and 6).

This document is a dated capability snapshot (July 2026) of a system whose coverage ratchets monotonically by construction; every number in Section 6 regenerates from the artifact, and the appendix — detailed proofs and the construct-inventory catalog — follows the bibliography.

2 Overview: one question, one growth step

Consider a small C program: a loop over an array with an index computation, and a question — can $x == 42$ hold at the failure label? Figure 2 draws the route this question takes; we narrate it, then one growth step, and Section 3 makes the definitions precise.

The spine. The program first moves from C to RISC-V. The translator on this edge is a *pinned* C compiler: a digest-locked gcc with recorded flags. We can replay it bit-for-bit, but nobody can foresee or prove its output — its honest grade

is reproducible, determinism without meaning. The RISC-V program then moves to BTOR2, a bit-vector transition-system logic that model checkers consume, and from there across a rule-for-rule bridge to SMT-LIB, where bit-vector solvers decide the reachability query.

Each of these moves is a *pair*: translator, source interpreter, target interpreter, and a target-to-source interpreter that carries behaviors backwards. When the RISC-V-to-BTOR2 translator runs, the platform can immediately check it *on this very program*: interpret the RISC-V program directly (the left edge of a square), interpret the BTOR2 translation and carry the resulting trace back to RISC-V observables (the other three edges), and compare, step by step, on the declared observables — program counter, registers, halt flag. That check passing is what the edge’s checked grade *means*. Note carefully what it covers: every hop *from the compiled binary onward*. The C hop itself has no square — there is no C interpreter and no ISA-to-C carry-back — so the verified portion of the route begins at the binary; the pinned compiler contributes reproducibility, re-checked separately by a corpus-level differential against an independent C verifier (Section 4).

The branch. RISC-V reaches BTOR2 twice. One translator was written against the prose ISA specification; a second route factors through Sail, deriving its semantics from the official RISC-V Sail model. On the segment where they diverge — from RISC-V to BTOR2 — the two routes share no translator and no carry-back; below the reconvergence they share the hub bridge, so it is the diverse prefix that agreement corroborates (§3.6). The platform runs the question down both, and the answers must agree. If they do, two independently derived encodings of RISC-V semantics corroborate each other — evidence strictly stronger than either route’s own grade (Lemma 3.16). If they disagree, at least one route has a defect, and the per-hop squares localize it: which hop, which step, which observable (Lemma 3.15 and Corollary 3.8). The same dual-route structure exists for AArch64 (Arm manual vs. Arm Sail model).

The answer comes home. Suppose the SMT solver answers SAT: the label is reachable, with a model. The model is not the answer the user asked for — it is a valuation of SMT variables. The route’s carry-backs now run in reverse: the SMT model becomes a BTOR2 witness, the witness a RISC-V trace, the trace an initial memory and register state — concretely, the inputs of the original C program. The platform then *replays* those inputs in the route’s source-side interpreter — for this spine, the shared RISC-V interpreter on the compiled binary, the question’s observable read at the ISA level (§3.5) — and watches the failure state actually happen. At that moment the user’s trust obligations collapse: even if every translator, both routes, and the solver were wrong, the replayed run exhibits the behavior (Theorem 3.17). Witness-carrying answers are self-certifying; only the interpreter that

replays them — itself differentially tested against an independently generated ISA simulator — remains to be believed.

Had the solver answered UNSAT, no replay could vouch for it. That is where the grades, the branch agreement, the multi-engine corroboration, and the independently checked certificates carry the weight (Theorem 3.18) — and where the platform spends its assurance budget.

Beyond one spine. Nothing above is specific to C or RISC-V (Figure 3 draws the full registry graph). The same square contract admits eBPF, Wasm, and EVM programs into the BTOR2 hub; Python functions and chemical reaction networks reach the SMT-LIB hub directly; a SMILES molecular graph reaches a molecular-formula target with no solver at all (a *compile pair* — the calculus does not care that the languages are far from computation, only that both have defined meaning). Each pair declares what it preserves (its projection), what it rejects (typed, enumerable unsupported), and its grade; the registry composes routes and reports each route’s composed coverage, grade, and loss.

One growth step. Now ask the platform something it cannot do: is this RISC-V program’s loop *live* — does it always eventually make progress? The diagnosis (gurdy why-not) walks its obstacles in order and stops at the third: routes exist, the observables survive, but no registered reasoning language expresses a liveness shape. The failure is recorded in the platform’s books — the question verbatim, the obstacle, the generation target it names (a liveness-to-safety reduction on the bit-level hub, or a new temporal hub), an origin tag — and the recommendation board aggregates it beside every other unmet demand. A generator drafts the brief citing those records; a human reads the evidence and registers, or declines; a builder agent implements against the contract; the gate admits or rejects; the ratchet keeps every prior verdict standing; the question is re-asked. That is one turn of the evolution plane, and no step of it answered a question or was answered by one — *answers never write; growth never answers*. The rest of the paper makes each of these words precise, then measures the system.

The graph in the limit. Nothing above says the graph is finished — the architecture is built so that it never has to be. When a question is unanswerable, exactly one of four obstacles fails first, each named by one shipped call (gurdy why-not): no route reaches a reasoning language; a route exists but some hop’s declared loss discards the observable the question reads; no registered reasoning language expresses the question’s shape; or the solver exhausts its budget. The diagnosis names the missing pair; the demand is recorded in the platform’s books and aggregated into recommendations (§5.3); and that makes a *loop* well-defined: generate the recommended pair, gate it, ratchet, re-ask. We leave the closed-loop composition as a concept — its stages are shipped, tested calls, and no autonomous run is claimed or evaluated here —

but its limit clarifies what the platform is *for*. The answerable set is the closure of a source language’s questions under the registered reductions; it only grows (Proposition 5.2); and any question that some finite chain of sound, deterministic reductions can bring to a mechanized decision procedure is eventually answered, with quantified trust. For a fixed finite-state program — the compiled binary above — every question over kept observables is decidable in principle, so growth for a *given* program is a matter of question shapes (new reasoning hubs) and of *cost* (abstraction pairs, §3.4), not connectivity. Trust grows on a separate axis — an added route answers no new question; it corroborates (§3.6) — and saturates at the supply of independent semantic anchors, which no generator enlarges. Undecidability and interpreter adequacy (Assumption 1) stand at every graph size: the limit is not an oracle but the reflection of everything mechanized deciding knows how to answer, behind one interface, with every answer’s trust itself measured. The artifact’s `POTENTIAL.md` develops the limit and its boundaries in full.

3 The machine: a calculus of pairs and its guarantees

This section is the whole use plane, in the introduction’s order: languages, behaviors, and projections (§3.1); the directional commuting square (§3.2); composition — pasting, and the contract meet (§3.3, §3.5); the direction axis at work (§3.4); trust beyond the meet — re-establishment, branches, and the trusted-base ledger (§3.5, §3.6); the end-to-end asymmetry (§3.7); and the mechanization (§3.8). Coverage and the ratchet are evolution-plane machinery and live with the economy (§5.2).

3.1 Languages, behaviors, projections

Definition 3.1 (Language). A *language* A is a triple $(\text{Prog}_A, F_A, \llbracket \cdot \rrbracket_A)$ where Prog_A is a decidable set of *programs*; F_A is a finite set of named *observable fields*, each $f \in F_A$ with a value domain V_f ; and $\llbracket \cdot \rrbracket_A : \text{Prog}_A \rightarrow \text{Beh}_A$ is the *reference semantics*, a partial function into behaviors. An *observable state* is a total map $\sigma \in \text{Obs}_A$, where $\text{Obs}_A = \prod_{f \in F_A} V_f$; a *behavior* is a finite sequence of observable states, $\text{Beh}_A = \text{Obs}_A^*$, recorded *post-step*: the i -th state is the observable state after the i -th transition.

The only admission criterion for a language is that $\llbracket \cdot \rrbracket_A$ is *definable* — an ISA manual, a logic’s model theory, a reaction-network semantics, and a molecular-graph notation all qualify. Nothing in this section assumes languages are executable or even computational.

The scope, stated plainly: behaviors are *finite* and the reference semantics is a *function* — nondeterminism, divergence, and reactive I/O are outside. Behavior *inclusion* is inside in exactly one controlled form: the square is a *directional* claim (Definitions 3.4 and 3.5), checked as a projected trace equality along a declared witness embedding — two-sided (exact)

or the simulation half (over); nothing else is admitted. This is the right notion for near-structure-preserving translation and the wrong one for optimizing compilation, whose home is full simulation over retimed structure — accordingly the one optimizing hop in the instantiation carries no square at all, and C’s non-functional official semantics enters through a determinized fragment, policed differentially (Section 4).

A program here is a *closed* configuration: free inputs, when present, are part of p (a program together with an input valuation). Open programs — programs quantified over their inputs — enter the square through their *closing valuations* (Definition 3.5 quantifies over them) and take center stage in §3.7, where a solver decides over all inputs and a witness closes one.

Definition 3.2 (Interpreter). An *interpreter* for A is a computable partial function $I_A : \text{Prog}_A \rightarrow \text{Beh}_A$ that is *pure*: identical input yields byte-identical output, on every host (the contract; §6.9 enforces it by twice-and-diff on the evaluation host). Outside its domain it fails with a typed unsupported verdict naming the construct; $\text{dom}(I_A)$ is A ’s *covered fragment*.

Assumption 1 (Interpreter adequacy). $I_A(p) = \llbracket p \rrbracket_A$ for all $p \in \text{dom}(I_A)$.

Adequacy is an assumption, not a theorem, and we keep it visible: the irreducible residue in every trusted-base computation of §3.6, discharged *empirically* by differential testing against independently produced oracles (Section 4; Python is the honest exception — its pinned runtime is both semantics and interpreter).

Definition 3.3 (Projection). A *projection* over A is a subset $\pi \subseteq F_A$. It lifts to states by restriction, $\pi(\sigma) = \sigma \upharpoonright_\pi$, and to behaviors pointwise, $\pi(\sigma_1 \cdots \sigma_n) = \pi(\sigma_1) \cdots \pi(\sigma_n)$ (in particular, projected behaviors of different lengths are unequal). Write $b \equiv_\pi b'$ for $\pi(b) = \pi(b')$.

3.2 Pairs and the directional square

Definition 3.4 (Pair). A *pair* $P : A \rightarrow B$ is a tuple $(A, B, T, \Lambda, \pi_P, d_P)$ where $T : \text{Prog}_A \rightarrow \text{Prog}_B$ is the *translator*; $\Lambda : \text{Beh}_B \rightarrow \text{Beh}_A$ is the *target-to-source interpreter*, which re-expresses a target behavior as a source behavior; $\pi_P \subseteq F_A$ is the pair’s *declared projection* — exactly the source observables it promises to preserve; and $d_P \in \{\text{exact}, \text{over}\}$ is its *declared direction*. An over (over-approximating) pair additionally ships a pure *witness embedding* W , mapping each closing valuation x of a source program p to a closing valuation $W(p, x)$ of $T(p)$; for an exact pair, W is the identity. T , Λ , and W are pure (as in Definition 3.2); I_A and I_B are owned by the languages and shared by every pair that touches them. The pair’s domain $\text{dom}(P)$ is the set of p with $p \in \text{dom}(I_A) \cap \text{dom}(T)$, $T(p) \in \text{dom}(I_B)$, and $I_B(T(p)) \in \text{dom}(\Lambda)$. Like the projection, the direction is a declared, *protected* part of the contract.

Definition 3.5 (Faithfulness: the directional square). P is *faithful at* $p \in \text{dom}(P)$ when its square commutes at p *along the witness embedding*: for every closing valuation x of p ,

$$\pi_P(I_A(p(x))) = \pi_P(\Lambda(I_B(T(p)(W(p, x))))),$$

where a closed program has the single trivial valuation. For an exact pair ($W = \text{id}$) this is the familiar commuting square $\pi_P(I_A(p)) = \pi_P(\Lambda(I_B(T(p))))$:

$$\begin{array}{ccc} p & \xrightarrow{T} & T(p) \\ I_A \downarrow & & \downarrow I_B \\ I_A(p) & \xleftarrow{\equiv_{\pi_P}} & \Lambda(I_B(T(p))) \end{array}$$

P is faithful on $C \subseteq \text{dom}(P)$ when it is faithful at every $p \in C$.

The direction is the *reading* of that equality. The embedding selects which target valuations the square checks: exactly those in its range. When W is the identity — surjective onto the closing valuations of $T(p)$ — every target valuation is checked and the target has no behaviors beyond the source’s kept ones: the square is two-sided, a bisimulation on the kept observables, and that is all $d_P = \text{exact}$ asserts. When W is not surjective, the target valuations outside its range are the pair’s *added* behaviors — their existence is the point, not a defect — and the same checked equality asserts only the simulation half, $I_A(p) \sqsubseteq_{\pi_P} \Lambda(I_B(T(p)))$: every source behavior has a target counterpart on the kept observables, and the target may have more. Exactness is thus not a separate notion but the identity-embedding special case of one square (Proposition 3.10, machine-checked). The check itself is direction-indifferent — run both legs, compare under π_P — so everything below applies to both directions verbatim; only what agreement *means* differs, which is why direction is protected like the projection: an over square passed off as exact would launder added behaviors into a meaning-preservation claim.

Three remarks. First, everything in Definition 3.5 is computable: faithfulness at a given p is a *decidable, executable check* — run both sides, compare under π_P . We call this check the *square oracle*; in fault-tolerance terms it is an acceptance test in the sense of recovery blocks [31], turning a silently wrong — in effect Byzantine — translator into a *fail-stop* component [37]. Second, when the check fails it fails at a *first* position: a least step index i and a field $f \in \pi_P$ on which the two sides differ. The oracle reports (i, f) — a translator (or interpreter, or carry-back) defect, localized to a step and a named observable. Third, the projection is part of the contract, not a tuning knob: π_P states what “preserves meaning” promises for this pair, and $F_A \setminus \pi_P$ — the pair’s *loss* — states what it does not.

The carry-back Λ is what makes a target-side result *mean* something at the source: a solver counterexample or a target trace is re-expressed as a source behavior. It is pair-specific

because the correspondence it encodes is pair-specific; it is also why the square’s oracle is as expressive as the translator it checks.

Example (One square, run — and failing). The JAL probe of the RV64IMC inventory (Definition 5.1) is a two-instruction program whose taken jump leaves the code image:

```
0x0: jal x1, 8 ; link x1 := 4, jump to 0x8
0x4: ecall ; (jumped over)
```

The left leg runs the shared RISC-V interpreter I_A ; the right leg translates to BTOR2, interprets, and carries the trace back, compared under $\pi \supseteq \{\text{pc}, \text{x1}, \text{halted}\}$. The square is exact ($W = \text{id}$) — as is every registered pair’s but the abstraction endo-pairs’ (§3.4). Post-step states, with the right leg as the `riscv-btor2` translator emitted them at version 0.1:

step	field	$I_A(p)$	$\Lambda(I_B(T(p)))$
0	pc, x1, halted	8, 4, F	8, 4, F
1	pc, x1	8, 4	8, 4
	halted	T	F

Address 0x8 matches no instruction: the reference semantics halts on the fetch miss; the translator had modeled only the instructions. The oracle reports $(i, f) = (1, \text{halted})$ and, run hop by hop (Corollary 3.8), indicts the `riscv-btor2` hop — incident I21 (§6.6), caught by the first conjoined coverage run in three independently written lowerings the same morning, fixed by a versioned translator bump with the taken-jump squares as permanent regressions. The all-pass rows of Table 3 are made of exactly such checks.

3.3 Pasting: when squares compose

Two pairs compose when the middle language is shared: $P_1 = (A, B, T_1, \Lambda_1, \pi_1, d_1)$ and $P_2 = (B, C, T_2, \Lambda_2, \pi_2, d_2)$ yield the candidate composite

$$P_2 \circ P_1 = (A, C, T_2 \circ T_1, \Lambda_1 \circ \Lambda_2, \pi, d_1 \wedge d_2)$$

for a projection $\pi \subseteq \pi_1$ to be determined, with direction the meet on the chain exact $>$ over — a composite is exact iff both hops are — witness embedding the composition $W_2 \circ W_1$ (an exact hop contributing the identity), and $\text{dom}(P_2 \circ P_1)$ the evident composite domain. Folklore says the squares paste. They do not paste for free: P_2 guarantees agreement of the two B -behaviors only *up to* π_2 , and Λ_1 consumes whole B -behaviors. If Λ_1 reads a B -field that P_2 discards, the outer rectangle can fail while both inner squares hold. The missing condition is that Λ_1 must not look outside what P_2 preserves:

Definition 3.6 (Support). Λ_1 is $(\pi_2 \Rightarrow \pi)$ -supported when for all $b, b' \in \text{dom}(\Lambda_1)$: $\pi_2(b) = \pi_2(b')$ implies $\pi(\Lambda_1(b)) = \pi(\Lambda_1(b'))$. Equivalently: $\pi \circ \Lambda_1$ descends to a well-defined map on π_2 -equivalence classes — a congruence condition, matching the mechanization exactly.

Theorem 3.7 (Pasting). *Let $p \in \text{dom}(P_2 \circ P_1)$, let P_1 be faithful at p , let P_2 be faithful at $T_1(p)$, let $\pi \subseteq \pi_1$, and let Λ_1 be $(\pi_2 \Rightarrow \pi)$ -supported. Then the composite $P_2 \circ P_1$ is faithful*

at p with respect to π , along the composed embedding $W_2 \circ W_1$ and with direction $d_1 \wedge d_2$; for the exact-exact instance, writing $r = T_2(T_1(p))$,

$$\pi(I_A(p)) = \pi(\Lambda_1(\Lambda_2(I_C(r)))).$$

Proof. Write $q = T_1(p)$. Then $\pi(I_A(p)) = \pi(\Lambda_1(I_B(q)))$ since $\pi \subseteq \pi_1$ and P_1 is faithful at p . Faithfulness of P_2 at q gives $\pi_2(I_B(q)) = \pi_2(\Lambda_2(I_C(r)))$, so the support condition applies to the two B -behaviors and yields $\pi(\Lambda_1(I_B(q))) = \pi(\Lambda_1(\Lambda_2(I_C(r))))$. Chain the equalities. For the directional form, run the same chain per closing valuation, the legs closed at x , $W_1(p, x)$, and $W_2(T_1(p), W_1(p, x))$; mechanized as `lax_pasting` and, telescoped over routes with the direction `meet`, `DRoute.lax_route_pasting` and `DRoute.direction_exact_iff` (§3.8). (Details: Appendix A.) $\square$

The support condition is not decorative. Take $F_B = \{g, h\}$ with $\pi_2 = \{g\}$, and let Λ_1 copy field h into a π_1 -kept source field: P_2 can be faithful — it preserves g — while $\Lambda_2(I_C(r))$ differs from $I_B(q)$ on h , which π_2 permits. The outer rectangle then fails on the copied field although both inner squares commute.

Composed keep and loss. In the implementable special case — Λ_1 *fieldwise* and step-aligned, each source field f computed from a dependency set $\text{deps}(f) \subseteq F_B$ of target fields — the support condition has a syntactic reading, and the largest π satisfying Theorem 3.7 is

$$\text{keep}(P_2 \circ P_1) = \{f \in \pi_1 \mid \text{deps}(f) \subseteq \pi_2\},$$

a source field survives the route iff P_1 keeps it and it is computed only from target fields P_2 keeps. Dually $\text{lost}(P_2 \circ P_1) = F_A \setminus \text{keep}(P_2 \circ P_1)$: route loss is the union of per-hop losses, each pulled back along the carry-backs. This is the formal content of the platform rule that a route must *declare its cumulative loss*: the observables a destination can still speak about are exactly those no hop discarded. (When Λ_1 changes step granularity — one source step spanning several target steps, as in C-to-ISA — the same statement holds with *deps* taken over the spanned window; appendix A.2.)

Corollary 3.8 (Localization). *Under the support condition, if the composite square fails at p (both sides defined), then P_1 's square fails at p or P_2 's square fails at $T_1(p)$. Inductively, along a route $R = P_n \circ \dots \circ P_1$ satisfying the pairwise support conditions, a failing outer rectangle implies a failing inner square at some hop i — and running the square oracle hop by hop finds the least such i , then the least failing step and field. (The check is direction-indifferent, so this holds along any directional route — divergences localize the same way whether the failing square's reading was $\equiv$ or $\sqsubseteq$.)*

Corollary 3.8 is the debugging story of the whole platform: a divergence anywhere along a route is never a mystery about the route; it is an indictment of one hop, one step, one

observable. It is also what disagreement between routes will lean on in §3.6.

Routes, and the contract algebra. The registry of languages and pairs forms a directed multigraph; a route $R : A \rightarrow Z$ is a path through it, with composed translator T_R , composed carry-back Λ_R , composed projection $\text{keep}(R)$, composed direction and embedding as above, and faithfulness given by iterating Theorem 3.7. Composition, told once: a pair's composable declaration is its *contract* — the assurance class of its guarantee (Definition 3.12) paired with its direction, alongside the keep-set and the measured cost — and a route's contract is the *componentwise meet*, the weakest hop on every axis at once, with nothing stronger entailed (`Contract.comp_glb`, machine-checked; the semantic content of each coordinate is Theorem 3.7 with Proposition 3.13, and Proposition 3.11). Purity composes too, and gives caching:

Proposition 3.9 (Determinism and caching). *If every component function of every hop of R is pure, then T_R and Λ_R are pure, and a content-addressed cache keyed by the input hash and the component versions returns, on a hit, exactly what recomputation would return — across the whole route. If some hop is impure, re-running the route on the same input and diffing bytes at every hop (twice-and-diff) can detect it and localize it to the first hop whose bytes differ — a sound but incomplete detector: two coinciding runs of an impure hop pass.*

3.4 The direction axis: abstraction as a pair

Every square so far shown ran exact, and most registered pairs do. The over half of Definition 3.5 earns its place on cost: an *abstraction* maps a program to a smaller or cheaper model with *more* behaviors — cut a state variable's update and let it range freely, and every source behavior survives while new, spurious ones appear. Such a translation is exactly what makes an expensive universal question tractable, and in this calculus it is not a special mechanism bolted onto a solver run but an ordinary pair whose declared direction is over: same oracle, same coverage conjunction (Definition 5.1), same ratchet (Proposition 5.2), same negative controls, checked along its witness embedding. Two results pin the axis down: exactness is a special case, and universal verdicts transfer.

Proposition 3.10 (Exactness is the identity embedding). *Under the specialization obligation of Theorem 3.18(iv) — translating the closed instance agrees with closing the one open translation — a pair with $W = \text{id}$ is faithful at an open p in the sense of Definition 3.5 iff its two-sided square commutes at every closed instance $p(x)$. The exact calculus of §3.2–§3.3 is thus the $W = \text{id}$ fragment of the directional one — literally: the mechanization derives each side from the other (`laxFaithful_id_iff_faithful`, `axiom-free`; §3.8).*

Proof. With $W = \text{id}$ the two legs close at the same valuation, and the specialization obligation identifies the closed

translation $T(p(x))$ with the closed instance $T(p)(x)$ of the open artifact; the quantification over valuations is then the quantification over closed instances. $\square$

Proposition 3.11 (Universal transfer across over-approximation). *Let $R : A \rightarrow Z$ have composed direction over and be faithful (Definition 3.5) on a fragment containing p , with φ over $\text{keep}(R)$. If no valuation of $T_R(p)$ exhibits φ within the declared bounds, then no valuation of p does: universal verdicts transfer across over-approximation. An existential verdict does not transfer; it remains subject to the carried-back replay of Theorem 3.17, whose failure on an over route has a second, benign reading — a spurious counterexample, a demand to refine the abstraction rather than an indictment of a hop.*

Proof. Contrapositive: a valuation x with φ observed in $\llbracket p(x) \rrbracket_A$ yields, by faithfulness along the composed embedding, the valuation $W_R(p, x)$ of $T_R(p)$ exhibiting φ on the kept observables — present within bounds, contradicting the premise. (Mechanized: `lax_universal_transfer`, §3.8.) $\square$

Together with Theorems 3.17 and 3.18 this closes the CE-GAR loop with durable artifacts: a transferred UNREACHABLE answers at the source (Proposition 3.11); a REACHABLE either replays (a true counterexample) or is spurious — and the refinement the failure demands is a *new registered pair* with a smaller havoc set, graded and reusable. The artifact instantiates this with the endo-pair `btor2-havoc`, localization abstraction on the bit-level hub, its lax square, negative controls, and refinement loop in the repository’s gate (a second over endo-pair, interval abstraction, is registered as a brief); §6.13 measures the loop, on authored systems and on an ingested HWMCC slice.

Advising the dial. The abstraction’s parameters stay the player’s, but they need not be guessed. The artifact ships an advisor over the bit-level hub: the *cone of influence* of a question — rooted in its bad conditions *and every environment constraint* (a state gating run validity is never free), closed backwards through the state-evolution supports — splits the state space into a *free* havoc set, whose abstraction provably cannot move the question’s signal, and a refinement ladder ordered farthest-from-the-question first; observed per-state bounds seed candidate intervals that the lax square then corroborates or refutes. The free-set claim is executable and negative-controlled in the artifact’s tests; mechanizing it is a natural next entry for §3.8’s audit.

The dual, for symmetry. The axis has an evident third value the platform deliberately does not yet inhabit: an *under-approximating square* — the embedding running the other way, the target with *fewer* behaviors — where existential verdicts would transfer and universal ones would not, the mirror image of Proposition 3.11. Nothing in this paper depends

on it; we note it because the directional reading makes the symmetry visible, and its verdict-transfer discipline would fall out of the same monotonicity.

The mechanization of §3.8 covers the directional calculus in full: the directional square, pasting along the composed embedding (binary and telescoped) with the direction meet, and both propositions above are machine-checked (Calculus/Lax.lean) with the same axiom footprint as the exact fragment.

3.5 Contracts: grades, classes, and the meet

A pair declares a *fidelity grade* from $G = \{\text{trusted, reproducible, checked, predicted, proved}\}$ — the *evidence species* behind its guarantee: a spec audit that re-derives the bytes (predicted), an independently re-checked certificate (proved), this run’s square-oracle verdict (checked), a digest pin (reproducible), or nothing (trusted). Grades differ in kind (predicted and proved are incomparable: foreseeable vs. re-checkable); what composition needs is the logical *form* of the guarantee, and that is totally ordered:

Definition 3.12 (Assurance class). The *assurance classes* are the chain $\mathbb{A} : \text{none} < \text{replay} < \text{perrun} < \text{universal}$, and *class* : $G \rightarrow \mathbb{A}$ maps $\text{trusted} \mapsto \text{none}$, $\text{reproducible} \mapsto \text{replay}$, $\text{checked} \mapsto \text{perrun}$, and $\text{predicted, proved} \mapsto \text{universal}$. The classes denote guarantee predicates for a pair P with covered fragment C_P : $\text{universal} - P$ is faithful at every $p \in C_P$; $\text{perrun} - P$ is faithful at every p on which the square oracle has run and passed (in particular, at the program of the present run); $\text{replay} - T$ is pure, nothing about meaning; $\text{none} - \text{nothing}$.

Only classes compose: a route with one predicted hop and one proved hop is universal end to end, as it should be.

Two honesty notes on the mapping. First, grade *declarations* are themselves trusted inputs: only checked is mechanically enforced by the framework (the oracle runs); $\text{class}(\text{predicted}) = \text{universal}$ additionally presumes that the audited specification maps rules to *semantics* — a translator faithful to a wrong rule table is predicted and universally unfaithful, and our own evaluation exhibits a predicted edge that was wrong on covered inputs until a coverage probe caught it (§6.6). Declarations therefore sit in the trusted-base ledger like any other component. Second, proved as instantiated in §6.5 certifies a *per-question* verdict — universal over that question’s inputs, per-run over questions — not the pair’s square for all programs.

Proposition 3.13 (Weakest link). *Let route $R = P_n \circ \dots \circ P_1$ satisfy the support conditions of Theorem 3.7. If every hop’s guarantee holds, then the composite guarantee of class $\min_i \text{class}(P_i)$ holds for R (with C_R the composite fragment), and no higher class is entailed by the hop guarantees alone.*

The proof is immediate from Definition 3.12 and Theorem 3.7: universal statements conjoin into universal statements over the composite fragment; a per-run statement at hop i caps the conjunction at the programs the oracle actually saw; a replay hop caps it at purity. Optimality is by the evident counterexamples. Statically, then, *a route is as faithful as its weakest hop* — and this is one instance of the paper’s single composition statement: a pair’s composable declaration, its *contract* (assurance class $\times$ direction), composes along a route by the componentwise meet, the weakest hop on every axis at once (mechanized: `Contract.comp_glb`, §3.8; the class coordinate is this proposition, the direction coordinate is Proposition 3.11). The static story is still not the whole story, because every pair carries its own oracle:

Theorem 3.14 (Per-run re-establishment). *Fix a run of route R on program p , with intermediate programs $q_0 = p$, $q_i = T_i(q_{i-1})$. If on this run the square oracle runs and passes at every hop i (on q_{i-1}), and the support conditions hold, then R is faithful at p — regardless of the hops’ static grades. In particular a reproducible or even trusted hop that is dynamically validated at q_{i-1} contributes, for this run, exactly what a checked hop contributes.*

Proof. Each passed oracle check is faithfulness at q_{i-1} (Definition 3.5 is decidable and the oracle decides it); apply Theorem 3.7 inductively. $\square$

Theorem 3.14 applies exactly to hops whose squares run: the pinned C compiler at the spine’s head has no square, so the inline oracles lift the route *from the compiled binary onward*, the compiler contributing reproducible plus a corpus-level differential against an independent C verifier (Section 4). Re-establishment is per-run evidence, never a static promotion, and never coverage for a hop with no oracle.

3.6 Branches, diversity, and the trusted base

The registry graph is not a line: one source may reach one destination by several routes. Let $R_1, R_2 : A \rightarrow Z$ with composed keep-sets K_1, K_2 and $K = K_1 \cap K_2$, sharing the endpoint interpreters (language-owned) but no translator or carry-back.

Lemma 3.15 (Disagreement localizes). *If R_1 and R_2 disagree at p under K , at least one route is unfaithful at p , and Corollary 3.8 pins the failure to a hop, a step, and a field of that route.*

Lemma 3.16 (Agreement corroborates). *If R_1 and R_2 agree at p under K , then either both are faithful at p (under K), or both are unfaithful with identical projected error: defects in independently built components producing the same wrong K -behavior at p .*

Both are immediate: two faithful routes each equal $K(I_A(p))$, hence each other. What Lemma 3.16 buys depends on an assumption we state rather than hide:

Assumption 2 (Diversity). Corroborating routes share no translator or carry-back *on the segment where they diverge* (up to the language at which they reconverge), and the diverse translators are derived from *independent semantic artifacts* — e.g. RISC-V reaches BTOR2 once via a translator written from the prose ISA specification and once via the Sail formal model; likewise AArch64 from the Arm manual vs. the Arm Sail model.

The assumption’s premise is, moreover, a *declared, protected registry fact* rather than prose alone: each pair names the semantic artifact its translator derives from, and a mechanical judgment (the trust advisor of §5.3) scores every branch by the diverse segments’ declared artifacts, the shared suffix removed — a shared artifact is never independent, an undeclared one is unknown, never silently independent — and states saturation plainly: pairs can be generated without bound, independent artifacts cannot, and corroboration stops growing at their supply.

The scoping matters, and independence must be argued, not assumed. Below the reconvergence, routes may share hops — in the platform both RISC-V $\rightarrow$ SMT-LIB routes share the BTOR2 $\rightarrow$ SMT-LIB bridge — and shared emission libraries are shared failure surface, so agreement corroborates the diverse prefix and nothing beneath it. The evaluation therefore also runs a *disjoint-decision* variant of every branch question (§6.2, Figure 4): the direct route’s BTOR2 system decided natively by `btormc`, against the Sail-derived route through the bridge and Z3, so the diverse segment extends through the decision procedure and the shared bridge drops out of the corroborating pair entirely; what remains shared is the emission library (the site of the cross-route incident below) and the language-owned endpoints. Correlated failures between nominally independent implementations are, moreover, the empirical norm [14]; our own history exhibits both a cross-route common-mode failure through a shared emitter and a shared-misreading blind spot (§6.6), and translators written by LLM agents plausibly share model-family failure modes.

Under Assumption 2, the residual failure mode of an agreeing branch is a *common-mode failure*: independently produced encodings of the same semantics, wrong in the same observable way on the same program. We do not assign this a probability; we account for it structurally, in the trusted base ledger below. This is how the platform manufactures assurance out of hops that are individually only checked — dual modular redundancy whose comparator, unlike a voter, localizes: agreement of independently derived routes is evidence that neither route’s grade alone provides.

Define the *trusted computing base* $TCB(v)$ of a verdict v as the set of components whose correctness v ’s soundness still assumes after all checks that ran. Each cross-check layer strictly shrinks it (Table 1); the last two rows are not interchangeable, and the difference is the central asymmetry of the whole design.

Table 1. The trusted-base ledger: what each layer of cross-checking removes from the set of components a verdict still assumes correct.

Layer that ran	Removed from TCB	Still in TCB
bare route + solver	—	all T_i , Λ_i , all interpreters, solver
+ square oracle at every hop (Theorem 3.14)	every T_i	the Λ_i , the interpreters, solver
+ branch agreement (Lemma 3.16, Assumption 2)	the diverse prefix's Λ_i (cross-corroborated)	shared endpoint interpreters, shared suffix hops and emission libraries, solver; common-mode residue
+ independent solver corroboration	the single solver	the agreeing engines' common failure modes
+ certificate check (proved; e.g. DRAT/LRAT)	the solver entirely	the certificate checker (formally verified, in the <code>cake_lpr</code> instantiation), plus the bit-blasters' $BV \rightarrow CNF$ step
+ source-level witness replay (§3.7)	<i>everything above</i>	I_A adequacy (Assumption 1) + the replay harness

3.7 The end-to-end asymmetry

Finally, what does a user hold at the end? Let $R : A \rightarrow Z$ be a route into a *reasoning language* Z (one a solver consumes: a transition-system logic, an SMT theory). The user asks a question about an *open* source program $p(x)$ — free inputs x — and a condition φ over $\text{keep}(R)$ -observables: is φ reachable? The solver decides at Z ; its answer comes back in one of two logical shapes, and they differ fundamentally in what must be trusted.

Theorem 3.17 (Existential answers are self-certifying). *Suppose the solver returns REACHABLE with witness w , the composed carry-back Λ_R re-expresses w as an input valuation x_0 (and claimed trace), and replaying $I_A(p(x_0))$ exhibits φ . Then φ is truly reachable in $\llbracket p \rrbracket_A$ — with $\text{TCB} = \{\text{Assumption 1 for } I_A\}$ plus the small fixed replay harness the judgment runs through (the projection, the φ -evaluator, and the substitution closing p), and nothing else. Every translator, carry-back, hub interpreter, and solver on R is a discovery device only: a defect in any of them can cause a missed or non-replaying witness, never a false REACHABLE.*

Proof. The replay is a run of I_A itself on a concrete closed program $p(x_0)$; by Assumption 1 its behavior is $\llbracket p(x_0) \rrbracket_A$, and φ was observed on it. No other component's output enters the final judgment. $\square$

Theorem 3.18 (Universal answers need the machinery). *Suppose the solver returns UNREACHABLE (within declared unrolling/step bounds k). If (i) every hop of R is faithful at every instance $p(x)$ — the universal-class guarantee on the fragment containing p 's constructs, and exactly the hypothesis the mechanization takes; (ii) the support conditions of Theorem 3.7 hold and φ mentions only $\text{keep}(R)$; (iii) the verdict is certified by an independently checked certificate or corroborated across independent engines; and (iv) the symbolic artifact the solver consumes denotes the family of closed translations the squares check — translation commutes with input specialization, an obligation each reasoning pair discharges by construction of its encoding and, where the encoding carries free inputs, by sampled commutation tests (§3.8), and under which the mechanization derives every per-instance translation from the one open translation the platform actually performs (universal_from_open_artifact, §3.8) — then no input drives $\llbracket p \rrbracket_A$ to φ within k steps, with TCB as in the corresponding row of the ledger (§3.6).*

One caution on hypothesis (i): per-run oracle evidence combined with branch agreement (Lemma 3.16, Assumption 2) raises confidence in it but does not entail it — oracle passes cover the finitely many closures actually run, and agreement bounds the residual failure to common-mode rather than excluding it. Universal verdicts are precisely where the universal tiers earn their keep; evidence below that tier is corroboration, not entailment.

Direction slots into the same asymmetry monotonically: along an over route a certified UNREACHABLE transfers to the source (Proposition 3.11), while a REACHABLE already rested on the carried-back replay — so the directional calculus adds no new trust obligation, only a second, benign reading of a replay failure: a spurious counterexample, the refinement demand of §3.4.

The asymmetry between Theorems 3.17 and 3.18 is, we argue, the right lens on the entire design: for questions whose answers carry witnesses, trust is nearly free — carry the witness back and replay it at the source; the platform's graded tiers, branches, and certificates exist for the other half, the universal answers where no witness can vouch for the verdict. This is the end-to-end argument [35] transplanted to translation: the check that settles a witness-carrying answer belongs at the endpoint — the source interpreter — and what the intermediate hops provide is, for that half, an optimization; only for universal answers, where no endpoint check can exist, does hop fidelity become the guarantee itself. A system that makes the carry-back Λ a first-class, per-pair component is a system in which the cheap half of trust is always cashed in; a system that grades and stacks cross-checks is one in which the expensive half is bought consciously, in labeled increments, with the bill itemized in the ledger of §3.6.

3.8 Mechanization

The compositional core of Sections 3 and 3.5 is mechanized in Lean 4 (core library only, no mathlib; ~1,250 lines, in the artifact): the pasting theorem with the support condition, localization, the assurance-class chain and weakest link (sound half), per-run re-establishment, both branch lemmas, the ratchet (verdict preservation and coverage monotonicity under extensions), both end-to-end theorems, the *specialization obligation* of Theorem 3.18(iv) — with the theorem that it discharges the per-instance-translation hypothesis from the single open translation the platform performs — and the *route telescope* — routes of arbitrary length as a dependently-typed chain of pairs over interpreter-bundled languages, with the paper’s “pairwise support conditions” as a recursive coherence predicate, and the n -ary pasting and localization theorems proved by induction through the binary ones (the canonical head-projection choice at each junction is shown lossless by a reprojection lemma). Three modeling choices mirror the paper exactly. Components are Lean functions, so *purity is by construction* and Proposition 3.9 is definitional; partiality is `Option`, with unsupported as none; and projections are generalized from field subsets to arbitrary observable-compression maps, with “ $\pi \subseteq \pi_1$ ” becoming *factoring*. Because every theorem takes each component-output witness as an explicit hypothesis, a statement’s trusted base is literally its hypothesis list — Theorem 3.17 in Lean assumes source-interpreter adequacy and nothing else, and its proof term is three tokens:

```
theorem existential_self_certifying
  (adequacy : ∀ p b, IA p = some b → sem p = some b)
  (hreply : IA p₀ = some b) (hφ : φ (projB π b)) :
  ∃ b', sem p₀ = some b' ∧ φ (projB π b') :=
  ⟨b, adequacy _ _ hreply, hφ⟩
```

Table 2 maps the paper’s results to their Lean theorems with each proof’s exact axiom footprint, re-checked at every build; the one classical proof is Corollary 3.8 (an unfaithful route names no witness by itself). The table also shows where mechanization stops, and we state it plainly: Theorem 3.18’s clauses (iii) and (iv) enter the Lean statement as *hypotheses*. Both now carry *tested surrogates* rather than by-construction assertions. The specialization obligation is discharged by sampled commutation checks per reasoning pair with free inputs (in the suite): the open program is translated once, and for sampled valuations the emitted artifact is byte-identical while the specialized instance’s square passes — the shape `universal_from_open_artifact` consumes. The solver-artifact-to-target-semantics correspondence behind (iii) is corroborated per verdict: every bounded-unreachable route verdict in the branch, benchmark, and certified experiments is additionally replayed through the strict target interpreter for the full bound — sampled inputs where the

Table 2. The mechanization at a glance: paper result, Lean theorem, and the proof’s axiom footprint as printed by the build-time audit (`Audit.lean`); “—” is axiom-free.

Result	Lean theorem	Axioms
Theorem 3.7 (pasting)	<code>pasting, pasting₃</code>	<code>propext</code>
Corollary 3.8	<code>localization</code>	<code>propext</code> , <code>Classical.choice</code> , <code>Quot.sound</code>
Proposition 3.13 (sound half)	<code>weakest_link_universal</code>	<code>propext</code>
Theorem 3.14	<code>reestablishment</code>	<code>propext</code>
Lemmas 3.15 and 3.16	<code>disagreement_localizes</code> , <code>agreement_corroborates</code>	—
Proposition 5.2	<code>ratchet_preserves_faithful</code> , <code>ratchet_coverage_mono</code>	—
Theorem 3.17	<code>existential_self_certifying</code>	—
Theorem 3.18	<code>universal_needs_machinery</code>	<code>propext</code>
Theorem 3.18(iv)	<code>universal_from_open_artifact</code>	<code>propext</code>
route telescope (n -ary)	<code>Route.route_pasting</code> , <code>Route.route_localization</code>	<code>propext</code> , <code>Quot.sound</code> (+ <code>Classical.choice</code> for localization)
directional pasting, direction meet (Theorem 3.7)	<code>lax_pasting</code> ; <code>telescoped</code> : <code>DRoute.lax_route_pasting</code> , <code>DRoute.direction_exact_iff</code>	<code>propext</code> (+ <code>Quot.sound</code> <code>telescoped</code>)
Proposition 3.10 (exactness = identity embedding)	<code>laxFaithful_id_iff_faithful</code>	—
Proposition 3.11 (universal transfer)	<code>lax_universal_transfer</code>	<code>propext</code>
contract algebra (composition = componentwise meet)	<code>Contract.comp_glb</code> , <code>Direction.comp_eq_min</code>	<code>propext</code> , <code>Quot.sound</code> (<code>comp_eq_min</code> : —)

system has any — and no bad may fire (§6.2–§6.5). Sampling corroborates, it does not entail — which is the grade discipline applied to the calculus’s own hypotheses.

Deliberately not mechanized: the fieldwise loss computation and retiming case of appendix A.2 (syntactic side conditions over a concrete carry-back representation), the optimality halves of Proposition 3.13 (meta-statements over models), and the grade set G itself — evidence provenance is not a mathematical object, which is the point of separating G from $\mathbb{A}$. The telescope theorems’ audit adds only `Quot.sound` (from structural-recursion equations); localization remains the sole classical proof among these results (the same build audit also prints the artifact’s frontier-exploration model — no result of this paper — whose three search lemmas are classical).

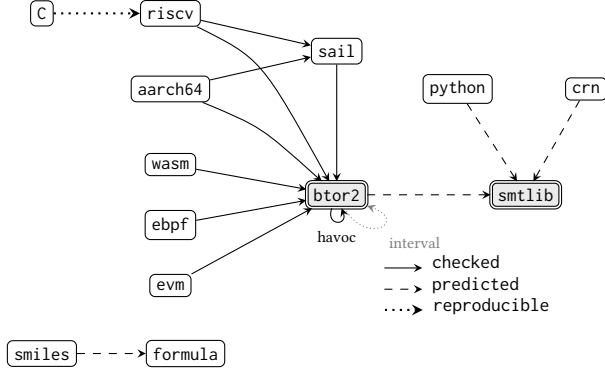


Figure 3. The registry: 13 languages (nodes; the two reasoning hubs shaded) and 15 registered pairs (edges), each carrying its declared grade. The two loops on the BTOR2 hub are the abstraction endo-pairs of the direction axis (§3.4): `btor2-havoc`, `built`, and — gray — `btor2-interval`, registered as a brief. The evaluation of Section 6 covers the thirteen pairs built at its snapshot. RISC-V and AArch64 each reach BTOR2 twice — directly (manual-derived) and through Sail (formal-model-derived) — the independently derived branches Assumption 2 requires, each leg’s semantic artifact declared per pair; the dashed `btor2→smtlib` bridge is the shared suffix that the disjoint-decision runs of §6.2 remove from the corroborating pair.

4 The platform

The calculus is implemented as HURDY-GURDY, a Python platform whose structure mirrors Section 3 exactly: a *framework* that holds no pair semantics, per-language *shared interpreters*, and per-pair translators and carry-backs. Figure 3 draws the registry graph; this section describes what the use plane runs on, Section 5 describes how it grows, and Section 6 measures both.

4.1 Framework

The framework provides the registry, the content-addressed cache of Proposition 3.9, the generic square oracle with step/observable localization, the route enumerator and runner (routes are enumerated and reported — composed grade, coverage, loss — never chosen), the coverage harness, the merge-run route grader, the solver/checker plumbing, and the books of §5.3 with their advisory reads (route report, answerability diagnosis, trust and reduction advisors) — all of which annotate and account, none of which chooses. The same surface is the *player interface*: an MCP server (gurdy mcp, stdio JSON-RPC) exposes exactly the enumerated, advisory calls — languages, pairs, annotated routes, coverage, the diagnosis, the advisors, and bounded decide-with-replay — so an LLM player connects to the platform as a machine peer, with the exposure rule pinned by test (§6.14 runs the player experiment over this surface, cold). Everything except

the solver call is byte-deterministic, enforced repo-wide by twice-and-diff.

4.2 Languages and reasoning hubs

Thirteen languages are registered, each with a specification-anchored formal semantics and (for all but C) a built shared interpreter: the ISAs RISC-V (RV64IMC), AArch64 (a growing A64 slice), eBPF, Wasm, and EVM; C (whose “interpreter” role is played differentially, see below); Python (a pinned CPython restricted by an AST allow-list to an integer subset — the loader rejects, CPython runs); Sail (an executable slice of the Sail-derived RISC-V and Arm semantics); chemical reaction networks (a discrete Petri-net stepper); SMILES molecular graphs and molecular formulas; and the two *reasoning hubs*: BTOR2, a bit-vector/array transition-system logic consumed by hardware model checkers — environment constraints enforced with the per-frame reading, a bad counting only on a constraint-valid prefix, on which the shared evaluator, the bridged and the native engines agree — and SMT-LIB (QF_ABV and QF_LIA fragments).

Reasoning languages own, beyond an interpreter, a solver inventory (BtorMC and Pono for BTOR2; Z3, Bitwuzla, Boolector, cvc5, Yices2 for SMT-LIB) and a witness-checker inventory: interpreter replay of BTOR2 .wit witnesses, model evaluation by the deterministic SMT-LIB evaluator, multi-engine corroboration, and a bit-blasted certificate pipeline for proved-tier unreachability with two checker rungs: the DRAT proof checked by `drat-trim` (independent, unverified), and — preferred when present — elaborated to LRAT (`drat-trim` as an *untrusted* elaborator) and re-validated by `cake_lpr`, the *formally verified* CakeML checker, built natively from its compiler-generated ARMv8 assembly (§6.5).

Interpreter adequacy (Assumption 1) is discharged differentially: the RISC-V interpreter against the Sail-generated reference simulator (`sail_riscv_sim`) and the official `riscv-tests / riscv-arch-test` suites; the Python subset against pinned CPython by construction — a circularity we note plainly: for this one language the pinned runtime is both the semantics and the interpreter, so adequacy has no independent reference; C against CBMC on the same source (with a classification step separating C-undefined-but-ISA-defined behavior from genuine faults).

4.3 Pairs and routes

Fifteen pairs are registered. Thirteen — built to varying, *measured* extents (Table 3) — form the evaluation snapshot of Section 6; the other two sit on the direction axis of §3.4: `btor2-havoc`, the localization abstraction, `built`, negative-controlled, and driving the refinement demonstration, and `btor2-interval`, a second over-approximation registered as a brief under the discipline of §5.3. The spine is $C \rightarrow \text{RISC-V} \rightarrow \text{BTOR2} \rightarrow \text{SMT-LIB}$, with the C head a digest-pinned gcc at grade reproducible: the square-verified portion of

the spine begins at the compiled binary (§3.5), and the C hop is re-checked separately by the CBMC differential above. The direct RISC-V→BTOR2 lowering draws on the rotor bounded model checker [12]. RISC-V and AArch64 each reach BTOR2 by two independently derived routes (manual-derived direct translator vs. Sail-model-mediated), instantiating Assumption 2; the BTOR2 hub funnels five ISAs into one solver interface, and the BTOR2 → SMT-LIB bridge (a rule-for-rule operator mapping at grade predicted) connects the hubs, so every BTOR2 question can also be decided natively-vs-bridged — solve-step corroboration. CRN and Python reach SMT-LIB directly (QF_LIA), and SMILES→formula exercises the calculus away from computation entirely.

5 The economy: how the platform grows

The evolution plane writes what Section 4 reads. Its stages — build under contract, gate, ratchet, and the books that direct them — are the growth step of Section 2, kept under one discipline: *growth never answers*.

5.1 How the pairs were built

Each pair (and each shared interpreter) was implemented by an *independent LLM agent* from a one-page registration brief — under the current discipline, a brief that opens by citing the demand records recommending the pair (§5.3) — against the calculus as a written contract, under three standing rules: agents never modify the framework or another deliverable’s code; interpreter changes are versioned events that re-validate every dependent pair (Proposition 5.2); and all growth is by additive widening — extend the covered fragment, re-run all prior evidence byte-for-byte, ratchet the coverage number. The platform’s checks — the square oracle, the differentials, solver corroboration, branch agreement, twice-and-diff — were the only *semantic* quality gate; no human reviewed agent code for semantic correctness, though an autonomy protocol did escalate one class of change — edits to shared emission code — for human sign-off (“largely unsupervised” means exactly this: the human gated whether such a change could land, never whether it was right). The defects those checks caught, and where they localized, are part of the evaluation (§6.6): the implementation process itself is an experiment in the paper’s thesis that translation trust can be manufactured by architecture rather than by trusting the translator’s author — whether that author is a compiler vendor or a language model. The same discipline is the growth model: pairs contributed by anyone — with LLMs, with agents, or by hand — through ordinary pull requests, admitted by architecture rather than authorship. A contribution arrives as the calculus’s tuple with its evidence surface attached (translator, carry-back, declared projection and grade, typed unsupported partiality, probes, a runnable square); the merge gate re-runs conjoined coverage, dependent branch agreements, and twice-and-diff — the

machinery of Section 6 applied as an admission test — and Proposition 5.2 guarantees an additive contribution extends, never silently invalidates, the verdicts already earned.

5.2 Coverage, and the ratchet

Fidelity alone is gameable by triviality: a pair handling one instruction is vacuously proved. Its companion axis is measured against a yardstick the implementer does not choose:

Definition 5.1 (Coverage). Fix for each language a *construct inventory* K_A enumerated from its specification (opcodes, operators, syntactic forms). A construct $k \in K_A$ *counts* for pair P iff P covers it (k ’s probe programs lie in $\text{dom}(P)$) and P is faithful on those probes: $\text{cov}(P) \subseteq K_A$ is the per-construct *conjunction* of covered and faithful. Route coverage $\text{cov}(R)$ counts k iff its lowering survives — covered and faithful — at every hop.

Coverage is gamed by unsoundness (accept everything, translate it wrongly) exactly as fidelity is gamed by triviality (translate one thing, prove it); the conjunction closes both routes to a vacuous “pass.” Everything a pair rejects must be a *typed* unsupported, so the uncovered set is itself enumerable and auditable — partiality is fail-fast, never silent.

Coverage then grows by a discipline with a soundness theorem:

Proposition 5.2 (Ratchet). *Call an update $I' \sqsupseteq I$ (likewise T, Λ) an extension when $\text{dom}(I') \supseteq \text{dom}(I)$ and $I' \upharpoonright_{\text{dom}(I)} = I$. Under extensions: every faithfulness verdict at every $p \in \text{dom}(I)$ is preserved; cov is monotone; and prior evidence (oracle passes, differentials, agreement records) never needs re-earning. An update that is not an extension can silently invalidate any of these, and must instead bump the component’s version and re-validate every dependent pair.*

The implementable extension check is byte-identity of all old outputs across the update — the same twice-and-diff mechanism as Proposition 3.9, run across versions. This is precisely the repo’s widening protocol (additive interpreter bumps, versioned events, dependent-pair re-validation), which Section 6 measures over the project’s own history.

The ratchet is the evolution plane’s contract with the use plane: declarations only strengthen, verdicts only accumulate. What directs the growth is the demand the use plane records:

5.3 Keeping the books: demand, cost, and recommendation

Between diagnosis and registration sits the accounting: the *books*, one append-only, opt-in, host-local ledger with two sides. The *cost* side is written beside the work by the instrumented call sites — translation on cache miss, the square oracle, every decide backend — and accumulates from the capped route-grader runs in CI; it feeds the measured axis of the annotated route report, where Pareto-dominated routes

are marked, never hidden, dominance is computed only between fully measured routes, and an absent measurement reads *unmeasured*, never zero. The *demand* side is written by the diagnosis calls: each question the platform cannot satisfy is recorded verbatim with its failing obstacle and the generation target it names — the four obstacles of §2, plus a fifth, *trust*, when a player’s assurance floor is unmet — and every record carries an *origin* tag separating organic player sessions from synthetic campaigns.

A recommendation is then an aggregation, not a judgment: the board groups recorded demand per target and deduplicates by question identity; the failing obstacle is the platform’s one demand taxonomy, naming what the candidate pair pays for — connectivity and shape buy capability, loss buys coverage, cost buys performance, trust buys an independent anchor. A campaign of five questions, run against the July 2026 registry, yields a four-row board that illustrates the shape of the evidence (the diagnosis and the board are measured as a benchmark in §6.12): a reasoning-language demand (two liveness questions no registered hub expresses — the depth growth of the conclusion), an independent-pair demand (a single-route source whose provenance is undeclared), a connectivity demand (a source with no route to any hub, with a draft brief stub attached), and a cost demand (a *resource-out* verdict naming the registered abstraction dials). Each row removes a different obstacle; no scalar ranks them.

The discipline this buys is *recommended, then registered*: a registration brief opens by citing the demand records behind it — no evidence, no brief — while registration itself remains the human act it has always been. The untrusted-generator stance of §5.1 extends from building pairs to *choosing* them: an LLM whose campaign manufactures demand to justify a pet pair cannot launder it, because demand is auditable (questions verbatim, origins displayed apart, volume explicitly not a verdict), and the trust-side demands rest on the declared, protected semantic artifacts of Assumption 2 — a shared artifact is never independent, an undeclared one never silently so.

6 Evaluation

The fifteen subsections below answer four questions. *Does the graph answer correctly?* — the capability snapshot, composed coverage and branch agreement, the compliance slice, and the end-to-end case studies (§6.1–§6.4). *Does the evidence mean what it claims?* — the certified tier and the escape-rate experiments for the gate itself (§6.5, §6.7). *Can untrusted authors build it?* — the defects the architecture caught (§6.6). *Can an LLM play it?* — the player experiment (§6.8); performance and scale close (§6.9). The snapshot tables end there; five later benchmark families, each stamped with its own commit, follow (§6.10–§6.14), and a short record of what remains narrated rather than measured ends the section (§6.15).

We evaluate the snapshot along the axes the calculus makes measurable: per-pair coverage (§6.1), composed route coverage and branch agreement — including a disjoint-decision block — (§6.2), a compliance-derived reachability benchmark decided along both RISC-V routes (§6.3), end-to-end case studies exercising Theorem 3.17 (§6.4), certified-unreachability runs inhabiting the proved tier (§6.5), the defects the architecture caught (§6.6), a measured escape-rate estimate for the gate (§6.7), a first controlled experiment with LLM players (§6.8), and performance, determinism, and scale (§6.9). Every number in this section’s tables is regenerated by one script from the live registry and real runs at the snapshot commit, with a few curated exceptions marked at source — the defect catalog behind Table 8 is hand-mined from history, and Table 11 formats the recorded outputs of a manual two-arm protocol; the escape experiment’s earlier-round numbers (§6.7) likewise come from its incident record. (Host: macOS/arm64, CPython 3.12, Z3 4.13, btormc 3.2, cadical; drat-trim pinned at source commit 2e3b2dc and cake_lpr at a4323b2, the engine inventory recorded in the regenerated `env.json`; the platform’s own suite runs 1215 tests there, all green, with 3 host-dependent skips.) The evaluation remains deliberately *fully specified* rather than large: every question — authored or derived — is checked end to end with its ground truth stated, and the largest sweep (the 78-question compliance-derived benchmark of §6.3) is still small next to an SV-COMP-scale campaign, which remains future work.

6.1 Capability snapshot

Table 3 reports per-construct coverage measured at harvest time — not transcribed from documentation — in both of Definition 5.1’s readings: *accepted* (the probe translates without a typed unsupported abort) and *conjoined* (accepted and the pair’s square oracle passes on the probe — the definition’s actual conjunction, run probe by probe). For every pair with a decidable square the two columns now coincide; they did not when the conjunction was first measured, and what it surfaced on its first run is instructive enough to report (§6.6, incidents I20–I22): the Sail-route front dropped the program’s *initial memory*, so every load-family probe diverged at step 0 (accepted, silently wrong — precisely the failure mode acceptance counting cannot see), and three of the BTOR2 lowerings modeled a program counter that leaves the code as *stuck* where every reference interpreter halts, so every taken-jump probe whose target exits the image diverged on halted (the worked example of §3.2 shows this square, and its oracle output, verbatim). It also audited its own instrument: one probe (SD) stored over its own ECALL terminator, so the reference interpreter could not run it and no square had ever executed on that construct — acceptance counted it covered anyway. Measuring the definition’s conjunction found all three in its first run; the fixes are ordinary

Table 3. Capability snapshot: per-pair construct coverage against the language-owned inventory. *Accepted* = the probe translates without a typed unsupported abort; *conjoined* = accepted *and* the pair’s square oracle passes on the probe — Definition 5.1’s conjunction, measured directly (§6.1). Pairs without a decidable square (the predicted-grade hops into the SMT-LIB hub) discharge the faithfulness conjunct per run instead (§3.5), marked *per-run*; the reproducible C hop carries no construct inventory and shows “—”. Gaps counts the distinct typed unsupported constructs. Measured from the live registry at the snapshot commit.

Pair (source→target)	Grade	Accepted	Conjoined	Gaps
c-riscv	reproducible	—	—	—
riscv-btor2	checked	96/96	96/96	0
riscv-sail	checked	96/96	96/96	0
sail-btor2	checked	95/95	95/95	0
aarch64-btor2	checked	27/33	27/33	6
aarch64-sail	checked	27/33	27/33	6
wasm-btor2	checked	54/75	54/75	21
ebpf-btor2	checked	126/126	126/126	0
evm-btor2	checked	86/144	86/144	58
btor2-smtlib	predicted	56/56	per-run	0
crn-smtlib	predicted	10/10	per-run	0
python-smtlib	predicted	11/27	per-run	16
smiles-formula	predicted	14/17	14/17	3

versioned translator bumps and one probe repair. Pairs without a decidable square — the predicted-grade hops into the SMT-LIB hub — discharge the faithfulness conjunct per run at question time instead (§3.5) — what their grade leaves to per-run checking; the table marks them *per-run* (the fourth predicted pair, SMILES→formula, has executable ends and conjoins directly). Denominators are language-owned inventories (Definition 5.1’s yardstick): both RISC-V-headed pairs measure against the same 96-construct RV64IMC inventory, the two AArch64 pairs against one declared A64 slice whose out-of-scope constructs count in the denominator, and the Wasm and EVM rows against their in-scope $\cup$ enumerated-out-of-scope unions (54/75, 86/144) — a gap shows as a typed unsupported entry, never by shrinking the total. Depth remains uneven by design and visibly so: the spine is deep (all 96 RV64IMC constructs conjoined; eBPF complete at 126; the BTOR2→SMT-LIB bridge total on its 56-item operator/-sort/directive inventory), Python stands at 11 of 27 subset constructs, and every gap is a *typed* unsupported the harness can enumerate (the “gaps” column). The declared A64 slice is still narrow against the full base ISA — the honest reading of 27/33 is “the in-scope family conjoins, and the slice is small.” The C head carries no construct inventory: its translator is the pinned compiler, graded reproducible (§3.5).

Table 4. Composed *conjoined* coverage: a probe counts iff it survives every hop *and* every hop with a decidable square passes it on that hop’s input (the route-level reading of Definition 5.1; “via Sail” routes are the independently derived branch; denominators are the source language’s inventory, §6.2). Routes marked [†] contain no decidable-square hop at all (their one translator is predicted-grade): the number is acceptance, with faithfulness discharged per run (§3.5). Branch agreement: the same question decided along both routes. Times are the slower route, end to end (translate every hop + decide with Z3). The bottom block decides the same questions with fully disjoint decision stacks after the head: the direct route’s BTOR2 system decided natively by btormc (no bridge, no SMT-LIB, no Z3) against the via-Sail route through the bridge and Z3 — the diverse segment spans both the lowering derivation and the decision procedure (§3.6).

Route	Composed coverage
RISC-V, direct	96/96
RISC-V, via Sail	96/96
AArch64, direct	27/33
AArch64, via Sail	27/33
Wasm	54/75
eBPF	126/126
EVM	86/144
CRN [†]	10/10
Python [†]	11/27
SMILES	14/17

Question (both routes)	Agree	Verdict	Time (s)
riscv const x1==42 (reach)	✓	reach	0.0
riscv const x1==99 (unreach)	✓	unreach	0.0
riscv loop sum==15 (reach)	✓	reach	0.0
riscv loop sum==99 (unreach)	✓	unreach	0.0
riscv store/load 0x123 (reach)	✓	reach	0.0
riscv store/load 0x999 (unreach)	✓	unreach	0.0
C a0==47 (reach)	✓	reach	0.1
C a0==99 (unreach)	✓	unreach	0.0
aarch64 movz/add x1==42 (reach)	✓	reach	0.0
aarch64 movz/add x1==999 (unreach)	✓	unreach	0.0
aarch64 SUBS/B.NE loop x0==1 (reach)	✓	reach	0.0
aarch64 SUBS/B.NE loop x0==5 (unreach)	✓	unreach	0.0
aarch64 flags + loop (SUBS/B.NE)	✓	trace = π	—
aarch64 32-bit W forms	✓	trace = π	—

Question, decision stacks fully disjoint	Agree	Verdict
riscv const x1==42 (reach)	✓	reach
riscv const x1==99 (unreach)	✓	unreach
riscv loop sum==15 (reach)	✓	reach
riscv loop sum==99 (unreach)	✓	unreach
riscv store/load 0x123 (reach)	✓	reach
riscv store/load 0x999 (unreach)	✓	unreach
aarch64 movz/add x1==42 (reach)	✓	reach
aarch64 movz/add x1==999 (unreach)	✓	unreach
aarch64 SUBS/B.NE loop x0==1 (reach)	✓	reach
aarch64 SUBS/B.NE loop x0==5 (unreach)	✓	unreach
C a0==47 (reach)	✓	reach
C a0==99 (unreach)	✓	unreach

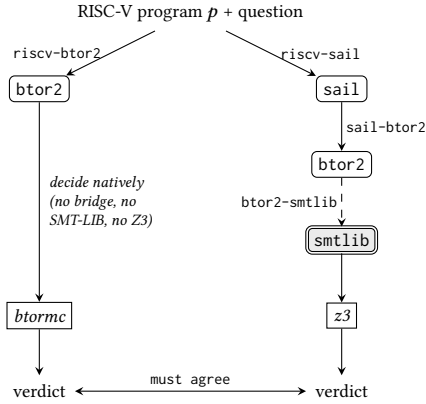


Figure 4. What the bottom block of Table 4 measures: the same question decided along two stacks sharing no *decision* component after the head (the named residue: emission library, endpoints) — the ISA-prose-derived lowering decided *natively* by btormc, against the Sail-model-derived lowering through the predicted-grade bridge and Z3. Agreement corroborates the whole diverse segment (Assumption 2); the stated residual shared surface is the BTOR2 emission library and the language-owned endpoint interpreters. The solver-level rows at the top of Table 4 instead decide *both* sides through the bridge and Z3, sharing everything below the reconvergence.

6.2 Composed coverage and branch agreement

Table 4 (top) composes conjoined coverage along whole routes: a construct counts iff its probe survives *every* hop and every hop with a decidable square passes it on that hop’s input. Nothing a head accepts is eaten at the hubs: every accepted probe of every route survives composed to its route’s target, squares included. The denominators are the source language’s inventory, so the two RISC-V routes are measured on the *same* 96-construct yardstick and both compose 96/96 — the spine composes losslessly, and the earlier version of this table, whose two RISC-V rows quoted different pair-chosen denominators (96 vs. 95), is exactly the yardstick-shopping Definition 5.1 forbids and this measurement now closes. The AArch64 rows also carry a ratchet anecdote the machinery makes precise: one revision earlier the Sail-mediated route composed to 0/33, because the Sail→BTOR2 translator lowered only the RV64IMC arm — and the harness localized every miss to the sail-btor2 hop by name. Widening that one hop (an additive translator bump, RISC-V arm byte-identical per Proposition 5.2) closed the gap without re-earning any other evidence. A gap the system *reports and localizes* is the designed behavior; a gap papered over would be the defect.

The bottom of Table 4 is the fidelity payoff of Lemma 3.16: the same reachability questions decided along independently derived routes. Twelve solver-level questions — constant dataflow, summation and countdown loops under unrolling,

store/load through memory, two questions about a *gcc-compiled C program* (can a0 be 47 at halt? can it be 99?), and four AArch64 questions decided along the Arm-manual-derived and the Arm-Sail-model-derived route — were each decided along both routes of their branch; all twelve pairs of verdicts agree, including the universal (UNREACHABLE) halves where agreement carries real information. The C rows exercise the full re-establishment story: an opaque reproducible compiler heads both routes, and its output is validated downstream twice, independently. The AArch64 trace-level rows cross-check the same branch below the solver, directly comparing the two carried-back behaviors under π . The table’s bottom block addresses Assumption 2’s scoping head-on: the twelve solver-level rows share the BTOR2→SMT-LIB bridge below the reconvergence, so every one of the twelve is re-decided with fully disjoint *decision* stacks after the head (Figure 4) — the direct route’s BTOR2 system decided *natively* by btormc (no bridge, no SMT-LIB, no Z3) against the Sail-model route through the bridge and Z3. All twelve agree. Every unreachable verdict among them is additionally corroborated below the solvers: the strict BTOR2 interpreter replays the direct route’s system for the full bound and no bad fires — the tested surrogate for Theorem 3.18’s artifact-to-semantics hypothesis (recorded per question, as is the same replay for every bounded-unreachable verdict of Table 5). The diverse segment now spans the lowering derivation (ISA-prose vs. formal-model) *and* the decision procedure (different solver, different input format); the residual shared surface, stated rather than hidden, is the BTOR2 emission library — the site of incident I3, the platform’s one recorded cross-route common-mode failure *through shared code* (shared misreadings are the other kind, §6.6) — and the language-owned endpoint interpreters.

6.3 The compliance slice as a question set

The questions above were authored; Table 5 scales the same discipline over a *derived* question set nobody hand-picked. The platform’s RISC-V compliance slice — self-checking programs in the upstream riscv-tests HTIF tohost convention, built with the pinned cross-toolchain at the upstream link base 0x8000_0000 — doubles as a reachability benchmark: each program is reference-run to completion, and for each data register the harness derives one question whose target value the register demonstrably held (ground truth REACHABLE) and one whose target no register held at any step (ground truth UNREACHABLE within the bound), with the unrolling bound covering the whole run. Every question is then decided independently along *both* RISC-V routes. Three honesty notes. First, the slice is curated in the upstream convention rather than taken binary-for-binary from upstream: the stock -p- binaries open with machine-mode CSR and trap setup that is outside the declared user-ISA scope, so the slice re-creates the grading convention over the user subset (the gap is typed, not hidden). Second, the ground

Table 5. The compliance slice as an external-format question set: self-checking programs in the riscv-tests HTIF convention (built with the pinned toolchain at the upstream link base), each reference-run to derive per-register reachable / bounded-unreachable questions with machine-derived ground truth, each question decided independently along BOTH RISC-V→SMT-LIB routes. Agree = the two routes’ verdicts coincide; correct = the agreed verdict matches the interpreter-derived ground truth. Time is both routes, all questions, end to end.

Program	Steps	k	Questions	Agree	Correct	Time (s)
rv64uc-compress	34	42	8	8/8	8/8	2.7
rv64ui-arith	63	71	8	8/8	8/8	8.2
rv64ui-branch	34	42	6	6/6	6/6	2.4
rv64ui-jump	18	26	8	8/8	8/8	1.4
rv64ui-ldst	68	76	8	8/8	8/8	12.0
rv64ui-logic	49	57	8	8/8	8/8	6.5
rv64ui-shift	45	53	8	8/8	8/8	5.7
rv64ui-word	43	51	8	8/8	8/8	5.0
rv64um-div	69	77	8	8/8	8/8	11.4
rv64um-mul	39	47	8	8/8	8/8	3.9
Total			78	78/78	78/78	

truth comes from the shared reference interpreter — but that interpreter is exactly the component the adequacy campaign validates step-for-step against the Sail-generated gold simulator *on these same programs*, so the benchmark’s ground truth is anchored outside the platform. Third, the benchmark’s discriminating power is scoped: ground truth and both routes share the reference interpreter, so it measures translator- and route-level defects — a shared-misreading defect of the MUL/ADD class (§6.6) would pass it undetected, and the external Sail differential, not this benchmark, is what polices that class. The result: 78 questions over 10 programs (constant dataflow, logic, shifts, 32-bit word ops, taken and untaken branches, computed jumps, the store/load family, multiplication, division with its RISC-V-defined edge cases, and compressed forms), both routes agreeing on all 78 and all 78 matching ground truth, in under a minute end to end — with every one of the 39 bounded-unreachable verdicts additionally corroborated by a full-bound replay of the direct route’s system through the strict BTOR2 interpreter (§6.2’s surrogate, recorded per question). Preparing this benchmark also forced one more fidelity repair the base-0 probes could not see: the Sail-route front rebased images to address 0, which silently breaks every pc-relative absolute-address computation (AUIPC/LA) on images linked at the upstream base — found while squaring the translator against the slice’s link discipline, and fixed by carrying absolute addresses through the Sail object (a versioned bump, with the squares and this benchmark as regressions).

Table 6. End-to-end case studies. “Replay” is the source-level witness check of Theorem 3.17: the carried-back witness re-executed by the source interpreter.

Case	Verdicts	Replay	Time (s)
C spine (both routes + source replay)	REACHABLE (both agree)	✓	0.21
Python assert violable? (QF_LIA)	REACHABLE	✓	0.18
EVM $6 \times 7 = 42$ native vs bridged	REACHABLE (both agree)	✓	0.05
CRN A→B twice reaches B=2	REACHABLE	✓	3.78

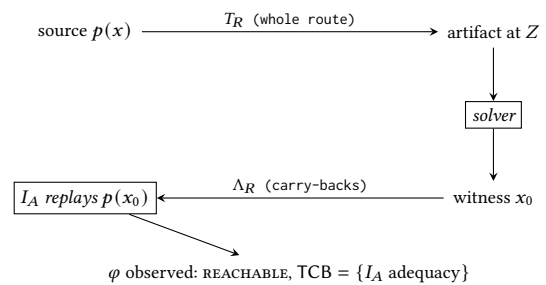


Figure 5. The round trip every case study in Table 6 completes (Theorem 3.17): the witness comes back through the route’s carry-backs and is replayed by the source interpreter. Everything on the way down is a *discovery device* — a defect in any translator, hub, or the solver can lose the witness, never fake the replay.

6.4 End-to-end case studies

Table 6 instantiates Theorem 3.17 once per hub and front-end family, completing the round trip of Figure 5 at the source each time. (1) The *C spine*: both routes answer REACHABLE for $a0=47$, and the source-level replay runs the compiled program in the shared RISC-V interpreter to the halt in `_start()` with $a0=47$ observed — the verdict survives even if every translator and the solver were wrong. (2) *Python*: “is the trailing assert violable?” for a function with a bounded loop and a branch; Z3 finds the witness $x=4$, the shared QF_LIA evaluator independently re-checks the model (`smt_model_ok`), and the input is replayed through the pinned CPython down the taken branches, firing the assert. (3) *EVM*: $6 \times 7 = 42$ on the operand stack, decided *natively* (btormc on the BTOR2 system, witness replayed by the strict BTOR2 interpreter) and *bridged* (through the SMT-LIB hub with Z3) — solve-step corroboration across two engine families, agreeing. (4) *CRN*: a two-firing reachability question in a reaction network, witness schedule replayed by the Petri-net interpreter. In all four, the final trust rests on the source interpreter (plus the small fixed replay harness Theorem 3.17 names), per the last row of the ledger in §3.6.

Table 7. The certified (proved) row inhabited, twice: input-driven unreachability claims from a real pair, corroborated by three engines, certified by a bit-blasted DRAT proof, and re-validated by the independent verified checker. The first exhibit is deliberately small (its refutation is essentially unit propagation); the second is certificate checking at scale — refuting a 16×16-bit multiplication. The controls are bogus checks that must fail — and do.

Question	propagation-scale <i>helper()</i> ² = 3 (no square mod 2 ⁶⁴)	search-scale $x \cdot y = 2^{31} - 1$, $x, y \in [2, 2^{16} + 1]$ (no bounded factorization of the Mersenne prime)
Engines agreeing UNSAT	bitwuzla, boolector, z3	bitwuzla, boolector, z3
Certificate (bitwuzla→CNF, cadical→DRAT)	41746 B DRAT, 18 B LRAT (drat-trim, untrusted)	2.8 MB DRAT, 11.8 MB LRAT
Independent check	cake_lpr (formally verified): verified ; tier proved	cake_lpr (formally verified): verified ; tier proved
Resulting TCB (solve step)	bitwuzla:bit-blast, cake_lpr:verified	
Reachable sibling	$x^2=4$: REACHABLE, no certificate	$x \cdot y=46341^2$: REACHABLE, no certificate
Negative controls	both rejected (bogus proofs vs. a satisfiable CNF)	
Wall time	0.36 s	4.85 s

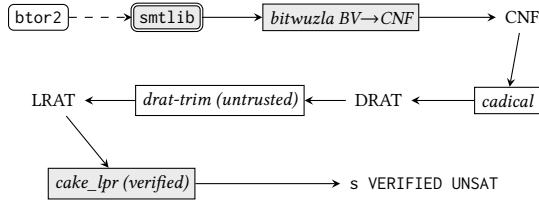


Figure 6. The pipeline Table 7 evaluates: the query is bit-blasted to CNF, cadical’s DRAT refutation is elaborated by drat-trim — an untrusted step that can only fail the re-check, never fake a pass — and cake_lpr, the formally verified checker, re-validates the LRAT against the CNF from scratch. Shaded is what stays in the verdict’s TCB: the bit-blast and the verified checker; the three agreeing engines and the elaborator are discovery devices.

6.5 The certified tier

Table 7 inhabits the ledger’s certified row (§3.6), twice — via the pipeline of Figure 6 — once at each end of the difficulty scale. Both questions are pair-derived and input-driven: eBPF programs whose CALL models helper returns as free inputs. The first squares one input and asks whether $x^2 = 3$; no square exists modulo 2⁶⁴, so the claim is universal over all inputs — and its refutation is essentially unit propagation on the low bits (the elaborated LRAT is 18 bytes). The second masks and offsets two inputs into $[2, 2^{16} + 1]$, multiplies them,

and asks whether the product can be $2^{31} - 1$: the Mersenne prime admits no factorization with both factors in range, and refuting a 16×16-bit multiplication is certificate checking at scale — a 2.8 MB DRAT elaborating to an 11.8 MB LRAT, re-validated in seconds. In both, three engines corroborate UNSAT, bitwuzla bit-blasts the query to CNF, cadical emits a DRAT refutation, drat-trim elaborates it to LRAT — an *untrusted* step: a wrong elaboration can only fail the re-check, never fake a pass — and cake_lpr, the *formally verified* CakeML LRAT checker (soundness machine-proved down to the binary; here built natively from its compiler-generated ARMv8 assembly), re-validates the proof against the CNF from scratch. The verdicts’ TCB is exactly the ledger’s certified row: the bit-blaster’s BV→CNF step and a verified checker, with all three deciding engines and the elaborator demoted to discovery devices — the solve step’s residue; the route hops that produced the artifact remain accounted per the ledger. Both certified systems are also corroborated below the whole certificate pipeline: fifty seeded random helper streams replayed through the strict BTOR2 interpreter fire no bad (recorded in the run data). The reachable siblings ($x^2 = 4$; $x \cdot y = 46341^2$) correctly decline to certify.

Wiring this exhibit produced one more architecture-caught defect, live: the checker *adapter* matched the substring VERIFIED in the checker’s output — and drat-trim reports failure as s NOT VERIFIED, which contains it. Every check, sound or bogus, reported success. The bug could not surface on hosts without the checker (the call raised before parsing) nor on real certificates (which do verify); it fell to the *negative control* — a bogus refutation of a satisfiable CNF that must fail and did not. The fix parses the exact status line, and the control is now a permanent test. This is the paper’s own instrument audited by the discipline it describes (cf. §6.6), and a caution we commend to anyone wiring a proof checker: *a checker adapter without a negative control is itself unchecked*. The verified checker’s adapter was written under that rule from the start — wisely, since cake_lpr exits 0 even when checking fails; only the exact s VERIFIED UNSAT line signals success, and both checkers’ negative controls are permanent tests. One honest subtlety the exercise surfaced: for this instance the refutation is propagation-dominated, so mutating single proof lines is not a valid negative control (the checker legitimately completes the derivation); the satisfiable-formula control is the sound one, since no valid refutation of a satisfiable formula exists.

6.6 Defects the architecture caught

The pairs were written by independent LLM agents with no human semantic review (§5.1); the architecture’s checks were the only gate. Mining the full history (675 commits across all refs at the 2026-07-03 mining pass; ~21 runtime-code fix commits) plus the three defects the conjoined-coverage measurement caught on its first run (§6.1), the probe-operand deficiency the fault-injection experiment exposed, and the

compare-vector gap only the common-mode round could expose (§6.7) yields 24 recorded defect incidents: 15 caught by the architecture’s cross-checks rather than by ordinary unit tests, and 7 more — including the checker-adapter defect of §6.5, a probe that could never have exercised its own square, probes whose operands underdetermined their constructs, and benchmark compare vectors on which signedness is invisible — by the audits and controls the architecture imposes on its own instruments, and the remaining two otherwise (one by machine-vs-human label disagreement, one only partially attributed). Read this as case-study evidence, not a hit rate: the catalog is mined from our own history, it has no denominator (the blind-spot incident below proves the escape rate is nonzero), and no baseline says what a conventional test regime would have caught. Table 8 lists ten representative architecture-caught defects, each localized — component, step, observable — as Corollary 3.8 promises.

Three second-order observations are worth as much as the table. First, *the checks caught their own instruments* — seven of the 24 incidents are check-of-the-check repairs; three representatives: the Sail ISA differential was once passing vacuously (comparing empty traces), the in-image suite caught a witness generator emitting empty witnesses, and the DRAT checker adapter accepted every outcome until a negative control ran (§6.5) — all found because the harnesses carry positive *and negative* controls, and all three are why Assumption 1 is stated as an assumption with empirical discharge rather than as a fact. Second, the history contains a genuine *blind spot* of the square, exactly of the class Lemma 3.16 predicts: the RISC-V interpreter *and* the RISC-V→BTOR2 translator both silently mis-decoded MUL (funct7 0x01) as ADD — both legs agreed, the square was blind, and the defect was found by manual audit. The platform’s structural answer is diversity: the decoder is now anchored against 610 Sail-emitted words, and unknown funct7 hard-aborts on both sides. Third, in one incident three existing unit tests had been written *against the buggy behavior* (an evaluator masking every array store to 8 bits): tests written by a component’s author codify the author’s misreading; cross-checks against independently derived semantics do not. The architecture also *disconfirmed* one reported bug (a claimed slice-width defect shown to be a stale-cache artifact), and its differential campaigns — 300 seeded RV64IMC programs vs. the Sail simulator, a 10-seed Csmith campaign vs. native gcc, 463 reference cases — completed with zero divergences against harnesses whose positive controls confirm they can fail.

Two incidents in full. The catalog’s two most argument-bearing entries deserve their narratives. First, the *blind spot*: the RISC-V interpreter *and* the riscv-btor2 translator mis-decoded MUL (funct7 0x01) as ADD — identically. Both legs of every square agreed, so the square was structurally blind, and the defect was found by manual audit during widening, not by the architecture. This is the residual failure mode

Table 8. Defects caught by the architecture (selection; full list with commit-level evidence in the artifact). “Caught by” names the check that fired — the cross-check layers of §3.6, plus the platform’s own audits and controls.

Defect	Component	Caught by
bv64 sort hardcoded for and/or/xor over bv1 operands — malformed BTOR2 that real solvers tolerated	RISC-V → BTOR2 translator	strict in-process BTOR2 evaluator during the square’s alignment walk
unsigned loads (LBU/LHU/LWU) missing zero-extension to bv64	RISC-V → BTOR2 translator	solver leg: Z3 sort rejection on the corpus
init value nid emitted after the state nid — rejected by every conformant tool, tolerated by the one wired solver; affected every stateful pair	shared BTOR2 emitter	solver corroboration: wiring the 2nd/3rd engines (btormc, pono) made the latent malformation manifest
local.get wrote a bv32 node into the bv64 stack array	Wasm → BTOR2 translator	solver leg: Z3 sort mismatch at BMC
carry-back silently zero-filled registers the solver witness omits (init-pinned states) — every pinned task’s entry state misread	witness carry-back Λ	witness-replay anchor audit (mismatch chain)
default BMC bound mapped “no violation within k ” to UNREACHABLE — a false negative at step 93	verdict semantics	oracle vs. corpus label
ELF header bytes decoded as instructions — interpreter tolerated it, the square did not	shared ELF loader	square oracle on the first real gcc binary
BTOR2 constraint lines silently dropped in the SMT-LIB unrolling — an under-constrained, soundness-leaking encoding	BTOR2 → SMT-LIB bridge	coverage probe: driving the bridge to its 56/56 spec
JUMP/JUMPI underflow-halt row diverged on pc	EVM → BTOR2 translator	inventory exposed the hole
INT_MIN / -1: C-undefined vs. RV64-defined divergence, plus a CBMC false positive on the same task	(real route divergence)	square step alignment during widening
		C-vs-ISA differential branch, with a UB-vs-fault classifier adjudicating

the calculus itself predicts — Lemma 3.16’s “both unfaithful with identical projected error” — landing not between two translators but between a translator and the component Theorem 3.17 crowns as the sole residual TCB. Both sides now hard-abort on unknown funct7, and the structural answer is *external* anchoring: the decoder is validated against 610 Sail-emitted instruction words and against an independently written RV64C decompressor, construct by construct — and the common-mode round of §6.7 now measures this incident’s whole class directly. Second, the *common mode*: the shared BTOR2 emission library declared states before their constant init values, so every emitted init line was

Table 9. Escape-rate experiment: seeded semantic mutations of the riscv-btor2 emissions (uniform rules model systematic mis-lowerings, site rules single-site defects; operand swaps only on non-commutative operators; rules that change no probe artifact are excluded from the denominator), each run through the architecture’s gates in order. “Square” is the conjoined probe suite (§6.1), “branch” the authored solver questions against the intact Sail route, “bench” the compliance-derived ground-truth questions (§6.3). Zero escapes means the seeded mutation families — catalog-derived, with probes hardened against this experiment’s own earlier rounds — are now covered; it is not an estimate that the escape rate is zero (§6.7).

Applicable mutants	55
Caught by the square suite	51
Caught by branch agreement	0
Caught by the derived benchmark	4
Escaped all three gates	0

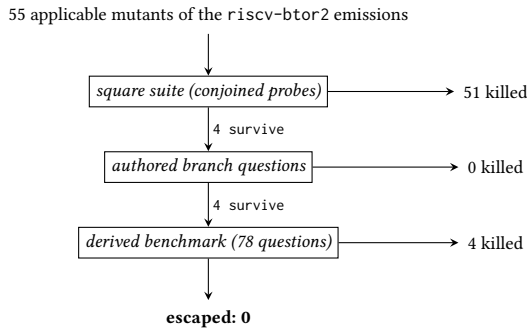


Figure 7. The escape-rate experiment (Table 9) as a gate stack: every applicable mutant runs the gates in the order the platform applies them, and each gate’s kill count is measured. The authored branch questions catch nothing the square suite missed — the derived benchmark is the differentiator (a finding in itself).

malformed — in every BTOR2-emitting pair at once, both branches of every RISC-V question included — and the one solver then wired (Z3, through the bridge) tolerated the malformation. Adding the second and third engines turned it into hard rejections: solve-step corroboration, not the squares, caught it (incident I3). Between them the two incidents mark the exact boundary of Assumption 2: shared code and shared misreadings are what agreement cannot see, which is why the ledger keeps the emission library and the endpoint interpreters inside every branch verdict’s TCB — and why the disjoint stacks of Figure 4 and the external differentials exist.

6.7 An escape-rate estimate for the gate

The catalog above is mined from history and has no denominator; the MUL/ADD blind spot proves the gate’s escape

Table 10. Common-mode (both-leg) fault injection: the same misreading injected into BOTH the reference interpreter and the riscv-btor2 translator — the MUL/ADD class of §6.6, which single-leg mutation cannot model. The square suite is structurally blind on every mutant (both legs wrong identically), and so is expected-based grading in the poisoned world, where the benchmark’s ground truth is derived by the mutated interpreter itself. What catches every mutant are the gates *outside* the shared misreading: the independently derived Sail route disagreeing (cross-route), with the external Sail-simulator differential — run as a parallel column — also catching every mutant.

Misreading (both legs)	Square	Poisoned	Caught by	Diff.
MUL as ADD	blind	blind	cross-route (rv64um-mul)	✓
SUB as ADD	blind	blind	cross-route (rv64ui-arith)	✓
SRA as SRL	blind	blind	cross-route (rv64ui-shift)	✓
SLT as SLTU	blind	blind	Sail differential	✓
AND as OR	blind	blind	Sail differential	✓
XOR as AND	blind	blind	cross-route (rv64ui-logic)	✓

rate is nonzero. Table 9 measures it (Figure 7 draws the gate stack): seeded semantic mutations of the riscv-btor2 translator’s emissions — uniform rules modeling systematic mis-lowerings (every sext emitted as uext, incident I2’s family) and site rules modeling single-site defects (incident I1’s family); operand swaps only on non-commutative operators, so no trivially-equivalent mutants; rules that change no probe artifact excluded from the denominator — each run through the architecture’s gates in the order the platform applies them. The experiment earned its keep before its final numbers did: in its first round, both srl→sra mutants escaped *all three* gates (36 of 51 caught at the square layer), because every ALU probe ran its construct on degenerate all-zero operands, on which logical and arithmetic shifts agree — the “96/96 conjoined” verdict was faithfulness *on the probes*, and the probes underdetermined the constructs. Hardening the probes with mixed-sign operands moved 50 of 53 catches to the square layer but let ult→ulte escape — strictness is observable only at *equal* operands — so the probes now run an equal-operand and a mixed-sign instance per construct (incident I23; the ratchet kept every previously covered construct covered throughout). In the final round, 51 of 55 applicable mutants die at the square suite, the remaining 4 at the compliance-derived benchmark, and none escape. Three honest notes: zero escapes means this *mutation family* is now covered, not that the escape rate is zero; the authored branch questions caught nothing in any round (the derived benchmark subsumes them as a differentiator, a finding in itself); and the denominator is one translator’s emission space, not the platform.

The common-mode round. Single-leg mutation cannot model the MUL/ADD class where both legs of the square

are wrong *identically* — so a second experiment injects exactly that (Table 10): six shared misreadings, each applied as the same uniqueness-checked source patch to *both* the reference interpreter and the `riscv-btor2` translator (in-memory shadows; the repository is untouched). The structural predictions hold, measured: the square suite is blind on all six (both legs agree on every probe), and so is expected-based grading in the *poisoned world*, where the benchmark’s ground truth is derived by the mutated interpreter itself. What catches the mutants are the gates *outside* the shared misreading — Figure 7’s stack read as ordered by independence, each gate derived farther from the shared code than the last: four die at cross-route disagreement with the Sail-derived branch, and two survive even that — their misreadings never surface in the per-register values the derived questions sample — falling only to the external Sail-simulator differential, which (run as a parallel column) catches all six. The round also caught its own instrument, live: in its first run, `slt-as-sltu escaped every gate` — the slice’s compare vectors were all same-sign, on which signed and unsigned comparison agree, so neither the derived questions nor the differential’s executed streams could see the difference (incident I24, the slice-level instance of I23’s probe lesson, and the platform’s first measured full-stack escape). The ratchet’s answer was upstream-faithful — `rv64ui-slt`’s mixed-sign and equal-operand vectors added to the slice — after which the round completes with zero escapes. The honest reading mirrors Assumption 2’s scope exactly: against shared misreadings every gate built from the shared reading is blind *by construction*, corroboration is only as strong as the most independently derived anchor, and that anchor’s vectors are themselves an instrument the discipline must audit.

6.8 The other direction: an LLM plays the platform

The introduction’s two-directional experiment has, until here, reported only its build half. This subsection is a first, deliberately small evaluation of the *player* half: 12 reachability questions with platform-established ground truth (6 reachable / 6 unreachable, spanning RISC-V signedness and load-width traps, eBPF square-residue and bounded-factorization questions, and Python assert-violability), posed to fresh, context-free frontier-LLM agents under two protocols (Figure 8). Arm A (unaided) received only the question text, instructed to answer by reasoning with no tools. Arm B (player) received the same question plus the repository and the head-construction snippet, instructed to decide *via the platform* and report the verdict with its evidence basis. One agent per question per arm, no retries; Table 11 lists the questions and both arms’ verdicts with each arm-B answer’s evidence artifact; prompts, ground truths, per-run outputs, and grading are in the artifact (`results/llm_player/`).

Both arms scored 12/12. That is the honest headline, and it reframes what the platform buys at this question scale: not raw accuracy — the unaided frontier model simulated the

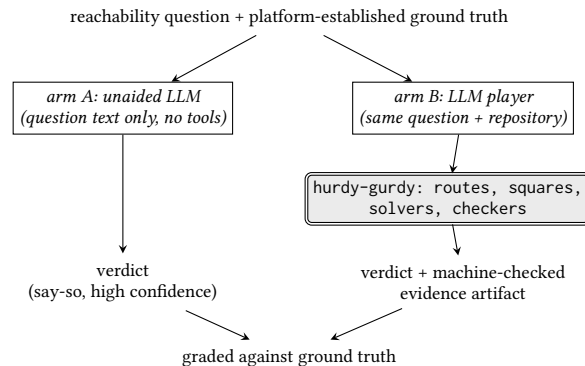


Figure 8. The two-arm player protocol of Table 11: one fresh, context-free agent per question per arm, no retries. Both arms are graded against the same platform-established ground truth; what differs by construction is what the verdict rests on — arm B can take no unchecked step, so every answer carries the evidence artifact of Table 11’s final column.

loops, caught both signedness traps, and factored 2147766287 by Fermat’s method in its head — but the *evidence class* of the answer. Every arm-A verdict rests on the model’s say-so (all were reported at high confidence, so confidence would not have flagged a wrong one); every arm-B verdict carries a machine-checked artifact: two-route agreement on the RISC-V questions, hedged explicitly as bounded-*k* verdicts resting on route fidelity; witness replays through the strict interpreters on the reachable eBPF/Python questions; and tier-raises to proved on the unreachable eBPF questions. The sharpest contrast is the bounded-factorization question: arm A answered correctly by *recalling* that 1073741789 is the largest prime below 2^{30} — opaque memory, exactly the evidence the calculus cannot grade — while arm B produced a 17 MB LRAT certificate re-validated by the formally verified checker, with the trusted base named. One player even devised its own positive control unprompted (flipping the load question’s target to the sign-extended value and confirming REACHABLE on both routes). Four limitations, stated plainly: the protocol scripted which platform entry points to use (the players executed and interpreted; they did not discover the platform cold); the subject model is from the same family that built the platform; the grading is partly circular — ground truth is platform-established and arm B answers *via* the platform, so arm B can fail essentially only by mis-operating or misreading the tools; and 12 questions at this size cannot separate the arms on correctness — questions hard enough that unaided reasoning actually fails are the obvious next step. (Both protocol limitations are removed, and the separation produced, by the post-snapshot rerun of §6.14.)

Table 11. The LLM-player experiment: 12 ground-truthed questions, two arms. Arm A (unaided) answers from reasoning alone; arm B answers *via the platform*. A ✓ means the verdict matches the platform-established ground truth (R = reachable, U = unreachable within the stated bound). Both arms are correct on all 12 — the contrast is the final column: every arm-B verdict carries a machine-checked evidence artifact, where arm A rests on the model’s say-so (all arm-A answers were reported at high confidence). Full question texts, per-run transcripts, and verbatim evidence bases: `results/llm_player/` in the artifact.

Q	Question	Truth	Arm A	Arm B	Arm-B evidence artifact
R1	RISC-V loop: $x_1=15$ within $k=25$	R	✓	✓	two-route agreement
R2	RISC-V loop: $x_1=16$ within $k=25$	U	✓	✓	two-route agreement (bounded)
R3	<code>srl</code> (logical) $0 \times F..F8 \gg 60$: $x_1=15$	R	✓	✓	two-route agreement
R4	<code>srai</code> (arithmetic) $\gg 60$: $x_1=15$	U	✓	✓	two-route agreement (bounded)
R5	<code>lb</code> (sign-ext.) of byte 0×84 : $x_3=0 \times 84$	U	✓	✓	two-route + self-devised positive control
R6	<code>lbu</code> (zero-ext.) of byte 0×84 : $x_3=0 \times 84$	R	✓	✓	two-route agreement
E1	eBPF $x \cdot x \bmod 2^{64} = 3$	U	✓	✓	proved: LRAT re-validated by <code>cake_lpr</code>
E2	eBPF $x \cdot x = 4$	R	✓	✓	<code>z3</code> + native <code>btormc</code> ; witness replayed
E3	$x \cdot y = 1073741789$, $x, y \in [2, 2^{16}+1]$	U	✓	✓	proved: 17 MB LRAT via <code>cake_lpr</code>
E4	$x \cdot y = 2147766287$, same range	R	✓	✓	witness replay; factor pair exhibited
P1	Python assert: $y=16$ violable	R	✓	✓	SMT model re-checked + CPython replay
P2	Python assert: $y=15$ violable	U	✓	✓	UNSAT; per-run-checked predicted route

Table 12. Route cost for the RISC-V loop question ($k=25$ unrolling): whole-route translation, cold vs. warm (the content-addressed cache of Proposition 3.9), `Z3` decide time, byte-determinism (twice-and-diff), and artifact size.

Route	cold (ms)	warm (ms)	decide (ms)	det.	artifact
RISC-V, direct	5	<0.1	55	✓	201 kB
RISC-V, via Sail	6	0.1	44	✓	209 kB

Table 13. Scalability probes on two axes. Left: the summation-loop question at growing bounds ($x_1 = N(N+1)/2$ after N iterations; reachable at every size), whole-route translation and `Z3` decide time. Right: the certified tier on the bounded-factorization family at growing factor widths — certificate sizes grow from tens of kilobytes to megabytes and `cake_lpr` re-validates each.

Loop question	verdict	translate (s)	decide (s)	artifact
$N=5, k=30$	reachable	0.01	0.04	240 kB
$N=20, k=105$	reachable	0.02	0.10	830 kB
$N=50, k=255$	reachable	0.04	0.27	2054 kB
$N=100, k=505$	reachable	0.07	0.55	4093 kB

Certified question	outcome	DRAT	LRAT	time (s)
8-bit factors, target 65521	certified	27.3 kB	24.7 kB	0.2
12-bit factors, target 16777213	certified	0.2 MB	64.1 kB	0.3
16-bit factors, target 2147483647	certified	2.8 MB	11.8 MB	4.9

6.9 Performance, determinism, and scale

Translation is not the cost center (Table 12): whole-route translation of the loop question ($k=25$ unrolling, ~200 kB of SMT-LIB) is ~5 ms cold and a sub-millisecond content-addressed cache hit warm (Proposition 3.9 cashed in), against a `Z3` decide in the tens of milliseconds on either route; the

twice-and-diff determinism check passes on both routes. The numbers say the honest overhead of the whole discipline — checking every hop, re-running for determinism, replaying witnesses — is small against the solver call it wraps. Table 13 probes where the pipeline stands as questions grow, on two axes: unrolling the summation loop to $N=100$ ($k=505$, a 4 MB artifact) keeps whole-route translation under 0.1 s and the decide under 1 s, growing roughly linearly; and the certified tier survives the bounded-factorization family from propagation-size to search-size — certificates growing from 25 kB to an 11.8 MB LRAT, each re-validated by the verified checker in seconds. Neither axis reaches industrial scale, but both cross the region where “toy” criticisms live: the pipeline’s costs grow smoothly, with no cliff through the measured range.

6.10 Post-snapshot: constraint enforcement across engines

The first of the exhibit families to graduate to a measurement — stamped with its own commit in Table 14’s caption; unlike every table above, its numbers postdate the snapshot. The shared BTOR2 evaluator enforces environment constraints with the per-frame reading (per-row observables; a violating row ends the run; a bad counts only on a constraint-valid row), and wiring that enforcement surfaced a latent bridge defect of independent interest: asserting constraints *globally* over the unrolling masks a bad reached on a valid prefix before a later, inevitable violation — and disagrees with the native checkers on exactly that system. Table 14 turns that episode into a benchmark: nine authored systems whose ground truth holds by construction — reaches on valid prefixes (single and double guards, short and long windows, through a constrained input), and unreachables that exist only because of a constraint, only beyond a truncation, only on an invalid row, or only beyond the bound — each decided natively (`btormc`), bridged (the per-frame encoding, `z3`), and

Table 14. The constrained corpus: nine authored BTOR2 systems with by-construction ground truth (5 reachable / 4 unreachable), each decided natively (btormc, canary-controlled bounded exhaustion), bridged (the per-frame encoding, z3), and corroborated by the shared evaluator — witness replay on the reachable rows (both the bridged model’s carry-back and btormc’s .wit), seeded no-bad runs on the unreachable rows (R = reachable, U = unreachable within the bound). Below the rule, the structural controls; the first keeps the historical global constraint reading as an instrument and measures what it masks. Post-snapshot measurement at commit 758b1f2 (2026-07-15).

System	<i>k</i>	Truth	Native	Bridged	Evaluator
valid-prefix-reach	5 R	R	R	R	replay ✓
two-guards-reach	6 R	R	R	R	replay ✓
late-window-reach	8 R	R	R	R	replay ✓
vacuous-constraint	4 R	R	R	R	replay ✓
constrained-input-reach	2 R	R	R	R	replay ✓
constraint-blocked-input	3 U	U	U	U	no bad ✓
truncated-before-bad	12 U	U	U	U	no bad ✓
invalid-row-bad	5 U	U	U	U	no bad ✓
bound-scoped-unreach	1 U	U	U	U	no bad ✓
global reading, valid-prefix-reach	UNREACH — the reach masked ✓				
vacuous constraint vs. none	verdicts equal ✓				
blocked input, constraint removed	flips to REACH ✓				

corroborated by the shared evaluator: witness replay on every reachable row (both the bridged model’s carry-back and btormc’s .wit replayed through the strict interpreter), seeded no-bad runs on every unreachable row. All nine agree with ground truth in both polarities, and the defective global reading, kept as an instrument, still masks the valid-prefix reach — the permanent negative control, beside the additive one (a vacuous constraint moves no verdict) and the blocking one (removing the constraint flips the blocked system back). Three honesty notes: the corpus is authored and deliberately tiny (nine systems, one operator family), constructed to pin the semantic corners of the constraint directive rather than to sample a population; the evaluator *corroborates* — replay and seeded runs — it never decides; and agreement here shares the BTOR2 emission surface all three deciders consume, so a shared misreading of the directive itself would pass — the mutation discipline of §6.7 applies and is future work for this family (tools/constraint_corpus.py; the experiment is also a permanent test).

6.11 Post-snapshot: cost calibration for the books

The books’ cost side, calibrated (Table 15). The instrument is the CI entryptpoint itself — the capped route-grader — run five times over the RISC-V head, each repetition a fresh subprocess with its own ledger file (a warm content-addressed cache translates nothing, so a warm run would record nothing: the repetition protocol is part of the calibration). The

Table 15. Cost calibration for the books: 5 repeated capped route-grader runs over the RISC-V head (fresh subprocess and ledger file each, so the translation cache swallows no record; the grader’s own probe cap applies). Top: pooled per-hop cost profiles — translate and square-oracle (o) medians — and the bridged decide per engine. Middle: per-repetition route translate totals (median and worst repetition) and, per route, in how many repetitions the annotated report marked it dominated — the mark’s coherence and stability are the measurement; both routes stay listed at equal assurance and direction, no scalar ranking. Bottom: the honesty invariants, executable. Timings are host-tagged (single machine); the corpus is the grader’s capped slice, so the numbers calibrate the *instrument*, not the platform’s workload. Post-snapshot measurement at commit b6e1d89 (2026-07-15).

Hop / engine	<i>n</i>	median (ms)	p90 (ms)	o (ms)
btor2-smtlib	235	0.543	0.733	—
riscv-btor2	120	0.550	0.715	1.439
riscv-sail	120	0.016	0.025	0.083
sail-btor2	120	0.558	0.727	1.465
decide[z3]	10	3.305	6.870	—
Route (translate total)	reps	median	max	marked
direct (riscv-btor2)	5	1.084	1.109	1/5
via Sail (3 hops)	5	1.102	1.144	4/5
mark coherent (never against the measured totals)	✓			
finding: totals tie within spread — no signal in the mark				
empty ledger: unmeasured (never zero), no dominance	✓			
one route measured: still no dominance	✓			

pooled profiles put numbers on the platform’s cost shape at probe scale: the two lowering hops and the bridge each translate in ~0.5 ms median, the RISC-V→Sail front is thirty times cheaper, square-oracle checks run ~1.4 ms, and the bridged decide dominates everything at ~3 ms median — consistent with the snapshot’s finding that translation is not the cost center (§6.9). The finding is in the middle block: on this host the two routes’ translate totals *tie within the repetition spread* (medians ~1.1 ms, μ s apart), and at a tie the report’s dominance mark carries no signal — it is computed on raw medians with no noise margin, and across calibration runs it pointed both ways. What the benchmark certifies instead is the mark’s *coherence* — pooled and per repetition, a mark never points against the measured totals — and the two honesty invariants, run executable: an empty ledger reads *unmeasured*, never zero, and computes no dominance; a ledger measuring only one route still computes no dominance, because dominance needs complete measurement on both sides. Three honesty notes: the timings are host-tagged and single-machine by design (profiles never mix machines — the CI runner class, where the grader also runs, keeps its own books); the corpus is the grader’s capped probe slice, so these numbers calibrate the *instrument*, not a workload;

Table 16. The question campaign: 25 authored questions whose *first failing obstacle is known by construction* — the five-obstacle demand taxonomy plus seven answerable controls spanning every pass mechanism (feasible routes; an assurance floor met by declared grade; a floor met by branch corroboration) — run through the diagnosis against the live registry with a fresh ledger. “Targets” counts the recommendation board’s rows per obstacle: aggregation is per generation target, so the three cost questions (three sources, one hub inventory) share one reduction row. Below the rule, the instrument checks. Post-snapshot measurement at commit e304a40 (2026-07-16).

Obstacle (constructed)	<i>n</i>	diagnosed	targets
connectivity	4	4/4	2
loss	4	4/4	4
shape	4	4/4	4
cost	3	3/3	1
trust	3	3/3	3
answerable controls	7	7/7	—
controls append no demand record			✓
6 verbatim re-asks add 0 distinct questions			✓
origins displayed apart (campaign vs. organic, 3 rows)			✓
diagnosis read-only (registry unchanged)			✓

and the tie finding names a concrete next step for the route report — a declared noise margin below which no dominance is marked (tools/cost_calibration.py; the experiment is also a permanent test).

6.12 Post-snapshot: a question campaign for the books

The economy’s front half — diagnosis to recommendation — measured (Table 16). Twenty-five authored questions are posed through why-not against the live registry, eighteen of them constructed so that a *known* obstacle fails first — routes that end short of every hub (connectivity), observables no head projection keeps (loss), question shapes no hub declares (shape), spent verdicts on feasible routes (cost), and assurance floors that single-route sources cannot meet (trust) — beside seven answerable controls that span every way a question can *pass*: feasible routes enumerated, a floor met by declared grade (Python’s predicted head), and a floor met by branch corroboration (both ISAs, and the C spine through its diverse segment). The diagnosis names the constructed obstacle, first, in all eighteen cases, with exactly one demand record written per failure; the seven controls come back answerable and append *nothing* — the books never record an answered question. The board then aggregates the eighteen records to fourteen generation targets, and the aggregation is per *target*, not per question: the three cost questions, from three different sources, share the one reduction row that names the hub’s registered abstraction dials. The instrument checks close the loop: six questions re-asked verbatim add

Table 17. The abstraction benchmark. Top, the authored block: free-set havoc on the decoy-*M* family (the advisor’s zero-loss set) — the bridge’s SMT artifact (kB) and its decide time (ms), exact→abstracted, verdicts preserved and the universal transferring. Bottom, the HWMCC slice: six bit-vector instances from the 2019–2024 corpora, streamed-within (mirror commit 57174f5d6f57, sha256 per instance), each ingested through the platform’s own stack, decided exactly (btormc, *k*=20, R/U = reachable/unreachable within the bound), then CEGAR-localized: havoc the advisor’s ladder prefix, refine on spurious counterexamples (each caught by replaying the witness at the source, havoc inputs filtered), and report where the loop converges — states still havocked / total (*nr* = rounds, *ns* = spurious) — and that the converged verdict agrees with the exact one. Post-snapshot measurement at commit b3e1323 (2026-07-16).

Authored	SMT kB	decide ms	
decoy-2	47.6→6.9	68→9	✓
decoy-4	92.0→9.6	16→7	✓
decoy-8	181.9→14.8	26→8	✓
cegar-chain: 4 spurious, 5 rounds, converges to the free set ✓			
true-cex: reachable via the abstraction; source replay confirms ✓			
sharp-boundary: a cone state havocked — spurious; replay refutes ✓			
HWMCC instance	family	exact	localization
bin-suffix-5	sosylab’24	U 0.11s	0/6 (4r, 3s) ✓
trex02-1	sosylab’24	U 0.11s	3/7 (1r, 0s) ✓
benchmark04_conjunctive	sosylab’24	U 0.38s	0/8 (5r, 4s) ✓
phases_2-1	sosylab’24	R 0.37s	0/8 (5r, 4s) ✓
analog_estimation	mann’19	R 0.01s	2/5 (1r, 0s) ✓
adding.5	beem’19	U 0.10s	5/10 (1r, 0s) ✓

zero distinct questions (dedup is by question identity); the same question arriving from an organic session and a synthetic campaign shows both origins, displayed apart, on its row — the auditability that keeps manufactured demand from laundering into evidence (§5.3); and the diagnosis is read-only against the registry. Two honesty notes: the corpus is authored, so this measures the diagnosis’s *correctness on constructed ground truth*, not its coverage of questions players actually ask — an organic corpus accumulates only as the platform is played; and the accuracy is of the diagnosis, not the recommendations — whether a named target is *worth* building stays the human judgment the board explicitly declines to make (tools/question_campaign.py; the campaign is also a permanent test).

6.13 Post-snapshot: the direction axis, measured

The direction axis of §3.4, exercised end to end (Table 17). The authored block runs on controlled ground truth. Havocking the advisor’s *free set* — the states its cone analysis proves cannot move the question — preserves the verdict on every decoy-*M* instance while the bridge’s SMT artifact shrinks by an order of magnitude (the hub encodes every

transition it is handed; localization is what keeps it from being handed dead update towers — preparing this measurement caught exactly that: the translator originally left the orphaned logic in its emission, and the artifact *grew*; v0.2 sweeps it, a versioned non-extension bump). Decide time is reported as measured, and its near-parity is a finding, not a disappointment: engines already refuse to branch into satisfiable-independent transitions, so the free set is free for everyone — what the abstraction buys is the artifact every downstream encoder, cache, and replay pays for, and the CEGAR capability inside the cone. The loop itself is the cegar-chain row: abstracted too aggressively on purpose, it yields four spurious counterexamples, each caught by source replay and each un-havocking one ladder rung, converging to exactly the advisor’s free set with the universal verdict transferring (Proposition 3.11); the true-cex row is the other half of the asymmetry (a reachable verdict believed only after the source replay confirms it), and the sharp-boundary control havocs one state *inside* the cone and must — and does — go spurious. The HWMCC block then takes the same machinery to six bit-vector instances from the 2019–2024 competition corpora, streamed-with-pin (BENCHMARKS.md’s ingestion discipline: mirror commit plus per-instance sha256). All six ingest through the platform’s own stack — parse, shared-evaluator run, reduction advisor — and preparing the slice caught a real defect: the beam instance’s negated node references crashed the evaluator with an *untyped* abort and, worse, silently narrowed the cone analysis (a dependency hidden behind a negation left the cone — an unsound free set); both are fixed and locked by tests, and the instance now decides identically native and bridged. The localization column is the honest news: on three of six instances CEGAR converges with states still havocked — adding.5 stays unreachable with half its protocol state havocked, trex02-1 with 3 of 7 — while on the other three it walks all the way back to the exact system, which is what a competition-curated cone should often force. Two honesty notes: the free set is empty on every competition instance (curators do not ship dead state), so all localization here is CEGAR-earned inside the cone; and six instances at $k=20$ measure the machinery, not the corpus — HWMCC at competition scale remains future work (tools/abstraction_bench.py; the authored block is a permanent test).

6.14 Post-snapshot: the player experiment, v2 — unscripted, over MCP

The first player experiment (§6.8) named its own protocol limitations: the entry points were scripted, and twelve questions at that difficulty could not separate the arms on correctness. This rerun removes both (Table 18). The platform’s player surface is now a machine interface — the MCP server (gurdy mcp, stdio JSON-RPC; the same enumerated, advisory tools as the library, exposure pinned by test) — and arm B receives only the question, the repository path, and the rule that this

Table 18. The player experiment, v2 — unscripted, over MCP: 8 bounded BTOR2 reachability questions (4/4 polarity split), ground truth established by bridge+btormc agreement with witnesses replayed, before any run. Arm A reasons unaided (confidence h/m/l in parentheses); arm B may touch the platform only through gurdy mcp — no scripted entry points, tool discovery included. One fresh agent per question per arm, no retries. The evidence column is arm B’s decisive artifact. Recorded runs of 2026-07-16; the section formats, it does not re-run (results/11m_player_v2/).

Question	Truth	A	B	B’s evidence
Q1: counter, hit@57, $k=60$	R	R (h)	R	replay@57
Q2: same, hit@36, $k=30$	U	U (h)	U	UNSAT + k -bracket
Q3: factor semiprime	R	R (h)	R	replay + pinned factors
Q4: factor a prime	U	R (l) × U	U	UNSAT + planted ctl
Q5: trex02-1	U	U (h)	U	UNSAT + advisor + ctl
Q6: phases_2-1	R	R (h)	R	replay@3
Q7: adding.5	U	U (h)	U	UNSAT + sem. probes
Q8: LCG, hit@7	R	R (h)	R	replay@7 + recompute
Correct		7/8	8/8	

interface is the whole platform: no head-construction snippets, no named entry points, no reading source or docs. Tool discovery is part of the task, and every agent performed it cold — wrote a stdlib JSON-RPC driver, listed the ten tools, and picked the one decision call. The questions are harder in exactly one calibrated way: each is a bounded BTOR2 reachability question given *verbatim* (constraint-guarded modular counters, 17-bit bounded factorization, three ingested HWMCC instances including the negated-refs beam protocol, a 64-bit LCG orbit), with ground truth established before any run by bridge+btormc agreement and witness replay. The result is the separation v1 could not produce: *arm A* 7/8, *arm B* 8/8, and the miss is exactly where the platform’s floor exceeds unaided cleverness — asked whether 1676656651 factors in range, the unaided model exhausted trial division and a Fermat pass, then *guessed* reachable on the meta-heuristic that benchmark constants are planted semiprimes (the constant is prime; the run took 34 minutes and was the experiment’s only low-confidence answer — this time confidence did flag the error, one instance, not a calibration claim). Arm A’s other seven answers remain formidable — it decoded two HWMCC pc-encodings, recognized and bounded the beam adding protocol, and iterated a 64-bit LCG seven steps by hand, digit-exact — which sharpens, rather than dulls, the point: at any difficulty the unaided answer is opaque recall or heroic arithmetic, graded only by its own confidence, while every arm-B verdict carries the artifact the calculus grades. What no protocol scripted is the finding of the experiment: the players *reinvented the platform’s own discipline* — one bracketed $k=35/36$ to pin the bound convention before trusting a negative; one pinned its hand-derived factors

with added constraints to machine-check them when the witness exposed no inputs; three devised positive controls so an UNSAT could not be a vacuous pipeline; one probed negated-reference semantics on self-authored one-bit models before believing the main verdict; and every negative was hedged, unprompted, as a bounded claim resting on the bridge — the exact evidence asymmetry of Theorems 3.17 and 3.18, articulated by subjects that were never told it. Honesty notes: the subject model stays in the builders’ family; eight questions measure the protocol, not a population; ground truth and arm B share the platform’s deciders, so the discriminating arm is A; and one arm-A prompt carried a transcription slip with its correction inline (recorded), while four arm-B first launches died on an infrastructure rate limit before any tool call and were relaunched fresh — no graded run was retried (results/llm_player_v2/; questions, per-run records, and all sixteen verbatim final messages).

6.15 What remains narrated

Every number above §6.10 is the dated snapshot, regenerable from the artifact by one script; nothing built since is mixed into those tables. The post-snapshot sections (§6.10–§6.14) are the former exhibit list, graduated: every family this subsection once narrated — constraint enforcement, the books in CI, the demand board, the refinement demonstration, HWMCC ingestion — is now a measured table with its own commit stamp (the trust advisor’s independence judgments are exercised inside the campaign’s trust rows and floor-met-by-corroboration controls, §6.12), and the player experiment’s named protocol fixes are run (§6.14). What remains future measurement is *scale*: HWMCC beyond a six-instance slice, an SV-COMP-scale compliance campaign, organic (rather than authored) question corpora for the books, and a cross-family subject model for the player arms.

7 Related work

Certified compilation and translation validation.

CompCert [18] and CakeML [16] prove one translator correct once; translation validation [26, 30] and its modern descendants [19, 38] validate each run of one translator, and validators can themselves be verified [42]. Credible compilation [32] — per-run validation of a compiler’s own result — is a direct ancestor of re-establishment (Theorem 3.14). In our vocabulary these are grades of a *single edge*; our contribution is the graph of edges of heterogeneous grade — how faithfulness, loss, and assurance compose along routes, how per-run validation re-establishes hops that carry squares, and how independent routes corroborate.

Compositional compiler correctness. Composing simulations across passes and languages is a rich line: Compositional CompCert [39], parametric inter-language simulations [27], CompCertO’s simulation conventions [15], certified abstraction layers [9], multi-language semantics [20, 29], and

DimSum’s decentralized multi-language graph with wrappers [36]. These works confront vertical composition of simulations *up to differing observations* — the habitat of our support condition, which in their terms is the congruence/well-definedness requirement on the mediating map; CompCert sidesteps it by fixing one global event type, CompCertO negotiates it through simulation conventions, DimSum through wrappers. We claim no mathematical novelty for the condition (Definition 3.6 is a one-line congruence); what this paper adds relative to that line is a different regime and different bookkeeping: edges that are *not* uniformly proved, trace-equality squares that are *decidable per run* rather than proved once, an explicit syntactic keep/loss computation for routes, and the grade/class algebra for composing heterogeneous evidence — with the trade-off stated plainly, since equality-up-to-projection is the right notion only for near-structure-preserving translations, not optimizing compilation (§3.1).

Semantics-first frameworks. The K framework derives interpreters, symbolic executors, and provers from one semantics [33], with KEVM [10] and KWasM as flagship instances; Sail does the same for ISAs [2], and ISA-conformance frameworks such as riscv-formal [45] prefigure the spec-enumerated per-construct yardsticks of Definition 5.1. These are our closest philosophical relatives, and our platform *consumes* their artifacts (the Sail RISC-V and Arm models anchor one of each ISA’s two routes). The difference is what carries trust: a semantics-first framework is a monoculture — every derived tool inherits the one semantics and the one derivation pipeline — whereas our unit of trust is *agreement between independently derived translations* (Assumption 2), with the framework structured so routes diverge over independent semantic artifacts. N-version programming [3] and differential testing [22, 46] exploit the same independence resource — and Knight and Leveson’s experiment [14] is the standing caution that independence must be argued, not assumed, which is why Assumption 2 is explicit, scoped to the diverse prefix, and confronted with our own common-mode incidents (§6.6). We give the possibilistic account of what agreement does and does not establish (Lemma 3.16) and wire it into a compositional calculus rather than a test harness.

Certificates, witnesses, and certifying algorithms.

Proof-carrying code [25], certifying algorithms [21], certified model-checking [24, 28, 47], and checked solver proofs (DRAT [44], verified checkers [41], Alethe/Carcara [1]) all instantiate the producer/checker split our proved grade requires; SV-COMP’s violation/correctness-witness ecosystem [4] is the deployed, cross-tool form of the existential/universal asymmetry our end-to-end theorems state; Sledgehammer’s checked reconstruction [5] is the same untrusted-discovery/trusted-replay split inside a proof assistant; and SMT-COMP’s model-validation tracks [43]

institutionalize witness re-checking at the solver level. What we add is the composition through a translation graph: an existential answer’s certificate is its *source-level replay* after carry-back (Theorem 3.17), while universal answers compose certificate checking with route fidelity (Theorem 3.18). The carry-back itself has verified precedent — decompilation into logic [23] makes the lifter a proved component — and our contribution is making it a mandatory, per-pair component of every edge rather than a per-tool artifact.

Moving programs to answerable representations. Verified lifting [11] and the broad practice of encoding programs into solver logics (BMC, symbolic execution) motivate the platform’s existence; Why3 [8] is the closest deployed relative of the hub pattern — one verification-condition language translated to many provers of heterogeneous trust — though its edges carry no per-run squares and no declared loss; refinement stacks such as seL4’s [13, 38] show multi-layer semantic preservation with uniform, proof-backed layers. Our setting differs in admitting layers that are *not* uniformly proved — pinned compilers, agent-written translators, third-party models — and making their heterogeneous trust first-class rather than a threat to the statement. Combining heterogeneous verification evidence with recorded provenance is itself prefigured by the Evidential Tool Bus [34]; the grade/-class algebra and the ledger are a formalized cousin.

Abstraction and refinement. The over-approximating half of the directional square is the simulation half of abstract interpretation’s Galois reading [7]; the loop it closes at the platform level — ask on the abstraction, transfer the universal verdict, replay the existential one, refine on a spurious counterexample — is counterexample-guided abstraction refinement [6]; and the first registered instance, havocking caller-named state, is localization reduction [17]. What the calculus adds is not a new abstraction but a different life cycle for one: the abstraction is a *registered pair* with a declared direction and witness embedding, its soundness on the corpus is a per-program decidable check along that embedding rather than a fixed-point argument, its refinements are durable, graded artifacts rather than solver-internal state, and its parameters remain the player’s — advised (cone of influence, observed interval seeds) but never chosen for them (§3.4, §5.3).

Fault tolerance, end to end. The paper’s vocabulary is deliberately that of fault-tolerant systems, because the concepts coincide: the square oracle is an acceptance test in the recovery-block sense [31], making a silently wrong — in effect Byzantine — translator fail-stop [37]; a branch is dual modular redundancy whose comparator localizes rather than votes; and the existential/universal asymmetry is the end-to-end argument [35] for translation graphs. What the transplant adds is the compositional bookkeeping — graded

evidence with weakest-link meets, per-run re-establishment, and the trusted-base ledger.

LLMs and formal tools. Recent systems couple LLM generation with solver-checked validation [40]. Our platform is built for that player — an LLM chooses questions and routes but every step it takes is deterministic, graded, and checked — and §5.1 reports the build half of the two-directional experiment of Section 1: the translators themselves were LLM-written, and correctness was carried by the architecture, not by author trust. §6.8 reports a first controlled experiment on the player half.

8 Limitations and conclusion

Limitations. This is a dated snapshot of a system designed to ratchet, and its numbers say so: coverage is deepest on the spine (all 96 RV64IMC constructs conjoined and composing losslessly to SMT-LIB on both routes; the in-scope eBPF set complete) and deliberately partial elsewhere (EVM at 86 of 144 opcodes; Wasm at 54 of its 75-item declared inventory, without loop/br; Python an integer subset with bounded unrolling). Coverage is now measured as Definition 5.1’s actual conjunction over language-owned inventories wherever a pair has a decidable square (§6.1); the predicted-grade hops still discharge faithfulness per run rather than per construct, and the A64 inventory, while language-owned, is a declared slice of a much larger ISA. Universal answers are bounded claims wherever BMC-style unrolling caps apply, and rest on universal-tier hypotheses that per-run evidence and §3.8’s tested surrogates corroborate but do not entail (Theorem 3.18). The verified portion of the C spine begins at the compiled binary: the compiler hop has no square and contributes reproducibility plus a differential, not faithfulness (§3.5). The proved tier’s certified row is inhabited with a *formally verified* checker at the anchor (cake_lpr, §6.5), on one trivial and one certificate-scale instance (an 11.8 MB LRAT); the residual TCB is the bit-blasters’ BV→CNF step, and a certified claim is per-question and bounded, never a proof of a pair. Interpreter adequacy remains an assumption discharged empirically at modest volume, and the diversity assumption behind branch corroboration is structural, not probabilistic — scoped to the diverse prefix, a boundary the common-mode round (§6.7) now measures directly: shared misreadings blind, by construction, every gate built from the shared reading; only an independently derived external anchor catches them. The compositional core of the calculus — including the n -ary route telescope and the specialization obligation of Theorem 3.18 — is mechanized in Lean 4 with a clean axiom audit (§3.8) — the directional square calculus included, lax telescope and all (Propositions 3.10 and 3.11); the fieldwise loss computation and the retiming case remain paper-stated.

Future work. The gaps above are the roadmap: scale the compliance-derived benchmark of §6.3 to an upstream suite taken binary-for-binary (which needs the machine-mode slice) and to SV-COMP-style C tasks; extend the escape-rate experiments of §6.7 beyond one translator’s emission space; widen the A64 slice toward the base ISA; and scale the player experiment beyond the eight-question rerun of §6.14, with subject models outside the builders’ family. Past these measured gaps lies the intended trajectory: *HURDY-GURDY* is meant to evolve into an open platform that scales in language support, where anyone — working with LLMs, with agents, or by hand — develops a new pair against the calculus’s written contract and lands it in the repository through an ordinary pull request. The admission bar is the architecture, not the author: a pair arrives with its declared projection, direction, and grade, its typed partiality, and a square the harness runs on merge, and the ratchet (Proposition 5.2) keeps every prior verdict standing as the graph grows. The direction axis (§3.4) points the growth inward as well as outward: not only more front-ends, but abstraction and property-transformation pairs — endo-edges on the hubs — whose refinement loops make the graph denser in *reductions*, with the lax telescope mechanized alongside the exact one (§3.8). Each such refinement is one turn of the loop of §1 and §2: diagnose the missing edge, generate it, gate it, ratchet, re-ask — growth as a loop, with the books of §5.3 keeping the demand that names each next edge, and a human hand on the registration valve.

Conclusion. We proposed treating translations the way distributed systems treat processes: as components that fail, whose failures are contained by architecture — declared projections, decidable squares, graded evidence, independent routes, carried-back witnesses — rather than prevented by universal proof. The calculus makes the composition of partial trust exact; the platform shows the discipline is buildable, by agents, at measured (if modest) coverage; and the asymmetry theorems say where proof effort actually buys assurance. The snapshot is the baseline; the ratchet is the roadmap.

Acknowledgments

This work was co-funded by the Czech Science Foundation under Grant No. 23-07580X and the European Union under the project Robotics and Advanced Industrial Production (reg. no. CZ.02.01.01/00/22_008/0004590).

References

- [1] Bruno Andreotti, Hanna Lachnitt, and Haniel Barbosa. 2023. Carcara: An Efficient Proof Checker and Elaborator for SMT Proofs in the Alethe Format. In *TACAS*.
- [2] Alasdair Armstrong, Thomas Bauereiss, Brian Campbell, Alastair Reid, Kathryn E. Gray, Robert M. Norton, Prashanth Mundkur, Mark Wasell, Jon French, Christopher Pulte, Shaked Flur, Ian Stark, Neel Krishnaswami, and Peter Sewell. 2019. ISA Semantics for ARMv8-A, RISC-V, and CHERI-MIPS. *Proceedings of the ACM on Programming Languages* 3, POPL (2019), 71:1–71:31.
- [3] Algirdas Avizienis. 1985. The N-Version Approach to Fault-Tolerant Software. *IEEE Transactions on Software Engineering* SE-11, 12 (1985), 1491–1501.
- [4] Dirk Beyer, Matthias Dangl, Daniel Dietsch, Matthias Heizmann, and Andreas Stahlbauer. 2015. Witness Validation and Stepwise Testification across Software Verifiers. In *ESEC/FSE*.
- [5] Jasmin Christian Blanchette, Sascha Böhme, and Lawrence C. Paulson. 2013. Extending Sledgehammer with SMT Solvers. *Journal of Automated Reasoning* 51, 1 (2013), 109–128.
- [6] Edmund M. Clarke, Orna Grumberg, Somesh Jha, Yuan Lu, and Helmut Veith. 2000. Counterexample-Guided Abstraction Refinement. In *CAV (LNCS, Vol. 1855)*. 154–169.
- [7] Patrick Cousot and Radhia Cousot. 1977. Abstract Interpretation: A Unified Lattice Model for Static Analysis of Programs by Construction or Approximation of Fixpoints. In *POPL*. 238–252.
- [8] Jean-Christophe Filliâtre and Andrei Paskevich. 2013. Why3 — Where Programs Meet Provers. In *ESOP*.
- [9] Ronghui Gu, Jérémie Koenig, Tahina Ramananandro, Zhong Shao, Xiongnan (Newman) Wu, Shu-Chun Weng, Haozhong Zhang, and Yu Guo. 2015. Deep Specifications and Certified Abstraction Layers. In *POPL*.
- [10] Everett Hildenbrandt, Manasvi Saxena, Nishant Rodrigues, Xiaoran Zhu, Philip Daian, Dwight Guth, Brandon Moore, Daejun Park, Yi Zhang, Andrei Stefanescu, and Grigore Roşu. 2018. KEVM: A Complete Formal Semantics of the Ethereum Virtual Machine. In *CSF*.
- [11] Shoaib Kamil, Alvin Cheung, Shachar Itzhaky, and Armando Solar-Lezama. 2016. Verified Lifting of Stencil Computations. In *PLDI*.
- [12] Christoph M. Kirsch. 2017. Selfie and the Basics. In *Onward!*
- [13] Gerwin Klein, Kevin Elphinstone, Gernot Heiser, June Andronick, David Cock, Philip Derrin, Dhammika Elkaduwe, Kai Engelhardt, Rafal Kolanski, Michael Norrish, Thomas Sewell, Harvey Tuch, and Simon Winwood. 2009. seL4: Formal Verification of an OS Kernel. In *SOSP*.
- [14] John C. Knight and Nancy G. Leveson. 1986. An Experimental Evaluation of the Assumption of Independence in Multiversion Programming. *IEEE Transactions on Software Engineering* SE-12, 1 (1986), 96–109.
- [15] Jérémie Koenig and Zhong Shao. 2021. CompCertO: Compiling Certified Open C Components. In *PLDI*.
- [16] Ramana Kumar, Magnus O. Myreen, Michael Norrish, and Scott Owens. 2014. CakeML: A Verified Implementation of ML. In *POPL*.
- [17] Robert P. Kurshan. 1994. *Computer-Aided Verification of Coordinating Processes: The Automata-Theoretic Approach*. Princeton University Press.
- [18] Xavier Leroy. 2009. Formal Verification of a Realistic Compiler. *Commun. ACM* 52, 7 (2009), 107–115.
- [19] Nuno P. Lopes, Juneyoung Lee, Chung-Kil Hur, Zhengyang Liu, and John Regehr. 2021. Alive2: Bounded Translation Validation for LLVM. In *PLDI*.
- [20] Jacob Matthews and Robert Bruce Findler. 2007. Operational Semantics for Multi-language Programs. In *POPL*.
- [21] Ross M. McConnell, Kurt Mehlhorn, Stefan Näher, and Pascal Schweitzer. 2011. Certifying Algorithms. *Computer Science Review* 5, 2 (2011), 119–161.
- [22] William M. McKeeman. 1998. Differential Testing for Software. *Digital Technical Journal* 10, 1 (1998), 100–107.
- [23] Magnus O. Myreen, Michael J. C. Gordon, and Konrad Slind. 2008. Machine-Code Verification for Multiple Architectures: An Application of Decompilation into Logic. In *FMCAD*.
- [24] Kedar S. Namjoshi. 2001. Certifying Model Checkers. In *CAV*.
- [25] George C. Necula. 1997. Proof-Carrying Code. In *POPL*.
- [26] George C. Necula. 2000. Translation Validation for an Optimizing Compiler. In *PLDI*.

- [27] Georg Neis, Chung-Kil Hur, Jan-Oliver Kaiser, Craig McLaughlin, Derek Dreyer, and Viktor Vafeiadis. 2015. Pilsner: A Compositionally Verified Compiler for a Higher-Order Imperative Language. In *ICFP*.
- [28] Aina Niemetz, Mathias Preiner, Clifford Wolf, and Armin Biere. 2018. Btor2, BtorMC and Boolector 3.0. In *CAV*.
- [29] James T. Perconti and Amal Ahmed. 2014. Verifying an Open Compiler Using Multi-language Semantics. In *ESOP*.
- [30] Amir Pnueli, Michael Siegel, and Eli Singerman. 1998. Translation Validation. In *TACAS*.
- [31] Brian Randell. 1975. System Structure for Software Fault Tolerance. *IEEE Transactions on Software Engineering* SE-1, 2 (1975), 220–232.
- [32] Martin Rinard and Darko Marinov. 1999. *Credible Compilation*. Technical Report MIT-LCS-TR-776. MIT Laboratory for Computer Science.
- [33] Grigore Roşu and Traian Florin Şerbănuţă. 2010. An Overview of the K Semantic Framework. *Journal of Logic and Algebraic Programming* 79, 6 (2010), 397–434.
- [34] John Rushby. 2005. An Evidential Tool Bus. In *ICFEM*.
- [35] Jerome H. Saltzer, David P. Reed, and David D. Clark. 1984. End-to-End Arguments in System Design. *ACM Transactions on Computer Systems* 2, 4 (1984), 277–288.
- [36] Michael Sammler, Simon Spies, Youngju Song, Emanuele D’Osualdo, Robbert Krebbers, Deepak Garg, and Derek Dreyer. 2023. DimSum: A Decentralized Approach to Multi-language Semantics and Verification. *Proceedings of the ACM on Programming Languages* 7, POPL (2023).
- [37] Richard D. Schlichting and Fred B. Schneider. 1983. Fail-Stop Processors: An Approach to Designing Fault-Tolerant Computing Systems. *ACM Transactions on Computer Systems* 1, 3 (1983), 222–238.
- [38] Thomas Arthur Leck Sewell, Magnus O. Myreen, and Gerwin Klein. 2013. Translation Validation for a Verified OS Kernel. In *PLDI*.
- [39] Gordon Stewart, Lennart Beringer, Santiago Cuellar, and Andrew W. Appel. 2015. Compositional CompCert. In *POPL*.
- [40] Chuyue Sun, Ying Sheng, Oded Padon, and Clark Barrett. 2024. Clover: Closed-Loop Verifiable Code Generation. *arXiv preprint arXiv:2310.17807* (2024).
- [41] Yong Kiam Tan, Marijn J. H. Heule, and Magnus O. Myreen. 2021. cake_lpr: Verified Propagation Redundancy Checking in CakeML. In *TACAS*.
- [42] Jean-Baptiste Tristan and Xavier Leroy. 2008. Formal Verification of Translation Validators: A Case Study on Instruction Scheduling Optimizations. In *POPL*.
- [43] Tjark Weber, Sylvain Conchon, David Déharbe, Matthias Heizmann, Aina Niemetz, and Giles Reger. 2019. The SMT Competition 2015–2018. *Journal on Satisfiability, Boolean Modeling and Computation* 11, 1 (2019), 221–259.
- [44] Nathan Wetzler, Marijn J. H. Heule, and Warren A. Hunt Jr. 2014. DRAT-trim: Efficient Checking and Trimming Using Expressive Clausal Proofs. In *SAT*.
- [45] Claire Wolf. 2019. riscv-formal: A Framework for RISC-V Formal Verification. <https://github.com/YosysHQ/riscv-formal>.
- [46] Xuejun Yang, Yang Chen, Eric Eide, and John Regehr. 2011. Finding and Understanding Bugs in C Compilers. In *PLDI*.
- [47] Emily Yu, Armin Biere, and Keijo Heljanko. 2021. Progress in Certifying Hardware Model Checking Results. In *CAV*.

A Proofs

A.1 Pasting (Theorem 3.7)

We spell out the chain, including the domain side conditions elided in the paper’s proof sketch. Let $p \in \text{dom}(P_2 \circ P_1)$, i.e. $p \in \text{dom}(I_A) \cap \text{dom}(T_1)$, $q := T_1(p) \in \text{dom}(T_2)$, $r := T_2(q)$, $I_C(r)$ defined, $\Lambda_2(I_C(r)) \in \text{dom}(\Lambda_1)$, and (from $p \in \text{dom}(P_1)$, $q \in \text{dom}(P_2)$) $I_B(q)$ defined with $I_B(q) \in \text{dom}(\Lambda_1)$ and $I_C(r) \in \text{dom}(\Lambda_2)$.

1. By faithfulness of P_1 at p and $\pi \subseteq \pi_1$, $\pi(I_A(p)) = \pi(\Lambda_1(I_B(q)))$.
2. By faithfulness of P_2 at q : $\pi_2(I_B(q)) = \pi_2(\Lambda_2(I_C(r)))$.
3. Both $I_B(q)$ and $\Lambda_2(I_C(r))$ lie in $\text{dom}(\Lambda_1)$ (the first by $p \in \text{dom}(P_1)$, the second by $p \in \text{dom}(P_2 \circ P_1)$). By $(\pi_2 \Rightarrow \pi)$ -support applied to step (2): $\pi(\Lambda_1(I_B(q))) = \pi(\Lambda_1(\Lambda_2(I_C(r))))$.
4. Chaining (1) and (3): $\pi(I_A(p)) = \pi(\Lambda_1(\Lambda_2(I_C(r))))$, which is faithfulness of $P_2 \circ P_1$ at p w.r.t. π . $\square$

Directional pairs. For pairs with a non-identity witness embedding (Definition 3.4), the same four steps run per closing valuation, the three legs closed at x , $W_1(p, x)$, and $W_2(T_1(p), W_1(p, x))$; the composite’s square is then faithfulness along $W_2 \circ W_1$, with direction the meet $d_1 \wedge d_2$. This form is machine-checked (lax_pasting; telescoped, DRoute.lax_route_pasting with DRoute.direction_exact_iff) — the chain above is its identity-embedding instance.

Necessity of support. Without the support condition (Definition 3.6) the theorem is false: let $F_B = \{g, h\}$, $\pi_2 = \{g\}$, and let Λ_1 copy field h into a π_1 -kept source field. Take P_2 faithful (it preserves g) but with $\Lambda_2(I_C(r))$ differing from $I_B(q)$ on h — permitted, since $h \notin \pi_2$. The outer rectangle then disagrees on the copied field although both inner squares commute.

A.2 Composed keep-set, and step granularity

For fieldwise, step-aligned Λ_1 (each kept source field f computed per step as $f = \phi_f(\{b.g \mid g \in \text{deps}(f)\})$), $(\pi_2 \Rightarrow \pi)$ -support holds iff $\text{deps}(f) \subseteq \pi_2$ for every $f \in \pi$; hence the largest admissible π is $\text{keep} = \{f \in \pi_1 \mid \text{deps}(f) \subseteq \pi_2\}$ and support for it is checkable syntactically from the dependency sets.

When Λ_1 retimes — one source step corresponds to a window of target steps, as in C statements over ISA instructions — model Λ_1 as a monotone window map w from source step indices to intervals of target step indices plus a fieldwise read within each window. Support then requires $\text{deps}(f) \subseteq \pi_2$ for reads *anywhere in the window*, and additionally that the window map itself be determined by π_2 -observables (e.g. by a kept program counter), since window boundaries influence the projected output. Both conditions are again syntactic given w and the dependency sets.

A.3 Localization (Corollary 3.8)

Contrapositive of the pasting theorem (Theorem 3.7) for two hops. For n hops, induct on the route: if the outer rectangle over hops 1.. n fails at p but hop 1’s square passes at p , then by the two-hop case applied to (hop 1, rectangle over hops 2.. n) the rectangle over 2.. n fails at $T_1(p)$; recurse. Termination yields a least failing hop i ; within it, the square oracle’s comparison yields the least failing step and a witnessing field. $\square$

A.4 Weakest link (Proposition 3.13)

Soundness: if every hop is universal on its fragment, iterate the pasting theorem (Theorem 3.7) over all p in the composite fragment. If some hop is perrun, the same iteration is available exactly at programs whose per-hop images passed the oracle — the per-run set of the route. If some hop is only replay, purity composes (Proposition 3.9) but no faithfulness statement is available for the route beyond it. Optimality: a route with a perrun hop entails no universal statement (take a defect outside the checked set); a route with a replay hop entails no faithfulness at all (take a pure but wrong translator). $\square$

A.5 Ratchet (Proposition 5.2)

Let $I' \supseteq I$ and let $p \in \text{dom}(I)$. Every quantity in the faithfulness square (Definition 3.5) evaluated at p reads only I -values on $\text{dom}(I)$ -points, which I' preserves; hence the verdict at p is unchanged. Coverage monotonicity: cov’s per-construct conjunction can only gain (new constructs enter dom) and

never lose (old verdicts preserved). Composition of extensions is an extension. For the failure half: a non-extension update changes some $I(p)$, which can flip the verdict at p for any pair whose square consumed it — justifying the versioned-event rule. $\square$

B Construct inventories and probe corpora

Per-language construct inventories (the yardsticks of the paper’s Definition 5.1) and the probe corpora behind every coverage figure in the paper’s Section 6 are enumerated in the artifact — the per-language inventory modules (gurdy/languages/*/inventory.py), the per-pair inventories (gurdy/pairs/*/inventory.py), and the measured coverage data (paper/results/data/); they are spec-derived: the RISC-V RV64IMC opcode inventory, the full 144-opcode EVM inventory, the 126-construct eBPF inventory slice (drawn from the 256-opcode space), the Wasm numeric/parametric/control inventory, the OpenSMILES construct list, the Python-subset AST allow-list, and the two hubs’ operator inventories.