

Notation

Formal languages, and the three that selfie is made of: EBNF, C*, and RISC-U.

← ICS 03 · Everything is Bits

The score is not the music.

SYNTAX · NOTATION

Marks on paper. Finite, discrete, checkable, copyable. 1 + 1, a staff of crotchets, H₂O, a line of code, this sentence.

SEMANTICS · MEANING

What the marks are *about*. The number two. Sound in a room. A molecule that dissolves salt. A machine's behaviour over all inputs.

A semantics is a function from notation to meaning. Defining that function precisely is the founding act of every exact discipline — and computer science is where it was done most sharply, because a machine does exactly what the marks say and nothing else.

Frege 1892 · Sinn / Bedeutung

Saussure · signifier / signified

Korzybski 1931 · the map is not the territory

Magritte 1929 · ceci n'est pas une pipe

TWO KINDS OF LANGUAGE

Natural language is **compression**.
Formal language is **commitment**.

"I saw the man with the telescope." Two readings, one string. English resolves it with a shared world you and I already have. That shared world is why English is powerful — and why it cannot be a foundation. Its semantics is *us*, and we differ.

A formal language pays a price — narrowness, pedantry, effort — to buy one thing: a meaning that does not depend on who is reading.

Prompting an AI in English is negotiation. Writing a test, a type, a schema, a unit, a contract is legislation.

NATURAL	FORMAL
ambiguous	single-valued
elastic, forgiving	brittle, exact
persuades	proves
needs a mind	needs a machine
learned by living	defined by decree

EBNF says what code may **look like**.
It can even say what EBNF looks like.

```
integer = digit { digit } .  
digit   = "0" | "1" | "2" | "3" | "4" |  
         "5" | "6" | "7" | "8" | "9" .  
while   = "while" "(" expression "  
         ( statement |  
         "{" { statement } "}" ) .
```

= defines. | is *or*. { } is *any number of*, including none. [] is *optional*. () groups. Quotes hold the literal characters. A full stop ends the rule.

So an integer is a digit followed by any number of digits: 0, 42, 007. A while statement is the word, a parenthesised expression, and either one statement or a braced block of them.

The synopsis of week 2 was this notation's cousin, a regular expression: braces, brackets, bars, and nothing else.

EBNF, written in EBNF. Nothing breaks.

```
EBNF      = { production } .
production = non_terminal "="
            expression "." .
expression = term { "|" term } .
term       = factor { " " factor } .
factor     = non_terminal | terminal
            | "{" expression "}"
            | "[" expression "]"
            | "(" expression ")" .
non_terminal = variable .
terminal     = "" { character } "" .
```

Every rule on the previous slide is a sentence of this language, these seven included. Check one: integer is a `non_terminal`, an `=`, an expression of one term of two factors, and a full stop.

Nothing strange happens: the text is finite, the reading terminates, the checker is the same stack machine as for any grammar. A text about texts is just another text.

Hold this example. It returns three times, harder each time: a compiler compiling itself, week 8; a program asked about its own halting, week 9; a kernel isolating itself, week 10. The same move on meaning, where the limits live.

C*

7 keywords. 22 symbols. One data type, and pointers to it.

uint64_t

void

sizeof

if

else

while

return

Five statements: assignment, while, if-else, procedure call, return. Arithmetic + - * / %, comparison == != < > <= >=, the * that reads a pointer — hence the star in the name. No other types, no arrays, no Boolean operators.

It is a real subset of C: any C compiler compiles C*. And it is enough to write a compiler for itself, an emulator, and a hypervisor, which is the only argument for its size.

```
// tiny.c
uint64_t c;
uint64_t main() {
    c = 0;
    while (c < 7)
        c = c + 1;
    return c;
}
```

RISC-U

14 instructions. 32 registers. 4 GB of memory. A real subset of real RISC-V.

GROUP	INSTRUCTION	WHAT IT DOES
initialise	lui rd,imm · addi rd,rs1,imm	put a number into a register
memory	ld rd,imm(rs1) · sd rs2,imm(rs1)	load a word from memory, store one
arithmetic	add · sub · mul · divu · remu	rd = rs1 ◦ rs2, unsigned
comparison	sltu rd,rs1,rs2	rd = 1 if rs1 < rs2, else 0
control	beq rs1,rs2,imm · jal rd,imm · jalr rd,imm(rs1)	branch if equal, jump and link, jump to a register
system	ecall	ask the operating system for something

Every instruction is 32 bits. Every one of them also does $pc = pc + 4$, or says where pc goes instead. That is the entire machine language, and the machine chapter gives each line its exact meaning.

THREE NOTATIONS, ONE MEANING

What the compiler makes of the **while** loop.


```
$ ./selfie -c tiny.c -S tiny.s
./selfie: 432 bytes generated with 104 instructions and 16 bytes of data
$ cat tiny.s
...
0x158(~6): 0xFF01B283: ld t0,-16(gp)      // c
0x15C(~6): 0x00700313: addi t1,zero,7      // 7
0x160(~6): 0x0062B2B3: sltu t0,t0,t1       // c < 7 ?
0x164(~6): 0x00028C63: beq t0,zero,6[0x17C] // if not, leave the loop
0x168(~7): 0xFF01B283: ld t0,-16(gp)      // c
0x16C(~7): 0x00100313: addi t1,zero,1      // 1
0x170(~7): 0x006282B3: add t0,t0,t1        // c + 1
0x174(~7): 0xFE51B823: sd t0,-16(gp)       // c = ...
0x178(~9): 0xFE1FF06F: jal zero,-8[0x158]  // back to the condition
```

Source. `while (c < 7) c = c + 1;` — for you.

Assembly. Nine instructions with names — for the person reading the machine.

Bits. `0xFF01B283` and eight more words — the only thing the machine sees. Three notations. One meaning. The last one is the one that runs.

A finite machine decides a **regular** language.
A stack decides a context-free one.

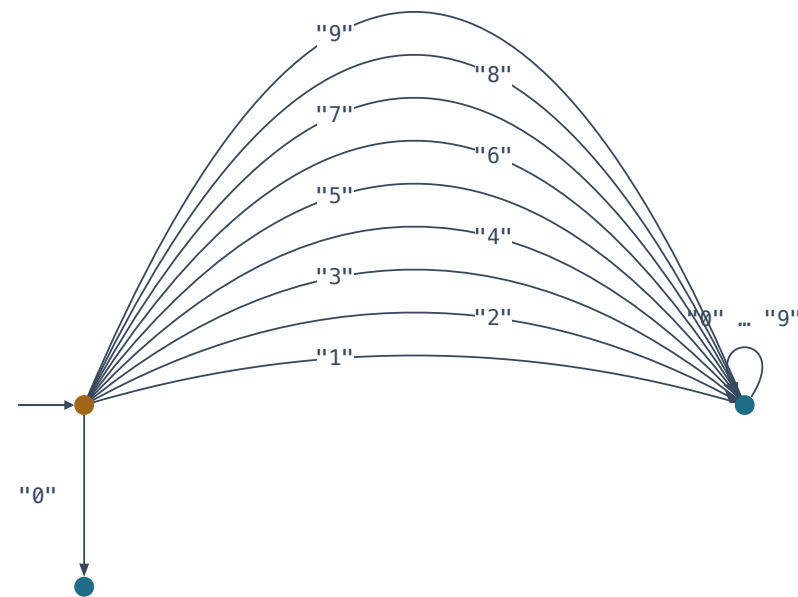

```

integer      = "0" | non_zero_digit { digit } .
non_zero_digit = "1" | ... | "9" .
digit        = "0" | non_zero_digit .
  
```

integer literals without leading zeros

A finite state machine reads one character at a time and remembers only which circle it is in. That is enough for integers, identifiers, and the whole synopsis — anything a regular expression describes.

It is not enough for parentheses: matching every (with its) means counting without bound. Add a stack and you can: expressions, statements, procedures, all of C*, all of EBNF itself.

Regular inside context-free inside ... — notation comes in sizes, a ladder, and week 9 says where it ends.

Everything on this deck is a **finite sequence of symbols**. Hold that thought.

A grammar is a finite text. A program is a finite text. The binary the compiler produced is a finite sequence of bytes. The machine language is a table with fourteen rows.

Finite things from a finite alphabet can be *listed*: all of length one, then two, then three. Next week we do the listing, and it turns out that every program that will ever be written has a number — and that a compiler and an emulator are just arithmetic on those numbers.

THE GAP, SO FAR

Week 2: one prefix, two meanings. Week 3: one byte, five. Week 4: three notations, one meaning, fixed by decree. The decree is a program, and it is written in one of the three notations. That loop is the subject of week 8.

Recommended exercises.

- 1 Read the Notation chapter: C*, RISC-U, EBNF.
- 2 Write the EBNF rule for a C* character literal, and for a string literal. Check against `grammar.md`.
- 3 Derive `c = c + 1;` from the grammar, rule by rule, starting at `statement`.
- 4 Type `tiny.c`, compile it with `-S`, and find the nine instructions of the loop. Change 7 to 700 and see which bits change.
- 5 Write a regular expression for the dates of this course, and an EBNF grammar for nested parentheses. Which of the two needs the stack?

NEXT WEEK

Countability: everything you can write down can be listed, so every program has a number — and a binary is one number, 194,648 bytes long. The compiler compiles itself and gets the same number twice.

Listen, then read.

LISTEN

Mozart · Symphony No. 41 “Jupiter” — Böhm, Vienna Philharmonic, 1979. The finale: a four-note motif and four other themes, combined by the rules of counterpoint in every way the rules allow. A grammar, derived to the end.

READ

Introduction to the Theory of Computation — Sipser: regular and context-free languages done properly, chapters 1 and 2. And, more technical, What can we do about the unnecessary diversity of notation for syntactic definitions? — Wirth, 1977: the one page that gave us EBNF.