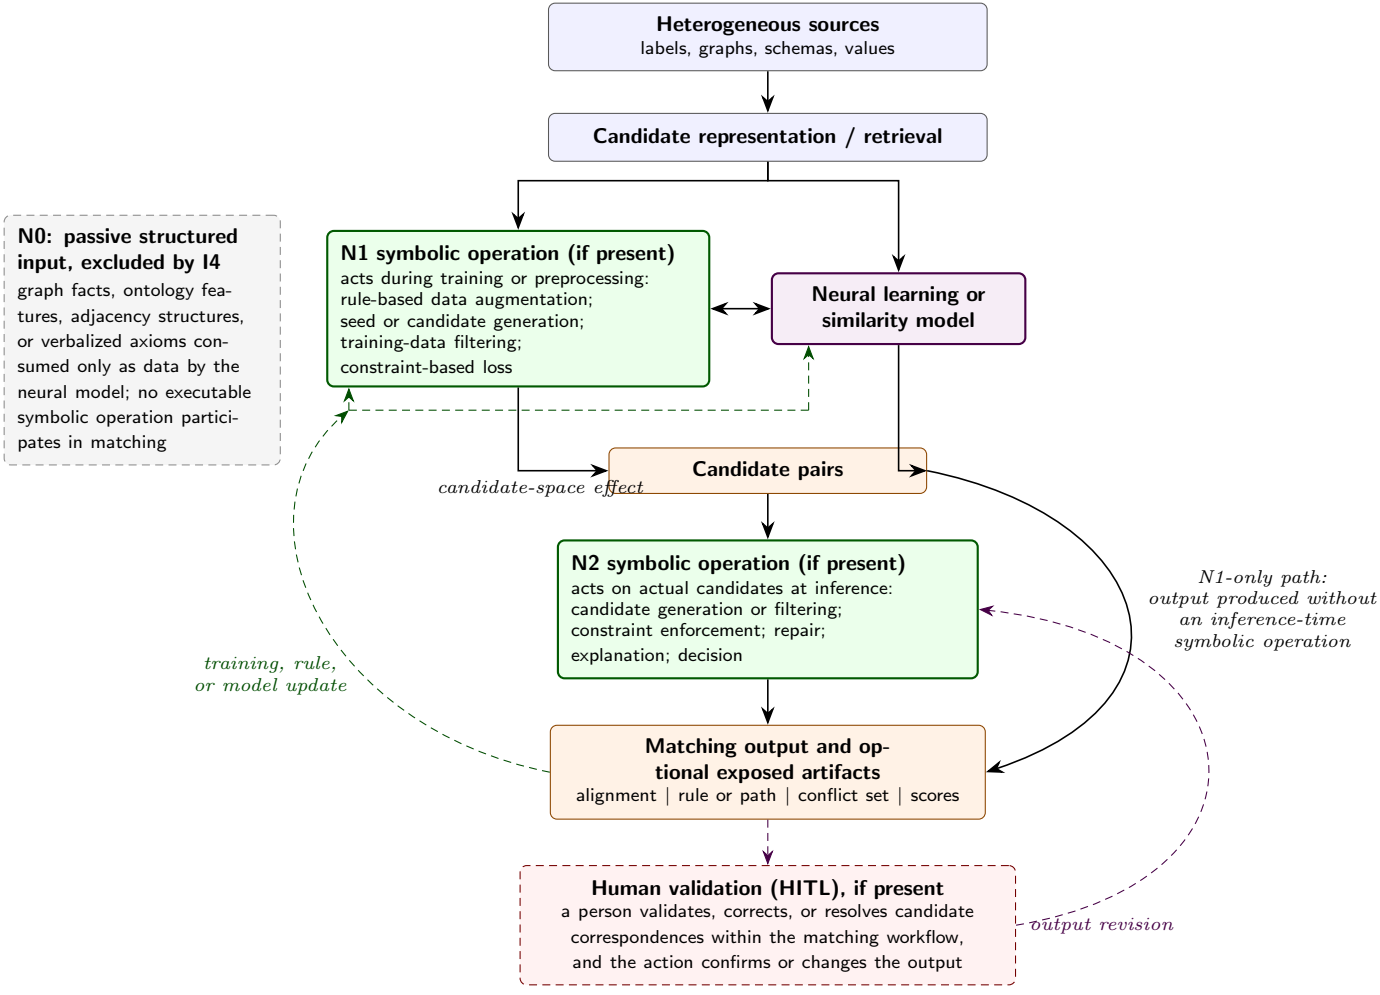
Heterogeneous sources
labels, graphs, schemas, values
Candidate representation / retrieval
N0: passive structured input, excluded by I4
graph facts, ontology features, adjacency structures, or verbalized axioms consumed only as data by the neural model; no executable symbolic operation participates in matching
N1 symbolic operation (if present)
acts during training or preprocessing:
rule-based data augmentation;
seed or candidate generation;
training-data filtering;
constraint-based loss
Neural learning or similarity model
candidate-space effect
Candidate pairs
N2 symbolic operation (if present)
acts on actual candidates at inference:
candidate generation or filtering;
constraint enforcement; repair;
explanation; decision
N1-only path: output produced without an inference-time symbolic operation
training, rule, or model update
Matching output and optional exposed artifacts
alignment | rule or path | conflict set | scores
Human validation (HITL), if present
a person validates, corrects, or resolves candidate correspondences within the matching workflow, and the action confirms or changes the output
output revision