


SQLiteProvider::getFriendsOf

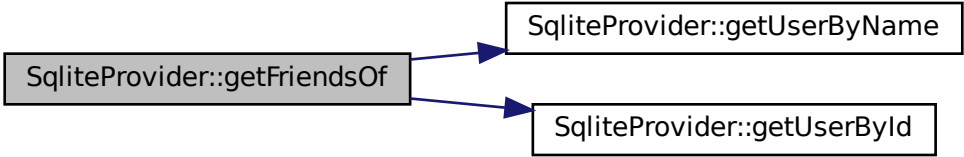

```
graph LR; A[SQLiteProvider::getFriendsOf] --> B[SQLiteProvider::getUserByName]; A --> C[SQLiteProvider::getUserById];
```

The diagram illustrates a method call sequence. A central box labeled 'SQLiteProvider::getFriendsOf' has two arrows pointing to the right. The top arrow points to a box labeled 'SQLiteProvider::getUserByName', and the bottom arrow points to a box labeled 'SQLiteProvider::getUserById'. All boxes have a black border, and the arrows are blue.

SQLiteProvider::getUserByName

SQLiteProvider::getUserById