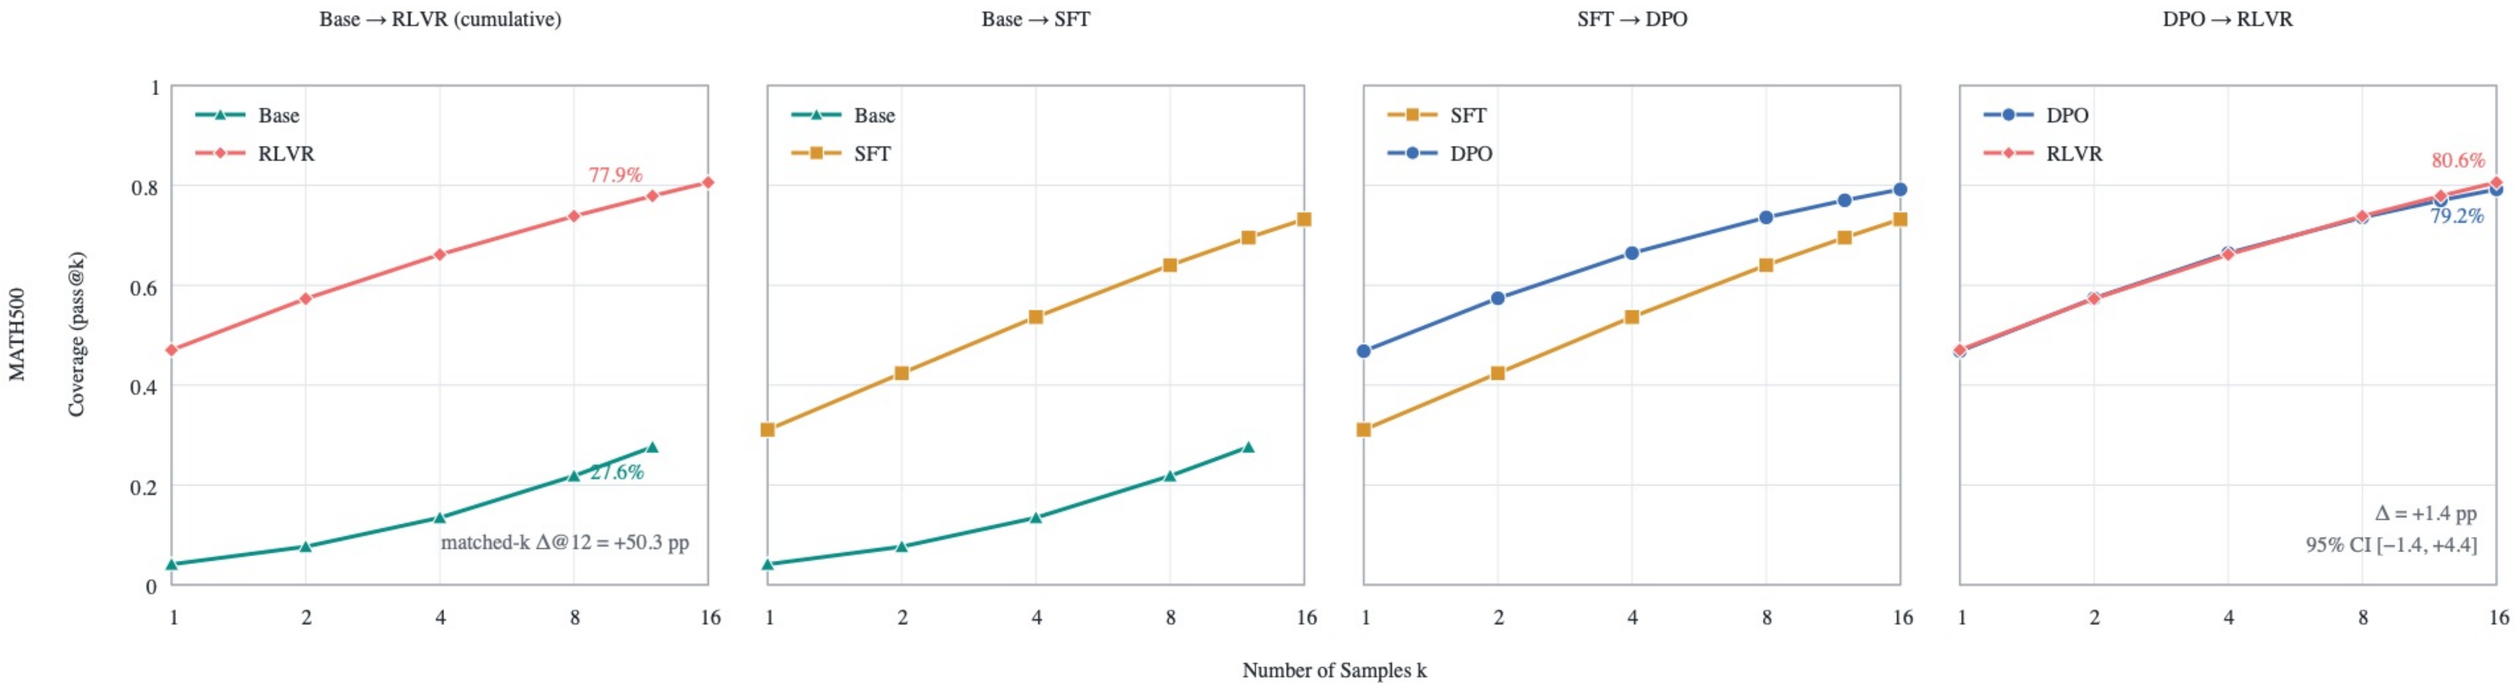


Unbiased pooled pass@k · Base: Seeds 1–3 (12 samples/question) · SFT/DPO/RLVR: Seeds 1–4 (16 samples/question) · n=500

Base uses the shared SFT chat template; interpret Base→RLVR as a cumulative, interface-sensitive contrast.