Not Secure clarabest.mycybersecurityclass.com

New Chrome available

All Bookmarks

Apache2 Debian Default Page

debian

It works!

This is the default welcome page used to test the correct operation of the Apache2 server after installation on Debian systems. If you can read this page, it means that the Apache HTTP server installed at this site is working properly. You should **replace this file** (located at `/var/www/html/index.html`) before continuing to operate your HTTP server.

If you are a normal user of this web site and don't know what this page is about, this probably means that the site is currently unavailable due to maintenance. If the problem persists, please contact the site's administrator.

Configuration Overview

Debian's Apache2 default configuration is different from the upstream default configuration, and split into several files optimized for interaction with Debian tools. The configuration system is **fully documented in /usr/share/doc/apache2/README.Debian.gz**. Refer to this for the full documentation. Documentation for the web server itself can be found by accessing the **manual** if the apache2-doc package was installed on this server.

The configuration layout for an Apache2 web server installation on Debian systems is as follows:

```
/etc/apache2/
|-- apache2.conf
```

debian-12-bookworm-v20260210

Description	Debian, Debian GNU/Linux, 12 (bookworm), amd64 built on 20260210
Location	asia (Asia Pacific), eu (European Union), us (United States)
Architecture	x86/64
Labels	public-image : true
Tags	Insufficient permission to list tags.
Creation time	Feb 10, 2026, 4:42:51 PM UTC-07:00
Family	debian-12
Encryption type	Google-managed

Equivalent REST

Not Secure clarabest.mycybersecurityclass.com

New Chrome available

All Bookmarks

Apache2 Debian Default Page

debian

It works!

This is the default welcome page used to test the correct operation of the Apache2 server after installation on Debian systems. If you can read this page, it means that the Apache HTTP server installed at this site is working properly. You should **replace this file** (located at `/var/www/html/index.html`) before continuing to operate your HTTP server.

If you are a normal user of this web site and don't know what this page is about, this probably means that the site is currently unavailable due to maintenance. If the problem persists, please contact the site's administrator.

Configuration Overview

Debian's Apache2 default configuration is different from the upstream default configuration, and split into several files optimized for interaction with Debian tools. The configuration system is **fully documented in /usr/share/doc/apache2/README.Debian.gz**. Refer to this for the full documentation. Documentation for the web server itself can be found by accessing the **manual** if the apache2-doc package was installed on this server.

The configuration layout for an Apache2 web server installation on Debian systems is as follows:

```
/etc/apache2/
|-- apache2.conf
```

ssh.cloud.google.com/v2/ssh/projects/devweb-488522/zones/us-central1-c/instances/clarabest?authuser=3&hl=en_US&projec...

ssh.cloud.google.com/v2/ssh/projects/devweb-488522/zones/us-central1-c/instances/clarabest?authuser=3&hl=en_US&...

SSH-in-browser UPLOAD FILE DOWNLOAD FILE

```
Linux clarabest 6.1.0-43-cloud-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.162-1 (2026-02-08) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Thu Feb 26 16:25:57 2026 from 35.235.244.33
devweb@clarabest:~$ uname -a
Linux clarabest 6.1.0-43-cloud-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.162-1 (2026-02-08) x86_64 GNU/Linux
devweb@clarabest:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1460 qdisc mq state UP group default qlen 1000
    link/ether 42:01:c0:a8:c8:06 brd ff:ff:ff:ff:ff:ff
    altname enp0s4
    inet 192.168.200.6/32 metric 100 scope global dynamic ens4
       valid_lft 3319sec preferred_lft 3319sec
    inet6 fe80::4001:c0ff:fea8:c806/64 scope link
       valid_lft forever preferred_lft forever
devweb@clarabest:~$ systemctl status apache2
● apache2.service - The Apache HTTP Server
     Loaded: loaded (/lib/systemd/system/apache2.service; enabled; preset: enabled)
     Active: active (running) since Thu 2026-02-26 16:30:12 UTC; 41min ago
       Docs: https://httpd.apache.org/docs/2.4/
   Main PID: 3603 (apache2)
      Tasks: 55 (limit: 2344)
     Memory: 9.2M
        CPU: 240ms
     CGroup: /system.slice/apache2.service
             ├─3603 /usr/sbin/apache2 -k start
             ├─3604 /usr/sbin/apache2 -k start
             └─3605 /usr/sbin/apache2 -k start

Feb 26 16:30:12 clarabest systemd[1]: Starting apache2.service - The Apache HTTP Server...
Feb 26 16:30:12 clarabest systemd[1]: Started apache2.service - The Apache HTTP Server.
devweb@clarabest:~$
```

Not Secure clarabest.mycybersecurityclass.com

New Chrome available

All Bookmarks

Apache2 Debian Default Page

debian

It works!

This is the default welcome page used to test the correct operation of the Apache2 server after installation on Debian systems. If you can read this page, it means that the Apache HTTP server installed at this site is working properly. You should **replace this file** (located at `/var/www/html/index.html`) before continuing to operate your HTTP server.

If you are a normal user of this web site and don't know what this page is about, this probably means that the site is currently unavailable due to maintenance. If the problem persists, please contact the site's administrator.

Configuration Overview

Debian's Apache2 default configuration is different from the upstream default configuration, and split into several files optimized for interaction with Debian tools. The configuration system is **fully documented in /usr/share/doc/apache2/README.Debian.gz**. Refer to this for the full documentation. Documentation for the web server itself can be found by accessing the **manual** if the apache2-doc package was installed on this server.

The configuration layout for an Apache2 web server installation on Debian systems is as follows:

```
/etc/apache2/
|-- apache2.conf
```

Zone details | Edit | Delete zone | Logs | Registrar setup

clarabest

DNS name	clarabest.mycybersecurityclass.com.
Type	Public
DNSSEC	Off
Cloud Logging	Off

Record sets

Add standard | Add with routing policy | Delete record sets | Refresh

Filter Filter record sets

DNS name	Type	TTL (seconds)	Record data
clarabest.mycybersecurityclass.com.	NS	21600	ns-cloud-
clarabest.mycybersecurityclass.com.	SOA	21600	ns-cloud-
clarabest.mycybersecurityclass.com.	A	0	34.72.97.160

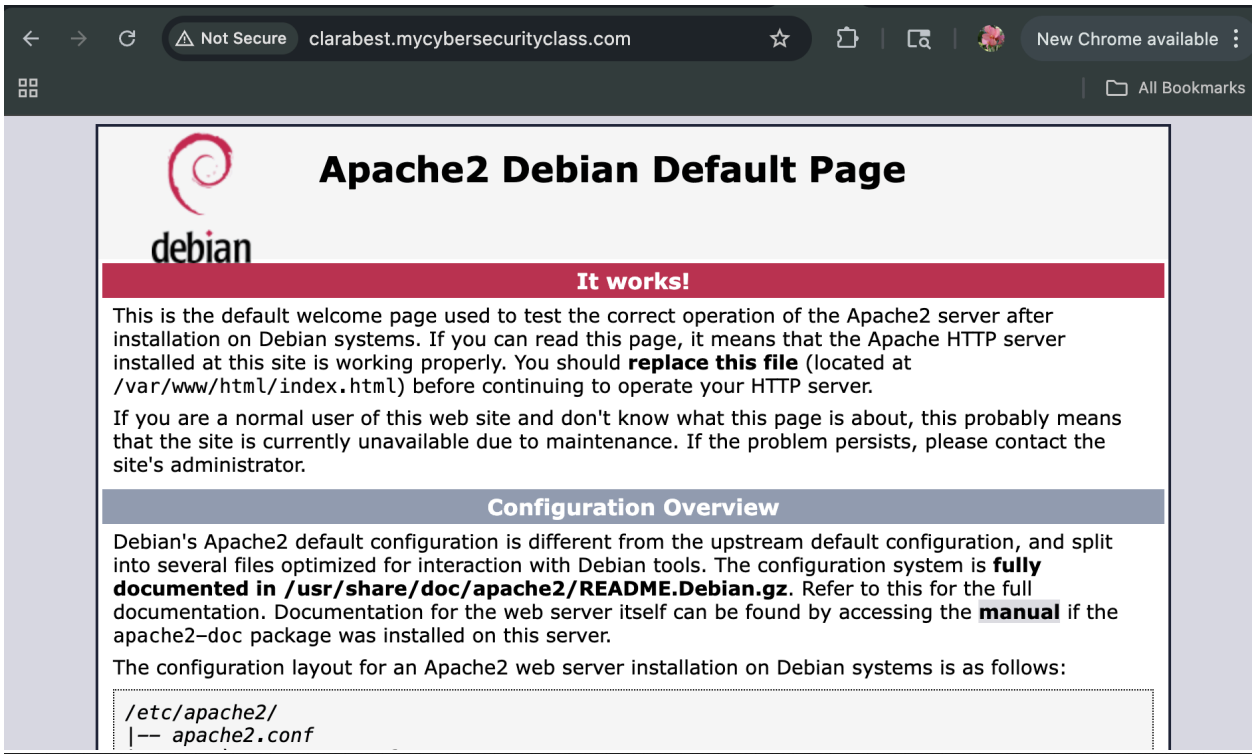


```
clara@Claras-MacBook-Air ~ % nslookup clarabest.mycybersecurityclass.com
Server:         205.118.215.90
Address:        205.118.215.90#53

Non-authoritative answer:
Name:   clarabest.mycybersecurityclass.com
Address: 34.72.97.160

clara@Claras-MacBook-Air ~ %
```

1. What are the biggest security risks in your current setup?

   It is on http instead of https.

2. Why is exposing SSH (port 22) risky?

   It makes it easy for hackers to get control over systems.

3. What does NAT protect you from?

   It protects from unauthorized access attempts and port scanning.

4. What would you change to make this production-ready?

   I would enable https to make it more production ready.

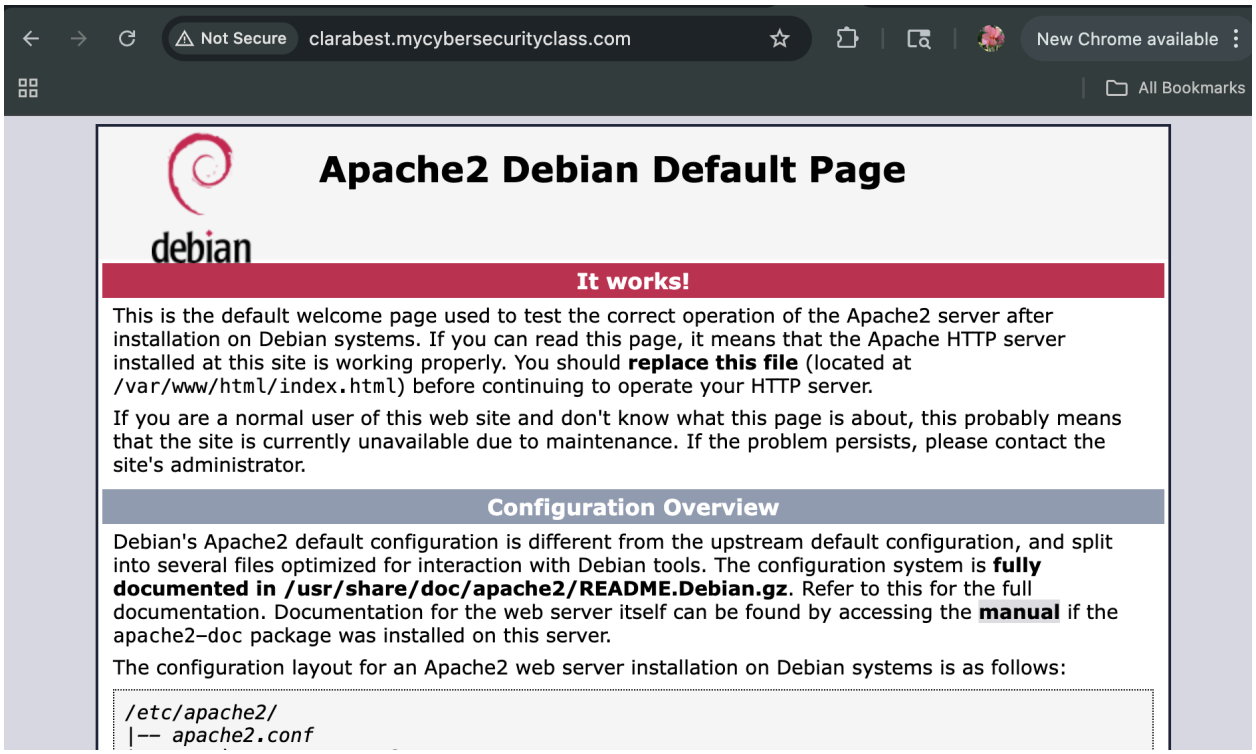

5. If you were an attacker, what would you target first?

   I would target the exposing SSH port 22 since it can give me access to things without authorization