- Commands used to create the Linux user

adduser username

usermod -aG sudo wordpress

- Command showing the user added to the sudo group

groups wordpress

- Screenshots showing the .ssh directory and authorized_keys file

```
i;
Query OK, 1 row affected (0.12 sec)

mysql> CREATE USER 'wp_user'@'localhost' IDENTIFIED BY 'StrongPasswordHere';
Query OK, 0 rows affected (0.09 sec)

mysql> mkdir -p /var/www/wordpress
    -> ^C
mysql> sudo mkdir -p /var/www/wordpress
    -> ^C
mysql> GRANT SELECT, INSERT, UPDATE, DELETE, CREATE, DROP, ALTER, INDEX
    -> ON wordpress.* TO 'wp_user'@'localhost';
Query OK, 0 rows affected (0.01 sec)

mysql> ^C
mysql> exit
Bye
myuser@clarabest:~$ sudo -s
[sudo] password for myuser:
root@clarabest:/home/myuser# cd
root@clarabest:~# cd /var/www/html
root@clarabest:/var/www/html# ls
hello.html  index.html  wordpress
root@clarabest:/var/www/html#
```

- SQL commands used to create the WordPress database and user

  CREATE DATABASE wordpress DEFAULT CHARACTER SET utf8mb4 COLLATE utf8mb4_unicode_ci;

  CREATE USER 'wp_user'@'localhost' IDENTIFIED BY 'StrongPasswordHere';

- A screenshot showing successful login as wp_user

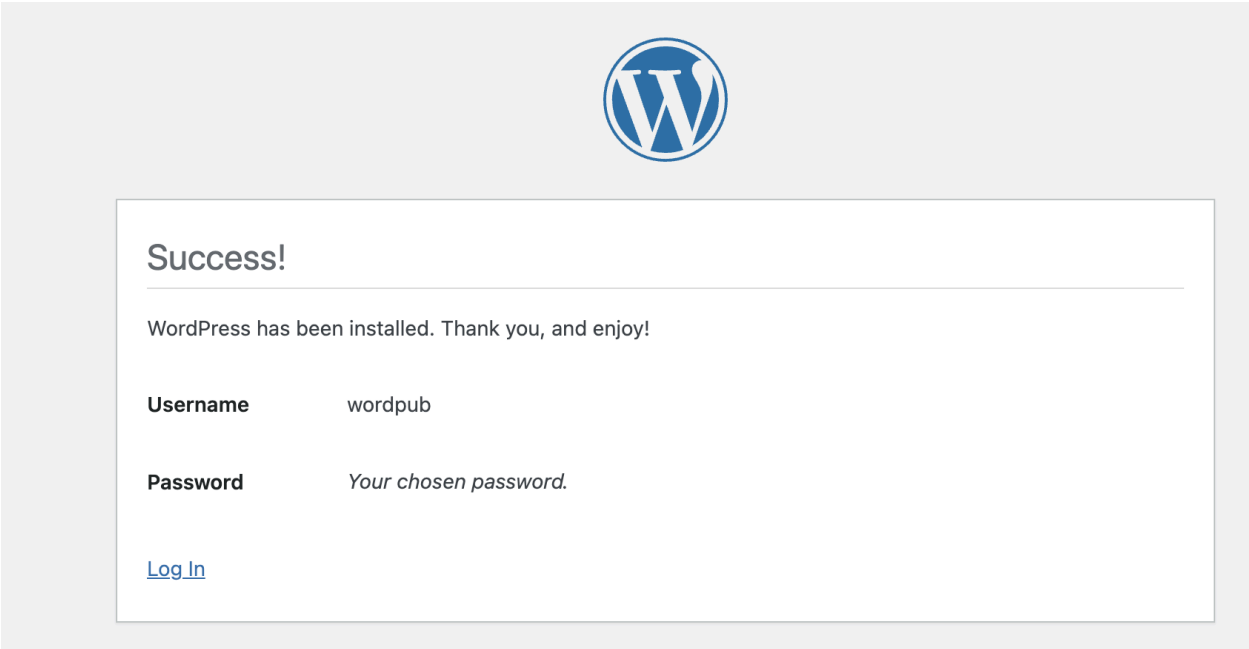

- A screenshot showing permissions on /var/www/wordpress

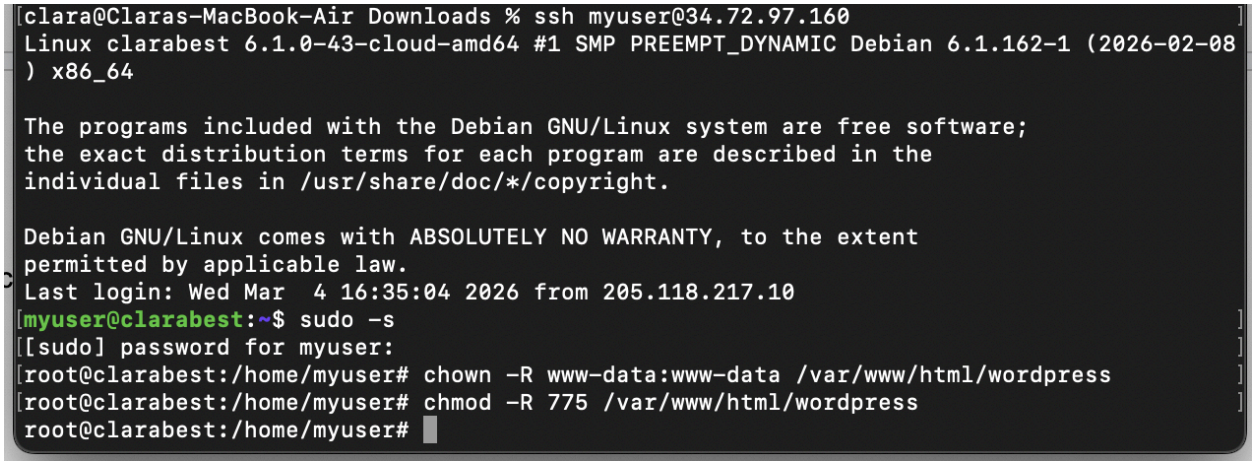

```
clara@Claras-MacBook-Air Downloads % ssh myuser@34.72.97.160
Linux clarabest 6.1.0-43-cloud-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.162-1 (2026-02-08
) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Wed Mar  4 16:35:04 2026 from 205.118.217.10
myuser@clarabest:~$ sudo -s
[sudo] password for myuser:
root@clarabest:/home/myuser# chown -R www-data:www-data /var/www/html/wordpress
root@clarabest:/home/myuser# chmod -R 775 /var/www/html/wordpress
root@clarabest:/home/myuser#
```