

Introduction to Computer Science

Introduction

Ryan Stansifer

Florida Institute of Technology
Melbourne, Florida USA 32901

<http://www.cs.fit.edu/~ryan/>

11 April 2021

Overview of Course

- Introduction and Context. What is CS?
- Java review. Data, control constructs, static methods
- Classes. Incorporation, instantiation, inheritance
- Generics. Code reuse
- Program analysis. Steps the program takes
- Data structures. Lists, stacks, queue

Course Goals

- Programming
 - exciting to translate ideas into reality
 - basics are simple, yet programming well is difficult; do not underestimate the challenge
 - delivery high-quality programs on time; be able to express control flow and design data in Java
 - problem solving is hard and difficult to teach
- Computer Science
 - Computer Science is not just programming
 - It is easy to lose sight of the big picture, so we have a general introduction
 - Other (non-programming) topics from time to time: architecture, Monte Carlo methods, $O(N)$, invariants, and so on

Outline of Introduction

There are couple of topics that put programming in context and that are helpful if pointed out in advance and getting mired in the details.

- What is Computer Science? Areas of study: AI, OS, ...
- What is a computer? Architecture, CPU, memory hierarchy
- Interface layers: hardware, operating system, application
- The Java platform
 - JVM and a million other pieces
 - Java history, pragmatics
- Programming languages — not just Java
- Program development; debuggers and so on
- Program style. A program is a text file
- I/O, streams

The single most important skill in programming, computer science, and science in general is abstraction. Yet I think that belaboring the idea may be too philosophical at this time. If one is observant, one will see abstraction at work in all the topics above.

What is Computer Science?

What is Computer Science?

computer science. *The study of information, protocols and algorithms for idealized and real automata.*

What is Computer Science?

computer science. *The study of information, protocols and algorithms for idealized and real automata.*

- automaton:

What is Computer Science?

computer science. *The study of information, protocols and algorithms for idealized and real automata.*

- automaton: “self moving” – in our context, self “deciding” or autonomous mechanism with bounded resources (time and space)

What is Computer Science?

computer science. *The study of information, protocols and algorithms for idealized and real automata.*

- automaton: “self moving” – in our context, self “deciding” or autonomous mechanism with bounded resources (time and space)
- information:

What is Computer Science?

computer science. *The study of information, protocols and algorithms for idealized and real automata.*

- automaton: “self moving” – in our context, self “deciding” or autonomous mechanism with bounded resources (time and space)
- information: knowledge represented in a form suitable for transmission, manipulation, etc.

What is Computer Science?

computer science. *The study of information, protocols and algorithms for idealized and real automata.*

- automaton: “self moving” – in our context, self “deciding” or autonomous mechanism with bounded resources (time and space)
- information: knowledge represented in a form suitable for transmission, manipulation, etc.
- protocol:

What is Computer Science?

computer science. *The study of information, protocols and algorithms for idealized and real automata.*

- automaton: “self moving” – in our context, self “deciding” or autonomous mechanism with bounded resources (time and space)
- information: knowledge represented in a form suitable for transmission, manipulation, etc.
- protocol: rules for exchanging information without problems

What is Computer Science?

computer science. *The study of information, protocols and algorithms for idealized and real automata.*

- automaton: “self moving” – in our context, self “deciding” or autonomous mechanism with bounded resources (time and space)
- information: knowledge represented in a form suitable for transmission, manipulation, etc.
- protocol: rules for exchanging information without problems
- algorithm:

What is Computer Science?

computer science. *The study of information, protocols and algorithms for idealized and real automata.*

- automaton: “self moving” – in our context, self “deciding” or autonomous mechanism with bounded resources (time and space)
- information: knowledge represented in a form suitable for transmission, manipulation, etc.
- protocol: rules for exchanging information without problems
- algorithm: an unambiguous, finite description in simple steps or actions


What is Computer Science?

computer science. *The study of information, protocols and algorithms for idealized and real automata.*

- automaton: “self moving” – in our context, self “deciding” or autonomous mechanism with bounded resources (time and space)
- information: knowledge represented in a form suitable for transmission, manipulation, etc.
- protocol: rules for exchanging information without problems
- algorithm: an unambiguous, finite description in simple steps or actions

Computer Science is not the study of computers, nor is it the practice of their use.

- Arabic: خوارزمية
- Chinese (simplified): 算法
- Dutch: algoritme
- Finnish: algoritmi
- French: algorithme
- German: Algorithmus
- Georgian: ალგორითმი
- Hindi: कलन विधि
- Icelandic: reiknirit
- Japanese: アルゴリズム
- Latin: algorithmus
- Spanish: algoritmo
- Swedish: algorit
- Turkish: algoritma



How does this class (studying Java) fit into the study of Computer Science?

How does this class (studying Java) fit into the study of Computer Science?

Learn some algorithms, some real and idealized machines, learn something about information. Mostly learn some mechanisms which can *express computation*.

Mathematics, science, or engineering?

Mathematics. *The science of numbers, interrelations, and abstractions.*

Science. *Systematic knowledge or practice. Acquiring knowledge through the scientific method of natural phenomena (natural sciences) or human or social behavior (social sciences).*

Engineering. *The applied science of acquiring and applying knowledge to design, or construct works for practical purposes.*

What is CS?

- Engineering? Application of science?
- Natural science? Observable phenomena?
- Mathematics? Invisible abstractions?
- Social science? Functioning of human society?

What is CS?

- Engineering? Application of science?
- Natural science? Observable phenomena?
- Mathematics? Invisible abstractions?
- Social science? Functioning of human society?

CS is exciting and difficult as it is all these things.

What is CS?

- To do anything requires programming
- To do something useful requires domain knowledge

Do you become skillful at programming, or an expert in some small area?

Existential Angst



The Scream by the Norwegian artist Edvard Munch, painted in 1893.

We are at the dawn of new era. The, as yet unfinished, language of computation is the language of science and engineering and is overtaking mathematics as the Queen of Science.

Philosophy is written in this grand book, the universe which stands continually open to our gaze. But the book cannot be understood unless one first learns to comprehend the language and read the letters in which it is composed. It is written in the language of mathematics, and its characters are triangles, circles and other geometric figures without which it is humanly impossible to understand a single word of it; without these, one wanders in a dark labyrinth.



Galileo Galilei in *The Assayer*

What Does A Computer Scientist Do?

Similar to mathematics, most everyone in modern society uses computing. So getting a computer science degree prepares you for everything and nothing.


The most visible activity is commanding computers to do our bidding, i.e., programming.

What do you want to do?

Fields

- Computer architecture
- Operating systems
- Programming languages and compilers
- Algorithms, data structures, complexity
- Computability theory
- Numerical analysis
- Networking and distributed computing
- Parallel computing
- Information Management/Database systems
- Software development (aka Software Engineering)
- Human-computer communication/interaction
- Graphics and Visual Computing
- Intelligent Systems (aka Artificial Intelligence)


Architecture

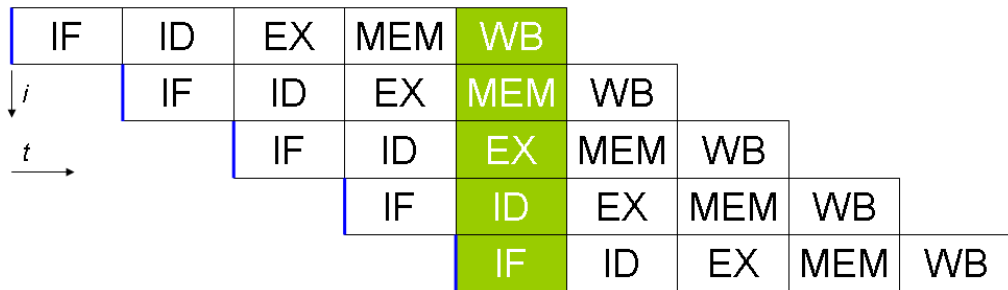

Basic five-stage pipeline in a RISC machine: instruction fetch, instruction decode, execute, memory access, register write back.

The IBM PowerPC G5 has 21 pipeline stages; the Intel Pentium 4E has 31 stages.

Operating Systems — paging

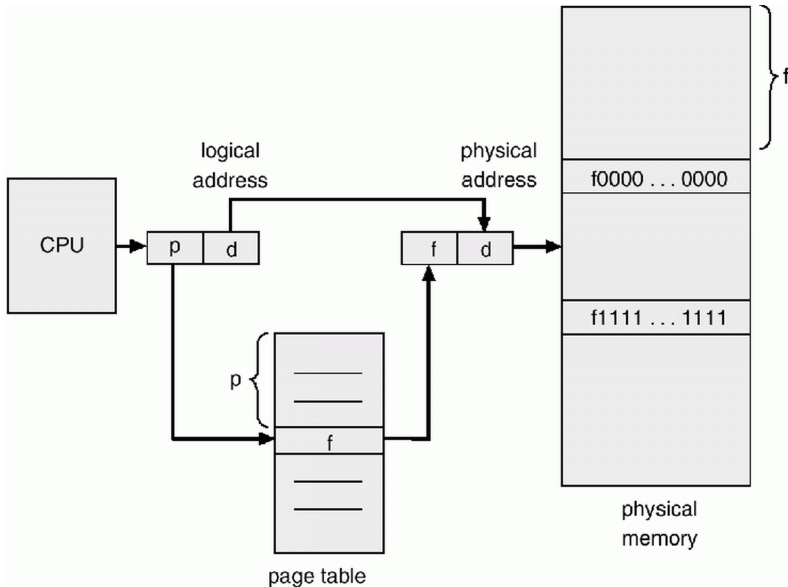

Programming Languages and Compilers

[Front end of compiler]

Algorithms and Data Structures — Sorting

Sorting animation

Theory of Computation — halting problem


The argument that the power of mechanical computations is limited is not surprising. Intuitively we know that many vague and speculative questions require special insight and reasoning well beyond the capacity of any computer that we can now construct or even foresee. What is more interesting to computer scientists is that there are questions than can be clearly and simple stated, with an apparent possibility of an algorithmic solution, but which are know to be unsolvable by any computer.

Linz 6th, Section 12.1, page 310

An example of such a problem is if a grammar is ambiguous or not. (This can formalized and is an interesting issue in constructing compilers.)

The proof that there are specific problems that cannot be solved, if not remarkably simple.

Theory of Computation — halting problem

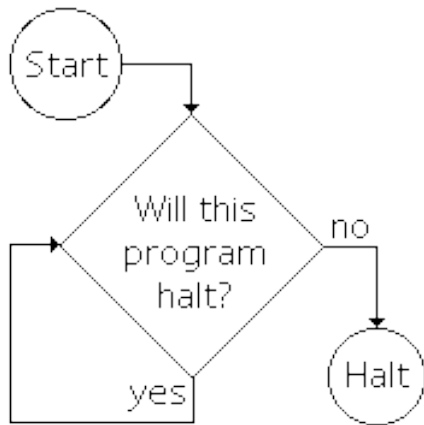

Numerical Analysis

A report from the United States General Accounting Office begins “On February 25, 1991, a Patriot missile defense system operating at Dhahran, Saudi Arabia, during Operation Desert Storm failed to track and intercept an incoming Scud. This Scud subsequently hit an Army barracks, killing 28 Americans.” The report finds the failure to track the Scud missile was caused by a precision problem in the software.

Nicholas J. Higham, *Accuracy and Stability of Numerical Algorithms*, SIAM, 1996, ISBN13 9780898713558. Page 505.

<http://www.ima.umn.edu/~arnold/disasters/disaster.html>

Networking


In the sliding window protocol the window size is the amount of data a sender is allowed to have sent into the network without having yet received an acknowledgment for it.

In Internet routers, active queue management (AQM) is a technique that consists in dropping packets before a router's queue is full.

Historically, queues use a *drop-tail* discipline: a packet is put onto the queue if the queue is shorter than its maximum size. Drop-tails queue have a tendency to penalize bursty flows.

Active queue disciplines drop packets before the queue is full based on probabilities. Active queue disciplines are able to maintain a shorter queue length than the drop-tail queue which reduces network latency.


Distributed Computing — barber shop problem

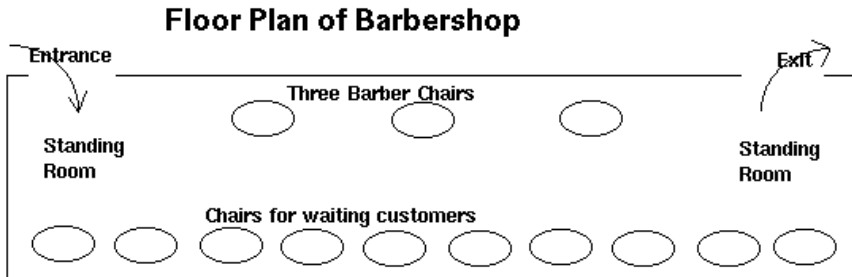

Parallel Computing

	sing instr	mult instr
single data	SISD	MISD
multiple data	SIMD	MIMD

Flynn's taxonomy



Information Management/Database Systems

Name	
A	B
Dot	cat
Sue	dog
Zan	cat
Bip	bird


Have	
B	C
cat	shots
dog	shots
dog	leash

Result of Join		
A	B	C
Dot	cat	shots
Sue	dog	shots
Sue	dog	leash
Zan	cat	shots


The join of two relational tables



Software Engineering — waterfall model

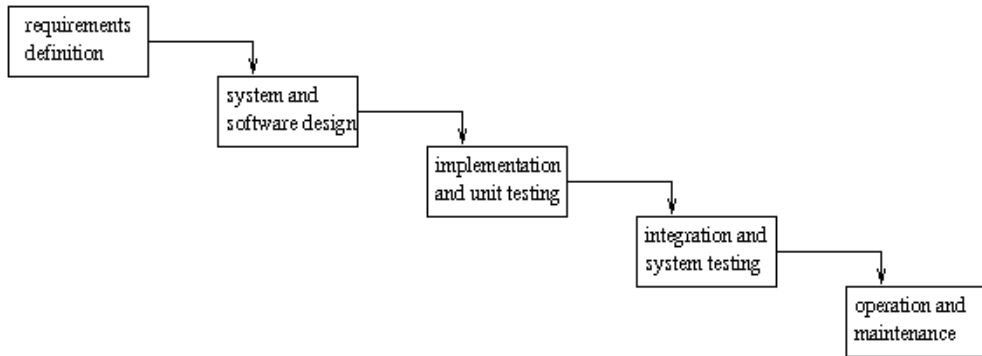

Human-Computer Communication/Interaction

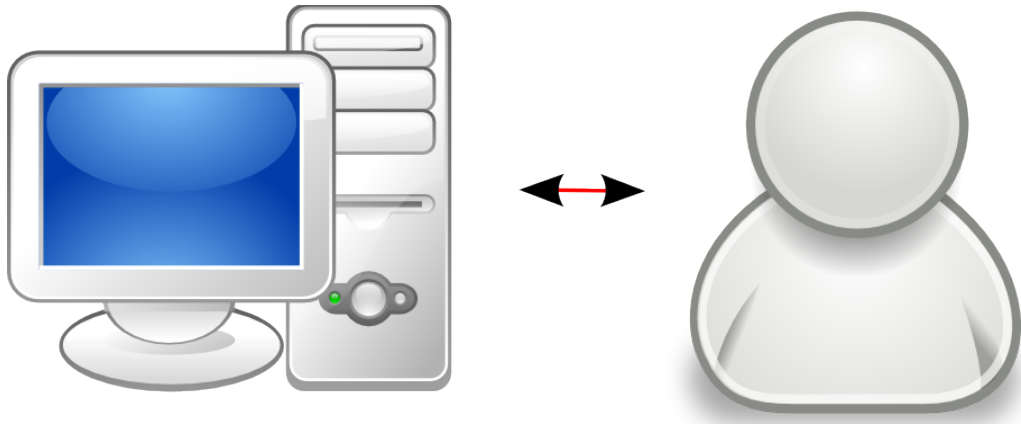

The [Miracle Worker](#) scene from Star Trek 4: The Voyage Home on YouTube.


Graphics and Visual Computing

Frozen Fire [↗](#)

- 37 hours to render
- POV ray uses a C-like programming language



Intelligent Systems

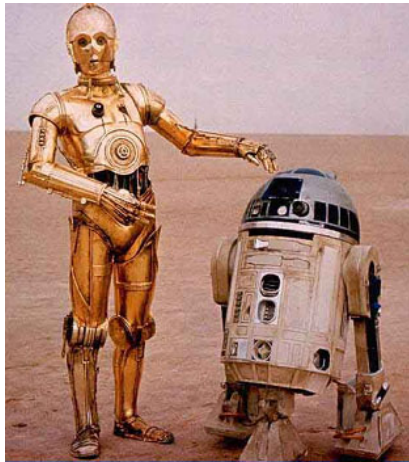



End of the overview of different fields of study in computer science

Layers, Scale, Interfaces

The solution to vast complexity is layers. Good layers enable high-quality specialization, bad layers just increase the complexity.

Software development—programming—is often about creating layers, even in small programming projects.

Computing is complex. There are many layers of interesting stuff between the person and the automaton.



Scale of the Universe 2

by Cary and Michael Huang

The vastness and minuteness of time and space is a challenge to comprehend.

From Wikipedia, the free encyclopedia

Section	Range (m)		Unit	Example Items
	≥	<		
Subatomic	0	10^{-15}	am	electron, quark, string
Atomic to Cellular	10^{-15}	10^{-12}	fm	proton, neutron
	10^{-12}	10^{-9}	pm	wavelength of gamma rays and X-rays, hydrogen atom
	10^{-9}	10^{-6}	nm	DNA helix, virus, wavelength of optical spectrum
Human Scale	10^{-6}	10^{-3}	μm	bacterium, fog water droplet, human hair ^[1]
	10^{-3}	10^0	mm	mosquito, golf ball, soccer ball,
	10^0	10^3	m	human being, American football field, Eiffel Tower
	10^3	10^6	km	Mount Everest, length of Panama Canal, asteroid
Astronomical	10^6	10^9	Mm	the Moon, Earth, one light-second
	10^9	10^{12}	Gm	Sun, one light-minute, Earth's orbit
	10^{12}	10^{15}	Tm	orbits of outer planets, Solar System,
	10^{15}	10^{18}	Pm	one light-year, distance to Proxima Centauri
	10^{18}	10^{21}	Em	galactic arm
	10^{21}	10^{24}	Zm	Milky Way, distance to Andromeda Galaxy
	10^{24}	∞	Ym	visible universe

SI Prefixes

A study of people in Nicaragua who were born deaf and never learned Spanish or a formal sign language has concluded that humans need language in order to understand large numbers. "Up to three, they're fine," says Elizabet Spaepen, a researcher at the University of Chicago and an author of the study. "But past three, they start to fall apart."

<http://www.npr.org/2011/02/09/>

SI Prefixes

peta	P	quadrillion	10^{15}	1 000 000 000 000 000
tera	T	trillion	10^{12}	1 000 000 000 000
giga	G	billion	10^9	1 000 000 000
mega	M	million	10^6	1 000 000
kilo	k	thousand	10^3	1 000
hecto	h	hundred	10^2	100
deca	da	ten	10^1	10
(none)		one	10^0	1
deci	d	tenth	10^{-1}	0.1
centi	c	hundredth	10^{-2}	0.01
milli	m	thousandth	10^{-3}	0.001
micro	μ	millionth	10^{-6}	0.000 001
nano	n	billionth	10^{-9}	0.000 000 001
pico	p	trillionth	10^{-12}	0.000 000 000 001
femto	f	quadrillionth	10^{-15}	0.000 000 000 000 001


XKCD PRESENTS: SOME NEW SCIENCE MNEMONICS



PLEASE EMAIL MY DAD A SHARK,
OR PEOPLE EXPECT MORE DRUGS AND SEX



EG: KARL MARX GAVE THE PROLETARIAT ELEVEN ZEPPELINS, YO.
GALL: MICROSOFT MADE NO PROFIT FROM ANYONE'S ZONES, YO.




KATY PERRY CLAIMS ORGASMS
FEEL GOOD SOMETIMES
OR: KOSHER, PINKIES ORIGIN OUR, PINKIE GIVE SYSTEM.



POLYCYSTIC OVARIAN SYNDROME DOES CAUSE PROBLEMS
THAT JUDDIOUS CONTRACEPTIVES PARTIALLY NEGATE.



"BIG BROTHER REPTILIAN OVERLORDS," YELLED
GLENN, "BRAINWASHING VIA GROUND WATER!!"
OR: BE BOLD, RESPECT OTHERS, YOU'LL GRADUALLY
BECOME VORACIOUS, GREAT WAKEDREAMS!



MARY'S "VIRGIN" EXPLANATION MADE
JOSEPH SUSPECT UPSTAIRS NEIGHBOR

A Memory Aid for the SI Prefixes

[deca, hecto], **k**ilo, **m**ega, **g**iga, **t**era, **p**eta, **e**x, **z**etta

Karl **M**arx **g**ave **t**he **p**roletariat **e**leven **z**eppelins.

[deci, centi], **m**illi, **μ**icro, **n**ano, **p**ico, **f**emto, **a**tto, **z**epto

Micro**S**oft **m**ade **n**o **p**rofit **f**rom **a**nyone's **z**unes.

Planets:

My very excellent mother just served us nachos.

Mary's "Virgin" explanation made Joseph suspect upstairs neighbor.

Man very early made jars serve useful needs [period].

A computer is a remarkable tool and easily works at all scale. Now some early history of technology and scientific computing...

The MANIAC (Mathematical Analyzer Numerical Integrator And Computer Model I) was an early computer built at the Los Alamos Scientific Laboratory. It ran from 1952–1958.

- Klára Dán von Neumann - wrote the first programs for MANIAC.
- Dana Scott - programmed the MANIAC to enumerate all solutions to a pentomino puzzle by backtracking in 1958.

By mid-1953, five distinct sets of problems were running on the MANIAC, characterized by different scale of time: (1) nuclear explosions, over in microseconds; (2) shock and blast waves, ranging from microseconds to minutes; (3) meteorology, ranging from minutes to years; (4) biological evolution, ranging from years to millions of years; and (5) stellar evolution, ranging from millions to billions of years. All this in 5 kilobytes—enough memory for about one-half second of audio, at the rate we now compress music into MP3s.

George Dyson, *Turing's Cathedral*, 2012, page 298.

Powers of Two

Because computers represent information in binary form, it is important to know how many pieces of information can be represented in n (binary) bits. 2^n pieces of information can be stored in n bits, and so is it necessary to be familiar with powers of two.

It is obvious that $\lceil \log_2 n \rceil$ bits are required to represent n things. Some bit patterns might be unused.

2^0	1
2^1	2
2^2	4
2^3	8
2^4	16
2^5	32

(What does it mean that one thing can be represented with zero bits? There is no need to represent one thing as there is nothing else which can be confused with it.)

In Java, the expression

`32 - Math.numberOfLeadingZeros(n-1)`

will compute the number of bits necessary to represent n things.

The number of bits necessary to represent a natural number n is closely related, but different notion. $\lfloor \log_2 n \rfloor + 1$ is *not* the same thing as $\lceil \log_2 n \rceil$.

n	$\log_2 n$	$\lfloor \log_2 n \rfloor$	$\lfloor \log_2 n \rfloor + 1$
1	0.0	0.0	1.0
2	1.0	1.0	2.0
3	1.6	2.0	2.0
4	2.0	2.0	3.0
5	2.3	3.0	3.0

See [jgloss](#).

Because information is represented in ones and twos, doubling (exponential growth) is an important concept in computing.
To grasp it better, we use an ancient Indian chess legend.










A picture of Krishna playing Chess from the National Museum, New Delhi

Legend of the Ambalappuzha Paal Payasam

According to the legend, Lord Krishna once appeared in the form of a sage in the court of the king who ruled the region and challenged him for a game of chess (or chaturanga).

The sage told the king that he would play for grains of rice—one grain of rice in the first square, two grains in the second square, four in the third square, eight in the fourth square, and so on. Every square would have double the number of grains of its predecessor. The king lost the game and soon realized that even if he provided all the rice in his kingdom, he would never be able to fulfill the promised reward. The sage appeared to the king in his true form, that of Lord Krishna. and said he could serve paal-payasam (sweet pudding made of milk and rice) in the temple freely to the pilgrims every day until the debt was paid off.

How many squares in a checkerboard? How big is 2^{64} ?

							128
1	2	4	8	16	32	64	128
256	512	1024	2048	4096	8192	16384	32768
256	512	1024	2048	4096	8192	16384	32768
65536	131K	262K	524K	1M	2M	4M	8M
65536	131 072	262 144	524 288	1 048 576	2 097 152	4 194 304	8 388 608
16M	33M	67M	134M	268M	536M	1G	2G
16 777 216	33 554 432	67 108 864	134 217 728	268 435 456	536 870 912	1 073 741 824	2 147 483 648
4G	8G	17G	34G	68G	137G	274G	549G
4 294 967 296	8 589 934 592	17 179 869 184	34 359 738 368	68 719 476 736	137 438 953 472	274 877 906 944	549 755 813 888
1T	2T	4T	8T	17T	35T	70T	140T
1 099 511 627 776	2 199 023 255 552	4 398 046 511 104	8 796 093 022 208	17 592 186 044 416	35 184 372 088 832	70 368 744 177 664	140 737 488 355 328
281T	562T	1P	2P	4P	9P	18P	36P
281 476 878 738 880	562 953 677 477 762	1 125 907 354 955 524	2 251 814 709 911 048	4 503 629 419 822 096	9 007 258 839 644 192	18 014 517 679 288 384	36 029 035 358 576 768
72P	144P	288P	576P	1E	2E	4E	9E
72 027 054 927 927 200	144 054 109 855 854 400	288 108 219 711 711 600	576 216 439 423 423 200	1 152 432 878 846 846 400	2 304 865 757 693 692 800	4 609 731 515 387 385 600	9 219 463 030 774 771 200

10^3 kilo k
 10^6 mega M
 10^9 giga G
 10^{12} tera T
 10^{15} peta P
 10^{18} exa E

Maybe we can comprehend it better as weight or time. How much does a grain of rice weigh? One grain of rice weighs about 0.029 grams. And, approximately 470 million tons of milled rice is harvested annually in the world today.



0	1	0.029g
1	2	0.058g
2	4	0.116g
3	8	0.232g
4	16	0.464g
5	32	0.928g
6	64	1.856g
7	128	3.712g
8	256	7.424g
9	512	14.848g

10	1 024	29.696g	about an ounce
11	2 048	59.392g	
12	4 096	118.784g	
13	8 192	237.568g	
14	16 384	475.136g	about a pound
⋮			
25	33 554 432	973.079kg	about a ton
⋮			
40	1 099 511 627 776		35 thousand tons
50	1 125 899 906 842 624		36 million tons
60	1 152 921 504 606 846 976		36 billion tons
64	18,446,744,073,709,551,616		589 billion tons

2^{64} grains of rice is the total rice harvest for over 1200 years.

Powers of Two (Time in Seconds)

Suppose we double 1 second and double the amount of time again. And, we do this again and again.

0	1	1 second
1	2	2 seconds
2	4	4 seconds
3	8	8 seconds
4	16	16 seconds
5	32	32 seconds
6	64	about a minute
7	128	about 2 minutes
8	256	about 4 minutes
9	512	about 8 minutes

Powers of Two

10	1 024	17 minutes
⋮		
19	524 288	one week
20	1 048 576	two weeks
⋮		
25	33 554 432	a year
⋮		
30	1 073 741 824	34 years
40	1 099 511 627 776	37 millennia
50	125 899 906 842 624	
60	1 152 921 504 606 846 976	age of universe

Powers of Two

Notice that $2^{10} \approx 10^3$, so these powers have significance:

10	1 024	$\approx 10^3$	kilo
20	1 048 576	$\approx 10^6$	mega
30	1 073 741 824	$\approx 10^9$	giga
40	1 099 511 627 776	$\approx 10^{12}$	tera
50	1 125 899 906 842 624	$\approx 10^{15}$	peta
60	1 152 921 504 606 846 976	$\approx 10^{18}$	exa
70	1 180 591 620 717 411 303 424	$\approx 10^{21}$	zetta

SI prefixes are not supposed to be used for powers of 2 (just powers of 10). Sadly, abuse of SI prefixes in computer technology has led to confusion. Whereas 1GHz usually means 10^9 instructions per second, 1GB usually means 2^9 bytes.

Powers of Two

Some other powers have special significance in computing.

<i>exponent</i>	<i>bit patterns</i>	
7	128	size of ASCII char set
8	256	size of Latin-1 char set
16	65 536	size of Java short
31	2 147 483 648	no. of neg int
32	4 294 967 296	size of Java int
63	9 233 372 036 854 775 808	no. of neg long
64	18 446 744 073 709 551 616	size of Java long

One challenge in computer science is the vast scale of computing devices.

A computer may have a terabyte (10^{12} bytes) worth of storage. A computer may execute ten instructions every nanosecond (10^{-9} seconds).


How does one deal with such complexity?

Layers

Car dashboard in an interface.

The details of the engine are immaterial to the user (but not to the mechanic).

Interface Layers

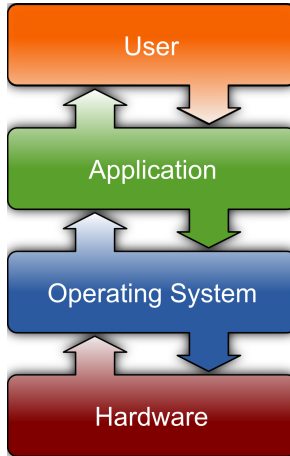

Computing is complex. There are many layers of interesting stuff between the person and the automaton.

- person (user)
- user-interface (mouse, etc)
- application (program)
- high-level programming language
- machine language
- operating system (OS)
- hardware
- logical devices
- physics

Definitions

- interface — An *interface* defines the communication boundary between two entities, such as a piece of software, a hardware device, or a user. It generally refers to an abstraction that an entity provides of itself to the outside.
- API — An *application programming interface (API)* is a set of procedures that an operating system, library, or service provides to support requests made by computer programs.


For example, the Java API

- IDE — In computing, an *Integrated development environment (IDE)* is a software application that provides facilities to computer programmers of a source code editor, a compiler and/or interpreter, build automation tools, and usually a debugger.

[The definition of IDE does not really belong here.]



Simple View of Programming

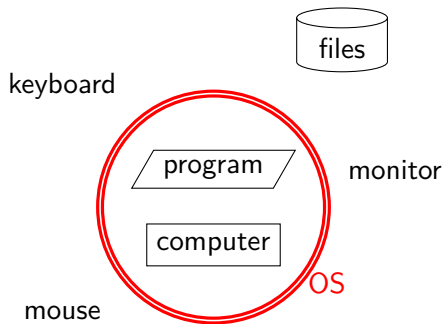

The program controls the computer, yet it needs critical assistance (from the operating system) to communicate with the outside environment and even to run effectively.

Can a Java program print or display a ß (es-zet) character?

Can a Java program draw a red line on the display?

Can a Java program determined which button on the display was clicked or touched?

Can a Java program print or display a ß (es-zet) character?

Can a Java program draw a red line on the display?

Can a Java program determined which button on the display was clicked or touched?

No, not really; yet we write Java programs to these things all the time. In reality the capabilities of the system are determined by the hardware and managed by the operating system.

Nothing can happen without the support of the operating system.

Java APIs abstract external communication. How easy these API's are to use is determined by the skill of the software designers.

For a deeper appreciation of programming a computer, we should examine briefly the many layers upon which the user depends.

An important lesson in organizing these complex systems is that the boundaries should be well chosen. Rapidly changing technology, competing business interests, and new insights make it impossible to settle these boundaries once and for all. Whole college classes like computer architecture, operating systems, compiler construction, and programming languages go into the subjects more deeply.

Hardware and Operating System Platform

Application

System calls: `open()`, `read()`, `mkdir()`, `kill()`



File system

Memory management

OS:

Process management

Networking

CPU

Memory

Hardware:

Network interface

Monitor

Disk

Keyboard

Example Platforms

- Hardware: IBM PowerPC, Intel x86, Sun Ultra-SPARC II
- OS: Microsoft Windows XP, Mac OS X v10.5 “Leopard”, Linux, Solaris 10

Try:

```
cs> uname -io  
RackMac3, 1 Darwin
```

```
olin> uname -io  
X86_64 GNU/Linux
```


The Java programming language (and other high-level languages) try to form a high-level platform.

Good interfaces mean you don't have to understand the lower layers. For example, you don't have to understand electronic flip-flops in order to program.

The point is:

- Many interfaces are software constructions, and software interfaces are an important design problem for programmers
- Many existing interfaces are in flux requiring an understanding of the lower layers.


Computer Hardware

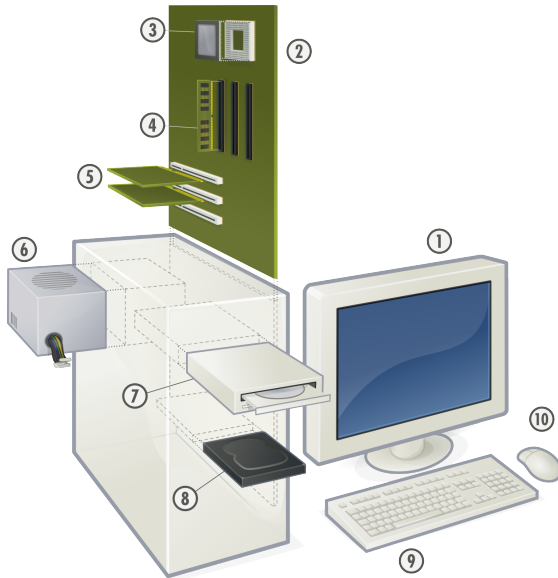

Computer Hardware




Computer Hardware

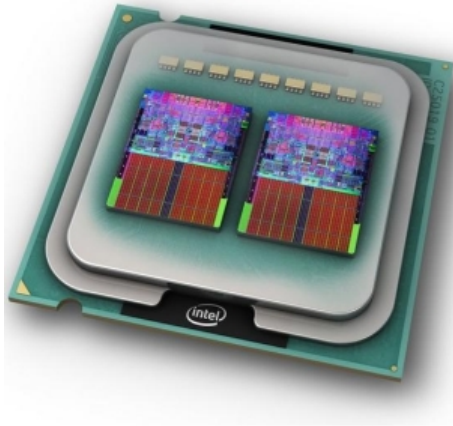

Intel quad

Computer Architecture—CPU

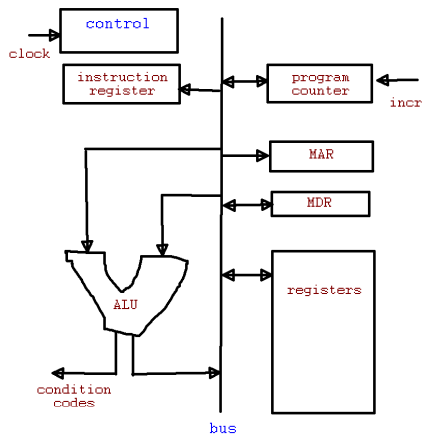

Computer Architecture—CPU

control unit is the part of the cpu that controls all the internal actions of the cpu, especially the fetch/execute cycle.


arithmetic/logic unit (ALU) is the part of the cpu that does operations: addition, multiplication, etc.

memory data register (MDR) is the register of the cpu that contains the data to be stored in the computer's main storage, or the data after a fetch from the storage. It acts like a buffer keeping the contents of storage ready for immediate use by the cpu.

Computer Architecture

Computer Memory Hierarchy

by Dan Lash (.com)

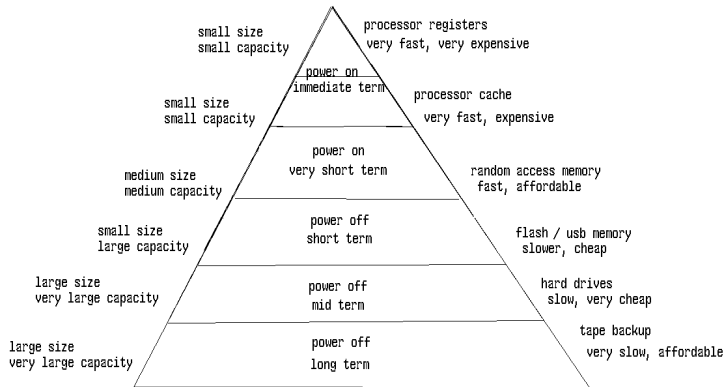

Computer Registers

Unfortunately, registers are always comparatively few in number, since they are among the most expensive resources in most implementations, both because of the read and interconnection complexity they require and because the number of registers affects the structure of instructions and the space available in instructions for specifying opcodes, offsets, conditions, and so on.

Muchnick, page 110

Memory Hierarchy

type	access	size	cost
registers	5ns	1e2	
caches (SRAM)	10ns	1e6	100.00 \$/MB
main memory (DRAM)	100ns	1e9	1.00 \$/MB
hard disk	5000ns	1e11	.05 \$/MB

As the technology improves and the costs go down over time, the typical size of each layer goes up. The ratio in access time between two layers influences the design of the computer hardware. When the ratio changes significantly a different design may achieve better performance.

Cloud Computing

A final note about computers. The computing platform today is less concerned about the individual computer and more concerned about the network of interconnected computers on the Internet.

The network is the computer
Slogan of Sun Microsystems

Cue *The Network is the Computer* [↗](#)

Java as a Teaching Language

The subject of this course is programming and teaching programming without any particular programming language does not seem possible.

There are good reasons to learn any programming language. There is no good reason to be proficient in one programming language over the rest.

There is no best language for learning the others. So a comprise of different pedagogic, societal, practical, and scientific factors govern the chose of Java.


“Buzz” about Java

Buzz about Java might mean more jobs, more student engagement.

- TIOBE based on search results
- RedMonk based on github/stack overflow

TIOBE Programming Community Index

Source: www.tiobe.com

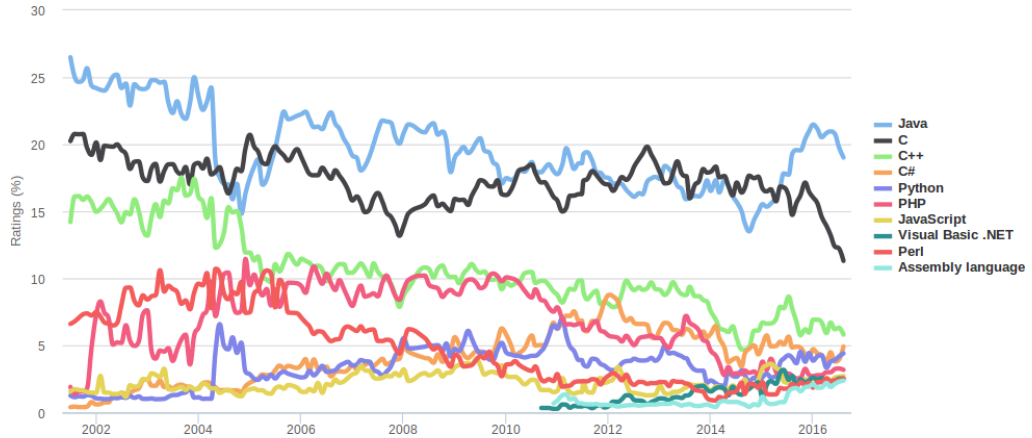






History of Java

- 1991: a small group led by James Gosling at Sun Microsystems rejected C/C++ as the basis for digital consumer devices.
- 1993: Failed to win the contract from Time-Warner for the interactive cable television trial in Orlando, Florida.
- 1995: WWW, browsers, Java, applets
- 2009: Oracle buys Sun
- 2010: Oracle sues Google over Java use in Android Java. “The lawsuit is one battle in a whole war of the mobile industry. Virtually every major player is locked in courtroom battles with another – many fighting on multiple fronts. Software patents, which tend to be broad and subject to multiple interpretations, make for useful tools to bludgeon competitors.”
- 2016 Android switches to OpenJDK

Versions

JDK 1.0	January 1996
JDK 1.1	February 1997
J2SE 1.2	December 1998
J2SE 1.3	May 2000
J2SE 1.4	February 2002
J2SE 5.0	September 2004
Java SE 6	December 2006
Java SE 7	July 2011
Java SE 8	March 2014
Java SE 9	September 2017
Java SE 10	March 2018
Java SE 11	September 2018
Java SE 12	March 2019
Java SE 13	September 2019
Java SE 14	March 2020
Java SE 15	September 2020

- 5 Generics, for-each loop, autoboxing, var args
- 8 Lambda
- 9 [Modular system](#) —project Jigsaw
- 10 Inferring the type of local variables from context
- 11 [Local variable type inference with var](#) 
- 13 [Switch expressions](#) 
- 15 Text blocks. Preview: sealed classes, record classes.

enterprise computing

networking


telecommunications

programs

WWW applications


databases



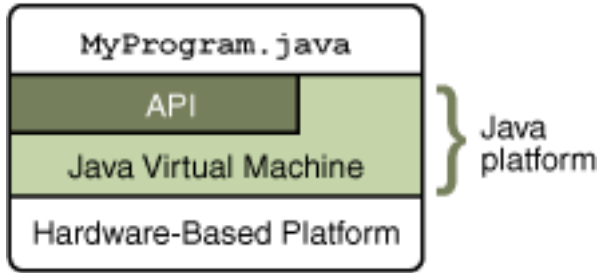


Java platform overview


- Java platform, Standard Edition (Java SE) is a computing platform for development and deployment of software. Java SE was formerly known as Java 2 Platform, Standard Edition (J2SE).
- Java Platform, Enterprise Edition (Java EE) is a related platform that includes all the classes in Java SE, plus a number that are more useful to programs that run on servers as opposed to workstations. Java Platform, Micro Edition (Java ME) is a related platform containing classes for resource-constrained devices such as cell phone.
- The Java Development Kit (JDK) includes the translator and other tools. The Java Runtime Environment (JRE) does not.
- OpenJDK (Open Java Development Kit) is a free and open-source implementation of the Java SE. The OpenJDK is the official reference implementation of Java and developed by Oracle Corporation, IBM, Apple, SAP AG, and others.

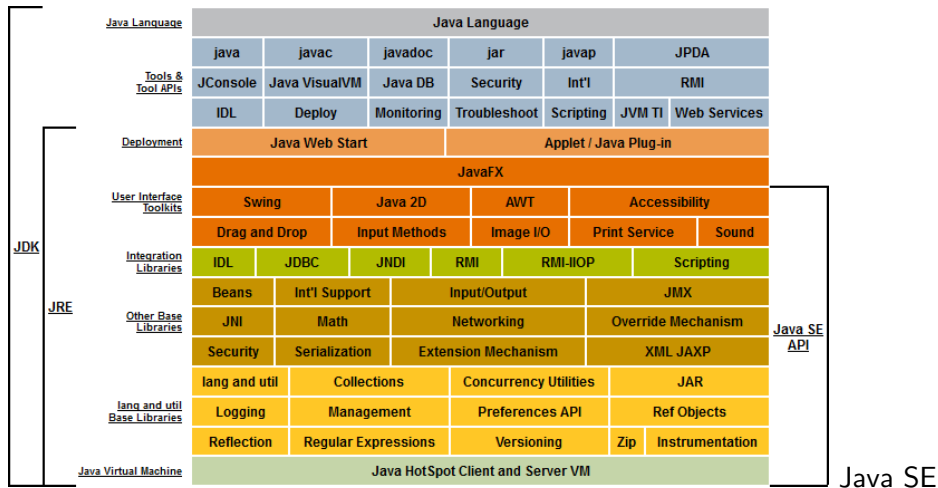

platform overview

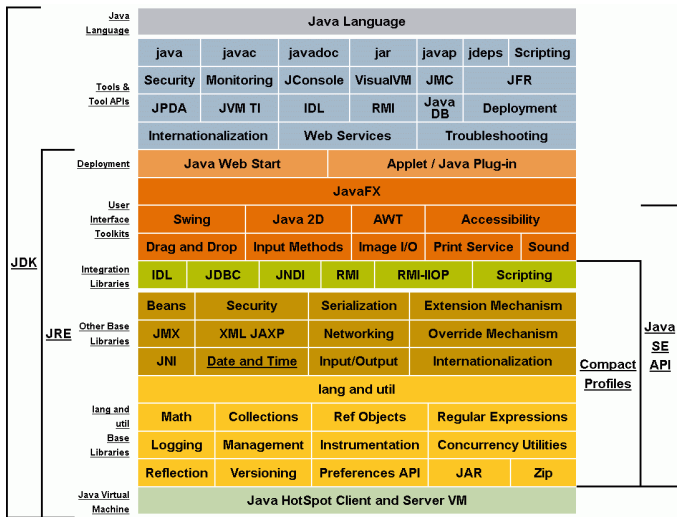

Java SE (Standard Edition) 8 platform overview

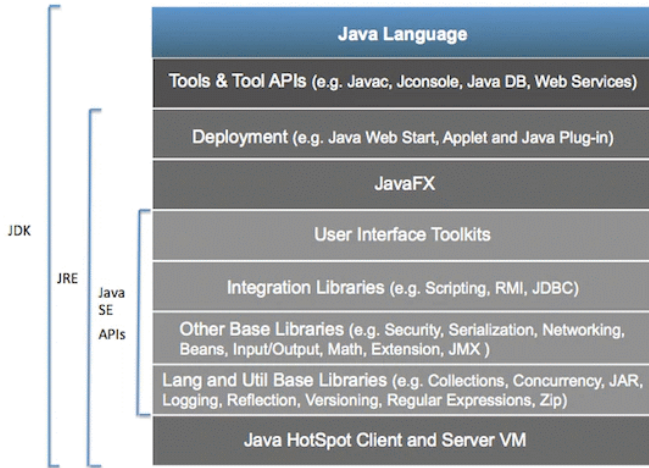

Java SE (Standard Edition) Conceptual Diagram

Java 15 Development Kit Tools

40 in Total

- `jaotc` - static compiler that produces native code for compiled Java methods

Java 15 Development Kit Tools

40 in Total

- `jaotc` - static compiler that produces native code for compiled Java methods
- `jar` - create and manipulaes an archive for classes and resources

Java 15 Development Kit Tools

40 in Total

- `jaotc` - static compiler that produces native code for compiled Java methods
- `jar` - create and manipulaes an archive for classes and resources
- `jarsigner` - sign and verify Java Archive (JAR) files

Java 15 Development Kit Tools

40 in Total

- `jaotc` - static compiler that produces native code for compiled Java methods
- `jar` - create and manipulate an archive for classes and resources
- `jarsigner` - sign and verify Java Archive (JAR) files
- `java` - launch a Java application

Java 15 Development Kit Tools

40 in Total

- `jaotc` - static compiler that produces native code for compiled Java methods
- `jar` - create and manipulaes an archive for classes and resources
- `jarsigner` - sign and verify Java Archive (JAR) files
- `java` - launch a Java application
- `javac` - read Java class definitions and compile them into bytecode code

Java 15 Development Kit Tools

40 in Total

- `jar` - create and manipulaes an archive for classes and resources
- `jarsigner` - sign and verify Java Archive (JAR) files
- `java` - launch a Java application
- `javac` - read Java class definitions and compile them into bytecode code
- `javadoc` - generate HTML pages of API documentation from Java source files

Java 15 Development Kit Tools

40 in Total

- `jarsigner` - sign and verify Java Archive (JAR) files
- `java` - launch a Java application
- `javac` - read Java class definitions and compile them into bytecode code
- `javadoc` - generate HTML pages of API documentation from Java source files
- `javap` - disassemble one or more class files

Java 15 Development Kit Tools

40 in Total

- `java` - launch a Java application
- `javac` - read Java class definitions and compile them into bytecode code
- `javadoc` - generate HTML pages of API documentation from Java source files
- `javap` - disassemble one or more class files
- `jcmd` - send diagnostic command requests to a running JVM

Java 15 Development Kit Tools

40 in Total

- `javac` - read Java class definitions and compile them into bytecode code
- `javadoc` - generate HTML pages of API documentation from Java source files
- `javap` - disassemble one or more class files
- `jcmd` - send diagnostic command requests to a running JVM
- `jconsole` - start a graphical console to monitor and manage Java applications

Java 15 Development Kit Tools

40 in Total

- `javadoc` - generate HTML pages of API documentation from Java source files
- `javap` - disassemble one or more class files
- `jcmd` - send diagnostic command requests to a running JVM
- `jconsole` - start a graphical console to monitor and manage Java applications
- `jdb` - find and fix bugs in Java platform programs

Java 15 Development Kit Tools

40 in Total

- `javap` - disassemble one or more class files
- `jcmd` - send diagnostic command requests to a running JVM
- `jconsole` - start a graphical console to monitor and manage Java applications
- `jdb` - find and fix bugs in Java platform programs
- `jdeprscan` - static analysis tool that scans a jar file (or some other aggregation of class files) for uses of deprecated API elements

Java 15 Development Kit Tools

40 in Total

- `jcmd` - send diagnostic command requests to a running JVM
- `jconsole` - start a graphical console to monitor and manage Java applications
- `jdb` - find and fix bugs in Java platform programs
- `jdeprscan` - static analysis tool that scans a jar file (or some other aggregation of class files) for uses of deprecated API elements
- `jdeps` - launch the Java class dependency analyzer

Java 15 Development Kit Tools

40 in Total

- `jconsole` - start a graphical console to monitor and manage Java applications
- `jdb` - find and fix bugs in Java platform programs
- `jdeprscan` - static analysis tool that scans a jar file (or some other aggregation of class files) for uses of deprecated API elements
- `jdeps` - launch the Java class dependency analyzer
- `jfr` - parse and print Flight Recorder files

Java 15 Development Kit Tools

40 in Total

- `jdb` - find and fix bugs in Java platform programs
- `jdeprscan` - static analysis tool that scans a jar file (or some other aggregation of class files) for uses of deprecated API elements
- `jdeps` - launch the Java class dependency analyzer
- `jfr` - parse and print Flight Recorder files
- `jhsdb` - a postmortem debugger to analyze the content of a core dump from a crashed JVM

Java 15 Development Kit Tools

40 in Total

- `jdeprscan` - static analysis tool that scans a jar file (or some other aggregation of class files) for uses of deprecated API elements
- `jdeps` - launch the Java class dependency analyzer
- `jfr` - parse and print Flight Recorder files
- `jhsdb` - a postmortem debugger to analyze the content of a core dump from a crashed JVM
- `jinfo` - generate Java configuration information for a specified Java process

Java 15 Development Kit Tools

40 in Total

- `jdeps` - launch the Java class dependency analyzer
- `jfr` - parse and print Flight Recorder files
- `jhsdb` - a postmortem debugger to analyze the content of a core dump from a crashed JVM
- `jinfo` - generate Java configuration information for a specified Java process
- `jlink` - assemble set of modules and their dependencies into a runtime image

Java 15 Development Kit Tools

40 in Total

- `jfr` - parse and print Flight Recorder files
- `jhsdb` - a postmortem debugger to analyze the content of a core dump from a crashed JVM
- `jinfo` - generate Java configuration information for a specified Java process
- `jlink` - assemble set of modules and their dependencies into a runtime image
- `jmap` - print details of a specified process

Java 15 Development Kit Tools

40 in Total

- `jhsdb` - a postmortem debugger to analyze the content of a core dump from a crashed JVM
- `jinfo` - generate Java configuration information for a specified Java process
- `jlink` - assemble set of modules and their dependencies into a runtime image
- `jmap` - print details of a specified process
- `jmod` - create JMOD files and list the content of existing JMOD files

Java 15 Development Kit Tools

40 in Total

- `jinfo` - generate Java configuration information for a specified Java process
- `jlink` - assemble set of modules and their dependencies into a runtime image
- `jmap` - print details of a specified process
- `jmod` - create JMOD files and list the content of existing JMOD files
- `jpackage` - package a self-contained Java application

Java 15 Development Kit Tools

40 in Total

- `jlink` - assemble set of modules and their dependencies into a runtime image
- `jmap` - print details of a specified process
- `jmod` - create JMOD files and list the content of existing JMOD files
- `jpackage` - package a self-contained Java application
- `jps` - list the instrumented JVMs on the target system

Java 15 Development Kit Tools

40 in Total

- `jmap` - print details of a specified process
- `jmod` - create JMOD files and list the content of existing JMOD files
- `jpackage` - package a self-contained Java application
- `jps` - list the instrumented JVMs on the target system
- `jrunscript` - run a command-line script shell that supports interactive and batch modes

Java 15 Development Kit Tools

40 in Total

- `jmod` - create JMOD files and list the content of existing JMOD files
- `jpackage` - package a self-contained Java application
- `jps` - list the instrumented JVMs on the target system
- `jrunscript` - run a command-line script shell that supports interactive and batch modes
- `jshell` - interactively evaluate declarations, statements, and expressions in a read-eval-print loop (REPL)

Java 15 Development Kit Tools

40 in Total

- `jpackage` - package a self-contained Java application
- `jps` - list the instrumented JVMs on the target system
- `jrunscript` - run a command-line script shell that supports interactive and batch modes
- `jshell` - interactively evaluate declarations, statements, and expressions in a read-eval-print loop (REPL)
- `jstack` - print Java stack traces of Java threads for a specified Java process

Java 15 Development Kit Tools

40 in Total

- `jps` - list the instrumented JVMs on the target system
- `jrunscript` - run a command-line script shell that supports interactive and batch modes
- `jshell` - interactively evaluate declarations, statements, and expressions in a read-eval-print loop (REPL)
- `jstack` - print Java stack traces of Java threads for a specified Java process
- `jstat` - monitor JVM statistics

Java 15 Development Kit Tools

40 in Total

- `jrunscript` - run a command-line script shell that supports interactive and batch modes
- `jshell` - interactively evaluate declarations, statements, and expressions in a read-eval-print loop (REPL)
- `jstack` - print Java stack traces of Java threads for a specified Java process
- `jstat` - monitor JVM statistics
- `jstatd` - monitor the creation and termination of instrumented Java HotSpot VMs

Java 15 Development Kit Tools

40 in Total

- `jshell` - interactively evaluate declarations, statements, and expressions in a read-eval-print loop (REPL)
- `jstack` - print Java stack traces of Java threads for a specified Java process
- `jstat` - monitor JVM statistics
- `jstatd` - monitor the creation and termination of instrumented Java HotSpot VMs
- `keytool` - manage a keystore (database) of cryptographic keys, X.509 certificate chains, and trusted certificates

Java 15 Development Kit Tools

40 in Total

- `jstack` - print Java stack traces of Java threads for a specified Java process
- `jstat` - monitor JVM statistics
- `jstatd` - monitor the creation and termination of instrumented Java HotSpot VMs
- `keytool` - manage a keystore (database) of cryptographic keys, X.509 certificate chains, and trusted certificates
- `rmid` - start the activation system daemon that enables objects to be registered and activated in a Java Virtual Machine (JVM)

Java 15 Development Kit Tools

40 in Total

- `jstat` - monitor JVM statistics
- `jstatd` - monitor the creation and termination of instrumented Java HotSpot VMs
- `keytool` - manage a keystore (database) of cryptographic keys, X.509 certificate chains, and trusted certificates
- `rmid` - start the activation system daemon that enables objects to be registered and activated in a Java Virtual Machine (JVM)
- `rmiregistry` - create and start a remote object registry on the specified port on the current host

Java 15 Development Kit Tools

40 in Total

- `jstatd` - monitor the creation and termination of instrumented Java HotSpot VMs
- `keytool` - manage a keystore (database) of cryptographic keys, X.509 certificate chains, and trusted certificates
- `rmid` - start the activation system daemon that enables objects to be registered and activated in a Java Virtual Machine (JVM)
- `rmiregistry` - create and start a remote object registry on the specified port on the current host
- `serialver` - return the 'serialVersionUID' for one or more classes in a form suitable for copying into an evolving class

Java 15 Development Kit Tools

40 in Total

- `keytool` - manage a keystore (database) of cryptographic keys, X.509 certificate chains, and trusted certificates
- `rmid` - start the activation system daemon that enables objects to be registered and activated in a Java Virtual Machine (JVM)
- `rmiregistry` - create and start a remote object registry on the specified port on the current host
- `serialver` - return the 'serialVersionUID' for one or more classes in a form suitable for copying into an evolving class

Java 15 Development Kit Tools

40 in Total

- `rmid` - start the activation system daemon that enables objects to be registered and activated in a Java Virtual Machine (JVM)
- `rmiregistry` - create and start a remote object registry on the specified port on the current host
- `serialver` - return the 'serialVersionUID' for one or more classes in a form suitable for copying into an evolving class

Java 15 Development Kit Tools

40 in Total

- `rmiregistry` - create and start a remote object registry on the specified port on the current host
- `serialver` - return the 'serialVersionUID' for one or more classes in a form suitable for copying into an evolving class

Java 15 Development Kit Tools

40 in Total

- `serialver` - return the 'serialVersionUID' for one or more classes in a form suitable for copying into an evolving class

Java Platform

Some of the major components surrounding Java:


- Java virtual machine (JVM) specification
- Virtual machine implementation (for Solaris, Window, and Linux), translation tools (`java` and `javac`), and development tools
- Java programming language specification
- A core library (the package `java.lang`), extensive libraries (APIs) for networking, graphics, etc., and additional APIs for special purposes (e.g., telephony)

Java Platform

Additional components surrounding Java:

- API documentation
(No reference material will be given to you. We expect you to go out on the Internet, find it, and know some parts of it in detail.)
- An IDE for developing Java programs and GUIs: Netbeans
(We expect you to be able to develop Java programs; we don't explicitly teach using an IDE.)

(In lab and lecture we have other priorities and we expect a lot from you. However, don't be reluctant to ask your classmates, instructors, the help desk, etc., if you have questions. Asking knowledgeable people is still the fastest way to learn.)

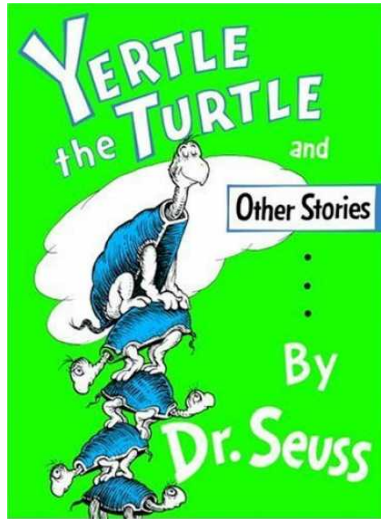

Precarious pyramid

Will programming evolve into specialized (and different) skills for telecommunications, enterprise computing, etc, each supported by sophisticated libraries?

Will programming evolve into specialized (and different) skills for telecommunications, enterprise computing, etc, each supported by sophisticated libraries?

I don't think so. Clearly, domain specific knowledge and powerful libraries are useful, but the I think programming will always be the glue that is necessary, independent of the application.

Next

- Software development cycle
- Files
- Language translation
- Streams

See notes elsewhere.