Aim : Write a restful webs services for creating books collection using entity class


```
mysql> show databases;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| test               |
| ty43               |
| tycs43             |
+--------------------+
5 rows in set (0.00 sec)

mysql> use tycs43;
Database changed
mysql> show tables;
Empty set (0.00 sec)


mysql> show tables;
+-----------------+
| Tables_in_tycs43 |
+-----------------+
| books           |
| sequence        |
+-----------------+
2 rows in set (0.00 sec)
```

1. Create new web project


2. Create new entity class

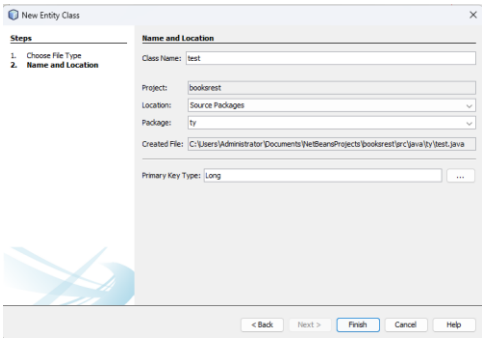


3. Create new restful web services from entity class

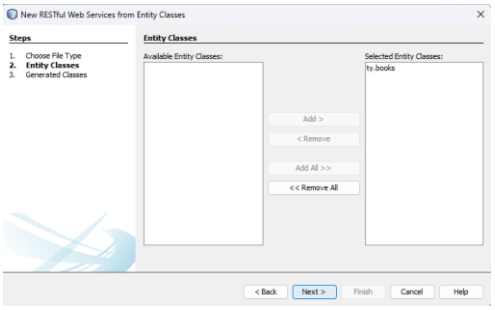

4. Create new JSF pages from entity class

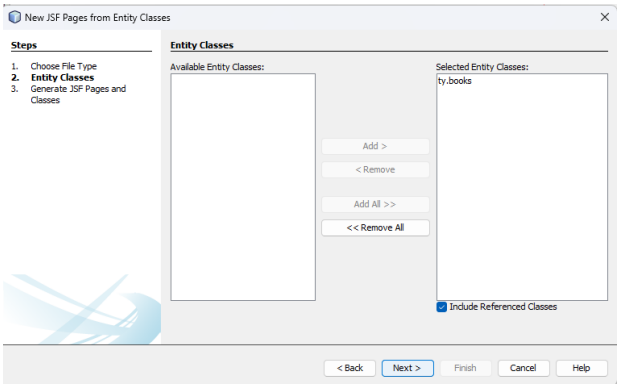

5. Connect the mysql connector to netbeans

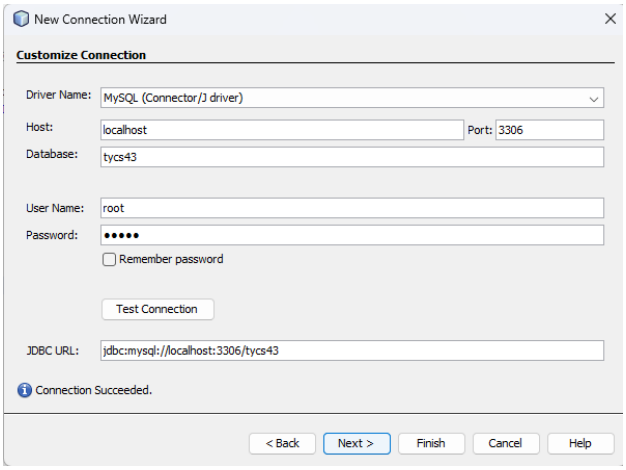

Code:

```
/*
 * To change this template, choose Tools | Templates
 * and open the template in the editor.
 */
package ty;
import java.io.Serializable;
import javax.persistence.Entity;
import javax.persistence.GeneratedValue;
import javax.persistence.GenerationType;
import javax.persistence.Id;
import javax.xml.bind.annotation.XmlRootElement;
/**
 *
 * @author Administrator
 */
@Entity
@XmlRootElement
public class books implements Serializable {
    private static final long serialVersionUID = 1L;
    @Id
    @GeneratedValue(strategy = GenerationType.AUTO)
    private Long id;
```


```
private String bname;
private String tbook;
private int price;
/**
 * Get the value of price
 *
 * @return the value of price
 */
public int getPrice() {
    return price;
}
/**
 * Set the value of price
 *
 * @param price new value of price
 */
public void setPrice(int price) {
    this.price = price;
}
/**
 * Get the value of tbook
 *
 * @return the value of tbook
 */
public String getTbook() {
    return tbook;
}


/**
 * Set the value of tbook
 *
 * @param tbook new value of tbook
 */
public void setTbook(String tbook) {
    this.tbook = tbook;
```


```
}
/**
 * Get the value of bname
 *
 * @return the value of bname
 */
public String getBname() {
    return bname;
}
/**
 * Set the value of bname
 *
 * @param bname new value of bname
 */
public void setBname(String bname) {
    this.bname = bname;
}
public Long getId() {
    return id;
}
public void setId(Long id) {
    this.id = id;
}
@Override
public int hashCode() {
    int hash = 0;
    hash += (id != null ? id.hashCode() : 0);
    return hash;
}
@Override
public boolean equals(Object object) {
    // TODO: Warning - this method won't work in the case the id fields are not set
    if (!(object instanceof books)) {
        return false;
    }
```

```
        books other = (books) object;
        if ((this.id == null && other.id != null) || (this.id != null && !this.id.equals(other.id))) {
            return false;
        }
        return true;
    }
    @Override
    public String toString() {
        return "ty.books[ id=" + id + " ]";
    }
}
```

Output:








```
mysql> show tables;
+------------------+
| Tables_in_tycs43 |
+------------------+
| books            |
| sequence         |
+------------------+
2 rows in set (0.00 sec)

mysql> use books;
ERROR 1049 (42000): Unknown database 'books'
mysql> desc books;
+--------+--------------+------+-----+---------+-------+
| Field  | Type         | Null | Key | Default | Extra |
+--------+--------------+------+-----+---------+-------+
| ID     | bigint(20)   | NO   | PRI | NULL    |       |
| BNAME  | varchar(255) | YES  |     | NULL    |       |
| PRICE  | int(11)      | YES  |     | NULL    |       |
| TBOOK  | varchar(255) | YES  |     | NULL    |       |
+--------+--------------+------+-----+---------+-------+
4 rows in set (0.00 sec)

mysql> select * from books;
+----+------------+-------+--------------+
| ID | BNAME      | PRICE | TBOOK        |
+----+------------+-------+--------------+
|  1 | The rivals |   500 | Harry Potter |
+----+------------+-------+--------------+
1 row in set (0.00 sec)
```