PRACTICAL 11

Aim: Create REST API that returns data in both XML and JSON format of player database.


Steps:

1. Create database


```
mysql> create database ty;
Query OK, 1 row affected (0.00 sec)

mysql> use ty;
Database changed
mysql> show tables;
Empty set (0.00 sec)
```


2. Create a Java Web Application
3. Create an Entity Class

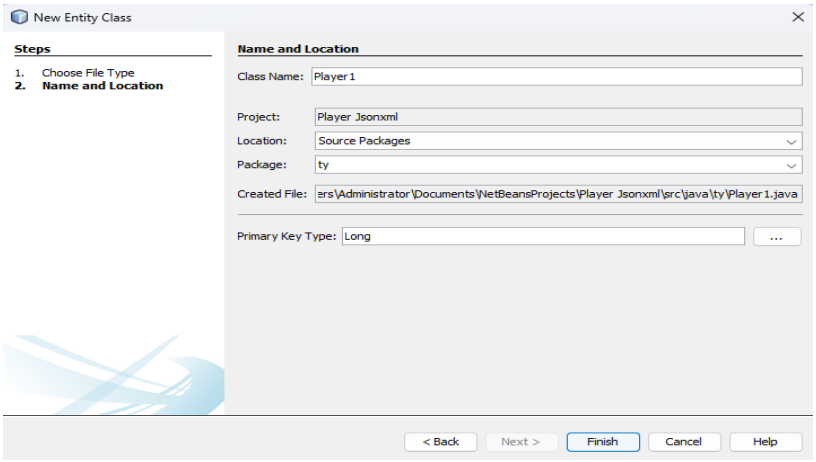


4. Check Web Application by deploying and run
5. Create Restful web service from entity class

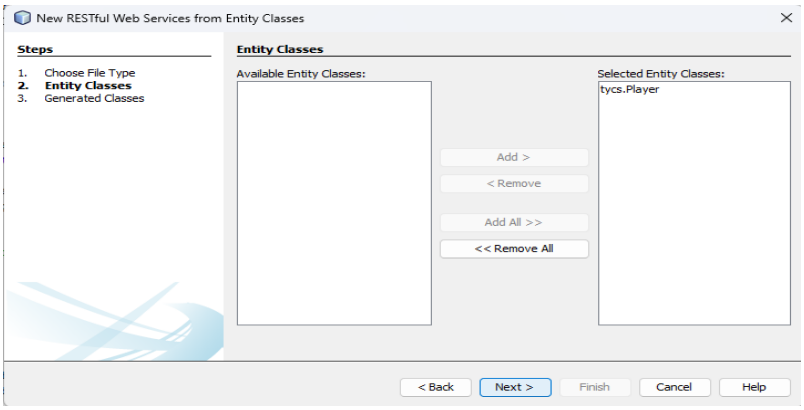

6. Go to Restful Web Service folder in Player Jsonxml

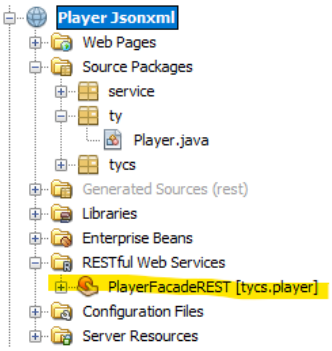

7. Click on PlayerFacadeREST[tycs.player] and go to find all() methods

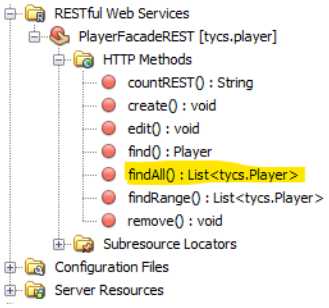

8. And remove “application/xml” from find all() method and vice versa for “application/json”



PRACTICAL 11

9. Describe player in ty database

```
mysql> show tables;
+---------------+
| Tables_in_ty |
+---------------+
| player       |
| sequence     |
+---------------+
2 rows in set (0.00 sec)

mysql> use player;
ERROR 1049 (42000): Unknown database 'player'
mysql> desc player;
+-------+------------+------+-----+---------+-------+
| Field | Type       | Null | Key | Default | Extra |
+-------+------------+------+-----+---------+-------+
| ID    | bigint(20) | NO   | PRI | NULL    |       |
+-------+------------+------+-----+---------+-------+
```

10. Insert the details of the player

```
mysql> insert into player values(1);
Query OK, 1 row affected (0.00 sec)

mysql> insert into player values(2);
Query OK, 1 row affected (0.00 sec)
```

11. Check Web Application by deploying and run
12. In restful web service test resource uri for PlayerFacadeREST[tycs.player]

13. For JSON Output add

```
@GET
  @Override
  @Produces({"application/json"})
 public List<Player> findAll() {
    return super.findAll();

}
```


```
Pretty-print
[{"id":1},{"id":2}]
```

JSON IMAGE

PRACTICAL 11

14. For XML Output add

```
@GET
   @Override
   @Produces({"application/xml"})
  public List<Player> findAll() {
     return super.findAll();
}
```

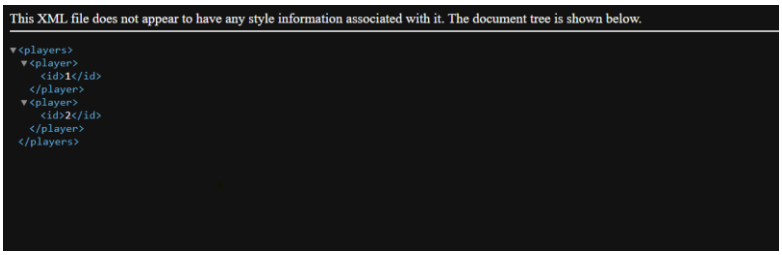

XML IMAGE