



Creating an ATL run configuration

How to create a run configuration for an ATL transformation.


Run Configurations menu

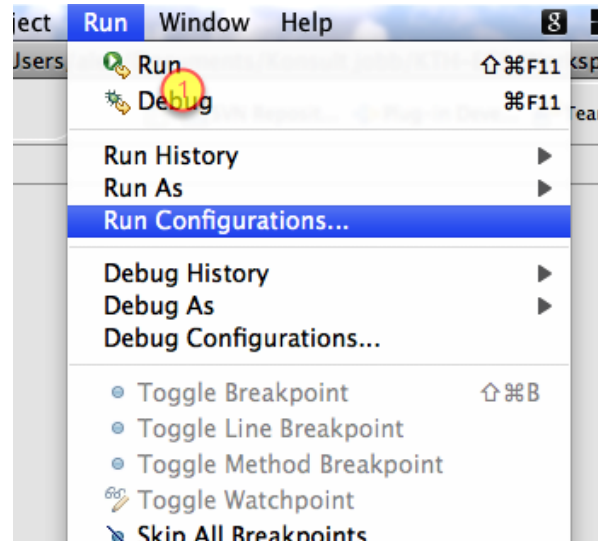

Create new ATL run configuration

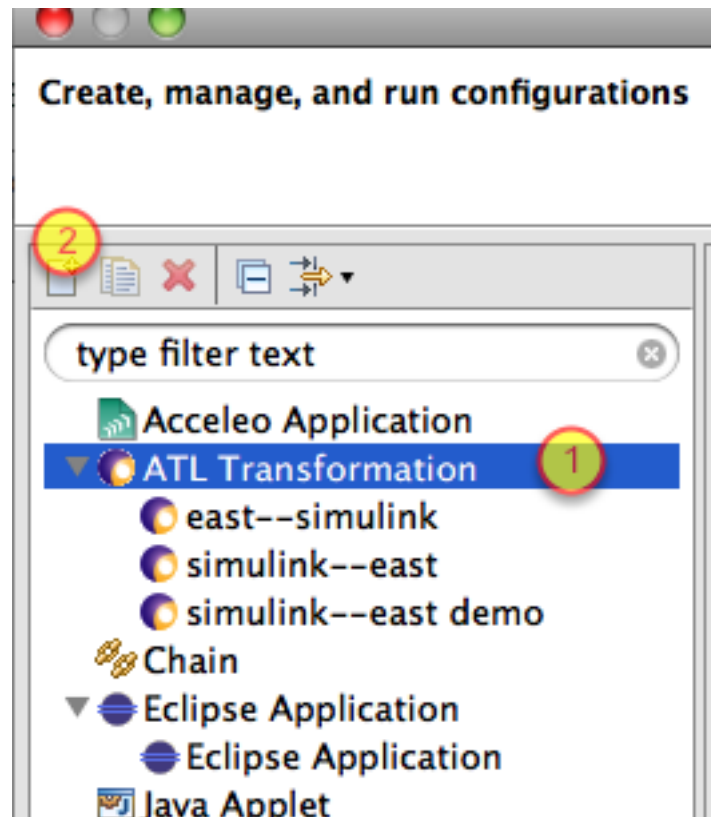


Choose ATL source code

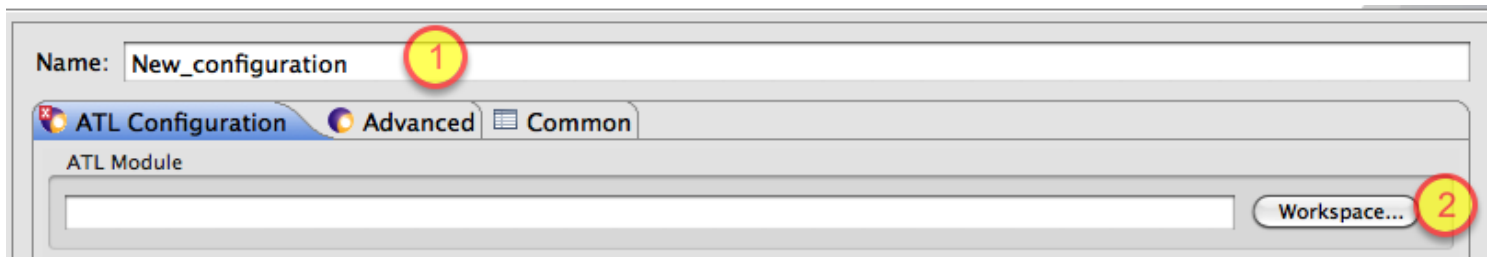

1: Give this configuration a name

2: Choose the ATL source code from the workspace


Choose metamodels

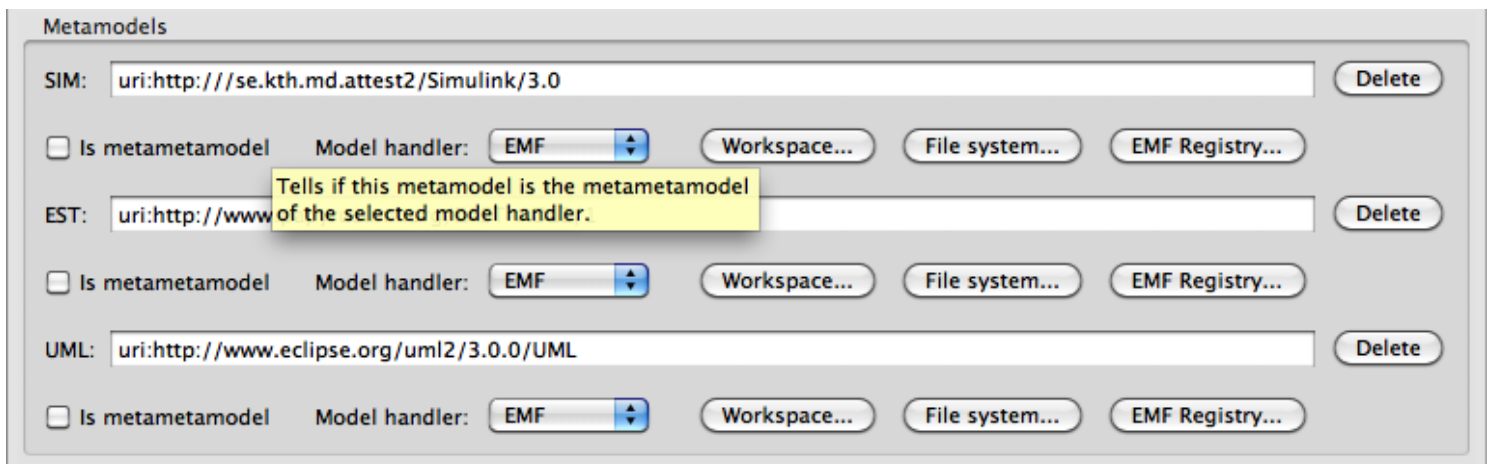

The ATL source code contains references to metamodels. In this example: SIM, EST and UML. Now you have to locate the metamodels that they represent.

The EMF registry contains the metamodels that are registered at startup with Eclipse.

Choose input and output models

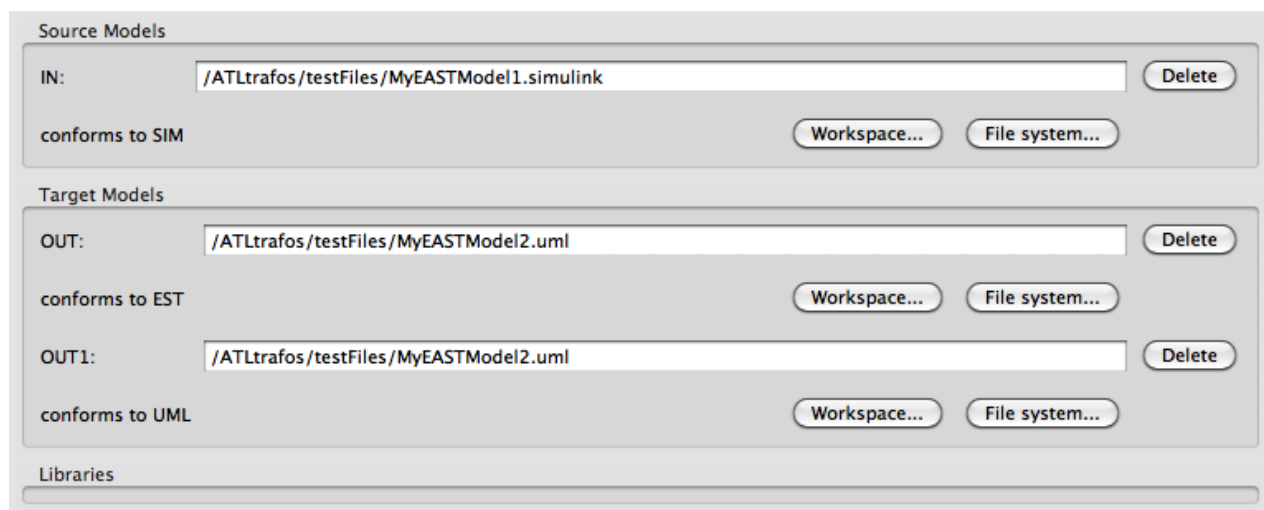

Choose the actual models that will be transformed.