

Hadoop MapReduce

Claudio Scheer¹ Gabriell Araujo¹

¹Master's Degree in Computer Science
Pontifical Catholic University of Rio Grande do Sul - PUCRS

High Performance for Big Data Applications

Table of Contents

1 Hadoop

2 Optimizations

3 Examples


Table of Contents

1 Hadoop

2 Optimizations


3 Examples

What we mean by Hadoop

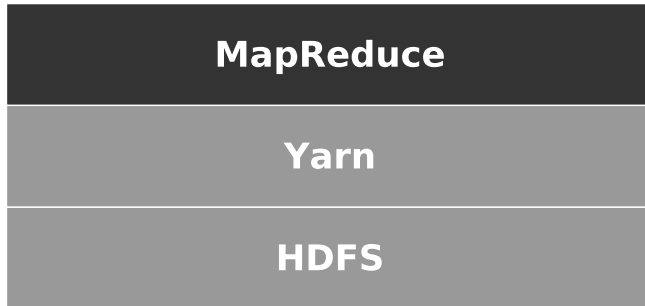

<https://data-flair.training/blogs/hadoop-ecosystem-components>

MapReduce execution flow

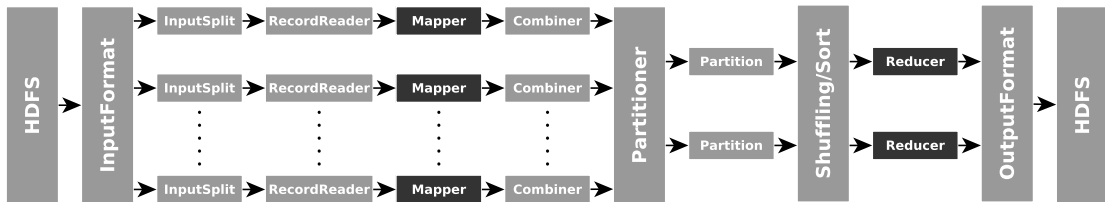

<https://data-flair.training/blogs/hadoop-ecosystem-components>

Custom data types

- LongWritable = long;
- IntWritable = int;
- Text = String;
- Other data types ([link](#));

```
public class IntWritable implements WritableComparable<IntWritable> {  
    private int value;  
  
    public IntWritable(int value) { set(value); }  
  
    public void set(int value) { this.value = value; }  
  
    public int get() { return value; }  
  
    @Override  
    public void readFields(DataInput in) throws IOException {  
        value = in.readInt();  
    }  
  
    @Override  
    public void write(DataOutput out) throws IOException {  
        out.writeInt(value);  
    }  
  
    @Override  
    public int compareTo(IntWritable o) {  
        int thisValue = this.value;  
        int thatValue = o.value;  
        return (thisValue < thatValue ? -1 : (thisValue == thatValue ? 0 : 1));  
    }  
}
```

► Source

- TextInputFormat: <LongWritable, Text>
- KeyValueTextInputFormat: <Text, Text>
 - Key splitted by \t;
- NLineInputFormat: <LongWritable, Text>
 - `config.setInt(NLineInputFormat.LINES_PER_MAP, 256);`
- Customs InputFormat must implement `getSplits` and `getRecordReader`;
 - <https://hadoop.apache.org/docs/stable/api/org/apache/hadoop/mapred/InputFormat.html>

- Defines the parallelism level;
- Usually splitted by the size of the block;
 - $10\text{TB}/128\text{MB} = 82000$
- It is a logical division of the input data;
- Ways to change it:
 - `config.set(MRJobConfig.NUM_MAPS, 2);`
 - `mapreduce.job.maps` on `mapsite-site.xml`;

<https://hadoop.apache.org/docs/stable/hadoop-mapreduce-client/hadoop-mapreduce-client-core/MapReduceTutorial.html>

- Split InputSplit into <key, value> pairs;
 - Custom implementations can read values from outside the InputSplit;
- Max record length:
 - `config.setInt(LineRecordReader.MAX_LINE_LENGTH, Integer.MAX_VALUE);`
- Vanilla example:

```
run(Context context) {  
    while(context.nextKeyValue())  
    {  
        map(context.setCurrentKey(), context.getCurrentValue(), context)  
    }  
}
```

- Maps <key1, value1> to <key2, value2>;
- Vanilla example:

```
public class SimpleMapper extends Mapper<LongWritable, Text, Text, IntWritable> {  
    private IntWritable one = new IntWritable(1);  
    private Text word = new Text();  
  
    @Override  
    public void map(LongWritable key, Text value, Context context) {  
        StringTokenizer itr = new StringTokenizer(value.toString());  
        while (itr.hasMoreElements()) {  
            word.set(itr.nextToken());  
            context.write(word, one);  
        }  
    }  
}
```

<https://hadoop.apache.org/docs/current/hadoop-mapreduce-client/hadoop-mapreduce-client-core/MapReduceTutorial.html>

Combiner

- Reduces data transfer between mapper and reducer;
- Reduces the amount of data to be processed in the reducer;



Partitioner

- Redirects the Combiner output to a specific reducer;
- Has the same number as the number of reducers;
- Used only when there is more than one reducer;
- Vanilla example:

```
public class StupidPartitioner extends Partitioner<Text, IntWritable> {  
    public int getPartition(Text key, IntWritable value, int numPartitions) {  
        if (value.get() < 35) {  
            return 0;  
        } else {  
            return 1;  
        }  
    }  
}
```

<https://hadoop.apache.org/docs/stable/api/org/apache/hadoop/mapreduce/Partitioner.html>

- Collects output from the mappers to the reducers using HTTP requests;
- Sorts the collected $\langle \text{key}, \text{value} \rangle$ pairs based on the key;
 - `job.setSortComparatorClass(StupidSortComparator.class);`

<https://hadoop.apache.org/docs/stable/hadoop-mapreduce-client/hadoop-mapreduce-client-core/PluggableShuffleAndPluggableSort.html>

<https://hadoop.apache.org/docs/stable/hadoop-mapreduce-client/hadoop-mapreduce-client-core/EncryptedShuffle.html>

- Reduces $\langle \text{key2}, \text{list}(\text{value2}) \rangle$ to $\langle \text{key3}, \text{value3} \rangle$;
- Change the number of reducers:
 - `job.setNumReduceTasks(2);`
- Vanilla example:

```
public static class SimpleReducer extends Reducer<Text, IntWritable, Text, IntWritable> {  
    private IntWritable result = new IntWritable();  
  
    @Override  
    public void reduce(Text key, Iterable<IntWritable> values, Context context) {  
        int sum = 0;  
        for (IntWritable val : values) {  
            sum += val.get();  
        }  
        result.set(sum);  
        context.write(key, result);  
    }  
}
```

<https://hadoop.apache.org/docs/current/hadoop-mapreduce-client/hadoop-mapreduce-client-core/MapReduceTutorial.html>

https://docs.cloudera.com/HDPDocuments/HDP2/HDP-2.6.5/bk_command-line-installation/content/determine-hdp-memory-config.html

- Specifies how reducer output will be written;
 - `config.set(TextOutputFormat.SEPARATOR, “,”);`
- Allows to write multiple outputs;
 - <https://hadoop.apache.org/docs/stable/api/org/apache/hadoop/mapred/lib/MultipleOutputs.html>

Table of Contents

1 Hadoop

2 Optimizations

3 Examples


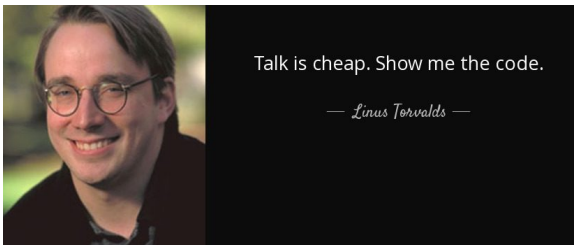


Table of Contents

1 Hadoop

2 Optimizations

3 Examples

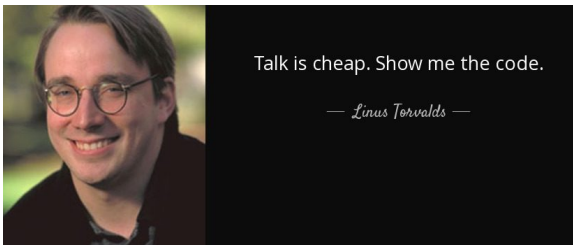

This is a text in first column.

$$E = mc^2$$

- First item
- Second item

This text will be in the second column and on a second thought this is a nice looking layout in some cases.