



JONAS SCHMEDTMANN

Subscribe here

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

Follow me here

SLIDES FOR THEORY LECTURES

(DON'T SKIP THEM, THEY ARE
SUPER IMPORTANT 😎)



TABLE OF CONTENTS: THEORY LECTURES (CLICK THE TITLES)

- [1 Watch Before You Start!](#)
- [2 Why Do front-end Frameworks exist?](#)
- [3 What is React?](#)
- [4 Setting Up a New React Project: The Two Options](#)
- [5 Components as Building Blocks](#)
- [6 What is JSX?](#)
- [7 Separation of Concerns](#)
- [8 Props, Immutability, and One-Way Data Flow](#)
- [9 The Rules of JSX](#)
- [10 Section Summary](#)
- [11 What is State in React?](#)
- [12 The Mechanics of State](#)
- [13 More Thoughts About State + State Guidelines](#)
- [14 State vs. Props](#)
- [15 What is "Thinking in React"?](#)
- [16 Fundamentals of State Management](#)
- [17 Derived State](#)
- [18 The children Prop: Making a Reusable Button](#)
- [19 How to Split a UI Into Components](#)
- [20 Component Categories](#)
- [21 Component Composition](#)
- [22 Props as a Component API](#)
- [23 Components, Instances, and Elements](#)
- [24 How Rendering Works: Overview](#)
- [25 How Rendering Works: The Render Phase](#)
- [26 How Rendering Works: The Commit Phase](#)
- [27 How Diffing Works](#)
- [28 The Key Prop](#)
- [29 Rules for Render Logic: Pure components](#)
- [30 State Update Batching](#)
- [31 How Events Work in React](#)
- [32 Libraries vs. Frameworks & The React Ecosystem](#)
- [33 Section Summary: Practical Takeaways](#)
- [34 The Component Lifecycle](#)
- [35 A First Look at Effects](#)
- [36 The useEffect Dependency Array](#)
- [37 The useEffect Cleanup Function](#)
- [38 React Hooks and Their Rules](#)
- [39 useState Summary](#)



TABLE OF CONTENTS: THEORY LECTURES (CLICK THE TITLES)

- [40 Introducing Another Hook: useRef](#)
- [41 What are Custom Hooks? When to Create One?](#)
- [42 Class Components vs. Function Components](#)
- [43 Managing State With useReducer](#)
- [44 Section Summary: useState vs. useReducer](#)
- [45 Routing and Single-Page Applications \(SPAs\)](#)
- [46 Styling Options For React Applications](#)
- [47 What is the Context API?](#)
- [48 Thinking In React: Advanced State Management](#)
- [49 Performance Optimization and Wasted Renders](#)
- [50 Understanding memo](#)
- [51 Understanding useMemo and useCallback](#)
- [52 Optimizing Bundle Size With Code Splitting](#)
- [53 Don't Optimize Prematurely!](#)
- [54 useEffect Rules and Best Practices](#)
- [55 Introduction to Redux](#)
- [56 Redux Middleware and thunks](#)
- [57 What is Redux Toolkit \(RTK\)?](#)
- [58 Redux vs. Context API](#)
- [59 Application Planning \("Fast React Pizza Co."\)](#)
- [60 What is Tailwind CSS?](#)
- [61 Application Planning \("The Wild Oasis"\)](#)
- [62 What is Supabase?](#)
- [63 Modeling Application State](#)
- [64 What is React Query?](#)
- [65 An Overview of Reusability in React](#)
- [66 An Overview of Server-Side Rendering \(SSR\)](#)
- [67 The Missing Piece: Hydration](#)
- [68 What is Next.js?](#)
- [69 What are React Server Components? \(RSC Part 1\)](#)
- [70 How RSC Works Behind the Scenes \(RSC Part 2\)](#)
- [71 RSC vs. SSR: How are They Related? \(RSC Part 3\)](#)
- [72 Project Planning: "The Wild Oasis" Website](#)
- [73 What is React Suspense?](#)
- [74 Types of SSR: Static vs. Dynamic Rendering](#)
- [75 Partial Pre-Rendering](#)
- [76 How Next.js Caches Data](#)
- [77 Blurring the Boundary Between Server and Client](#)
- [78 What is Middleware in Next.js?](#)
- [79 What are Server Actions?](#)

**WELCOME, WELCOME,
WELCOME!**



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION


WELCOME, WELCOME, WELCOME!

LECTURE


WATCH BEFORE YOU START!

SOME QUICK CONSIDERATIONS BEFORE WE START...

- 👉 This course is for everyone! So please don't write a bad review right away if the course is too easy, or too hard, or progressing too slow, or too fast for you
- 👉 To make the course perfect for YOU: **rewatch lectures, jump to other sections, watch the course with slower or faster speed, or ask questions**

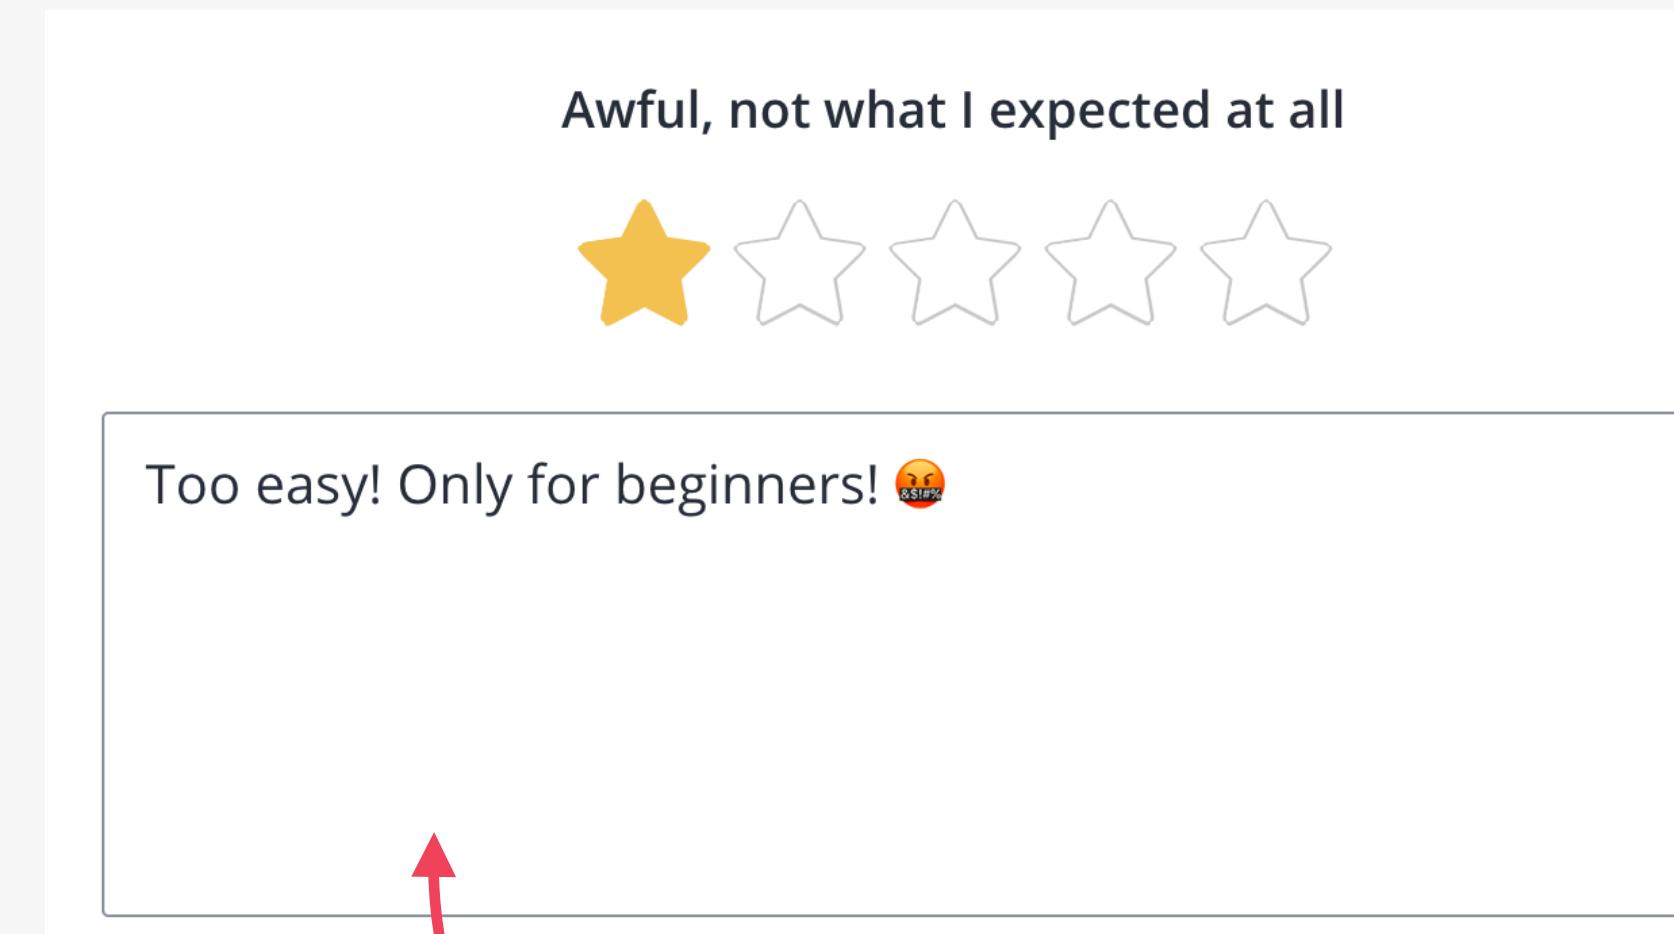

Please don't be that person. Everyone is different... Unless the course is truly terrible (it's not 😛)

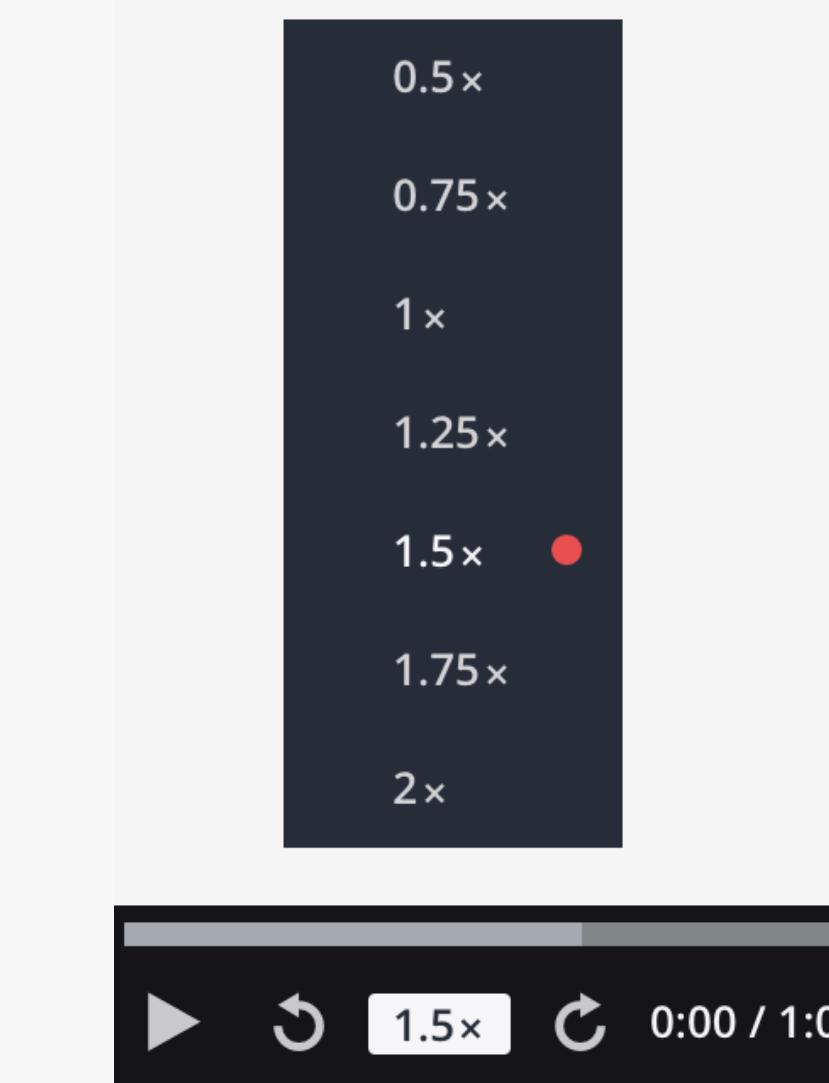

SOME QUICK CONSIDERATIONS BEFORE WE START...



💡 You don't need to watch the entire course in order to learn React! If you are in a hurry, can cut the course length in **HALF** by skipping optional sections and practice parts

✓ A First Look at React	7 lectures • 1hr 8min
✓ [Optional] Review of Essential JavaScript for React	14 lectures • 1hr 51min
✓ Working With Components, Props, and JSX	23 lectures • 2hr 53min
✓ State, Events, and Forms: Interactive Components	20 lectures • 2hr 54min
✓ Thinking In React: State Management	16 lectures • 2hr 41min
✓ [Optional] Practice Project: Eat-'N-Split	8 lectures • 1hr 28min
✓ Thinking in React: Components, Composition, and Reusability	16 lectures • 2hr 38min
✓ How React Works Behind the Scenes	17 lectures • 2hr 36min
✓ Effects and Data Fetching	18 lectures • 3hr 12min
✓ Custom Hooks, Refs, and More State	14 lectures • 2hr 1min
✓ [Optional] React Before Hooks: Class-Based React	9 lectures • 1hr 21min

SOME QUICK CONSIDERATIONS BEFORE WE START...



You need to code along with me! You will learn **ZERO** React skills by just sitting and watching me code. You really have to write code **YOURSELF!**




SOME QUICK CONSIDERATIONS BEFORE WE START...

 In the first sections of the course, don't worry about WHY and HOW things work, or about React "best practices". While learning, we just want to make things WORK. We will worry about everything else later in the course



SOME QUICK CONSIDERATIONS BEFORE WE START...

! If you have a problem or a question, **start by trying to solve it yourself!** This is essential for your progress. If you can't solve it, check the Q&A section. If that doesn't help, you can ask a new question. Use a short description, and post code on codesandbox.io

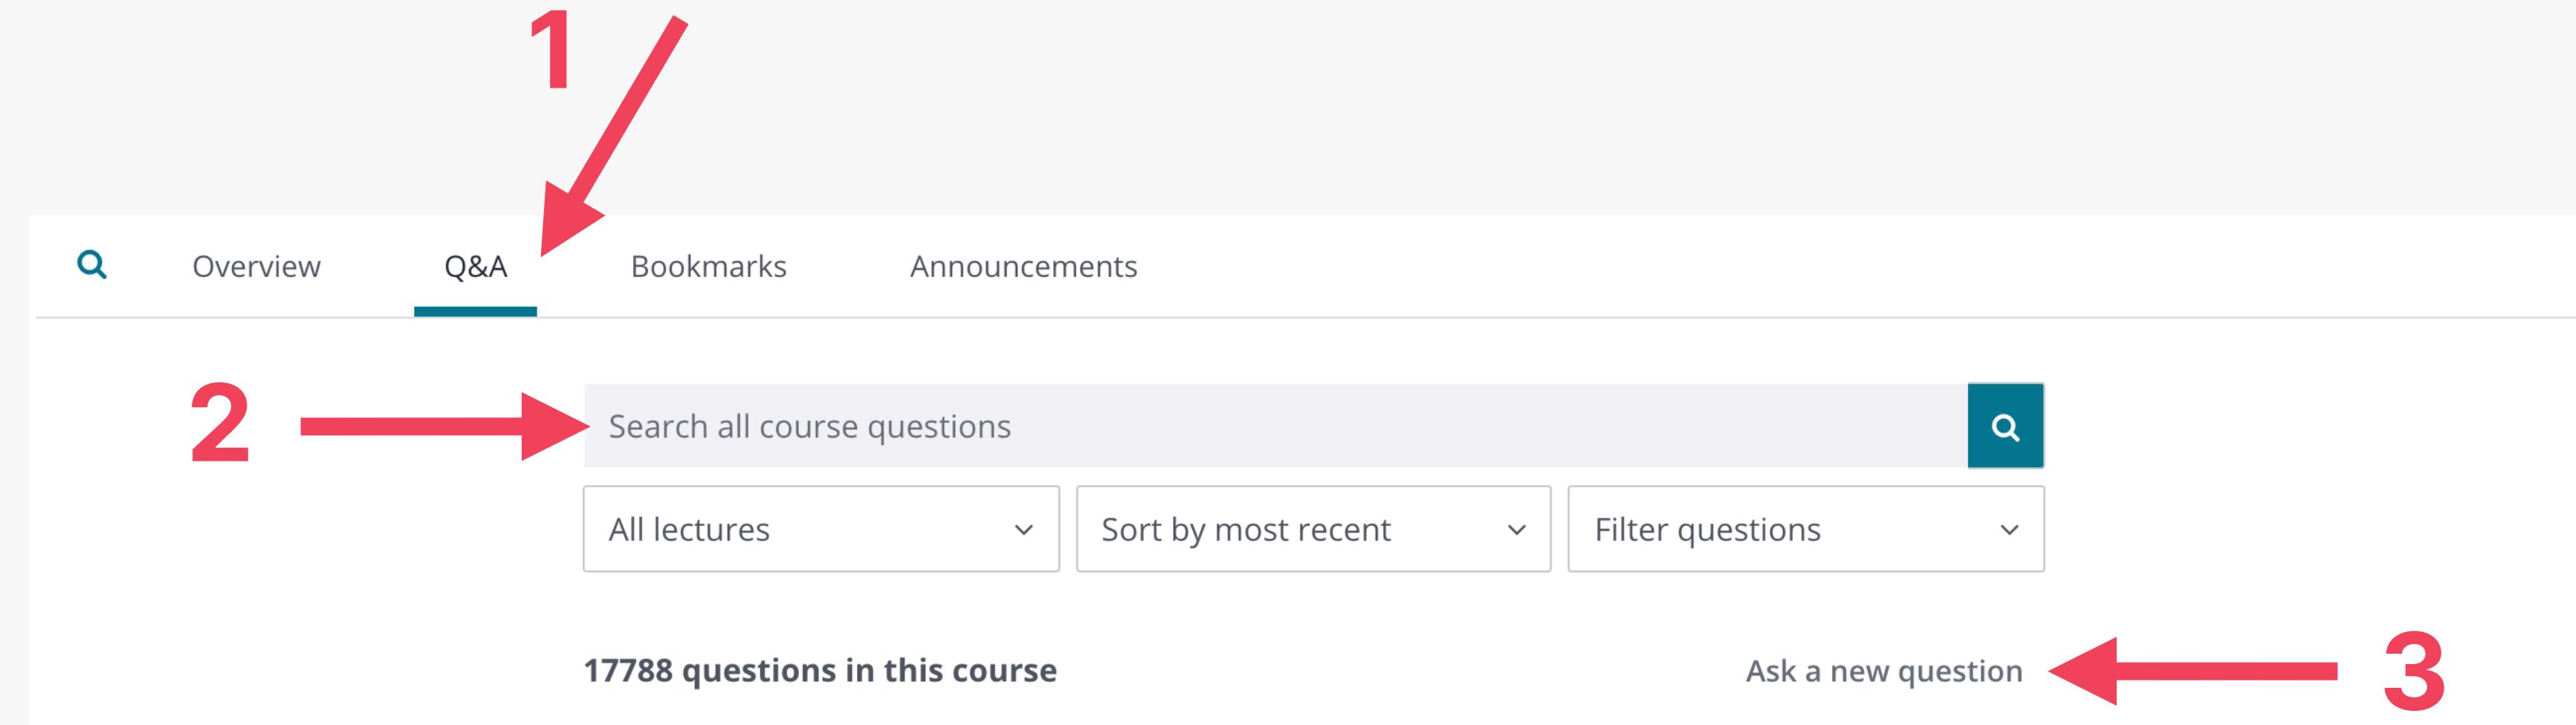


A screenshot of a course's Q&A section. At the top, there are navigation links: Overview, Q&A (which is underlined in blue), Bookmarks, and Announcements. Below this is a search bar with the placeholder "Search all course questions" and a magnifying glass icon. Underneath the search bar are three dropdown filters: "All lectures", "Sort by most recent", and "Filter questions". At the bottom left, it says "17788 questions in this course". On the bottom right, there is a button labeled "Ask a new question". Three red numbers with arrows point to specific elements: "1" points to the "Q&A" link, "2" points to the search bar, and "3" points to the "Ask a new question" button.

SOME QUICK CONSIDERATIONS BEFORE WE START...



Before moving on from a section, make sure that you understand exactly what was covered. Take a break, review the code we wrote, review your notes, review the projects we built, and maybe even write some code yourself

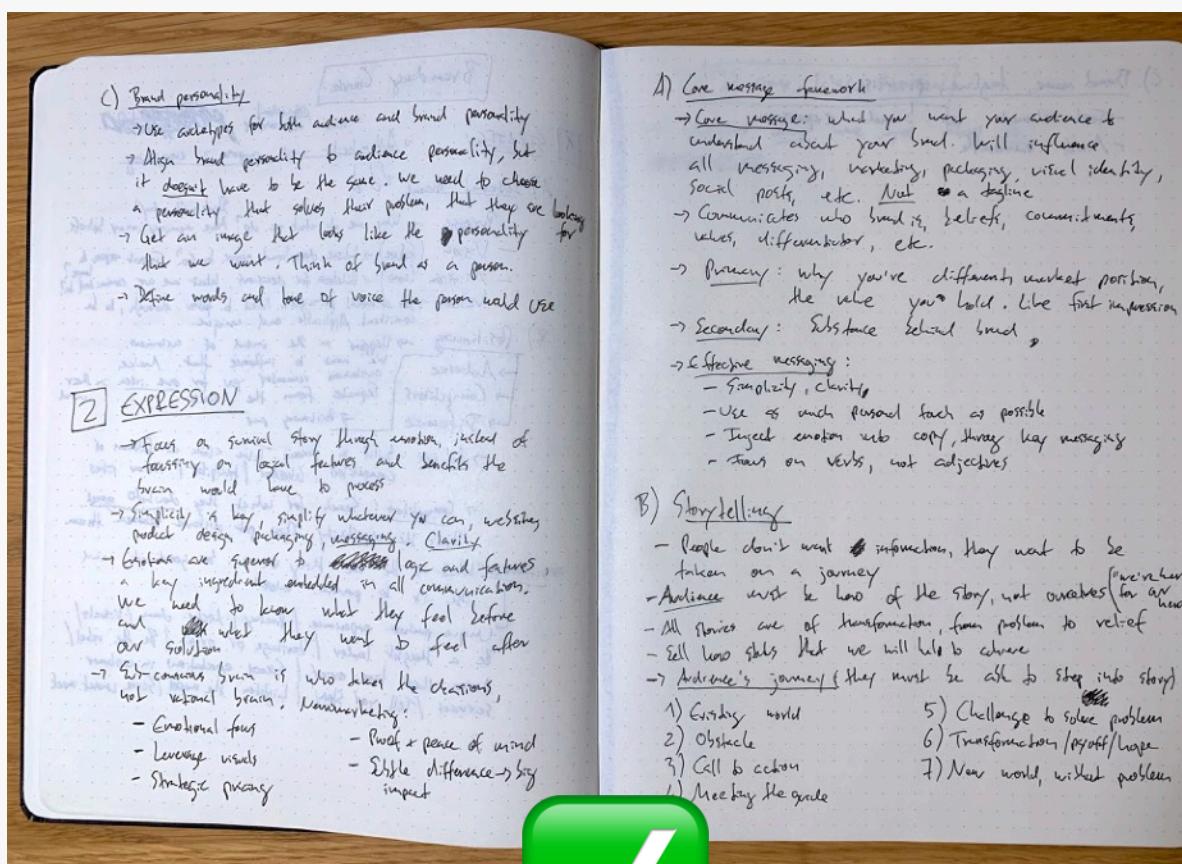

```
function Item({ item, onToggleItem, onDeleteItem }) {
  return (
    <li>
      <input
        type='checkbox'
        value={item.packed}
        onChange={() => onToggleItem(item.id)}
      />
      <span style={{ textDecoration: item.packed ? 'line-through' : '' }}>
        {item.quantity} {item.description}
      </span>
      <button onClick={() => onDeleteItem(item.id)}>X</button>
    </li>
  );
}

function Stats({ items }) {
  if (!items.length)
    return (
      <p className='stats'>
        <em>Start adding some items to your packing list!</em>
      </p>
    );
}
```





SOME QUICK CONSIDERATIONS BEFORE WE START...



I recorded this course on a Mac, but everything works the exact same way on Windows or Linux.

If something doesn't work on your computer, it's NOT because you're using a different OS

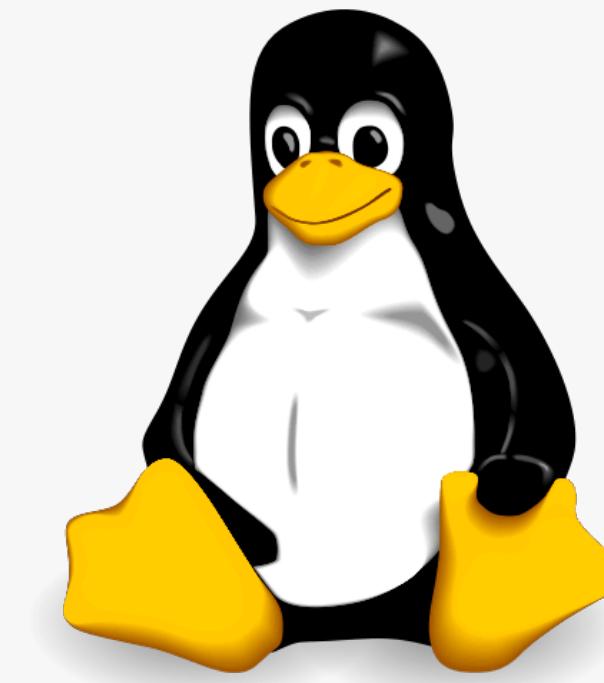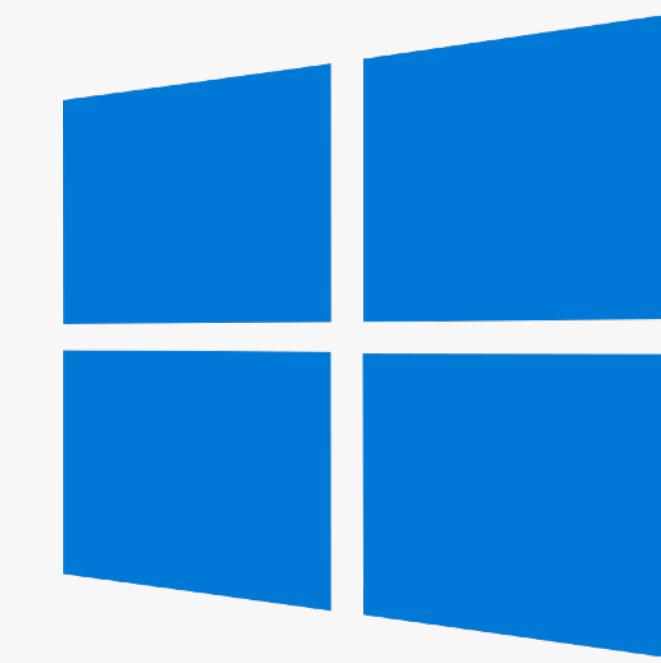

SOME QUICK CONSIDERATIONS BEFORE WE START...

😍 Most importantly, have fun! It's so rewarding to see an app come to life that YOU have built YOURSELF!
So if you're feeling frustrated, stop whatever you're doing, and come back later!



And I mean REAL fun 😁

PART 01

REACT FUNDAMENTALS

A FIRST LOOK AT REACT



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

A FIRST LOOK AT REACT

LECTURE

WHY DO FRONT-END
FRAMEWORKS EXIST?

THE RISE OF SINGLE-PAGE APPLICATIONS

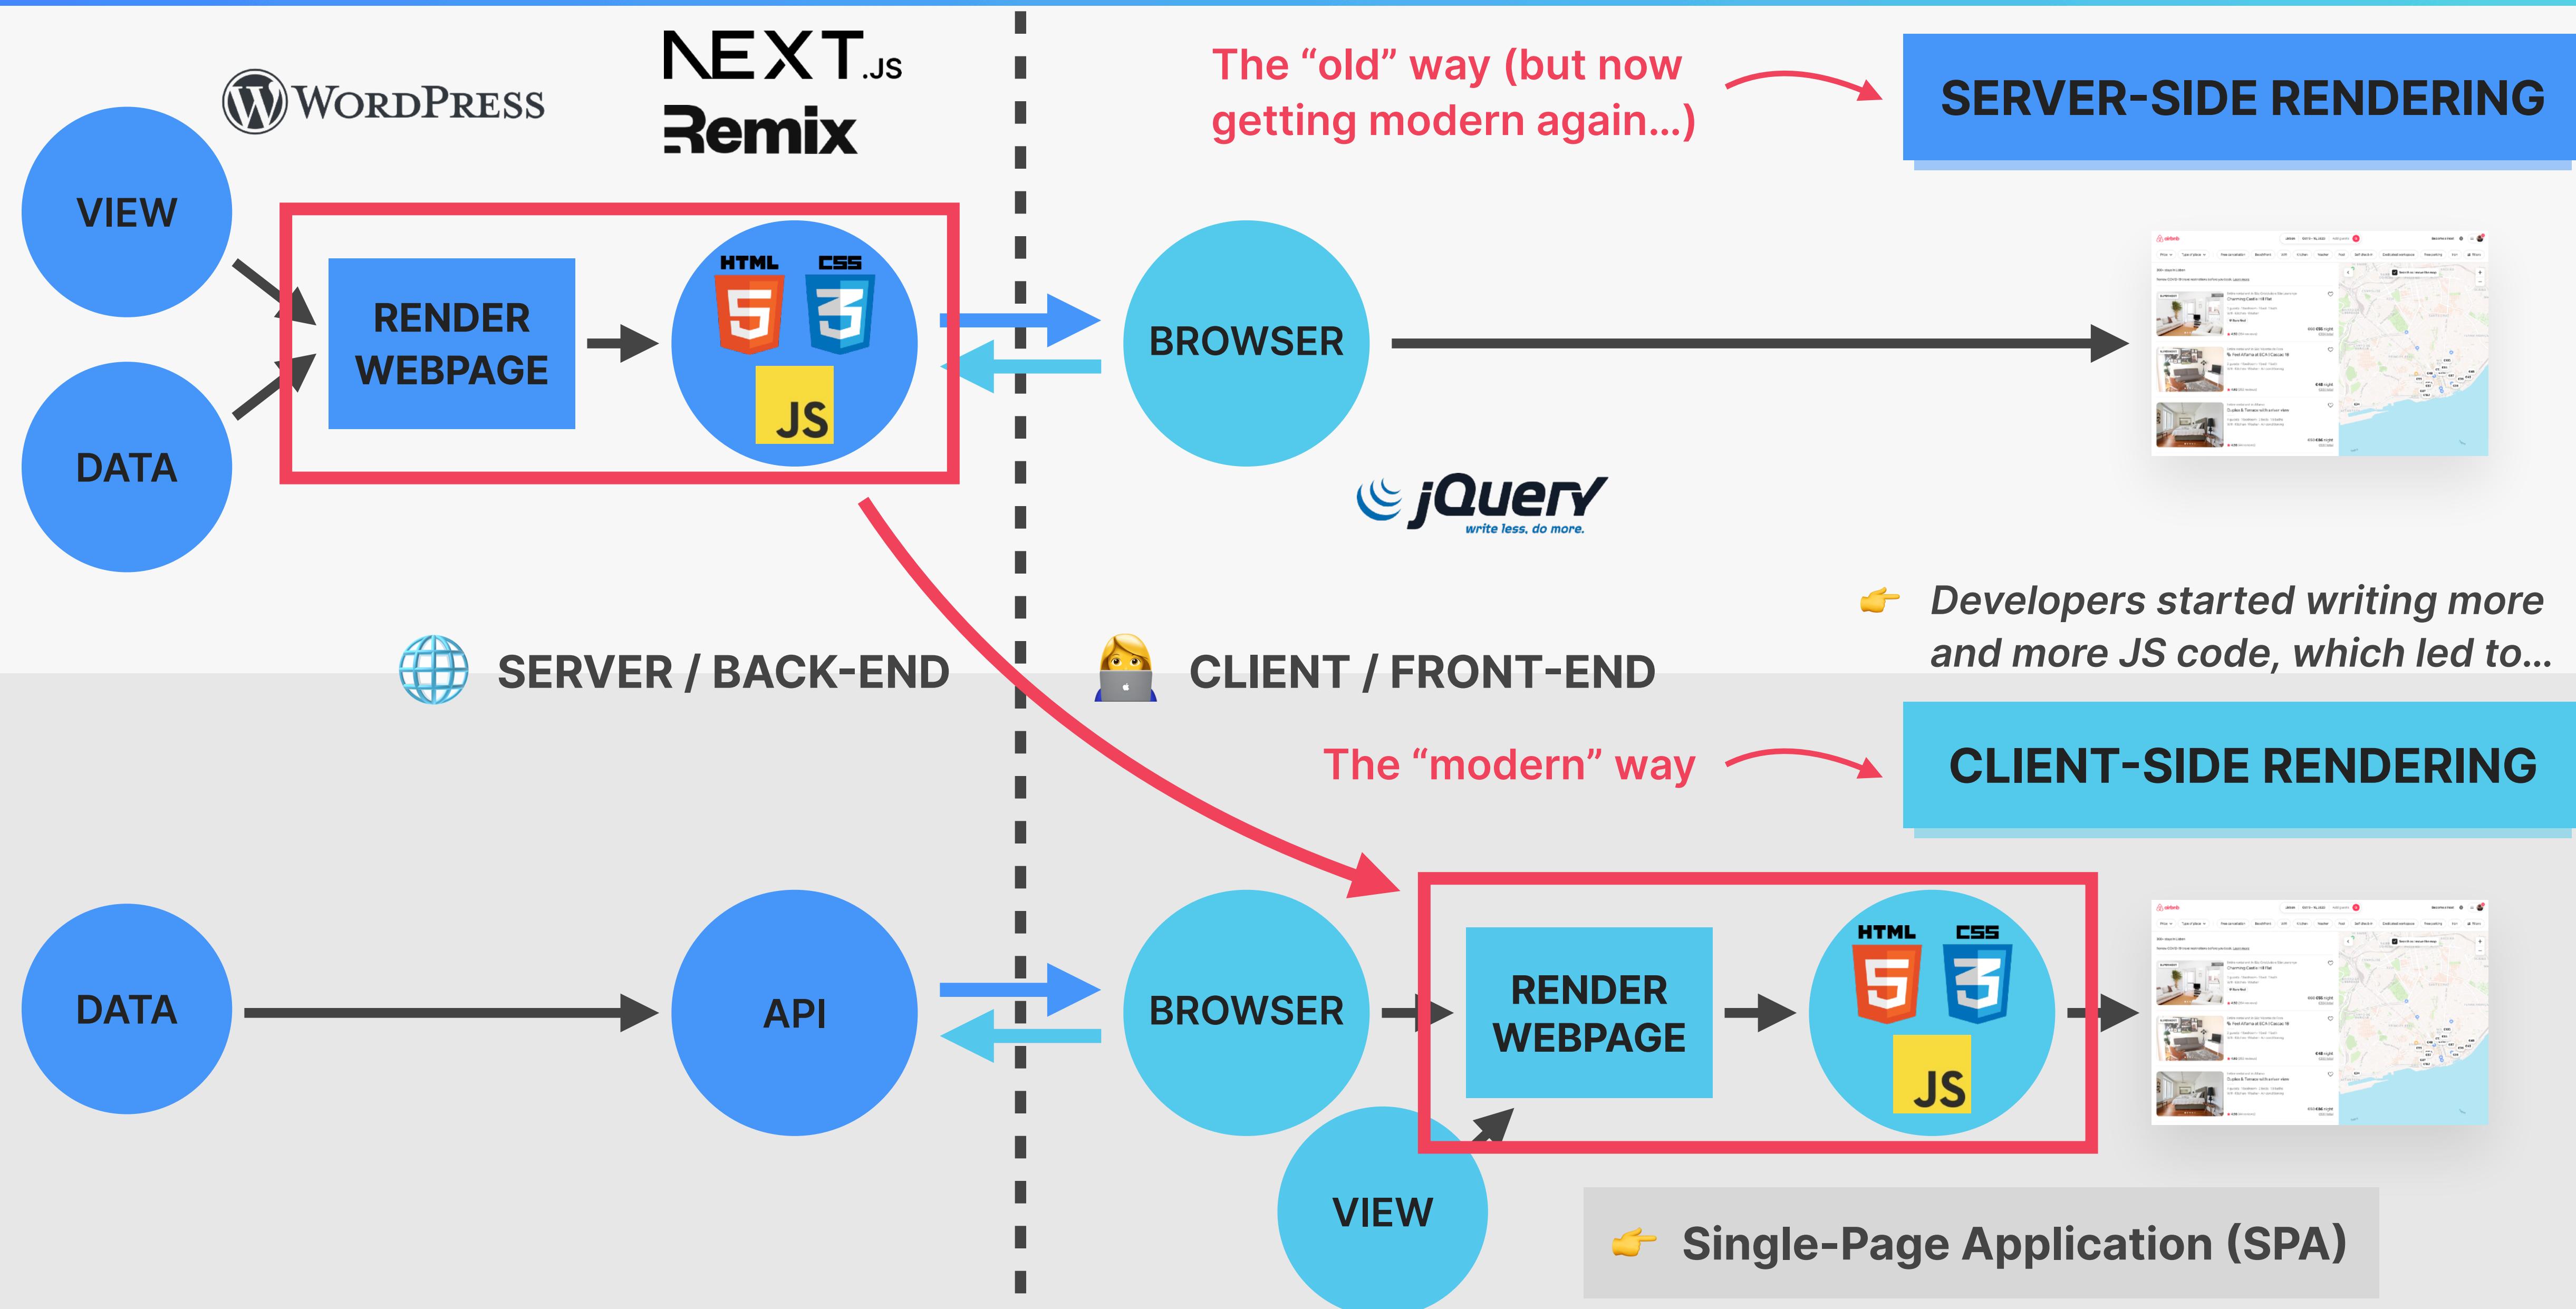


SINGLE-PAGE APPLICATIONS WITH VANILLA JAVASCRIPT?

👉 *Front-end web applications are all about...*

**Handling data + displaying
data in a user interface**





User interface needs to
stay in sync with data

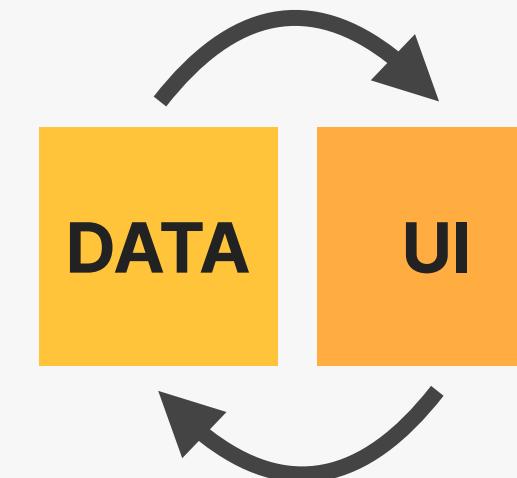

Very hard problem to solve!

KEEPING UI IN SYNC WITH DATA

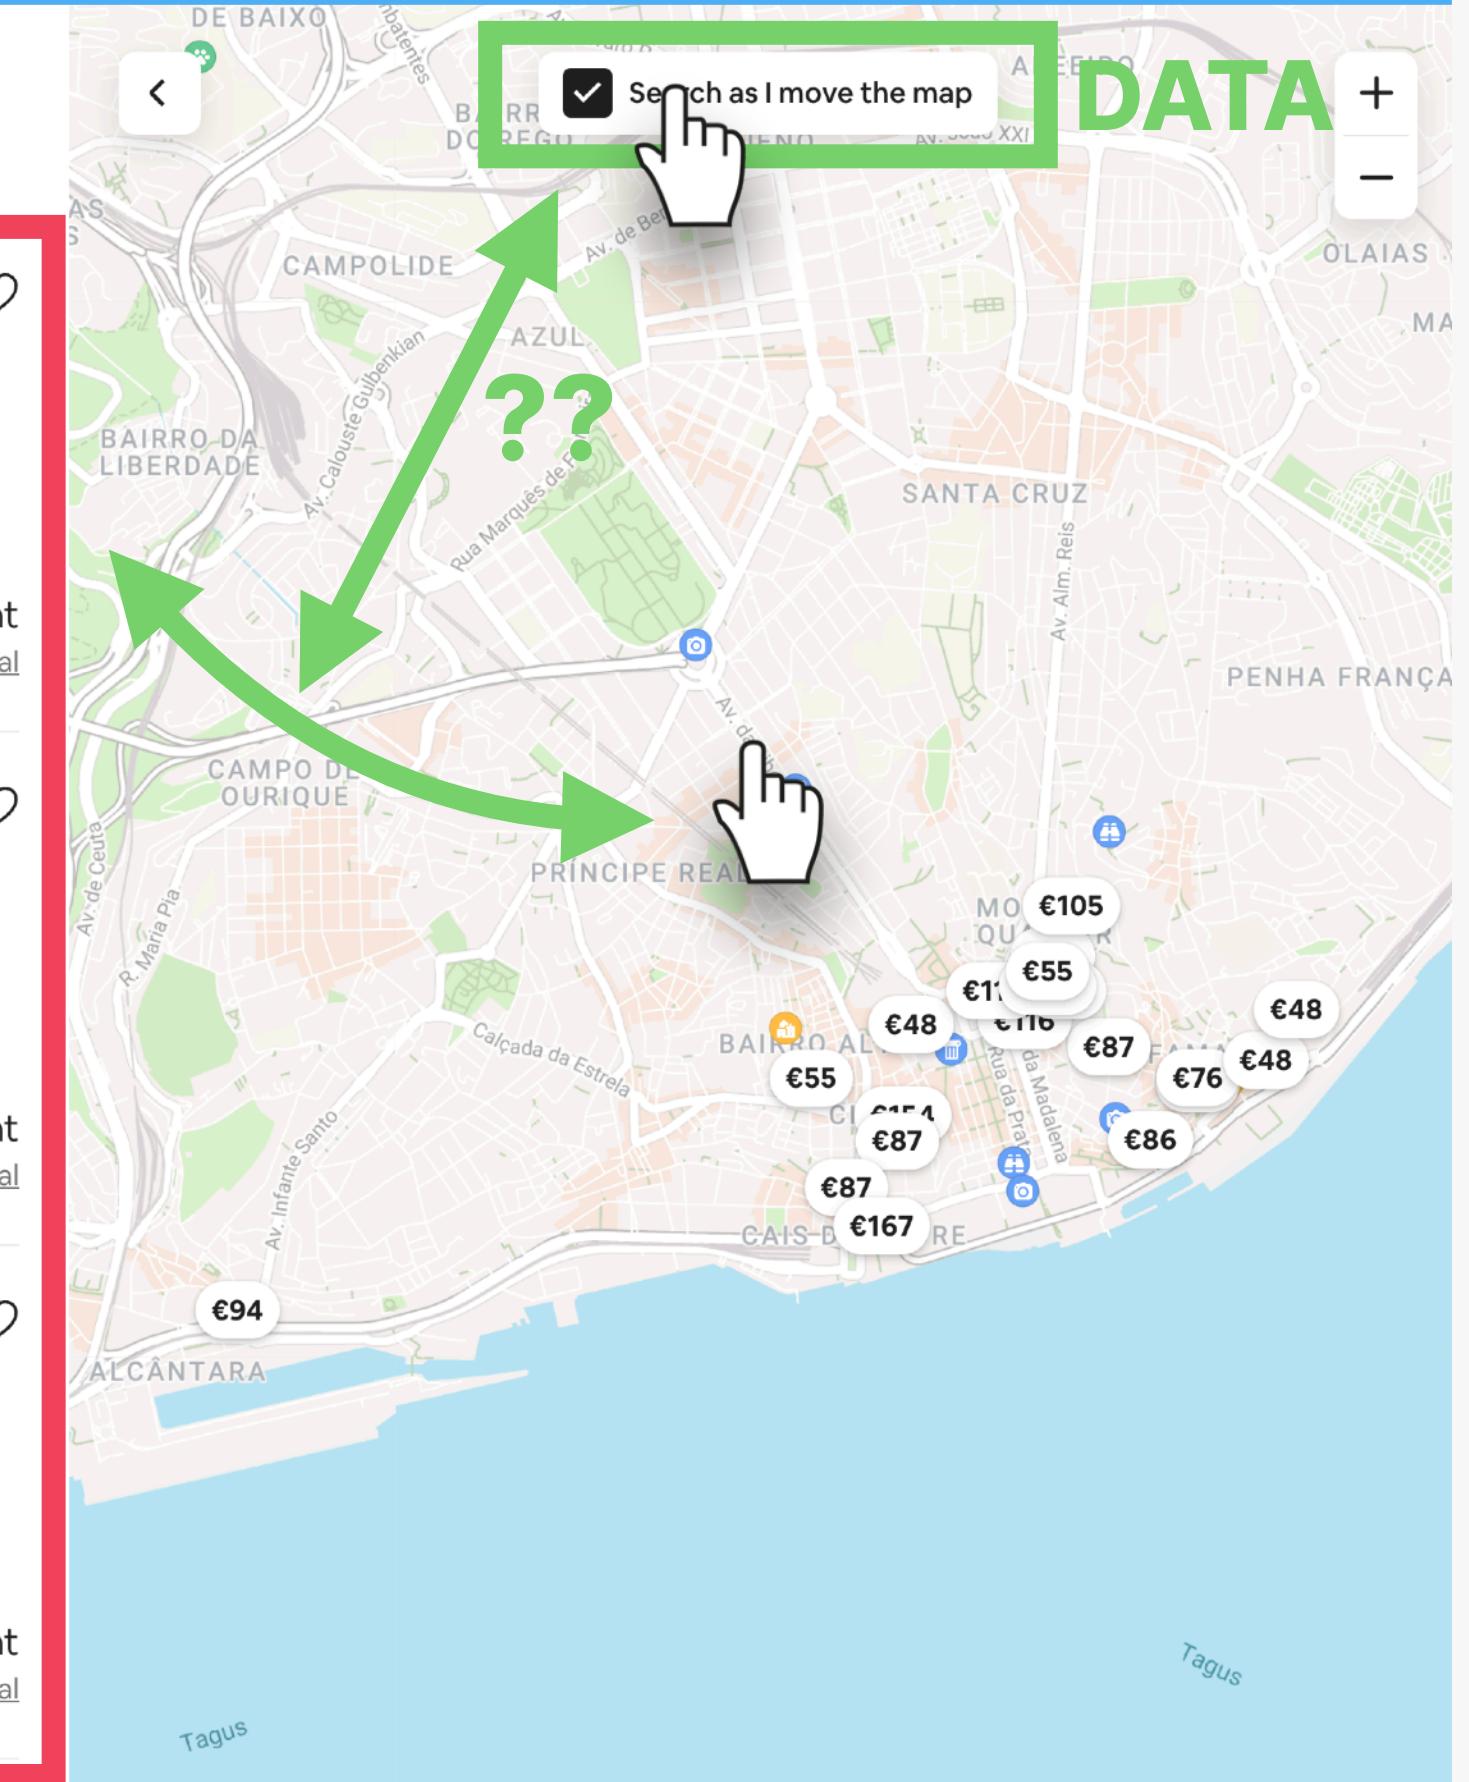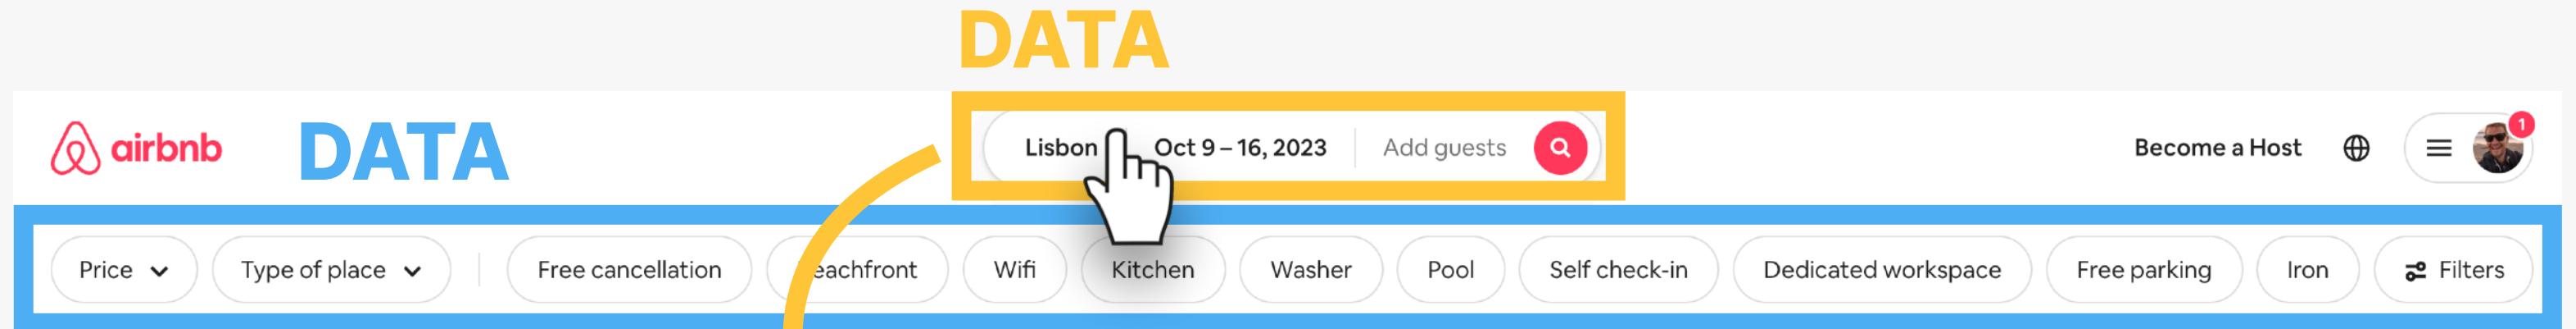

The image shows the Airbnb search interface and listing details page. A yellow arrow points from the search bar to the word 'DATA'. Another green arrow points from the search bar to the word 'DATA' on the map view.

👉 Keeping UI
and data in sync
would be virtually
impossible with
just vanilla
JavaScript

Piece of data
=
Piece of state

```
const data = {  
  currency: {  
    currencyCountries: [],  
    currencySelectorExpanded: false,  
    selectedCurrencyCode: 'EUR',  
    loadingCurrencies: false,  
  },  
  footer: {  
    footerExpanded: false,  
  },  
  map: {  
    hoveredListingId: null,  
    hoveredDestinationPlaceId: null,  
    clickedListingId: null,  
    expandMapToItLocations: null,  
  },  
  saveToListModal: {  
    entity: null,  
    entityId: null,  
    entityType: null,  
    fetchListsError: false,  
    isCreatingList: false,  
    isFetchingLists: false,  
    isListsCacheValid: true,  
    entityMap: {  
      'listing-36109352': {},  
      'listing-34888453': {},  
      'listing-13357289': {},  
      'listing-29842619': {},  
      'listing-21693919': {},  
      'listing-44308963': {},  
      'listing-45085968': {},  
    },  
    lastError: null,  
    lastListSavedTo: null,  
    lastListSavedToOperation: null,  
    lists: {  
      id: 870054853,  
      name: 'Bons',  
      listing_ids: [  
        36109352, 34888453, 13357289, 29842619, 21693919, 44308963, 45085968,  
      ],  
      mt_template_ids: [],  
      place_activity_ids: [],  
      place_ids: [],  
      article_ids: [],  
      mt_scheduled_template_ids: [],  
      is_china_wishlist_home_collection: false,  
      settings_disabled: false,  
      airbnb_canonical_place_ids: [],  
      listing_id_str: [  
        '36109352',  
        '34888453',  
        '13357289',  
        '29842619',  
        '21693919',  
        '44308963',  
        '45085968',  
      ],  
      newListName: null,  
      newTask: {  
        actionText: '',  
        listRef: null,  
        message: null,  
      },  
      requiresSignup: false,  
      savingFrom: null,  
      visible: false,  
    },  
    ui: {  
      hideMap: true,  
      openedFilterId: null,  
      openedSearchInputField: null,  
      shouldLoadInterceptSurvey: false,  
      visiblePromos: {},  
    },  
    header: {  
      user: {  
        isLoggedIn: true,  
        profilePicUrl: 'https://a.muscache.com/im/pictures/user/9ed27941-a4f0-4c5e-b347-959a7f',  
        name: 'Jonas',  
        currency: 'EUR',  
        isHost: false,  
        guidebooksCount: 0,  
      },  
      dynamicColorTheme: null,  
      activeNavigationItem: null,  
      navigationItemsWithNotifications: 0,  
      flyoutMenuIsOpen: false,  
    },  
};
```

SINGLE-PAGE APPLICATIONS WITH VANILLA JAVASCRIPT?

👉 *Front-end web applications are all about...*


**Handling data + displaying
data in a user interface**



User interface needs to
stay in sync with data



Very hard problem to solve!

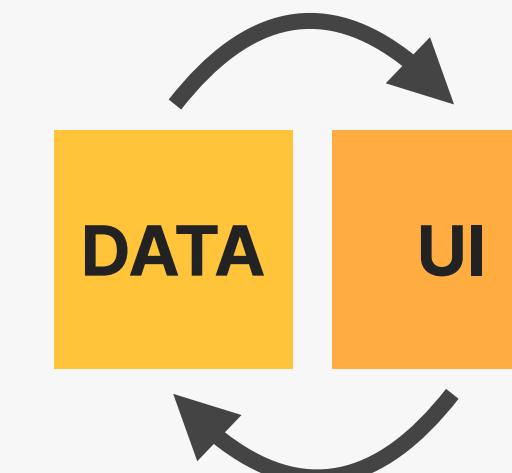

PROBLEMS WITH



1

Requires lots of direct DOM manipulation and
traversing (*imperative*) ➡ “Spaghetti code” 🍝

```
const guestsEl = document.querySelector('.guests');
const guestsPickerEl = document.querySelector('.picker');

guestsEl.addEventListener('click', function () {
    guestsEl.classList.toggle('inactive');
    guestsEl.classList.toggle('active');

    if (guestsPickerEl.style.display === 'block') {
        guestsPickerEl.style.display = 'none';
        guestsEl.firstElementChild.textContent = 'Add guests';
    } else {
        guestsPickerEl.style.display = 'block';
        guestsEl.firstElementChild.textContent = '';
    }
})
```

2


Data (state) is usually **stored in the DOM**, shared
across entire app ➡ Hard to reason + bugs 🐛

WHY DO FRONT-END FRAMEWORKS EXIST?


1

JavaScript front-end frameworks exist because...

KEEPING A USER INTERFACE IN SYNC WITH DATA
IS REALLY HARD AND A LOT OF WORK

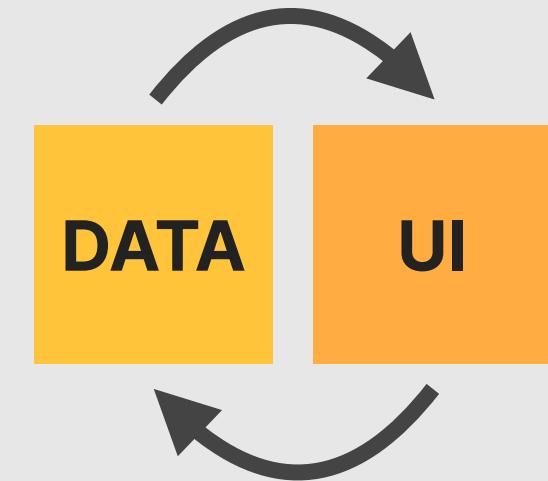

Front-end frameworks **solve this problem** and take hard work away from developers 🎉

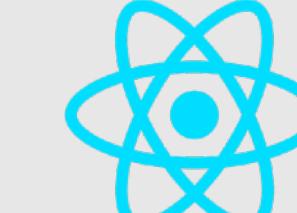

←

Different approaches, same goal

2

They enforce a “correct” way of structuring and writing code (therefore contributing to solving the problem of “spaghetti code” 🍝)

3

They give developers and teams a **consistent** way of building front-end applications



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

A FIRST LOOK AT REACT


LECTURE

WHAT IS REACT?

WHAT IS REACT?

REACT


JAVASCRIPT LIBRARY FOR BUILDING
USER INTERFACES

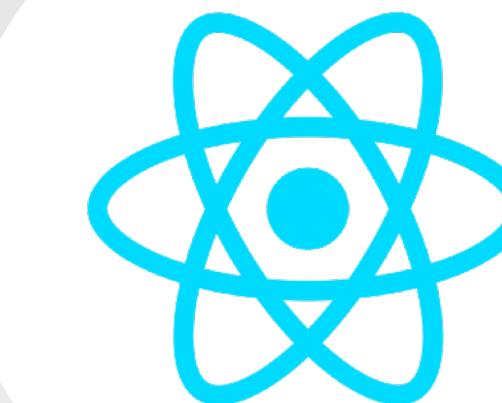

WHAT IS REACT?

REACT

EXTREMELY POPULAR DECLARATIVE,
COMPONENT-BASED STATE-DRIVEN JAVASCRIPT
LIBRARY FOR BUILDING USER INTERFACES,
CREATED BY FACEBOOK

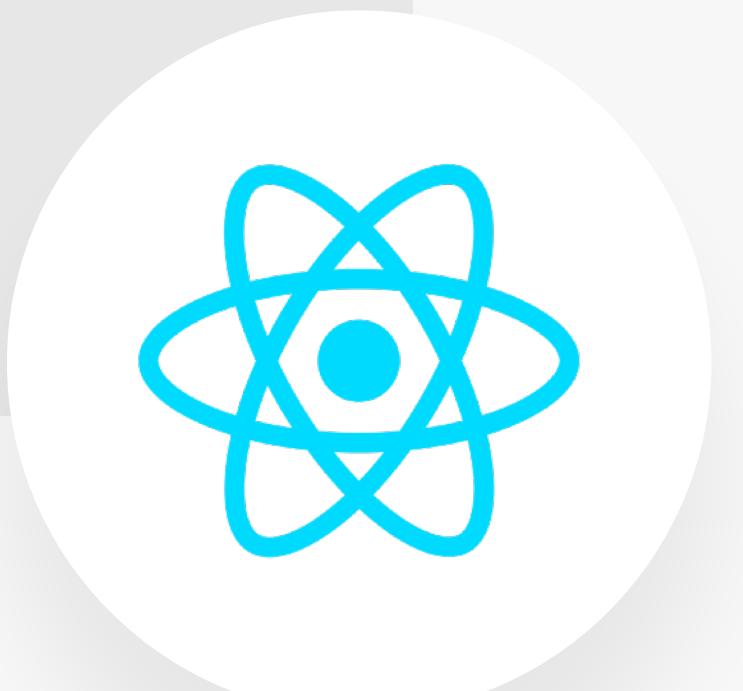

REACT IS BASED ON COMPONENTS

Based on components

Declarative


State-driven

JavaScript library


Extremely popular

Created by facebook

👉 Components are the **building blocks** of user interfaces in React

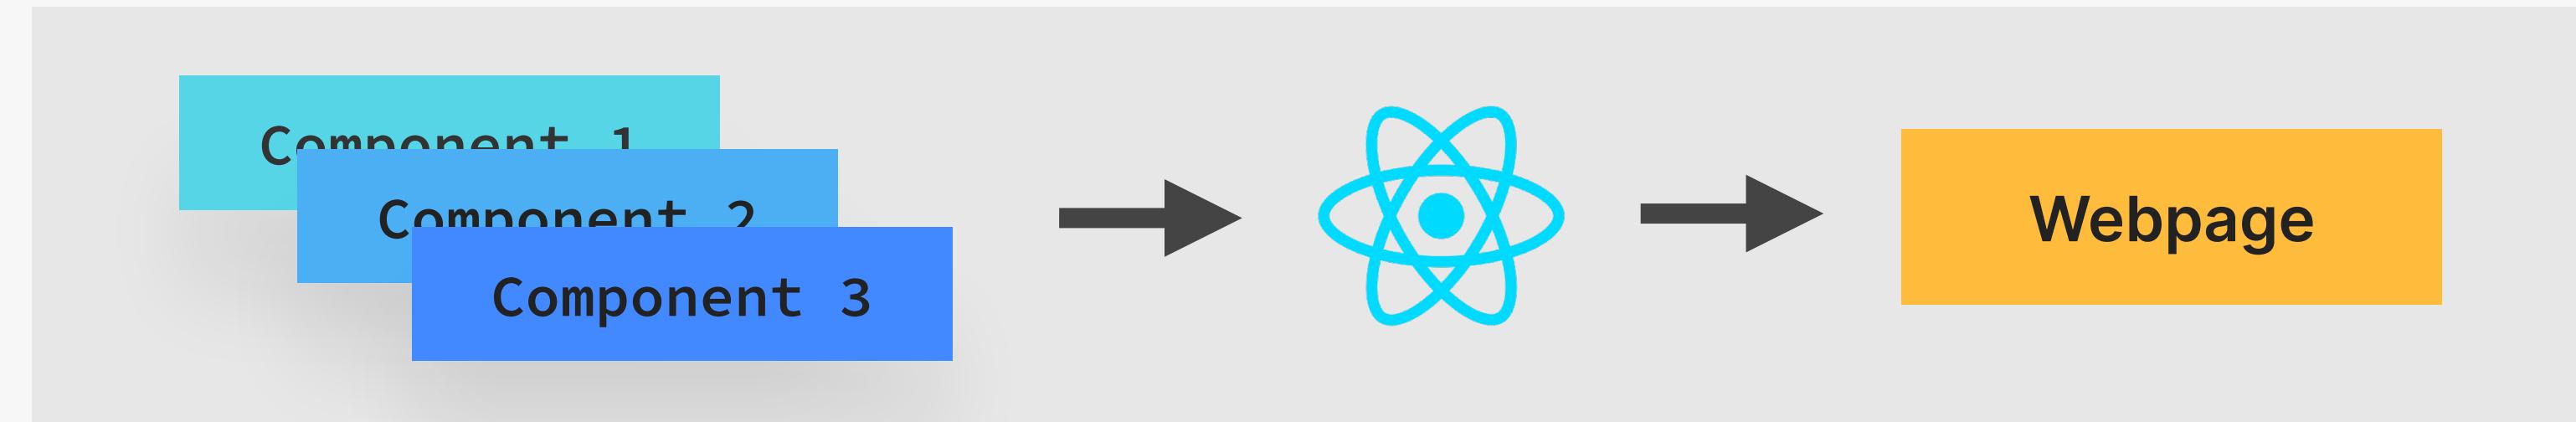

👉 We build complex UIs by **building and combining multiple components**

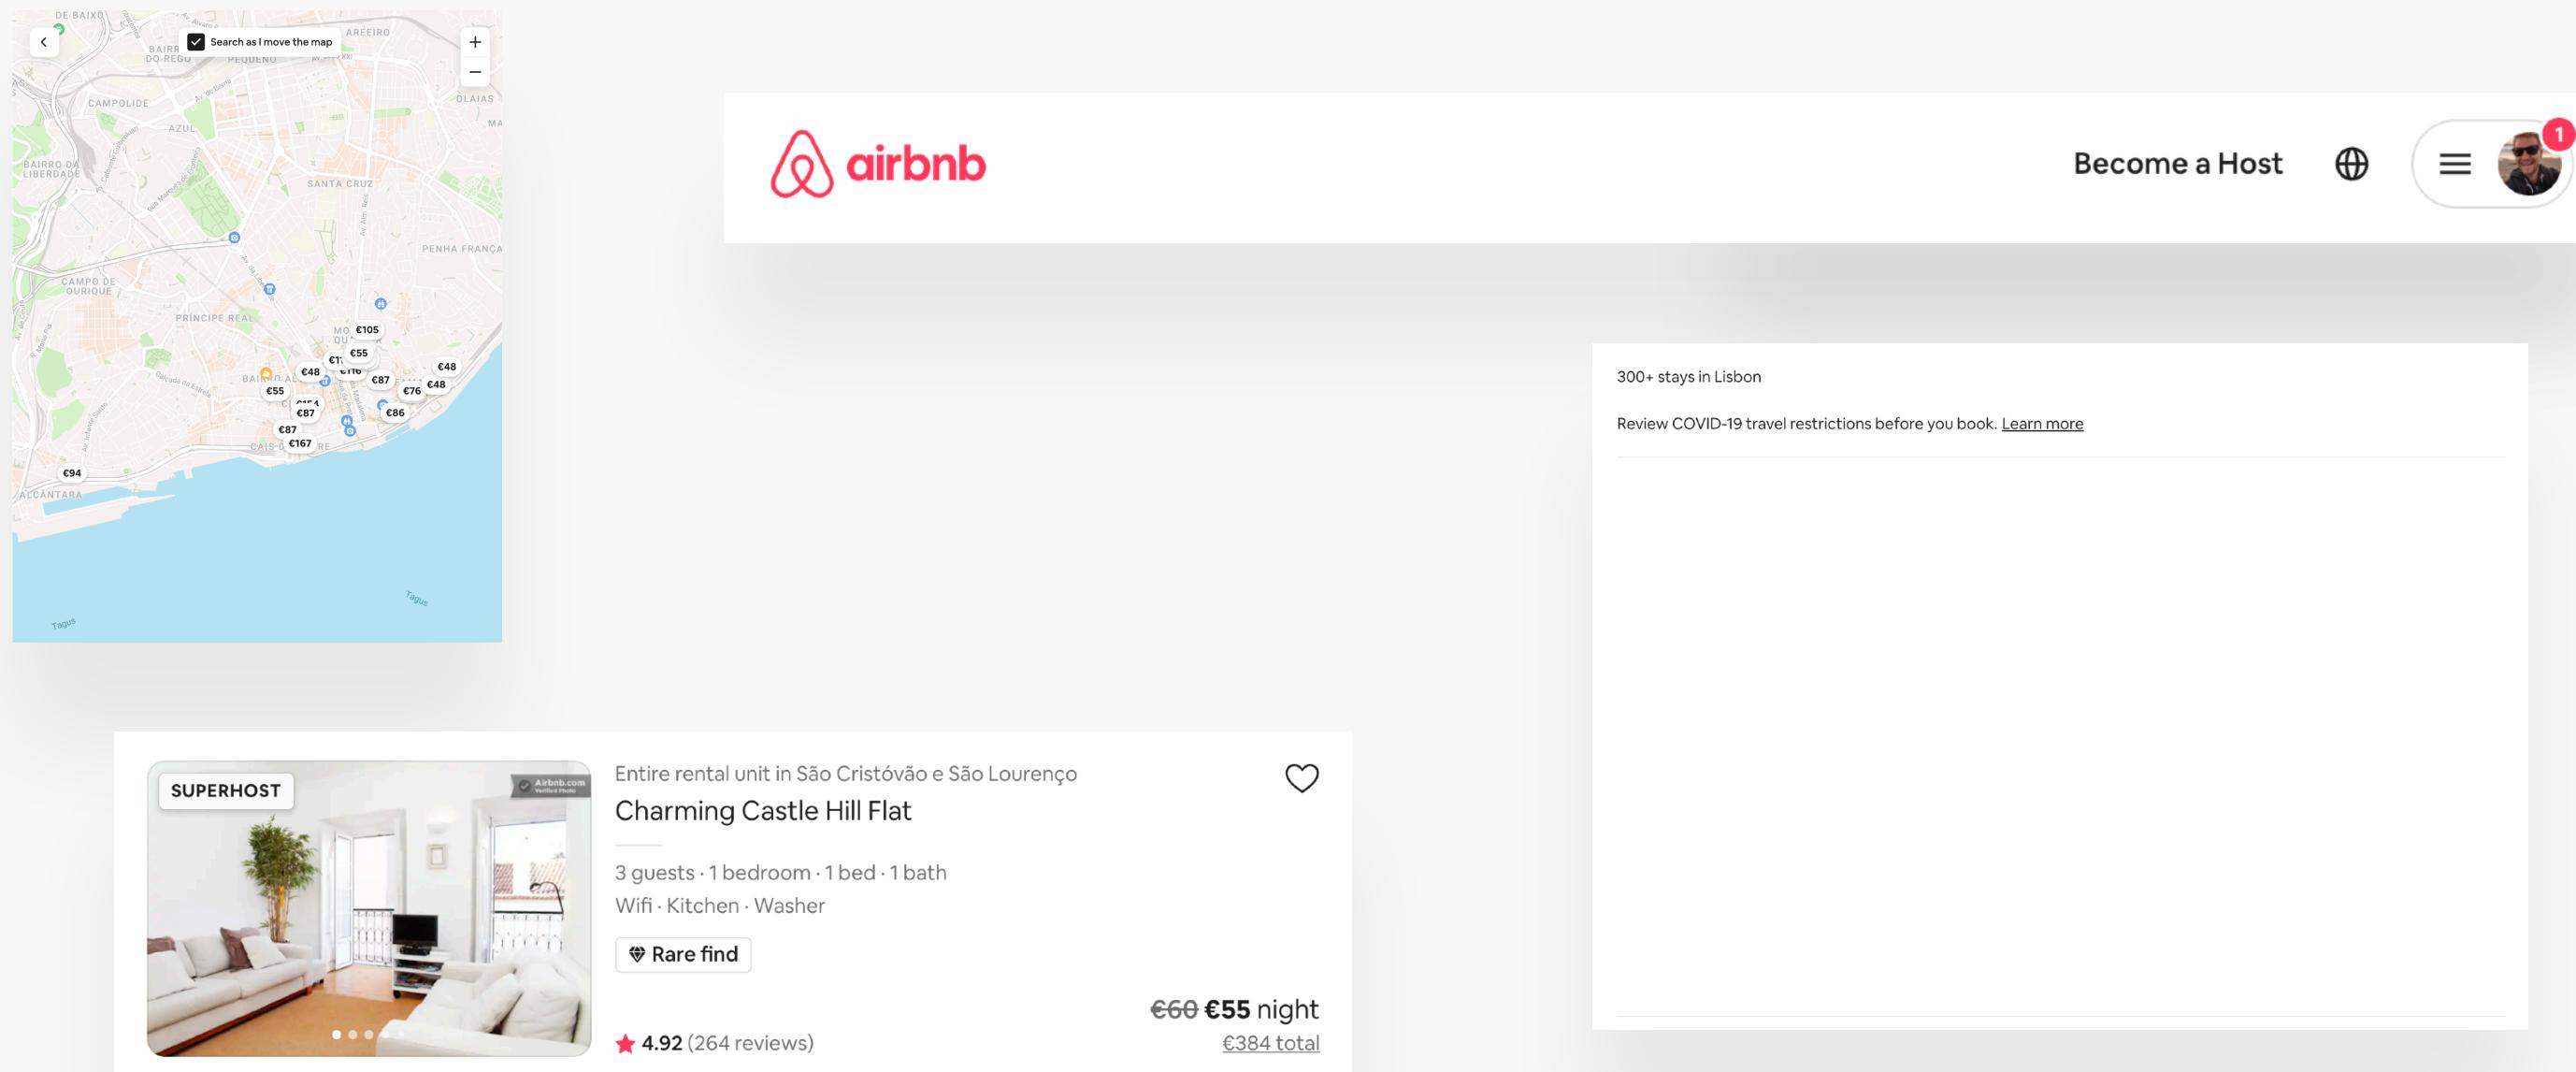

REACT IS BASED ON COMPONENTS

Based on components

Declarative

State-driven

JavaScript library

Extremely popular

Created by facebook

The screenshot shows the Airbnb search interface. At the top, there's a red header bar with the Airbnb logo, a 'NavBar' section, and search filters for 'Lisbon', 'Oct 9–16, 2023', 'Add guests', and a search icon. To the right are links for 'Become a Host', a profile icon with a notification count of 1, and a menu icon.

The main area is titled 'Results' and displays three listing cards:

- Listing 1:** Charming Castle Hill Flat, São Cristóvão e São Lourenço. It's a SUPERHOST listing with a rare find badge. It sleeps 3 guests in 1 bedroom (1 bed) and 1 bathroom. It includes WiFi, Kitchen, and Washer. It costs €60 per night for a total of €384. It has a 4.92 rating from 264 reviews.
- Listing 2:** Feel Alfama at BCA | Cascao 18, São Vicente de Fora. It's a SUPERHOST listing. It sleeps 2 guests in 1 bedroom (1 bed) and 1 bathroom. It includes WiFi, Kitchen, Washer, and Air conditioning. It costs €48 per night for a total of €333. It has a 4.92 rating from 252 reviews.
- Listing 3:** Entire rental unit in Alfama. It's a SUPERHOST listing. It sleeps 4 guests in 1 bedroom (2 beds) and 1.5 bathrooms. It includes WiFi, Kitchen, Washer, and Air conditioning. It costs €93 per night for a total of €597. It has a 4.98 rating from 44 reviews.

To the right of the listings is a map of Lisbon showing price ranges for different neighborhoods. The map is overlaid with colored circles indicating price levels, with labels like €105, €55, €48, etc., scattered across the city. The Tagus River is visible at the bottom right.

REACT IS DECLARATIVE

Based on components

Declarative

State-driven

JavaScript library

Extremely popular


Created by facebook

- 👉 We describe how components look like and how they work using a **declarative syntax called JSX**
- 👉 **Declarative:** telling React what a component should look like, **based on current data/state**
- 👉 React is **abstraction** away from DOM: we **never touch the DOM**
- 👉 JSX: a syntax that **combines** **HTML** **CSS** **JavaScript** as well as referencing **other components**

JSX returned from a component

```
return (
  <main>
    <NavBar>
      <h1 style={{ fontSize: '3.2rem' }}>AirBnB</h1>
      <Search />
      <a href="#">Become a host</a>
    </NavBar>
    <Results>
      <p style={{ fontSize: '1.6rem', margin: '1.2rem' }}>
        {numListings} stays in Lisbon
      </p>
      <Listing listing={listings[0]} />
      <Listing listing={listings[1]} />
      <Listing listing={listings[2]} />
    </Results>
    <Map listings={listings} onClick={moveMap} />
  </main>
);
```

REACT IS STATE-DRIVEN

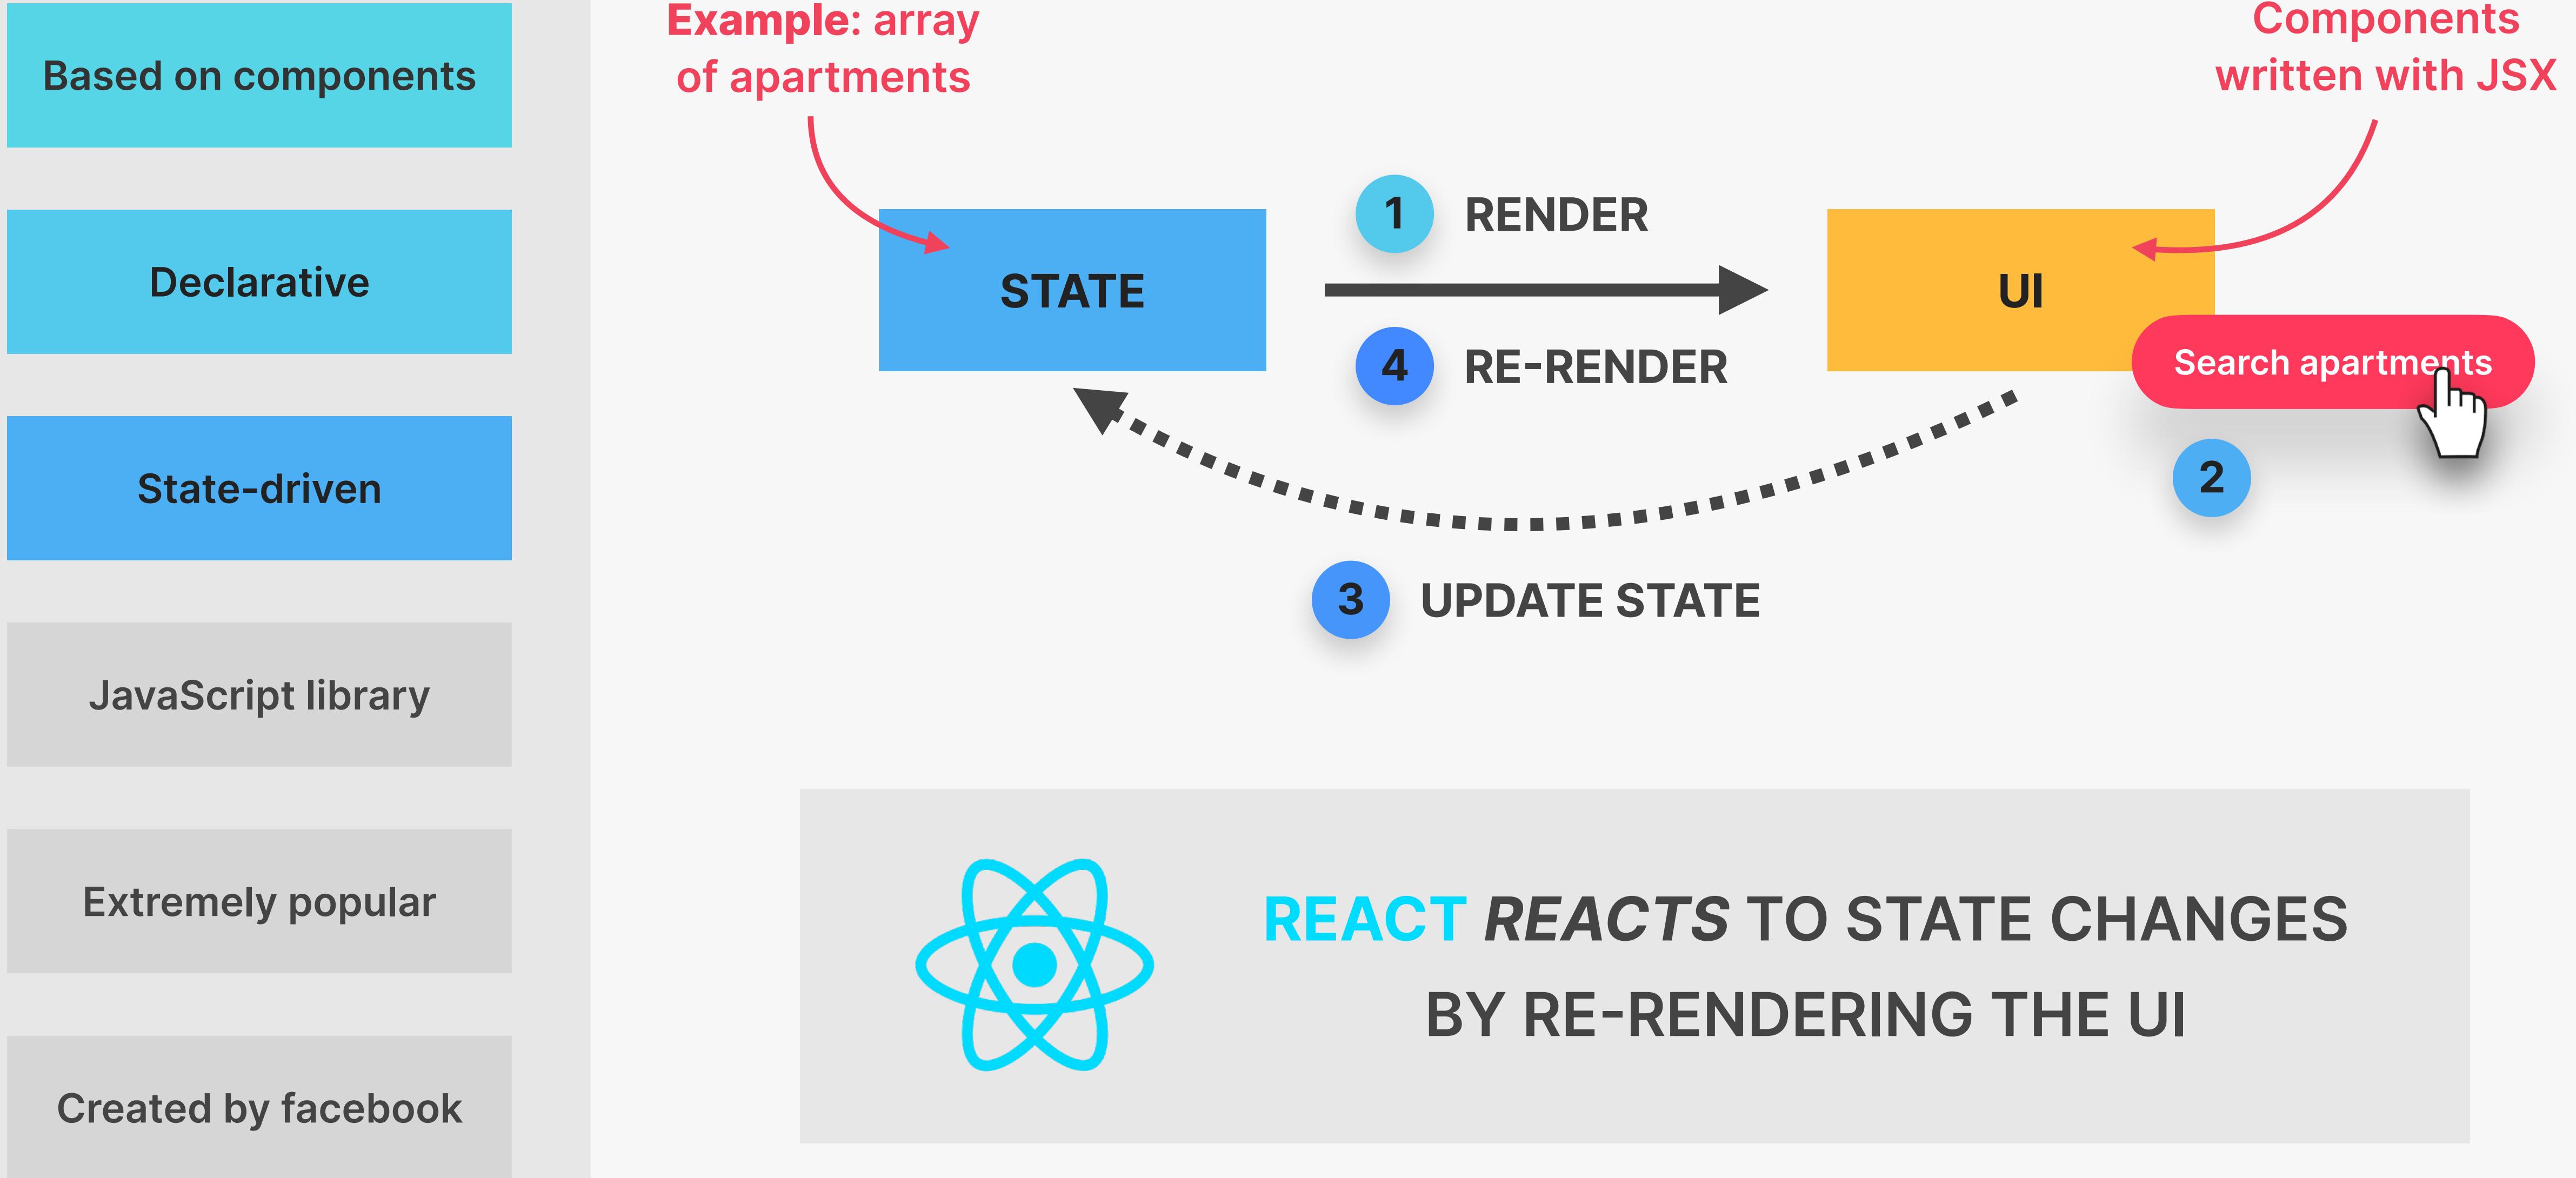

**REACT REACTS TO STATE CHANGES
BY RE-RENDERING THE UI**

REACT IS A JAVASCRIPT LIBRARY

Based on components

Declarative

State-driven

JavaScript library

Extremely popular

Created by facebook



Is React a **library** or a framework?



Because React is only the “view” layer. We need to pick multiple external libraries to build a complete application

NEXT.js Remix

Complete frameworks built on top of React

REACT IS EXTREMELY POPULAR

Based on components


Declarative

State-driven

JavaScript library

Extremely popular

Created by facebook

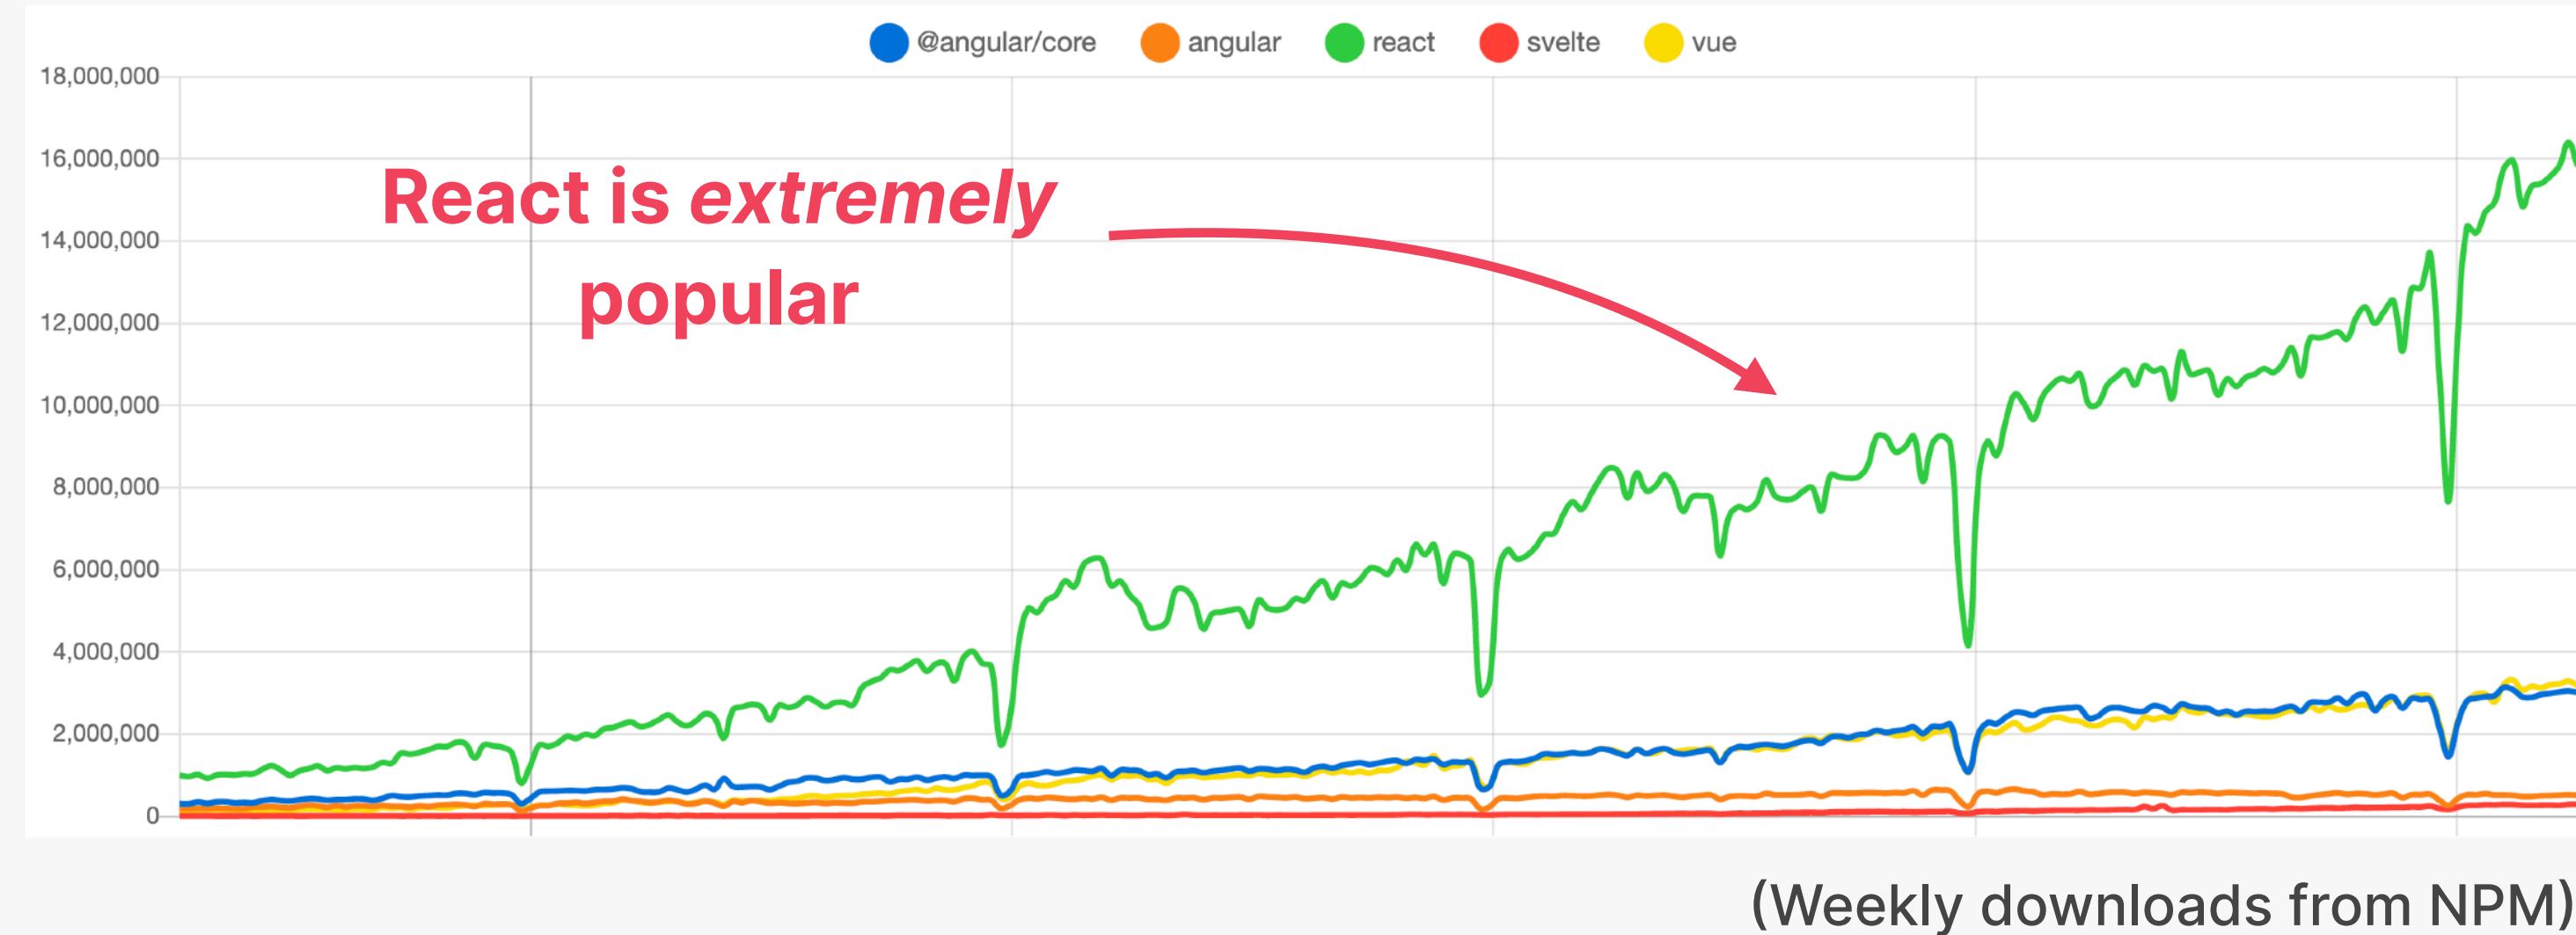

✓ Many large companies have adopted React



✓ Huge job market with high demand for React developers 💰

✓ Large and vibrant React developer community

✓ Gigantic third-party library ecosystem

REACT WAS CREATED BY FACEBOOK

Based on components

Declarative

State-driven

JavaScript library

Extremely popular

Created by facebook



- 👉 React was created in 2011 by Jordan Walke, an engineer working at Facebook at the time
- 👉 React was open-sourced in 2013, and has since then completely transformed front-end web development

facebook

Meta




SUMMARY

1

Rendering components on a webpage (UI) based on their current state

2

Keeping the UI in sync with state, by re-rendering (*reacting*) when state changes

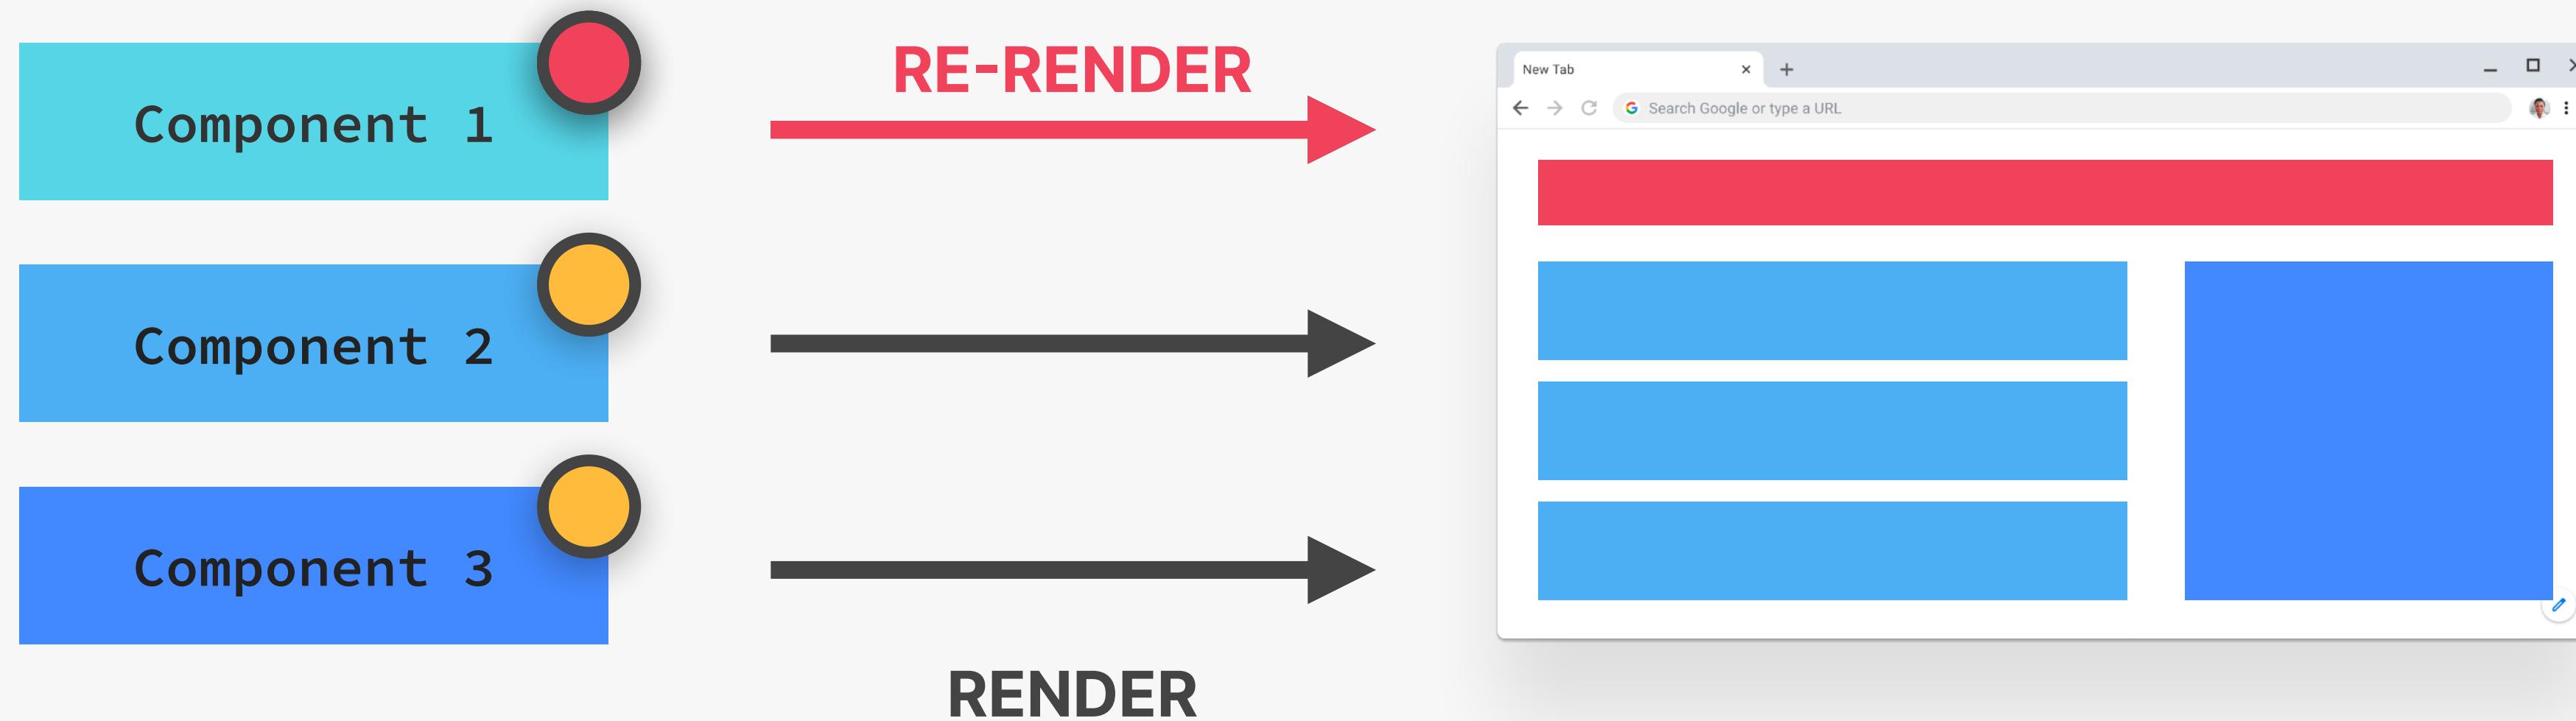



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

A FIRST LOOK AT REACT

LECTURE

SETTING UP A NEW REACT
PROJECT: THE TWO OPTIONS

THE TWO OPTIONS FOR SETTING UP A REACT PROJECT



CREATE-REACT-APP

- 👉 Complete “starter kit” for React applications
- 👉 Everything is already configured: ESLint, Prettier, Jest, etc.  ESLint  Prettier  Jest
- 👉 Uses slow and outdated technologies (i.e. webpack)



VITE

- 👉 Modern build tool that contains a template for setting up React applications
- 👉 Need to manually set up ESLint (and others)
- 👉 Extremely fast hot module replacement (HMR) and bundling



Most of the course

- ✓ Use for tutorials or experiments
- ✗ Don't use for a real-world app



By the end of the course

- ✓ Use for modern real-world apps

WHAT ABOUT REACT FRAMEWORKS?

NEXT.js

Remix

- 👉 The React team now advises to use a “**React Framework**” for new projects
- 👉 Many people think that this is not the best idea: “**vanilla**” React apps are important too!
- 👉 This only makes sense for building actual products, **not for learning React**
- 👉 Of course, you still need to **learn React itself**

✌️ Don’t worry about this recommendation for now. Let’s just learn React!

LEARN REACT > INSTALLATION >

👉 react.dev

Start a New React Project

If you want to build a new app or a new website fully with React, we recommend picking one of the React-powered frameworks popular in the community. Frameworks provide features that most apps and sites eventually need, including routing, data fetching, and generating HTML.

Production-grade React frameworks

Next.js

Next.js is a full-stack React framework. It’s versatile and lets you create React apps of any size—from a mostly static blog to a complex dynamic application. To create a new Next.js project, run in your terminal:

Terminal

```
npx create-next-app
```

Copy

If you’re new to Next.js, check out the [Next.js tutorial](#).

Next.js is maintained by [Vercel](#). You can [deploy a Next.js app](#) to any Node.js or serverless hosting, or to your own server. [Fully static Next.js apps](#) can be deployed to any static hosting.

Remix

Remix is a full-stack React framework with nested routing. It lets you break your app into nested parts that can load data in parallel and refresh in response to the user actions. To create a new Remix project, run:

WORKING WITH COMPONENTS, PROPS, AND JSX



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

WORKING WITH COMPONENTS,
PROPS, AND JSX

LECTURE

COMPONENTS AS BUILDING
BLOCKS

COMPONENTS AS BUILDING BLOCKS

COMPONENTS


- 👉 React applications are entirely made out of components
- 👉 Building blocks of user interfaces in React

The screenshot shows a portion of the Udemy website. At the top right, there's a search bar with the placeholder "Search for anything". Below it is a purple "Add to cart" button. To the left of the search bar is a "Filter questions" dropdown menu with three options: "Questions I'm following", "Questions I asked", and "Questions without responses", each with an unchecked checkbox. On the far right, there are icons for Udemy Business, Instructor, My learning, a heart, a shopping cart, a bell, and a user profile. In the center, there's a course card for "The Complete JavaScript Course 2022: From Zero to Expert!" by Jonas Schmedtmann. The card features a thumbnail of a laptop screen displaying code and a yellow "JS" logo, along with a small profile picture of the instructor. Below the thumbnail, the course title and author are listed, followed by a rating of 4.7 stars from 136,226 reviews and a price of €19.99. A "Bestseller" badge is at the bottom. To the right of the course card, there's a sidebar titled "Topic" with a list of categories: Web Development (694), PHP (665), React (576), and CSS (493). A "Show more" link is at the bottom of this sidebar.

COMPONENTS AS BUILDING BLOCKS

COMPONENTS

- 👉 React applications are entirely made out of components
- 👉 **Building blocks** of user interfaces in React
- 👉 Piece of UI that has its own **data, logic, and appearance** (*how it works and looks*)
- 👉 We build complex UIs by **building multiple components and combining them**

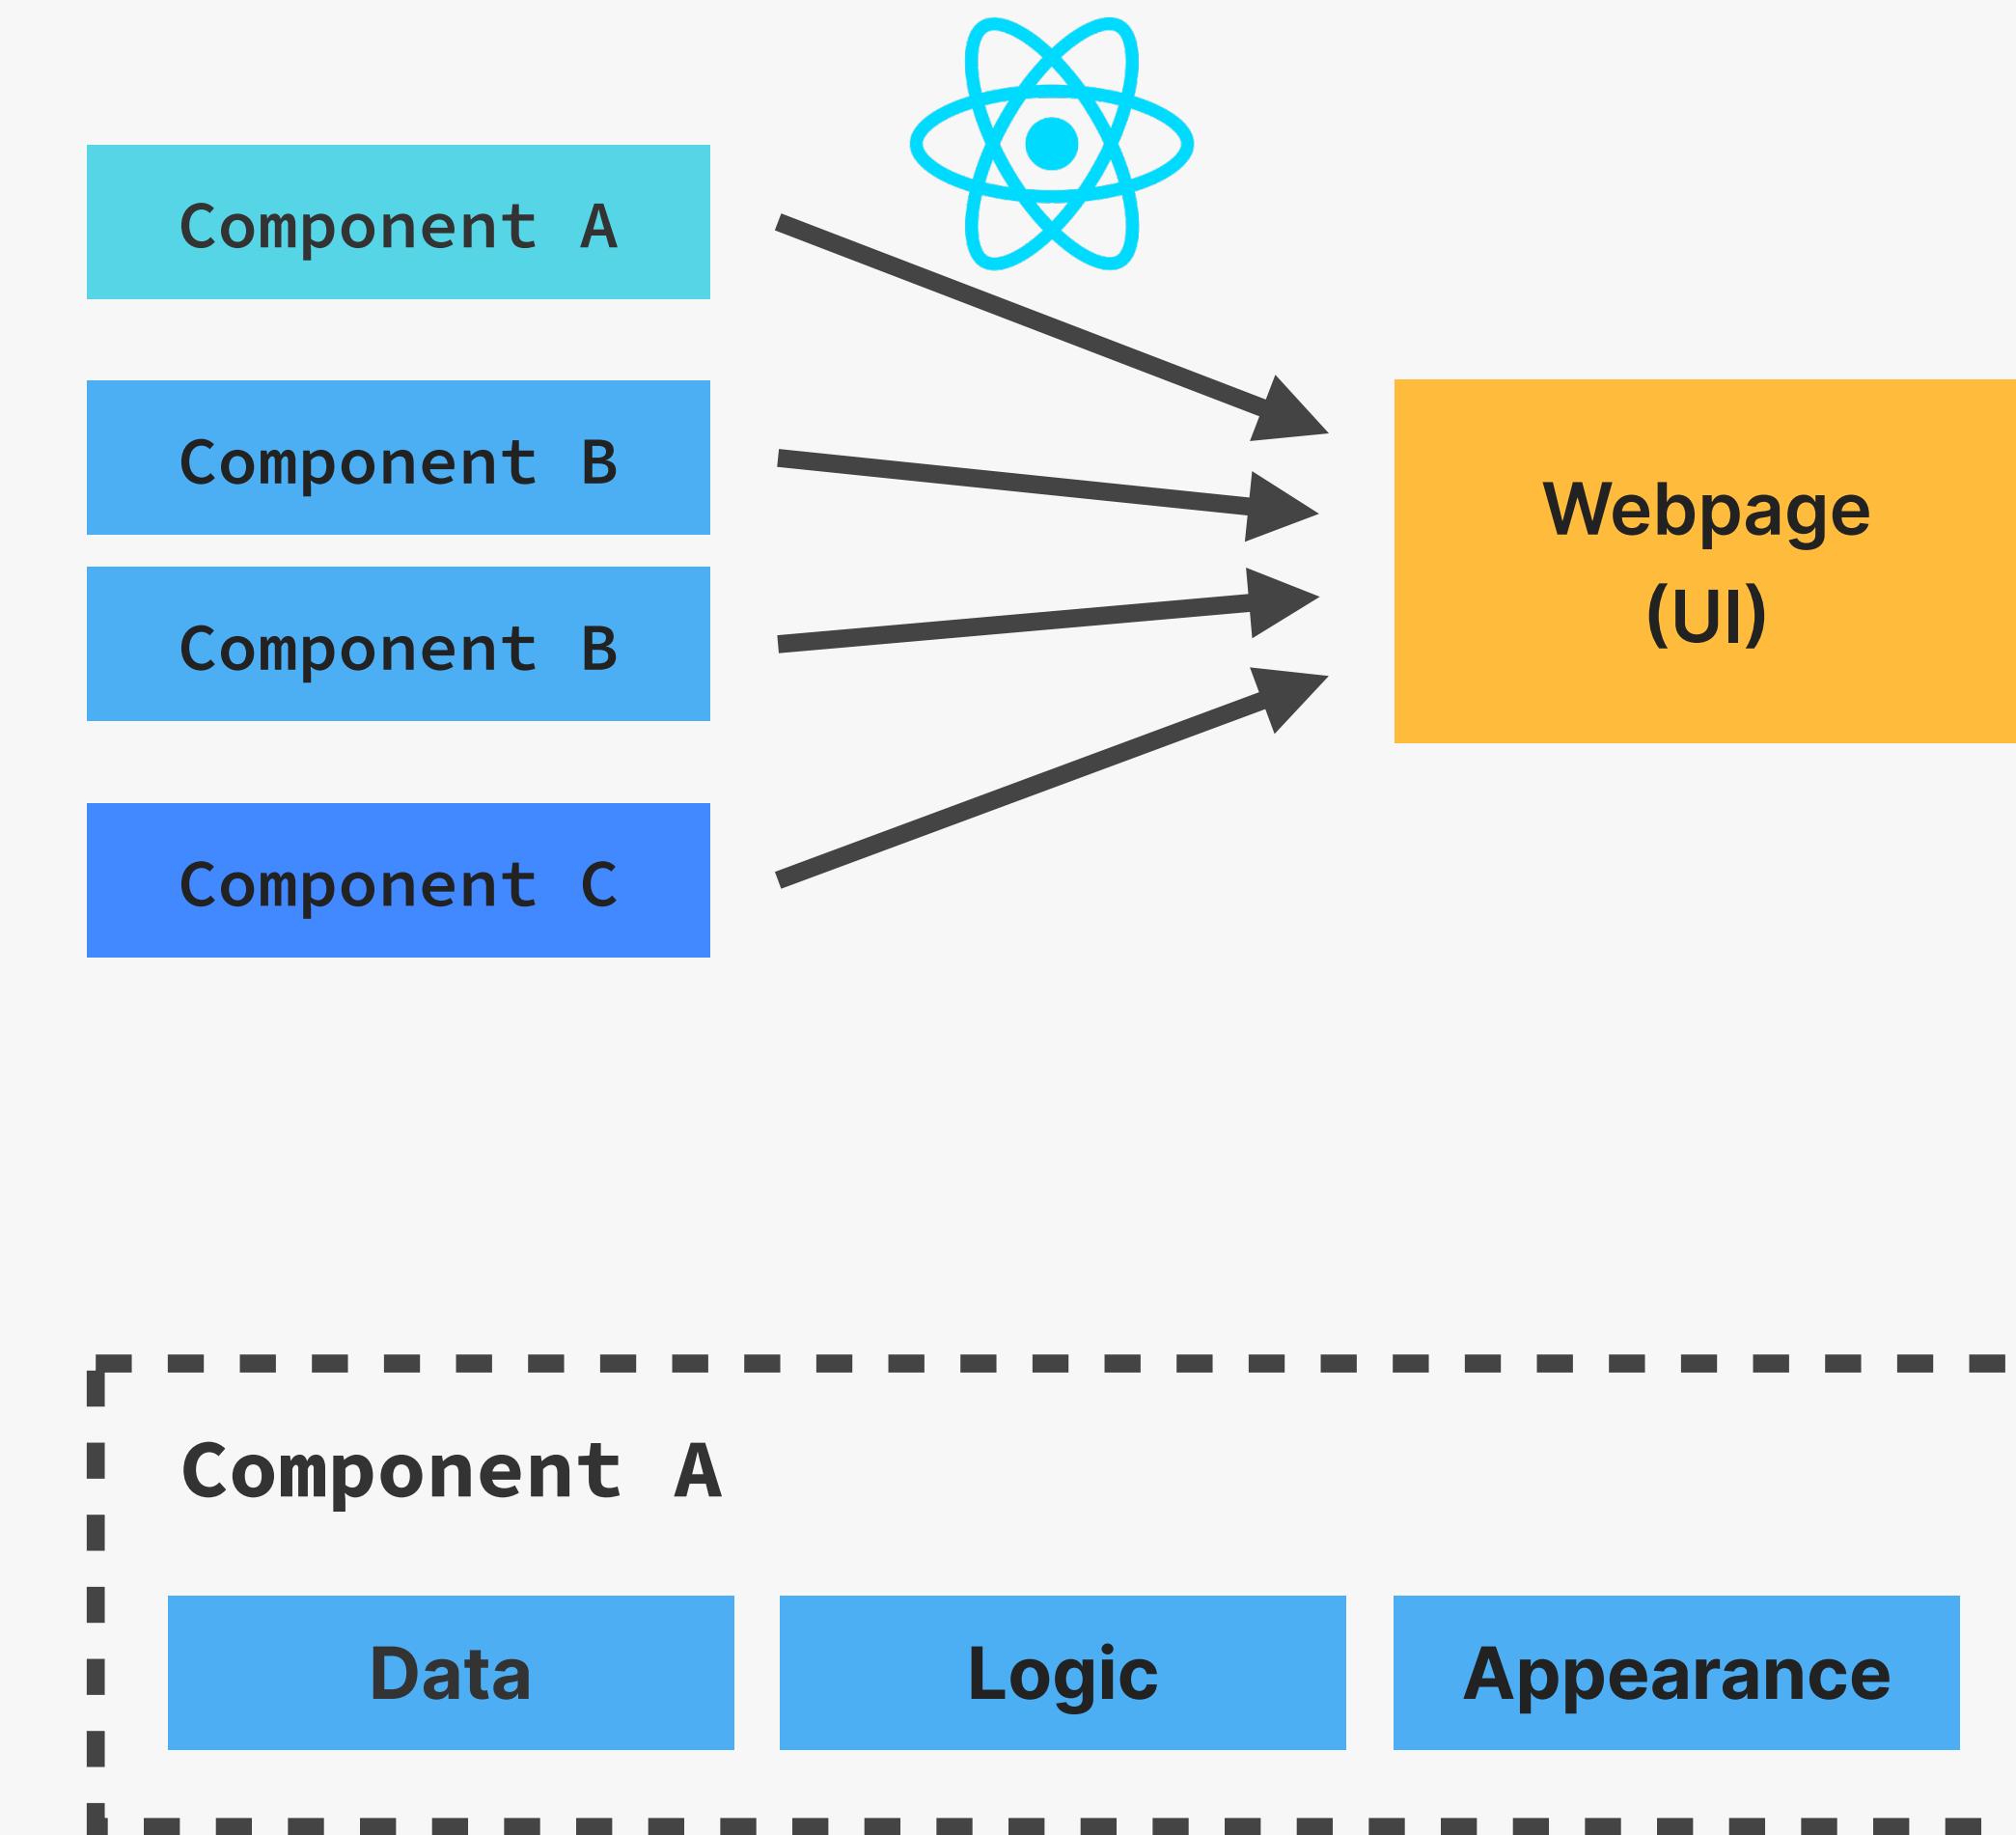

COMPONENTS AS BUILDING BLOCKS


COMPONENTS

- 👉 React applications are entirely made out of components
- 👉 Building blocks of user interfaces in React
- 👉 Piece of UI that has its own **data, logic, and appearance** (*how it works and looks*)
- 👉 We build complex UIs by **building multiple components and combining them**
- 👉 Components can be **reused, nested inside each other, and pass data between them**

The screenshot shows a course interface with the following components:

- VideoPlayer**: A large video player at the top right.
- Menu**: A yellow navigation bar with links: Course content, Overview, Q&A (underlined), Notes, Announcements, and a search icon.
- RefineQuestions**: A green search bar labeled "Search all course questions" with a magnifying glass icon.
- Filters**: A section below the search bar with dropdown menus: All lectures, Sort by most recent, and Filter questions.
- All questions in this course (41683)**: A purple header for a list of questions.
- Question**: Three question cards:
 - Question 2 on Challenge 2** by Darryl (Lecture 115, 13 hours ago). It has 0 upvotes and 0 comments.
 - Elegant alternative for loading markers from localStorage** by Vincent Giovanni (Lecture 242, 14 hours ago). It has 0 upvotes and 0 comments.
 - How to not violate the "Do not repeat yourself" principle** by Marinela (Lecture 45, 15 hours ago). It has 0 upvotes and 1 comment.
- QuestionList**: A purple footer at the bottom.

COMPONENT TREES

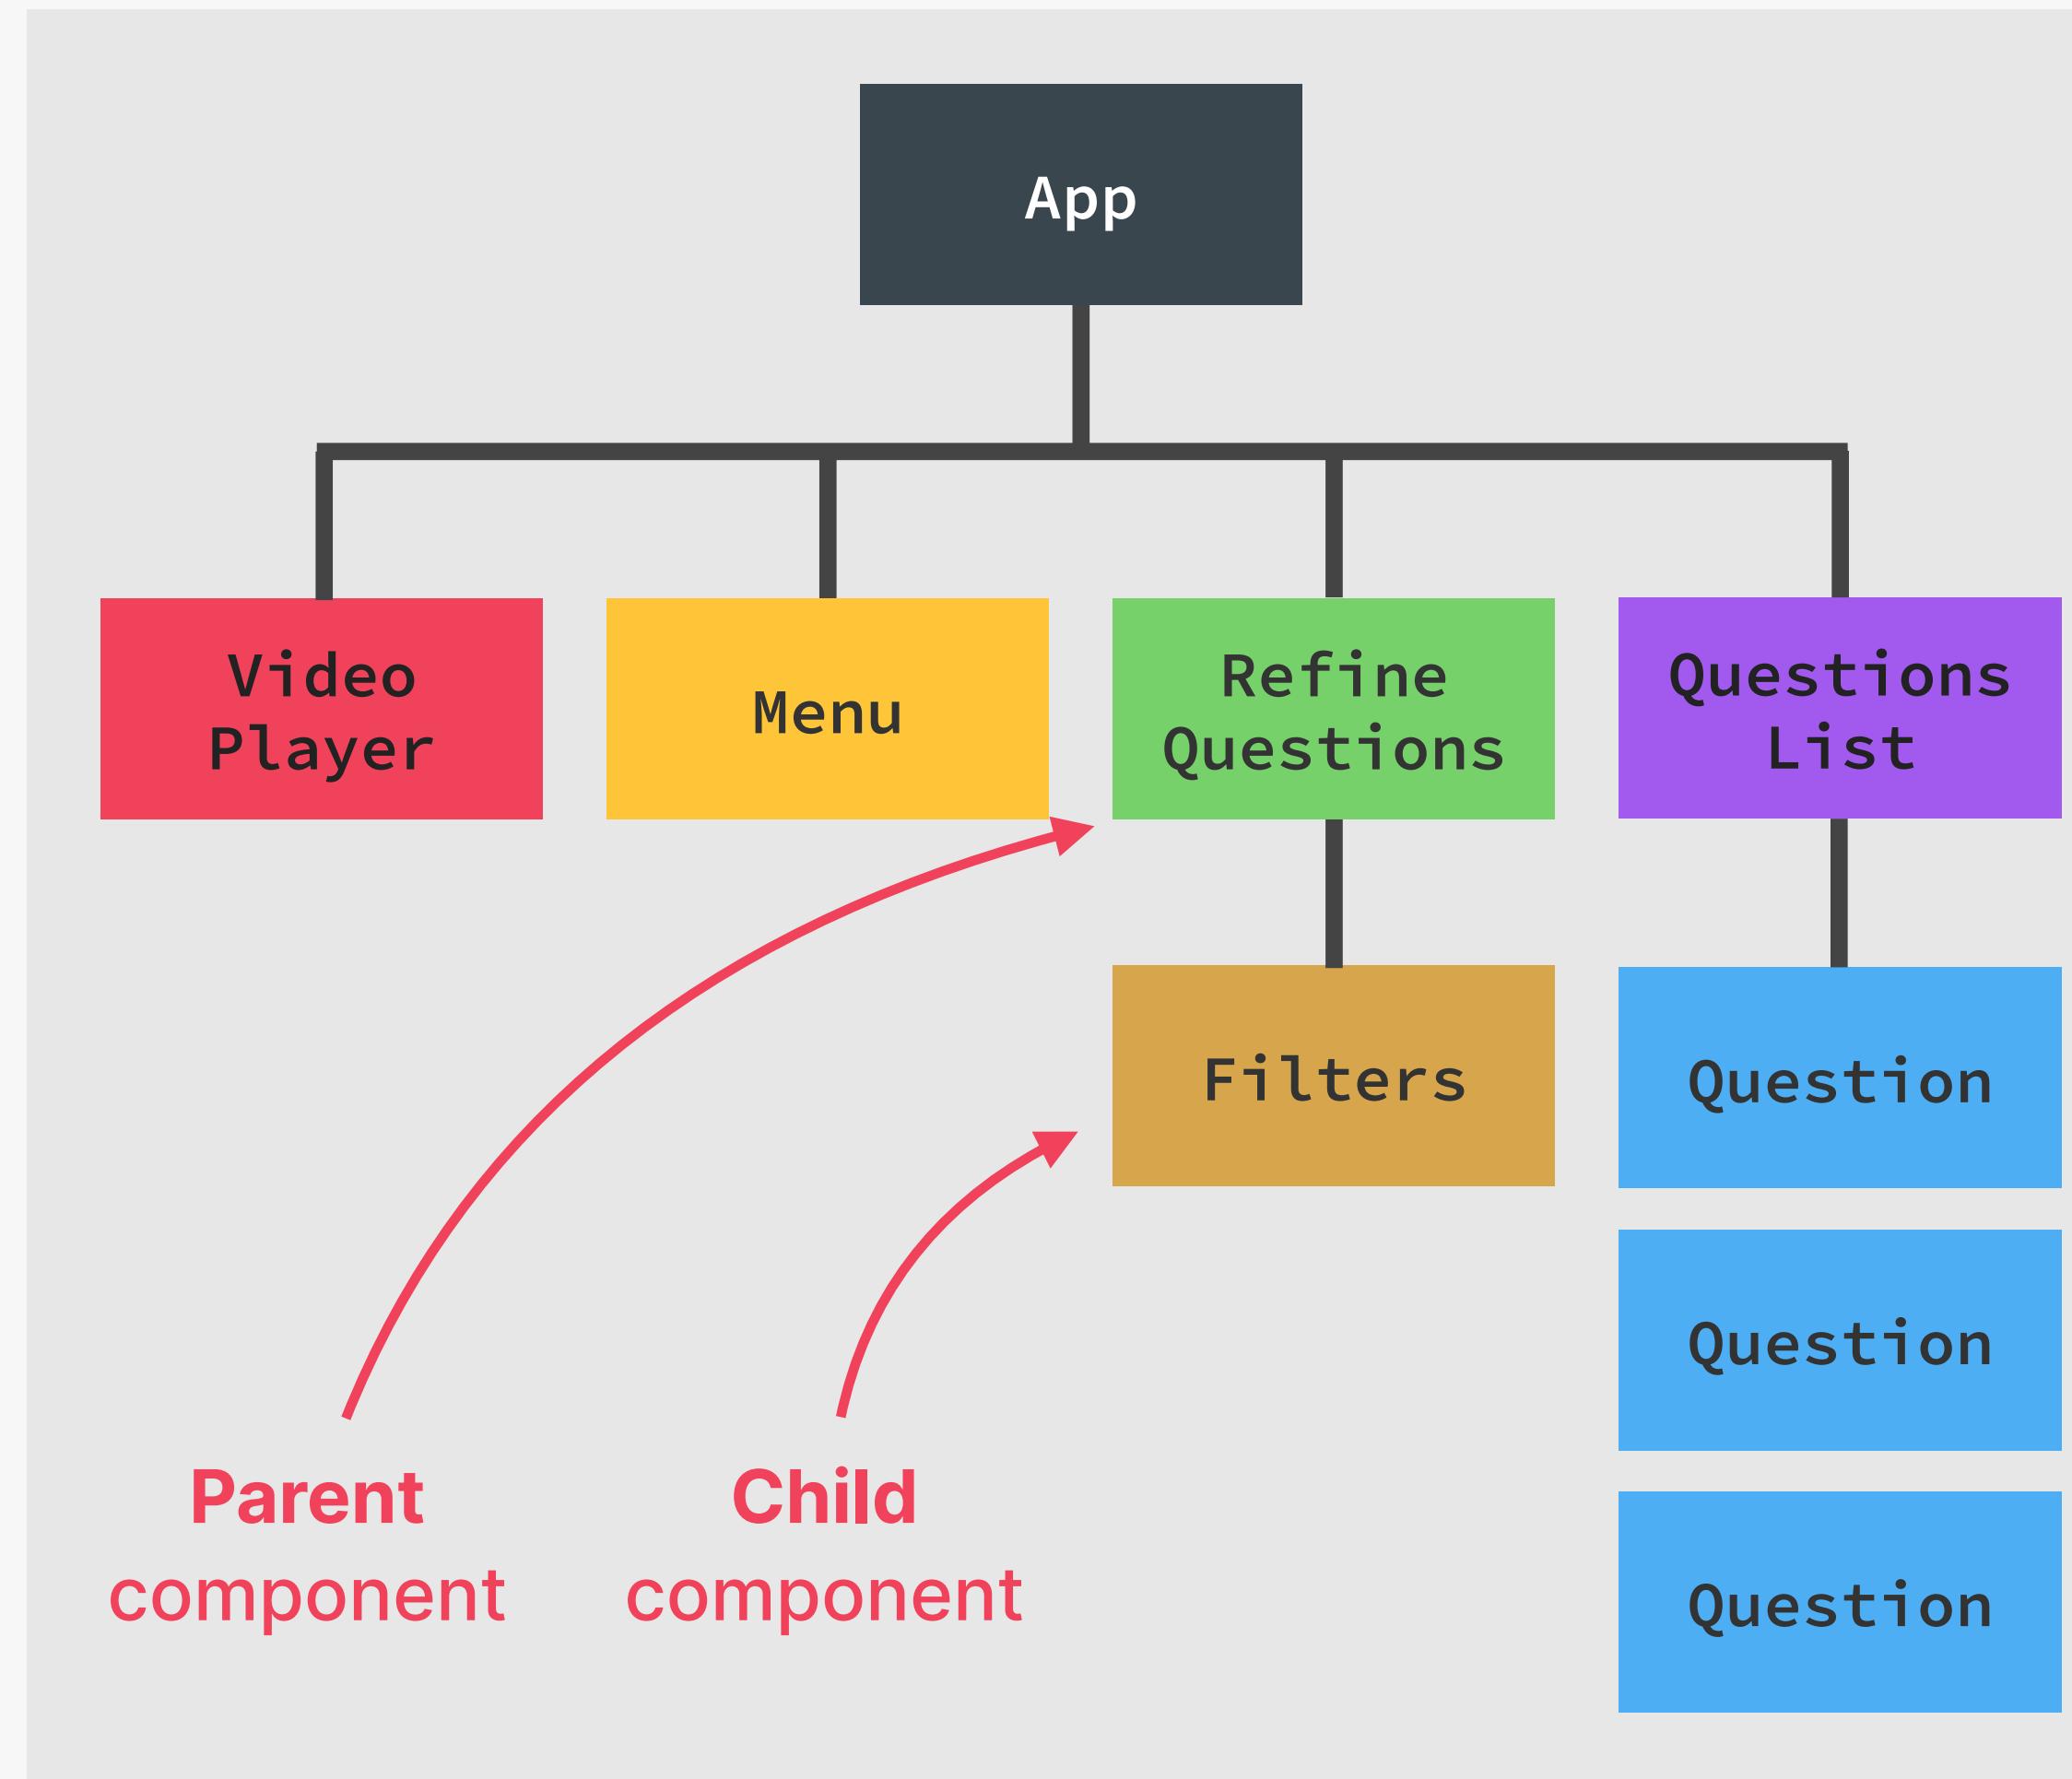

VideoPlayer

Menu

RefineQuestions

Filters

All questions in this course (41683)

Question

Question

Question

QuestionList



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

WORKING WITH COMPONENTS,
PROPS, AND JSX

LECTURE

WHAT IS JSX?

WHAT IS JSX?

JSX

- 👉 Declarative syntax to describe what components look like and how they work
- 👉 Components must **return** a block of JSX
- 👉 Extension of JavaScript that allows us to embed **JavaScript** **CSS** and React **components** into **HTML**

```
function Question(props) {  
  const question = props.question;  
  const [upvotes, setUpvotes] = useState(0);  
  
  const upvote = () => setUpvotes((v) => v + 1);  
  
  const openQuestion = () => {}; // Todo  
  
  return (  
    <div>  
      <h4 style={{ fontSize: "2.4rem" }}>  
        {question.title}  
      </h4>  
      <p>{question.text}</p>  
      <p>{question.hours} hours ago</p>  
  
      <UpvoteBtn onClick={upvote} />  
      <Answers  
        numAnswers={question.num}  
        onClick={openQuestion}>  
    </div>  
  );  
}
```

JSX returned from component

WHAT IS JSX?

JSX

- 👉 Declarative syntax to describe what components look like and how they work
- 👉 Components must **return** a block of JSX
- 👉 Extension of JavaScript that allows us to **embed JavaScript, CSS, and React components into HTML**
- 👉 Each JSX element is **converted** to a `React.createElement` function call
- 👉 We could use React **without** JSX

```
<header>
  <h1 style="color: red">
    Hello React!
  </h1>
</header>
```




```
React.createElement(
  'header',
  null,
  React.createElement(
    'h1',
    { style: { color: 'red' } },
    'Hello React!'
)
);
```



BABEL



Hello React!

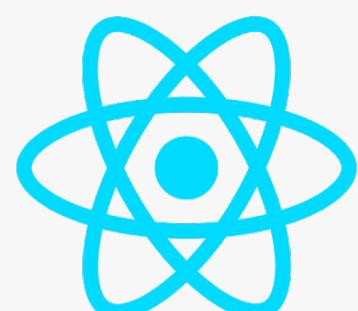

JSX IS DECLARATIVE

IMPERATIVE

"How to do things"




- 👉 Manual DOM element selections and DOM traversing
- 👉 Step-by-step DOM mutations until we reach the desired UI

```
const title = document.querySelector("title")
const upvoteBtn = document.querySelector("btn")
title.textContent = `[0] ${question.title}`;
let upvotes = 0;
upvoteBtn.addEventListener("click", function(){
  upvotes++;
  title.textContent =
    `[$upvotes] ${question.title}`;
  title.classList.add("upvoted");
});
```

DECLARATIVE

"What we want"

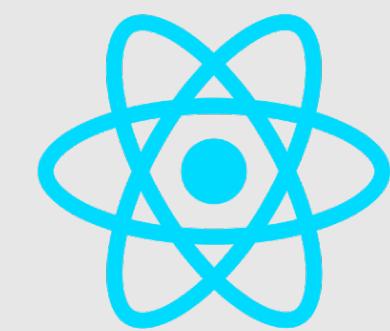

- 👉 Describe what UI should look like using JSX, **based on current data**
- 👉 React is an **abstraction** away from DOM: **we never touch the DOM**
- 👉 Instead, we think of the UI as a **reflection of the current data**

```
function Question(props) {
  const question = props.question;
  const [upvotes, setUpvotes] = useState(0);
  const upvote = () => setUpvotes(v => v + 1);

  return (
    <div>
      <h4>{question.title}</h4>
      <p>{question.text}</p>
      <UpvoteBtn
        onClick={upvote}
        upvotes={upvotes}
      />
    </div>
  );
}
```




JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN



SECTION

WORKING WITH COMPONENTS,
PROPS, AND JSX

LECTURE


SEPARATION OF CONCERNS

SEPARATION OF CONCERNS?

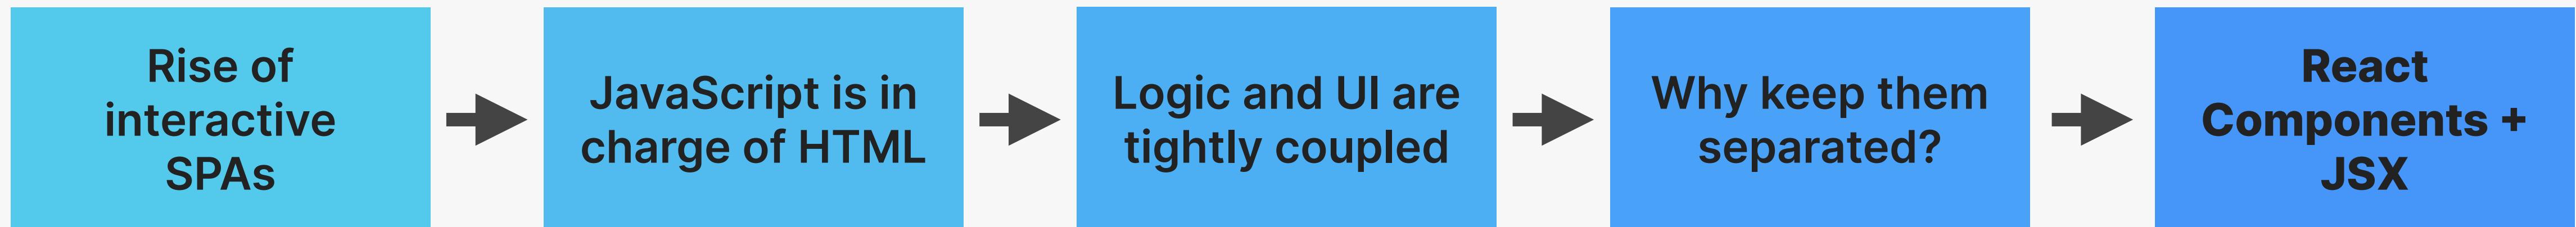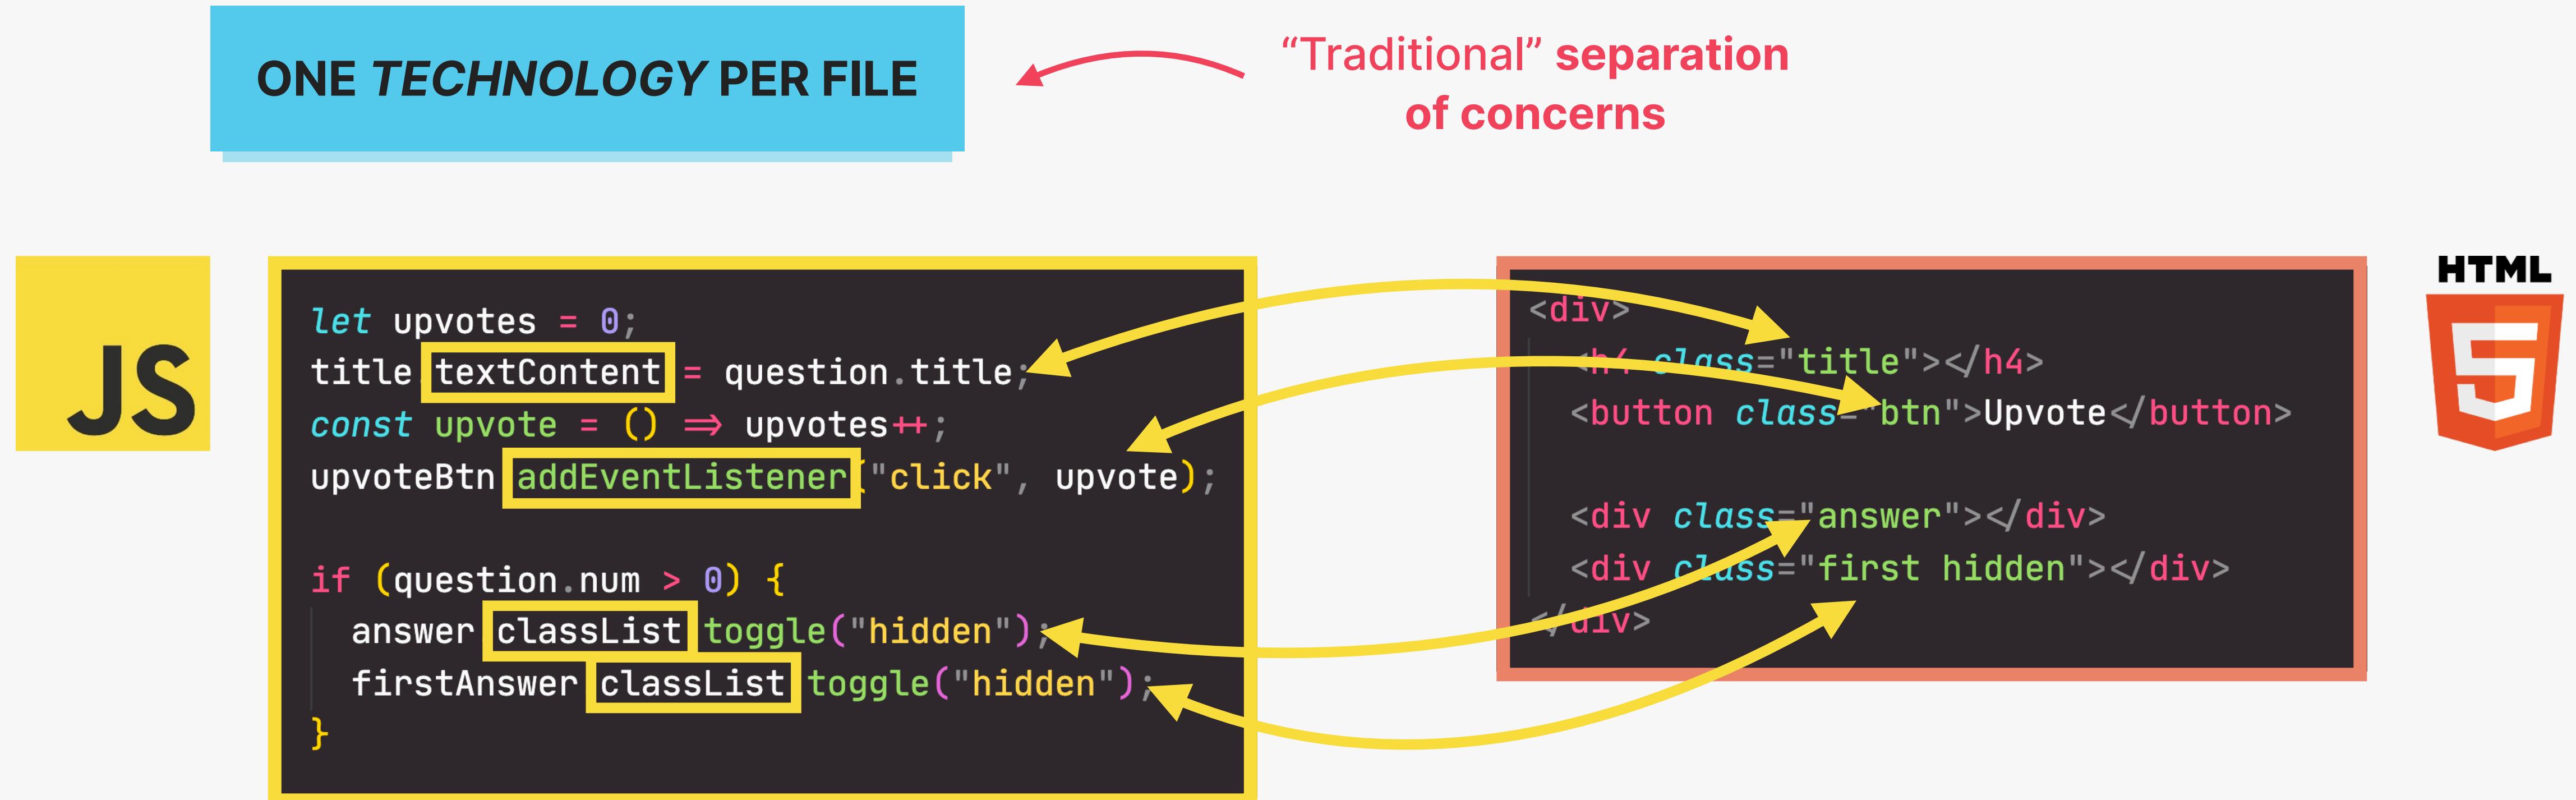

SEPARATION OF CONCERNS?

ONE COMPONENT PER FILE

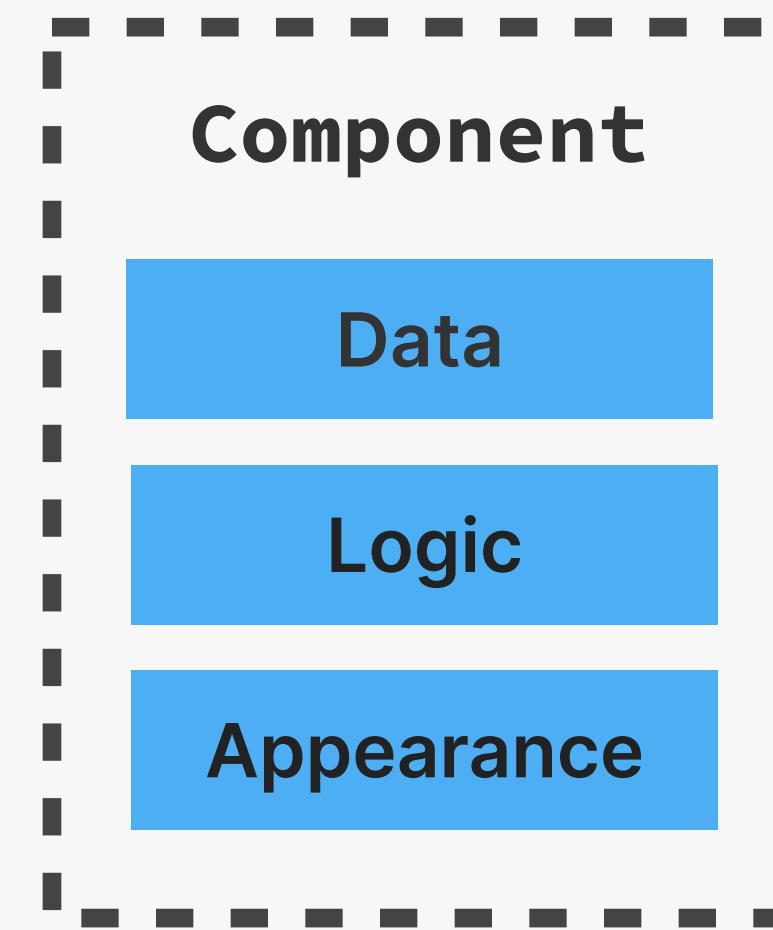


HTML and JS
are *colocated*

```
function Question({ question }) {  
  const [upvotes, setUpvotes] = useState(0);  
  const upvote = () => setUpvotes((v) => v + 1);  
  
  return (  
    <div>  
      <h4>{question.title}</h4>  
      <UpvoteBtn onClick={upvote} />  
      {question.num > 0 ? (  
        <Answers numAnswers={question.num}></Answers>  
      ) : (  
        <FirstAnswer />  
      )}  
    </div>  
  );  
}
```



Fundamental reason for components

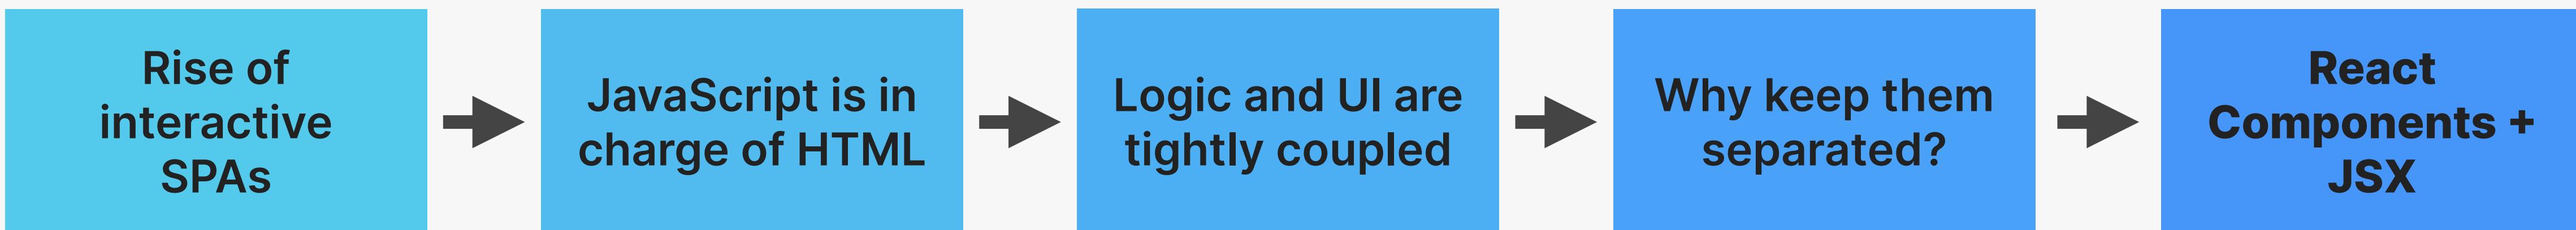

SEPARATION OF CONCERNS!


ONE TECHNOLOGY PER FILE




“Traditional”
separation of
concerns

COMpletely
NEW PARADIGM


ONE COMPONENT PER FILE

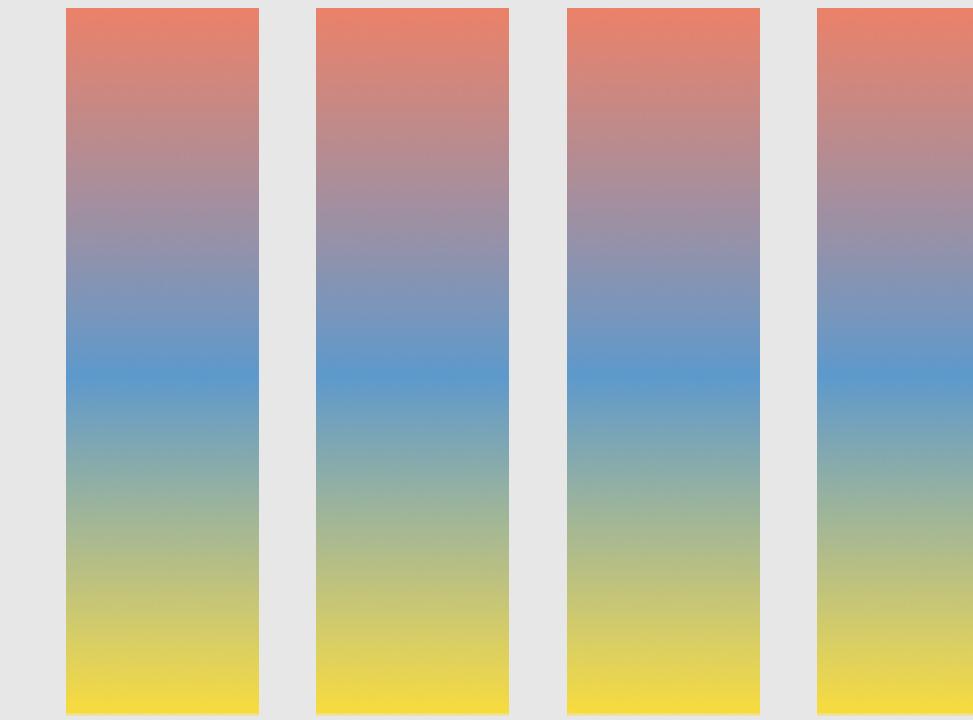

Each component
is concerned
with one piece
of the UI

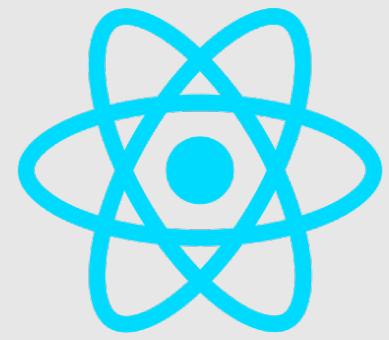

Question
Menu
Filters
Player

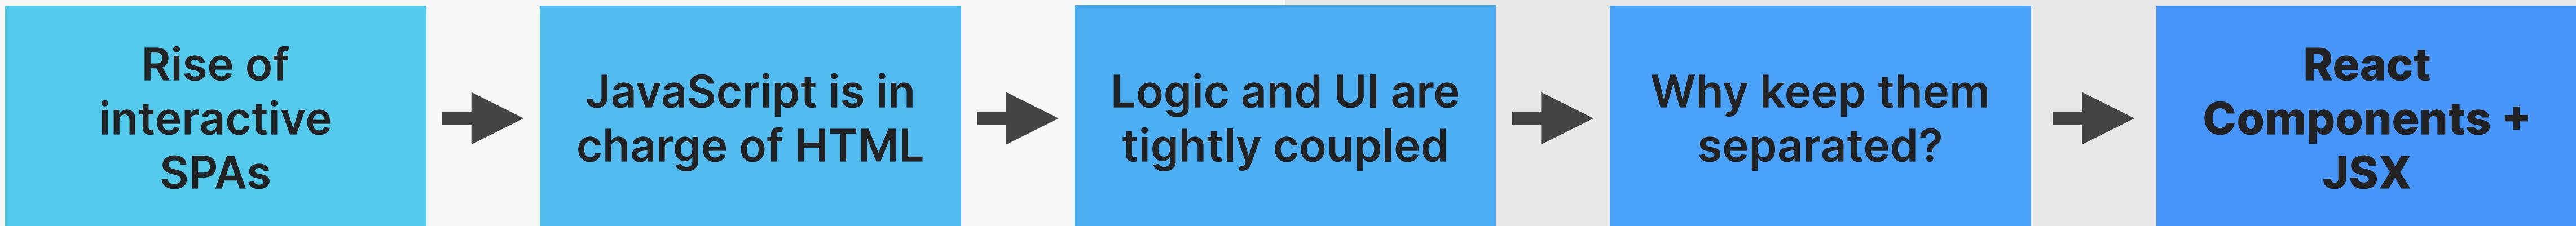



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

WORKING WITH COMPONENTS,
PROPS, AND JSX


LECTURE

PROPS, IMMUTABILITY, AND ONE-
WAY DATA FLOW

REVIEWING PROPS

PROPS

- 👉 Props are used to pass data from **parent components** to **child components** (down the component tree)

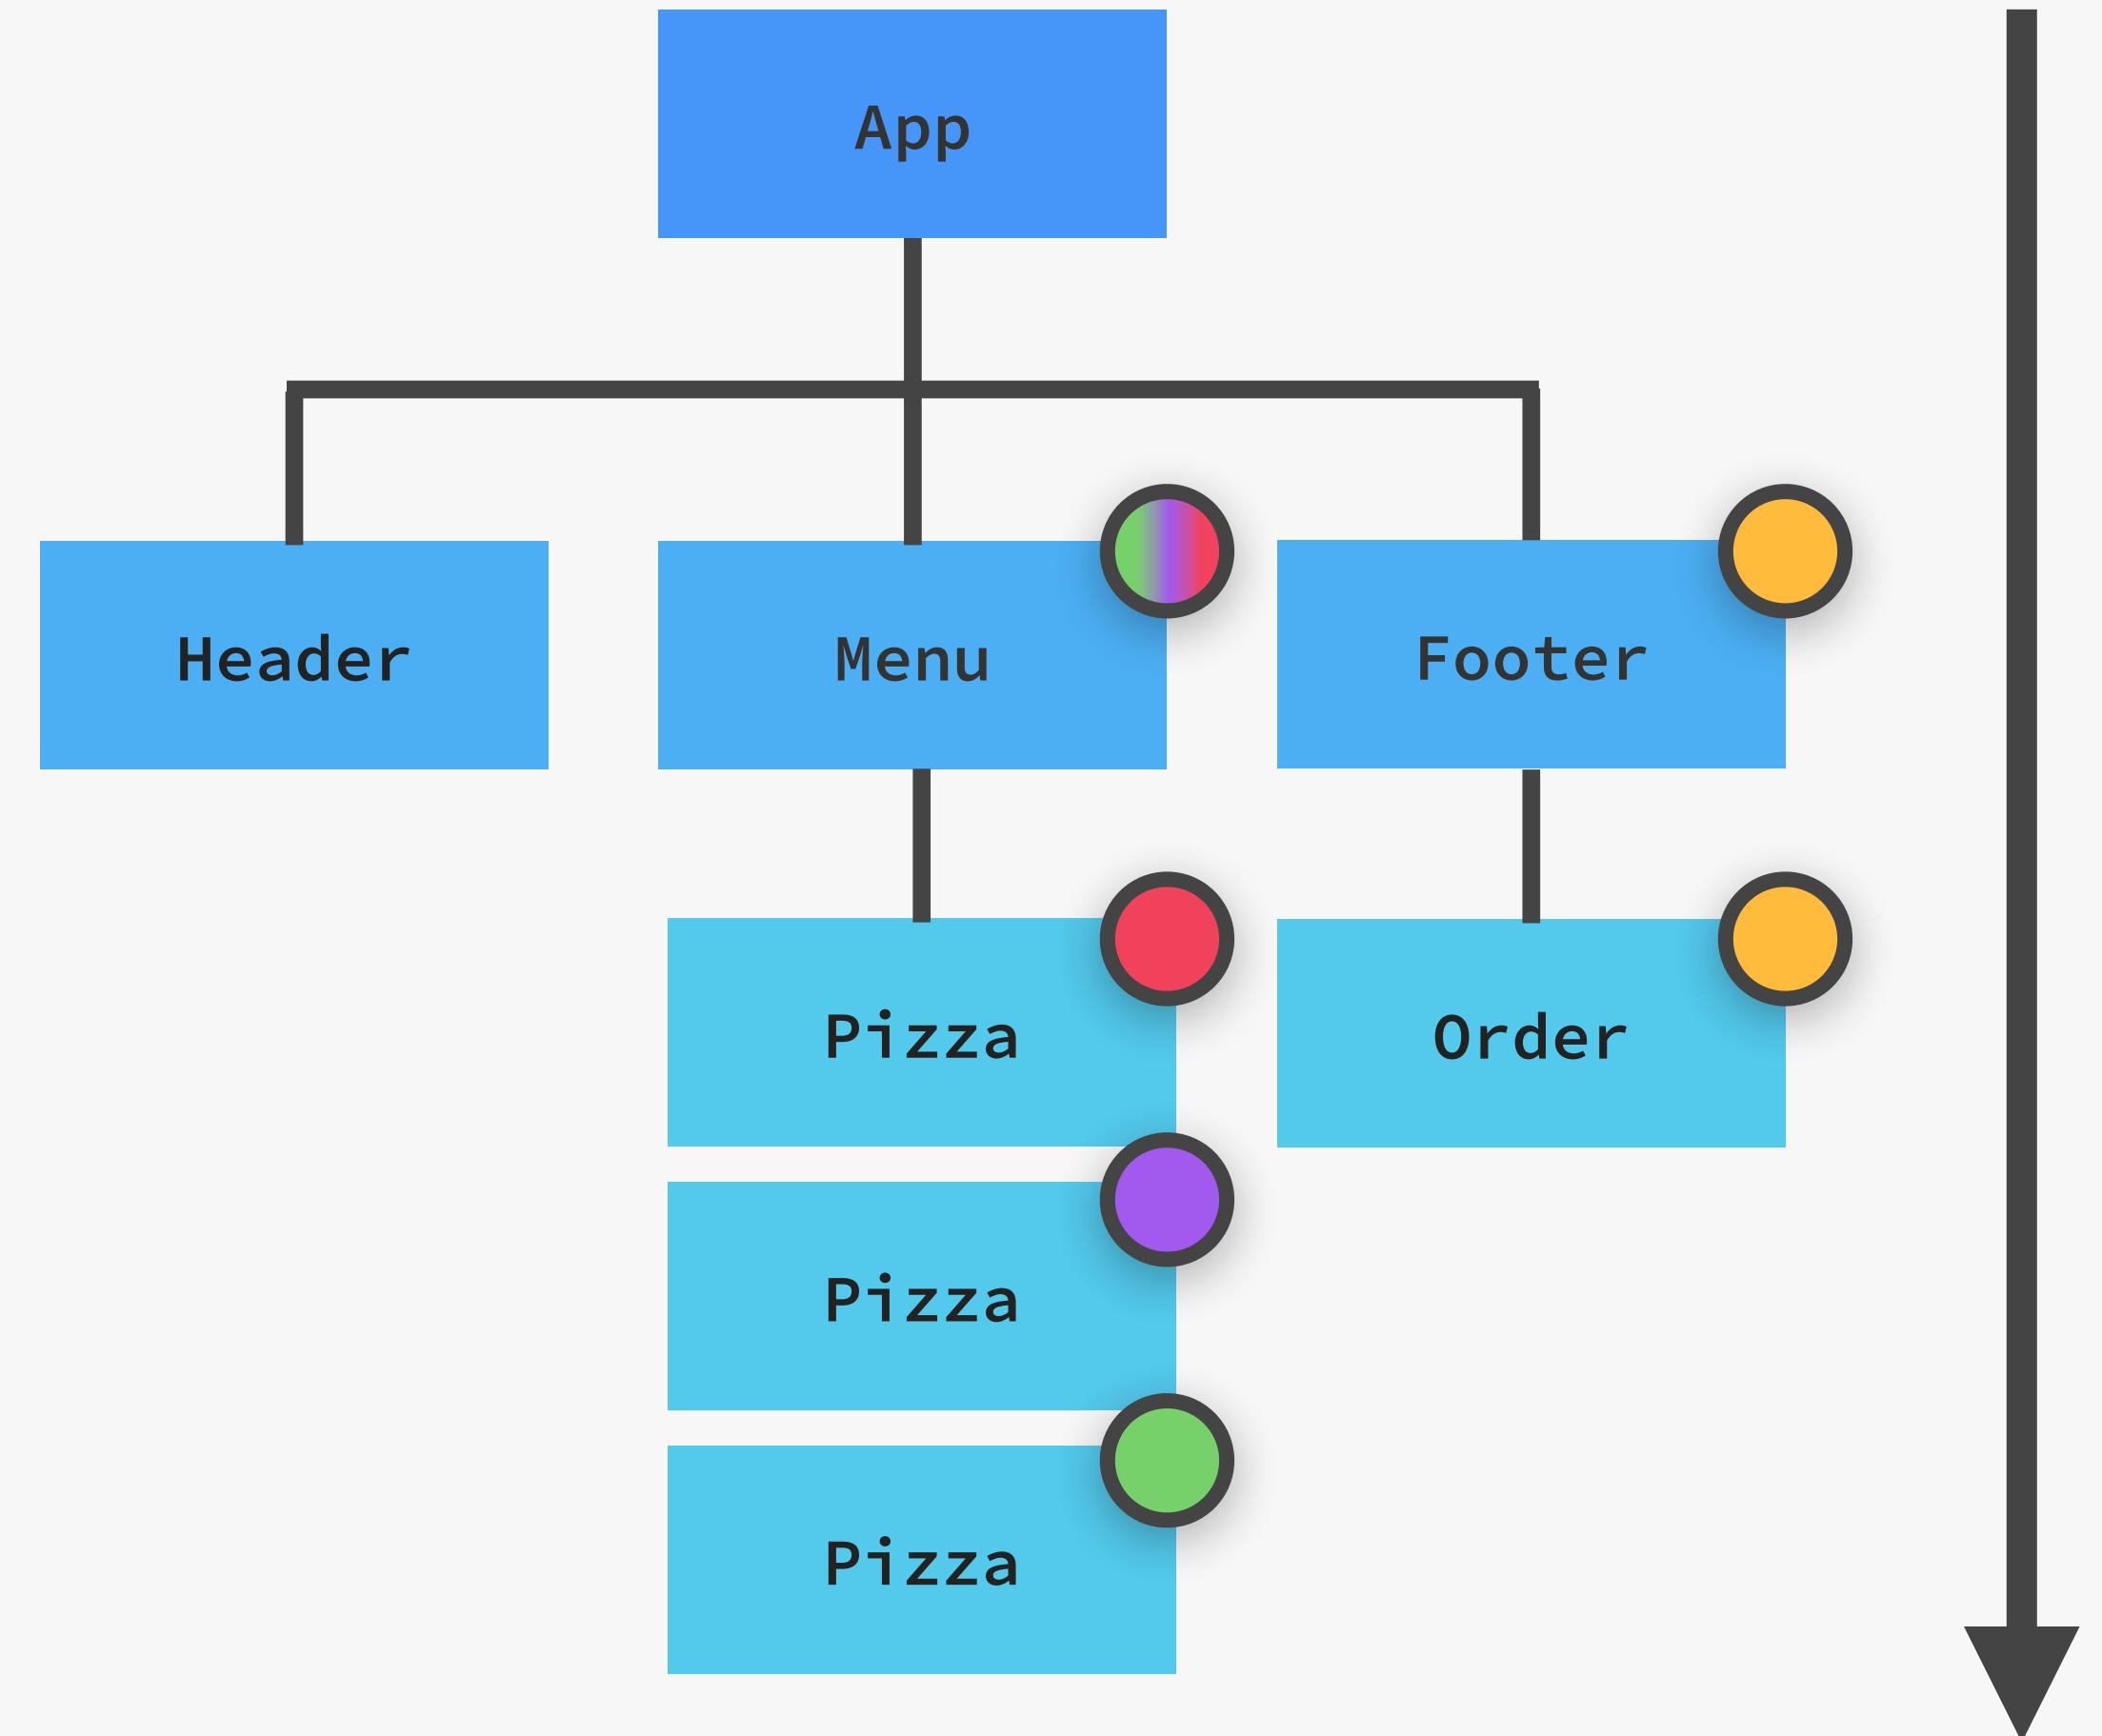


REVIEWING PROPS

PROPS

- 👉 Props are used to pass data from **parent components** to **child components** (down the component tree)
- 👉 Essential tool to **configure** and **customize** components (like function parameters)
- 👉 With props, parent components **control** how child components look and work

```
<Menu>
  <Button bgColor="blue" text="New" />
  <Button bgColor="green" text="Edit" />
  <Button bgColor="red" text="Delete" />
</Menu>
```

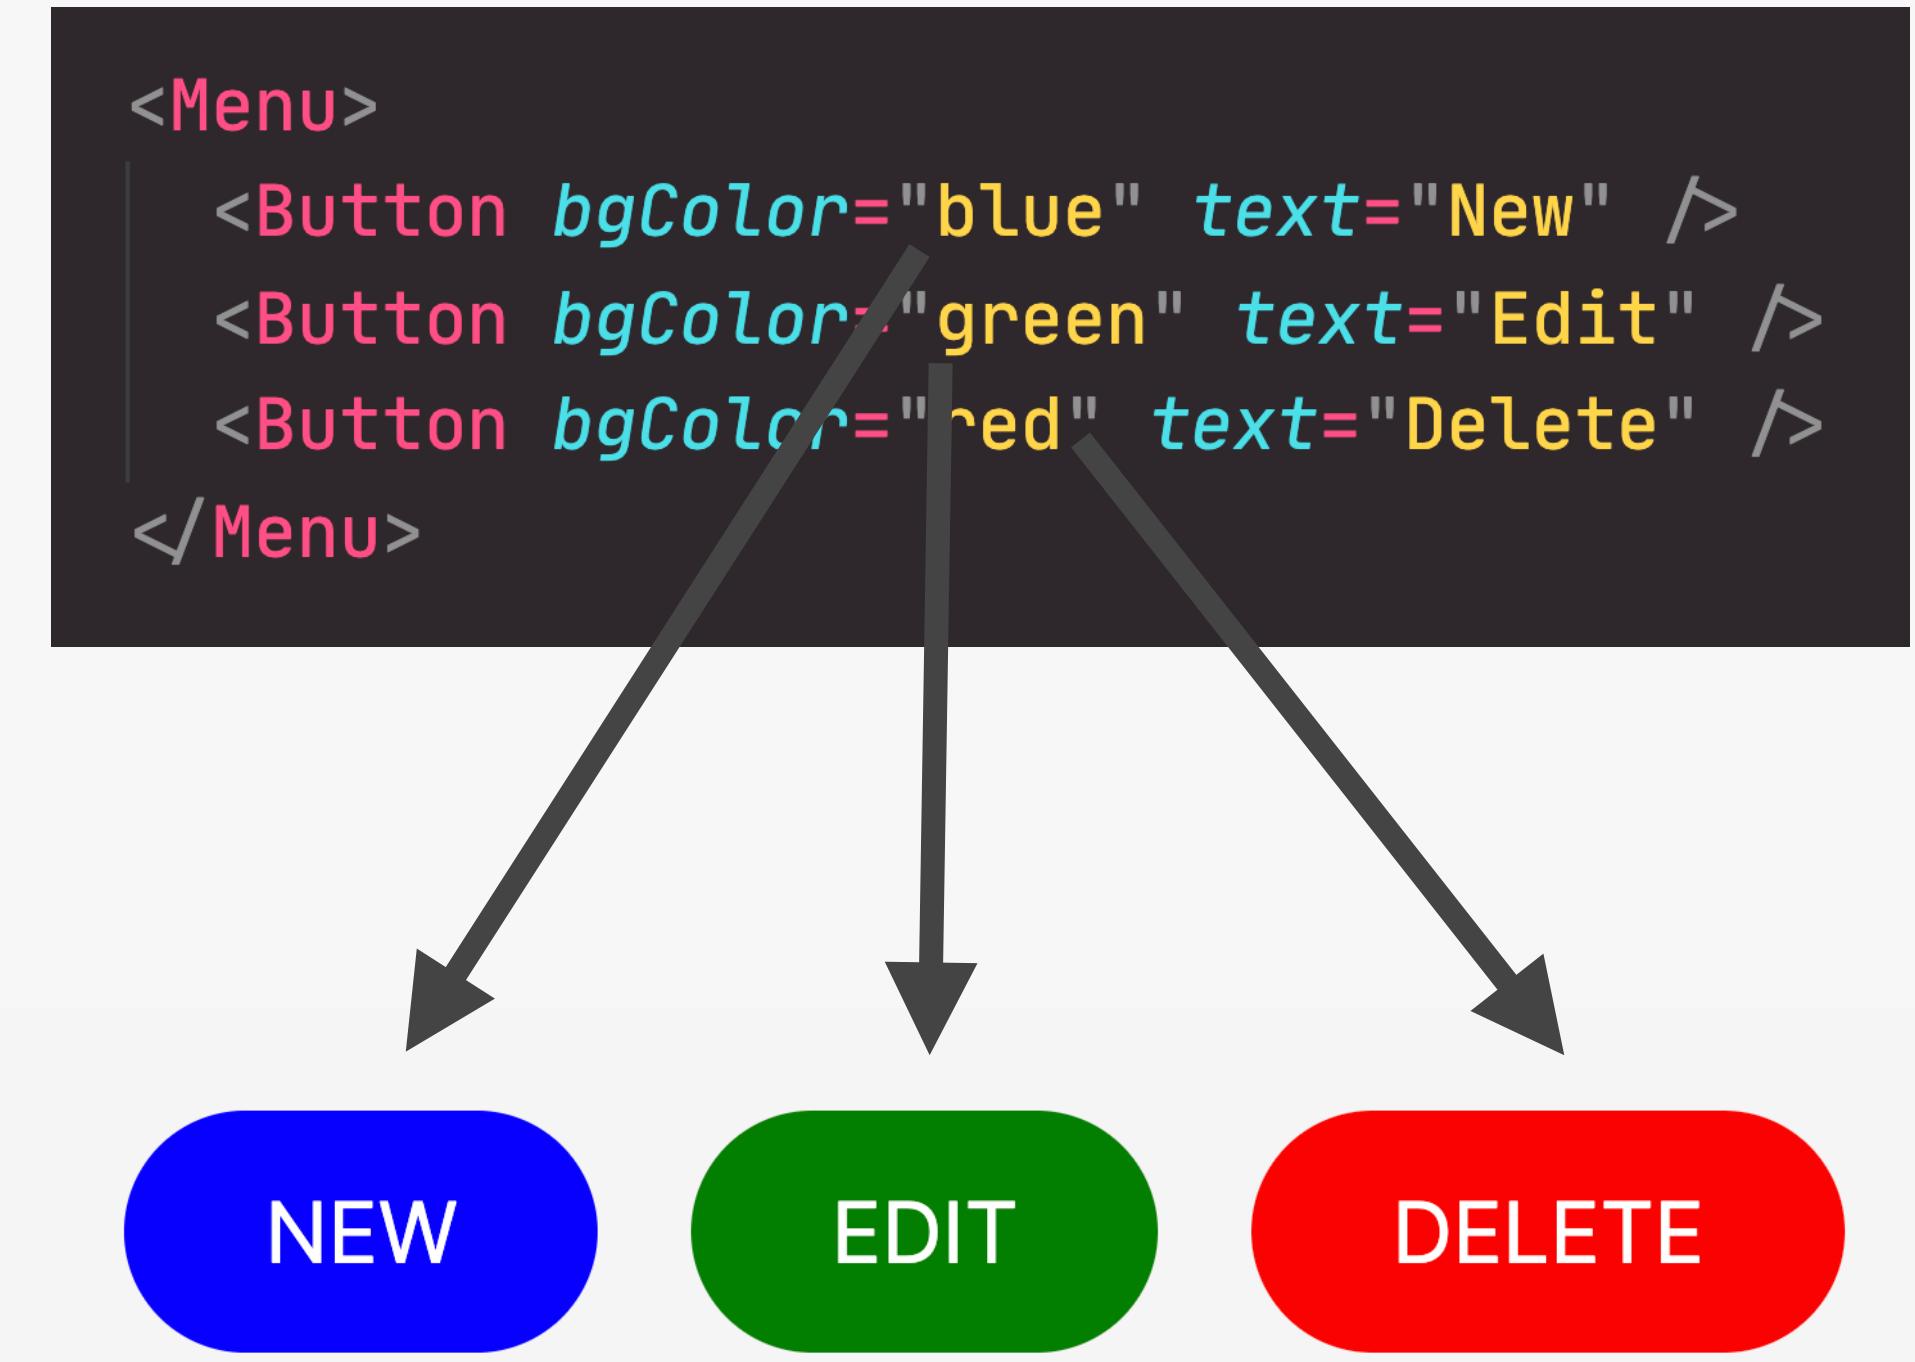

REVIEWING PROPS

PROPS

- 👉 Props are used to pass data from **parent components** to **child components** (down the component tree)
- 👉 Essential tool to **configure** and **customize** components (like function parameters)
- 👉 With props, parent components **control** how child components look and work
- 👉 **Anything** can be passed as props: single values, arrays, objects, functions, even other components

```
function CourseRating() {  
  const [rating, setRating] = useState(0);  
  
  return (  
    <Rating  
      text="Course rating"  
      currentRating={rating}  
      numOptions={3}  
      options={["Terrible", "Okay", "Amazing"]}  
      allRatings={{} num: 2390, avg: 4.8 }  
      setRating={setRating}  
      component={Star}  
    />  
  );  
  
  function Star() {  
    // To do  
  }  
}
```


PROPS ARE READ-ONLY!

Props is data coming from the **outside**, and can **only** be updated by the **parent component**

Parent Component

State is **internal data** that can be updated by the **component's logic**

```
let x = 7;  
  
function Component() {  
  x = 23;  
  return <h1>Number {x}</h1>  
}
```

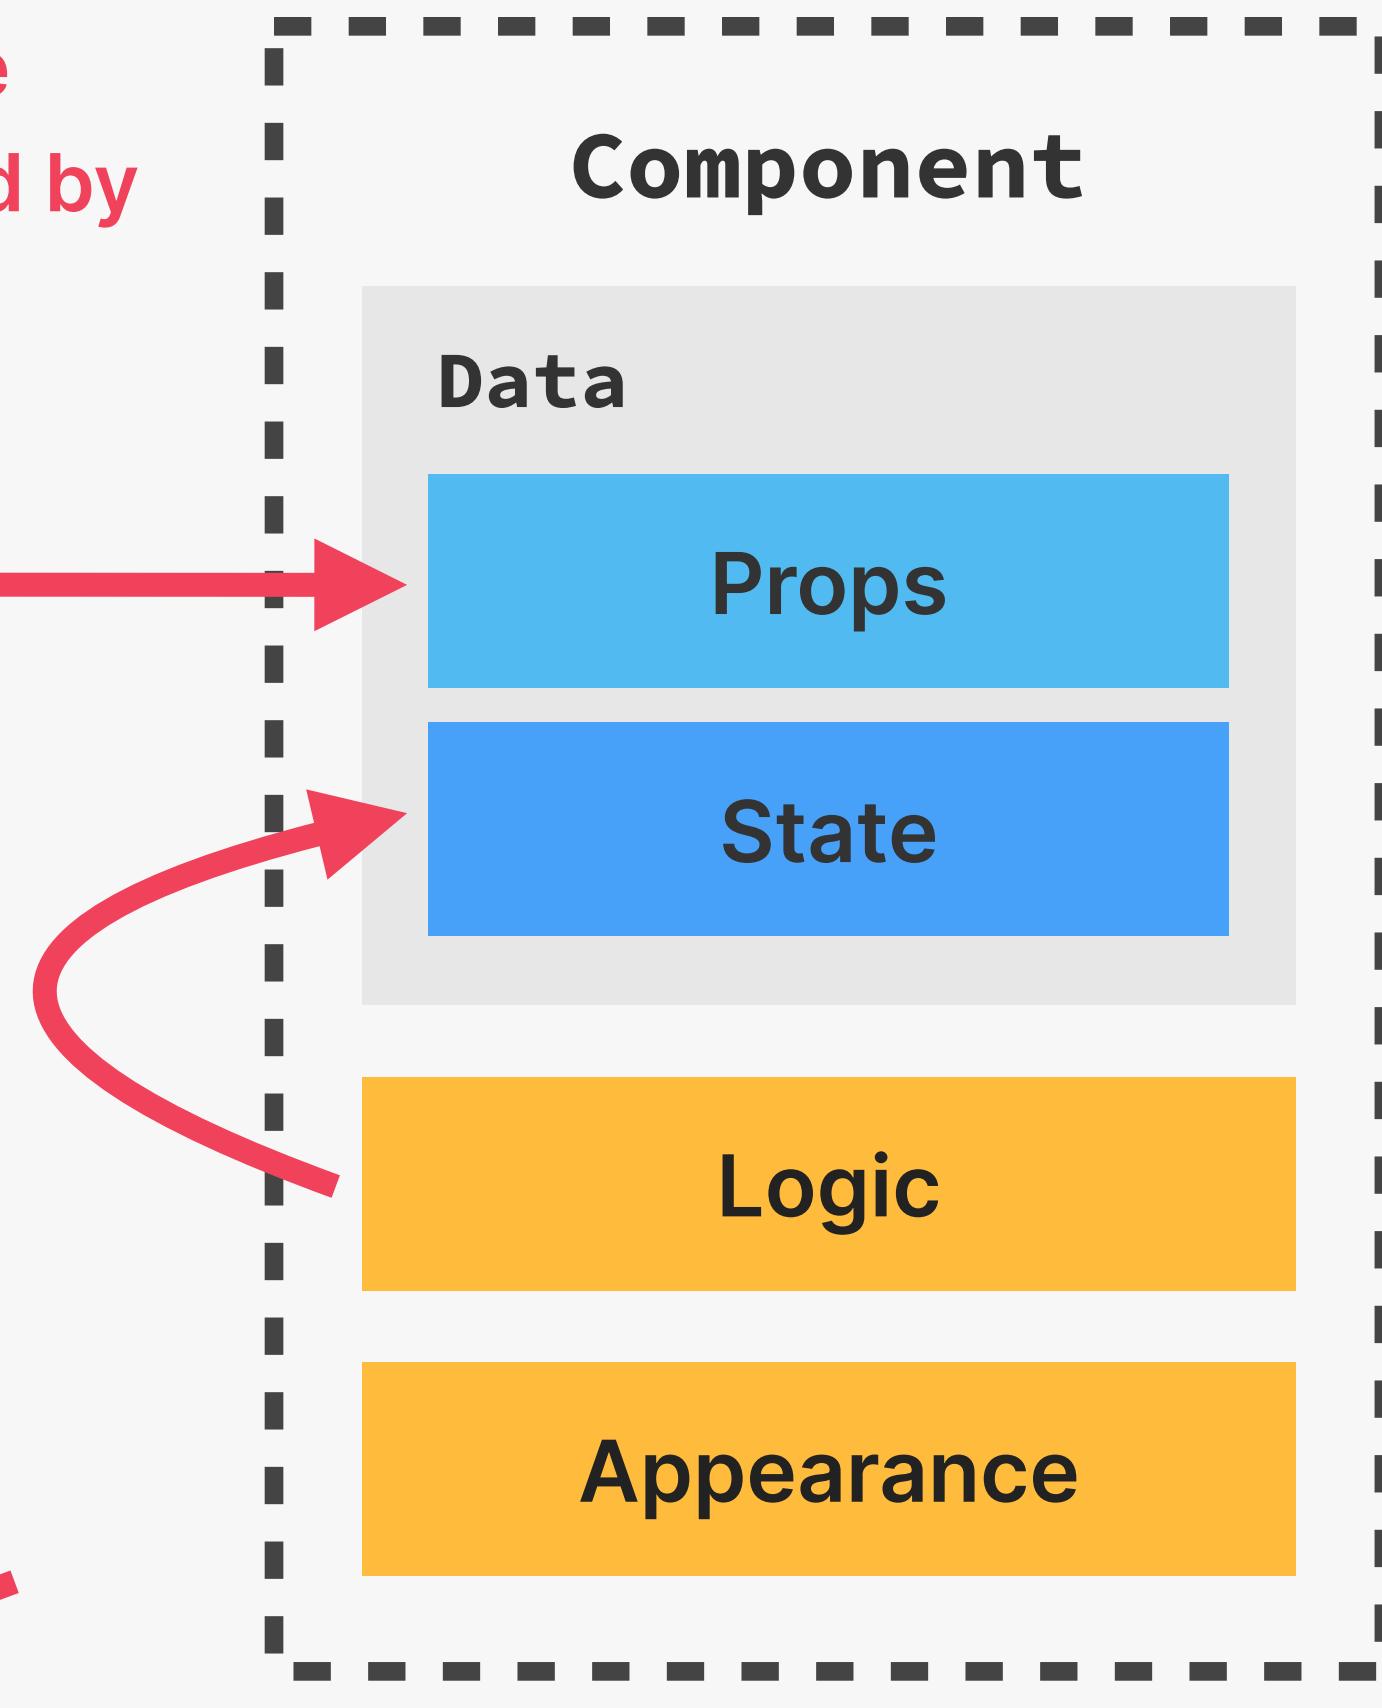

Don't do this!

👉 Props are **read-only**, they are **immutable**! This is one of React's strict rules.

👉 If you need to mutate props, you actually **need state**


↓ WHY?

👉 Mutating props would affect parent, creating **side effects** (not pure)

👉 Components have to be **pure functions** in terms of props and state

👉 This allows React to optimize apps, avoid bugs, make apps predictable

ONE-WAY DATA FLOW

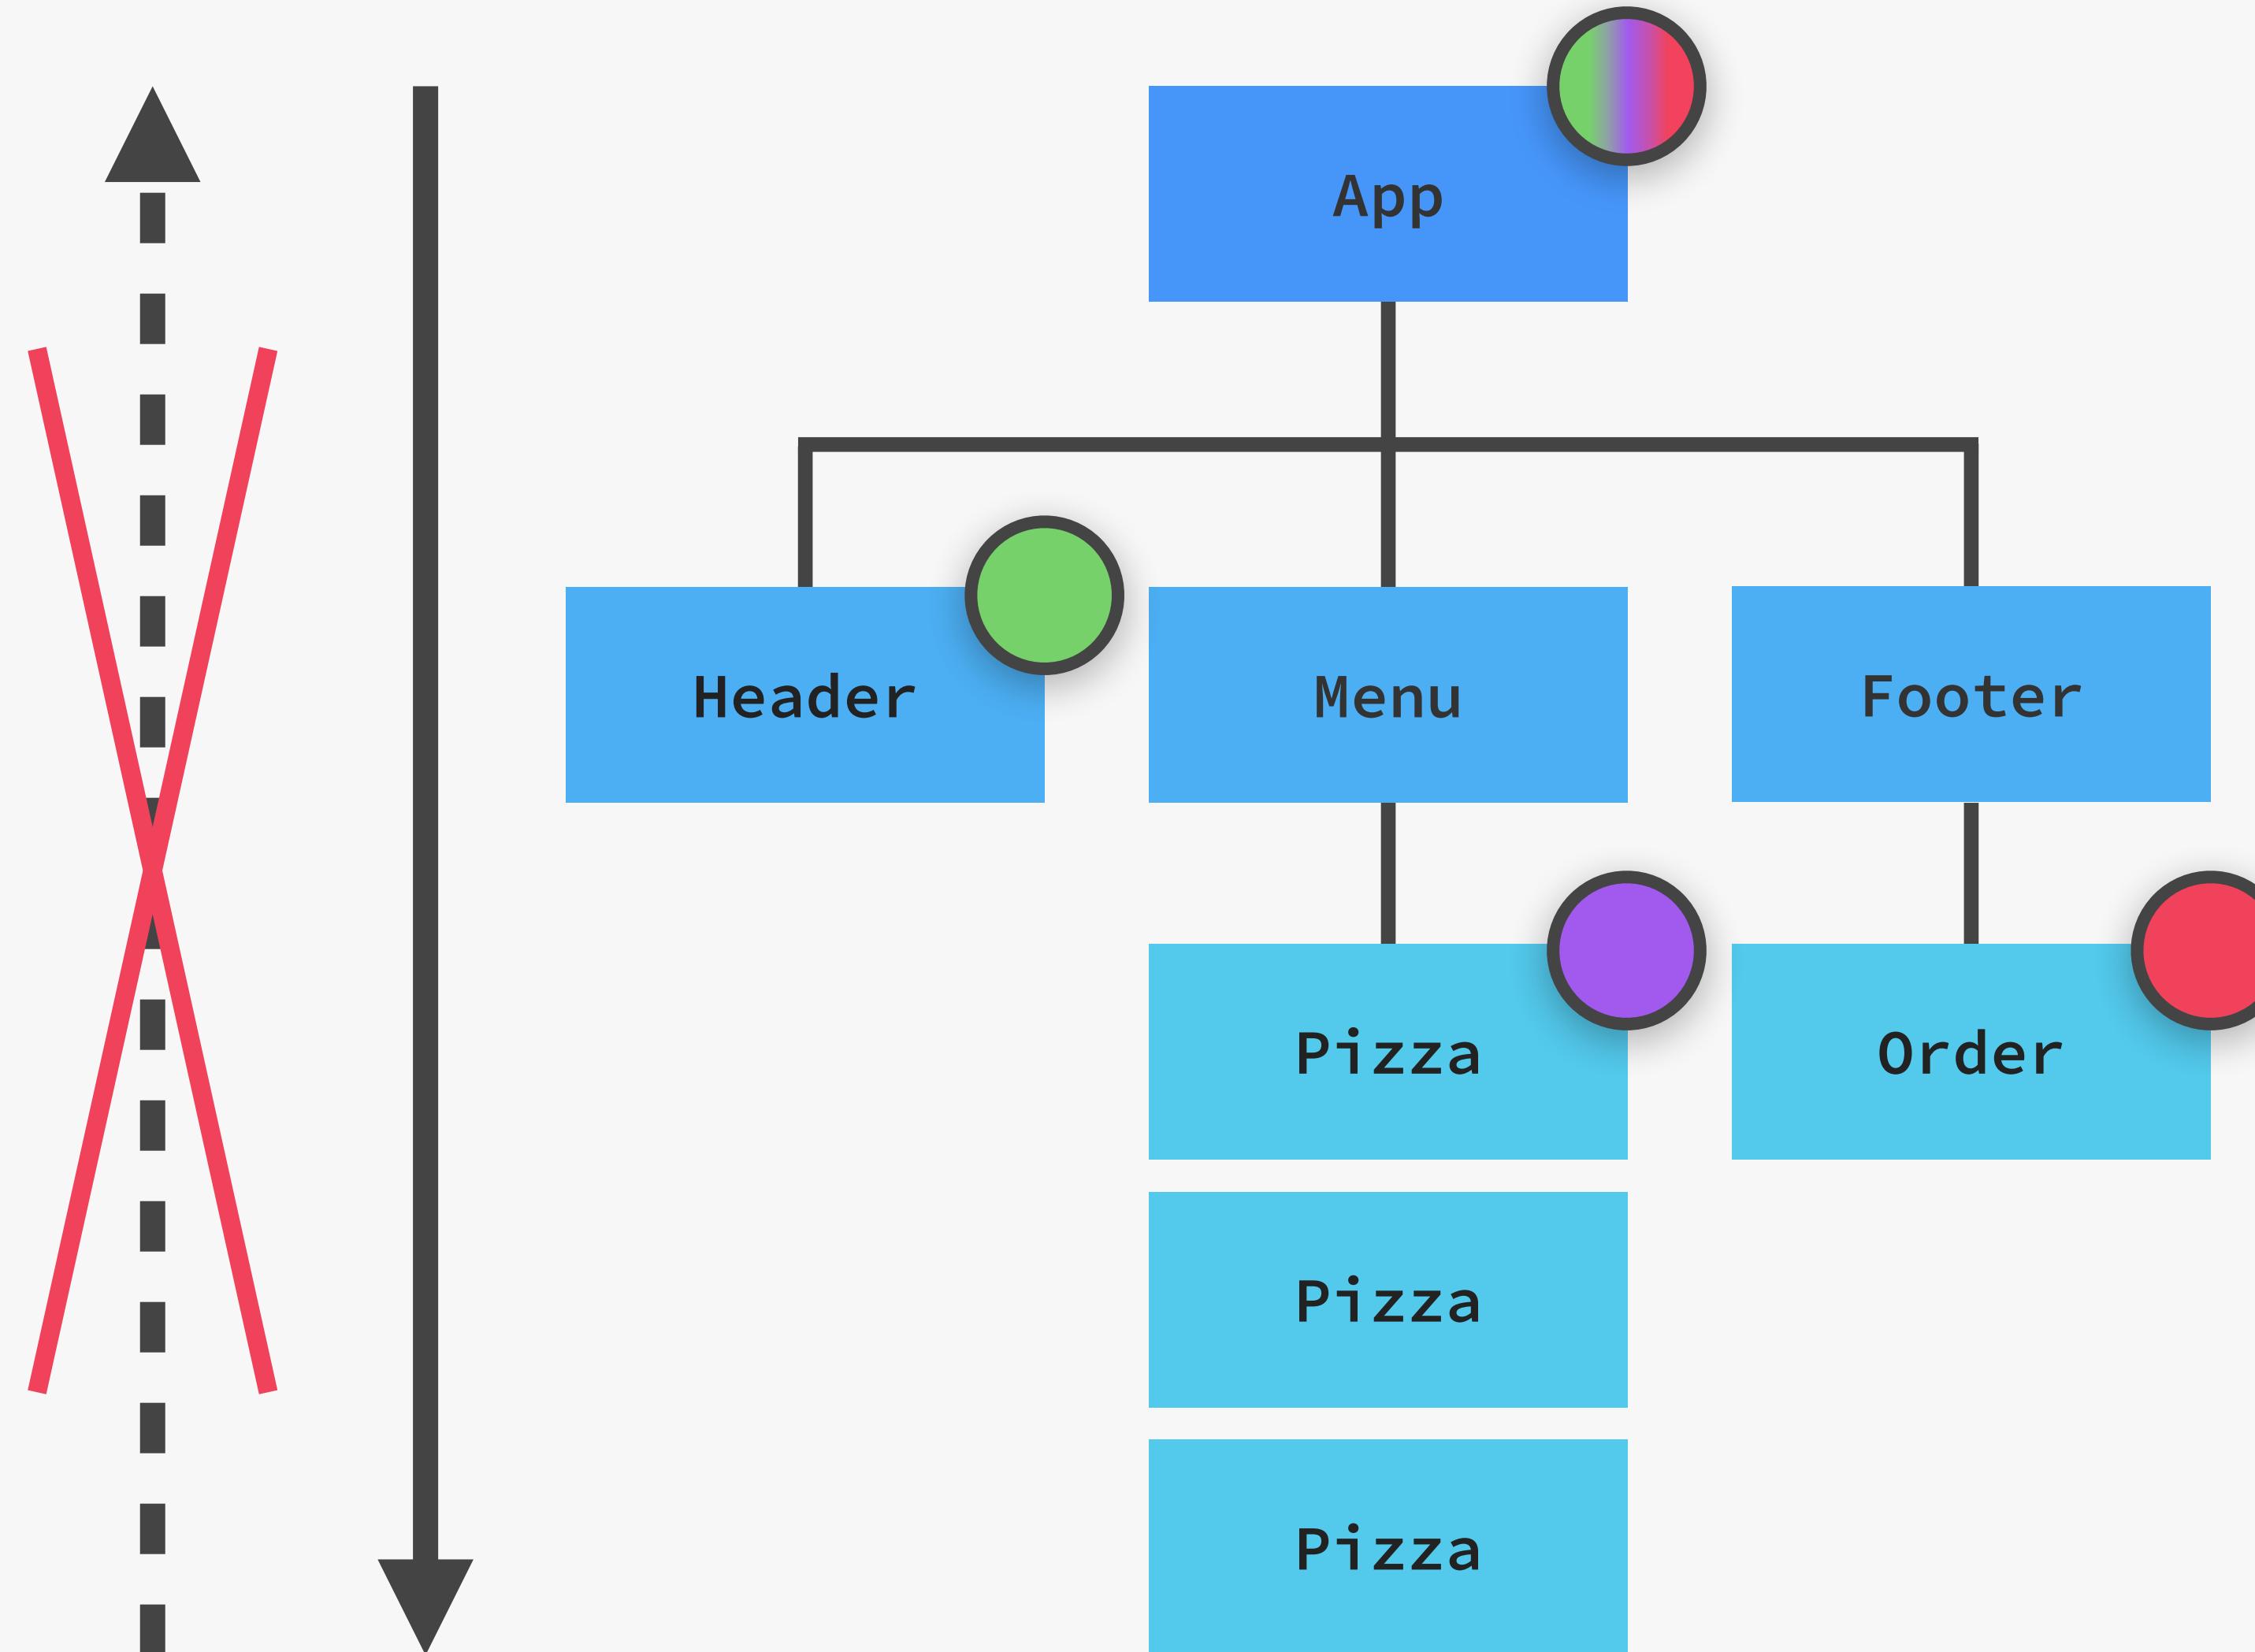

ONE-WAY DATA FLOW...

- 👍 ... makes applications more predictable and easier to understand
- 👍 ... makes applications easier to debug, as we have more control over the data
- 👍 ... is more performant



Angular has two-way data flow



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

WORKING WITH COMPONENTS,
PROPS, AND JSX

LECTURE

THE RULES OF JSX

RULES OF JSX

GENERAL JSX RULES

- 👉 JSX works essentially like HTML, but we can enter “**JavaScript mode**” by using {} (for text or attributes)
 - 👉 We can place **JavaScript expressions** inside {}.
Examples: reference variables, create arrays or objects, [] .map(), ternary operator
 - 👉 Statements are **not allowed** (if/else, for, switch)
 - 👉 JSX produces a **JavaScript expression**
- ==  `const el = <h1>Hello React!</h1>;`
`const el = React.createElement("h1", null, "Hello React!");`
- 1 We can place **other pieces of JSX** inside {}
 - 2 We can write JSX **anywhere** inside a component (in if/else, assign to variables, pass it into functions)
 - 👉 A piece of JSX can only have **one root element**. If you need more, use <React.Fragment> (or the short <>)

DIFFERENCES BETWEEN JSX AND HTML

- 👉 `className` instead of HTML's `class`
- 👉 `htmlFor` instead of HTML's `for`
- 👉 Every tag needs to be **closed**. Examples: `` or `
`
- 👉 All event handlers and other properties need to be **camelCased**. Examples: `onClick` or `onMouseOver`
- 👉 **Exception:** `aria-*` and `data-*` are written with dashes like in HTML
- 👉 CSS inline styles are written like this: `{}{{<style>}}` (to reference a variable, and then an object)
- 👉 CSS property names are also **camelCased**
- 👉 Comments need to be in {} (because they are JS)



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

WORKING WITH COMPONENTS,
PROPS, AND JSX


LECTURE

SECTION SUMMARY




SECTION SUMMARY

To pass data from parent to child components

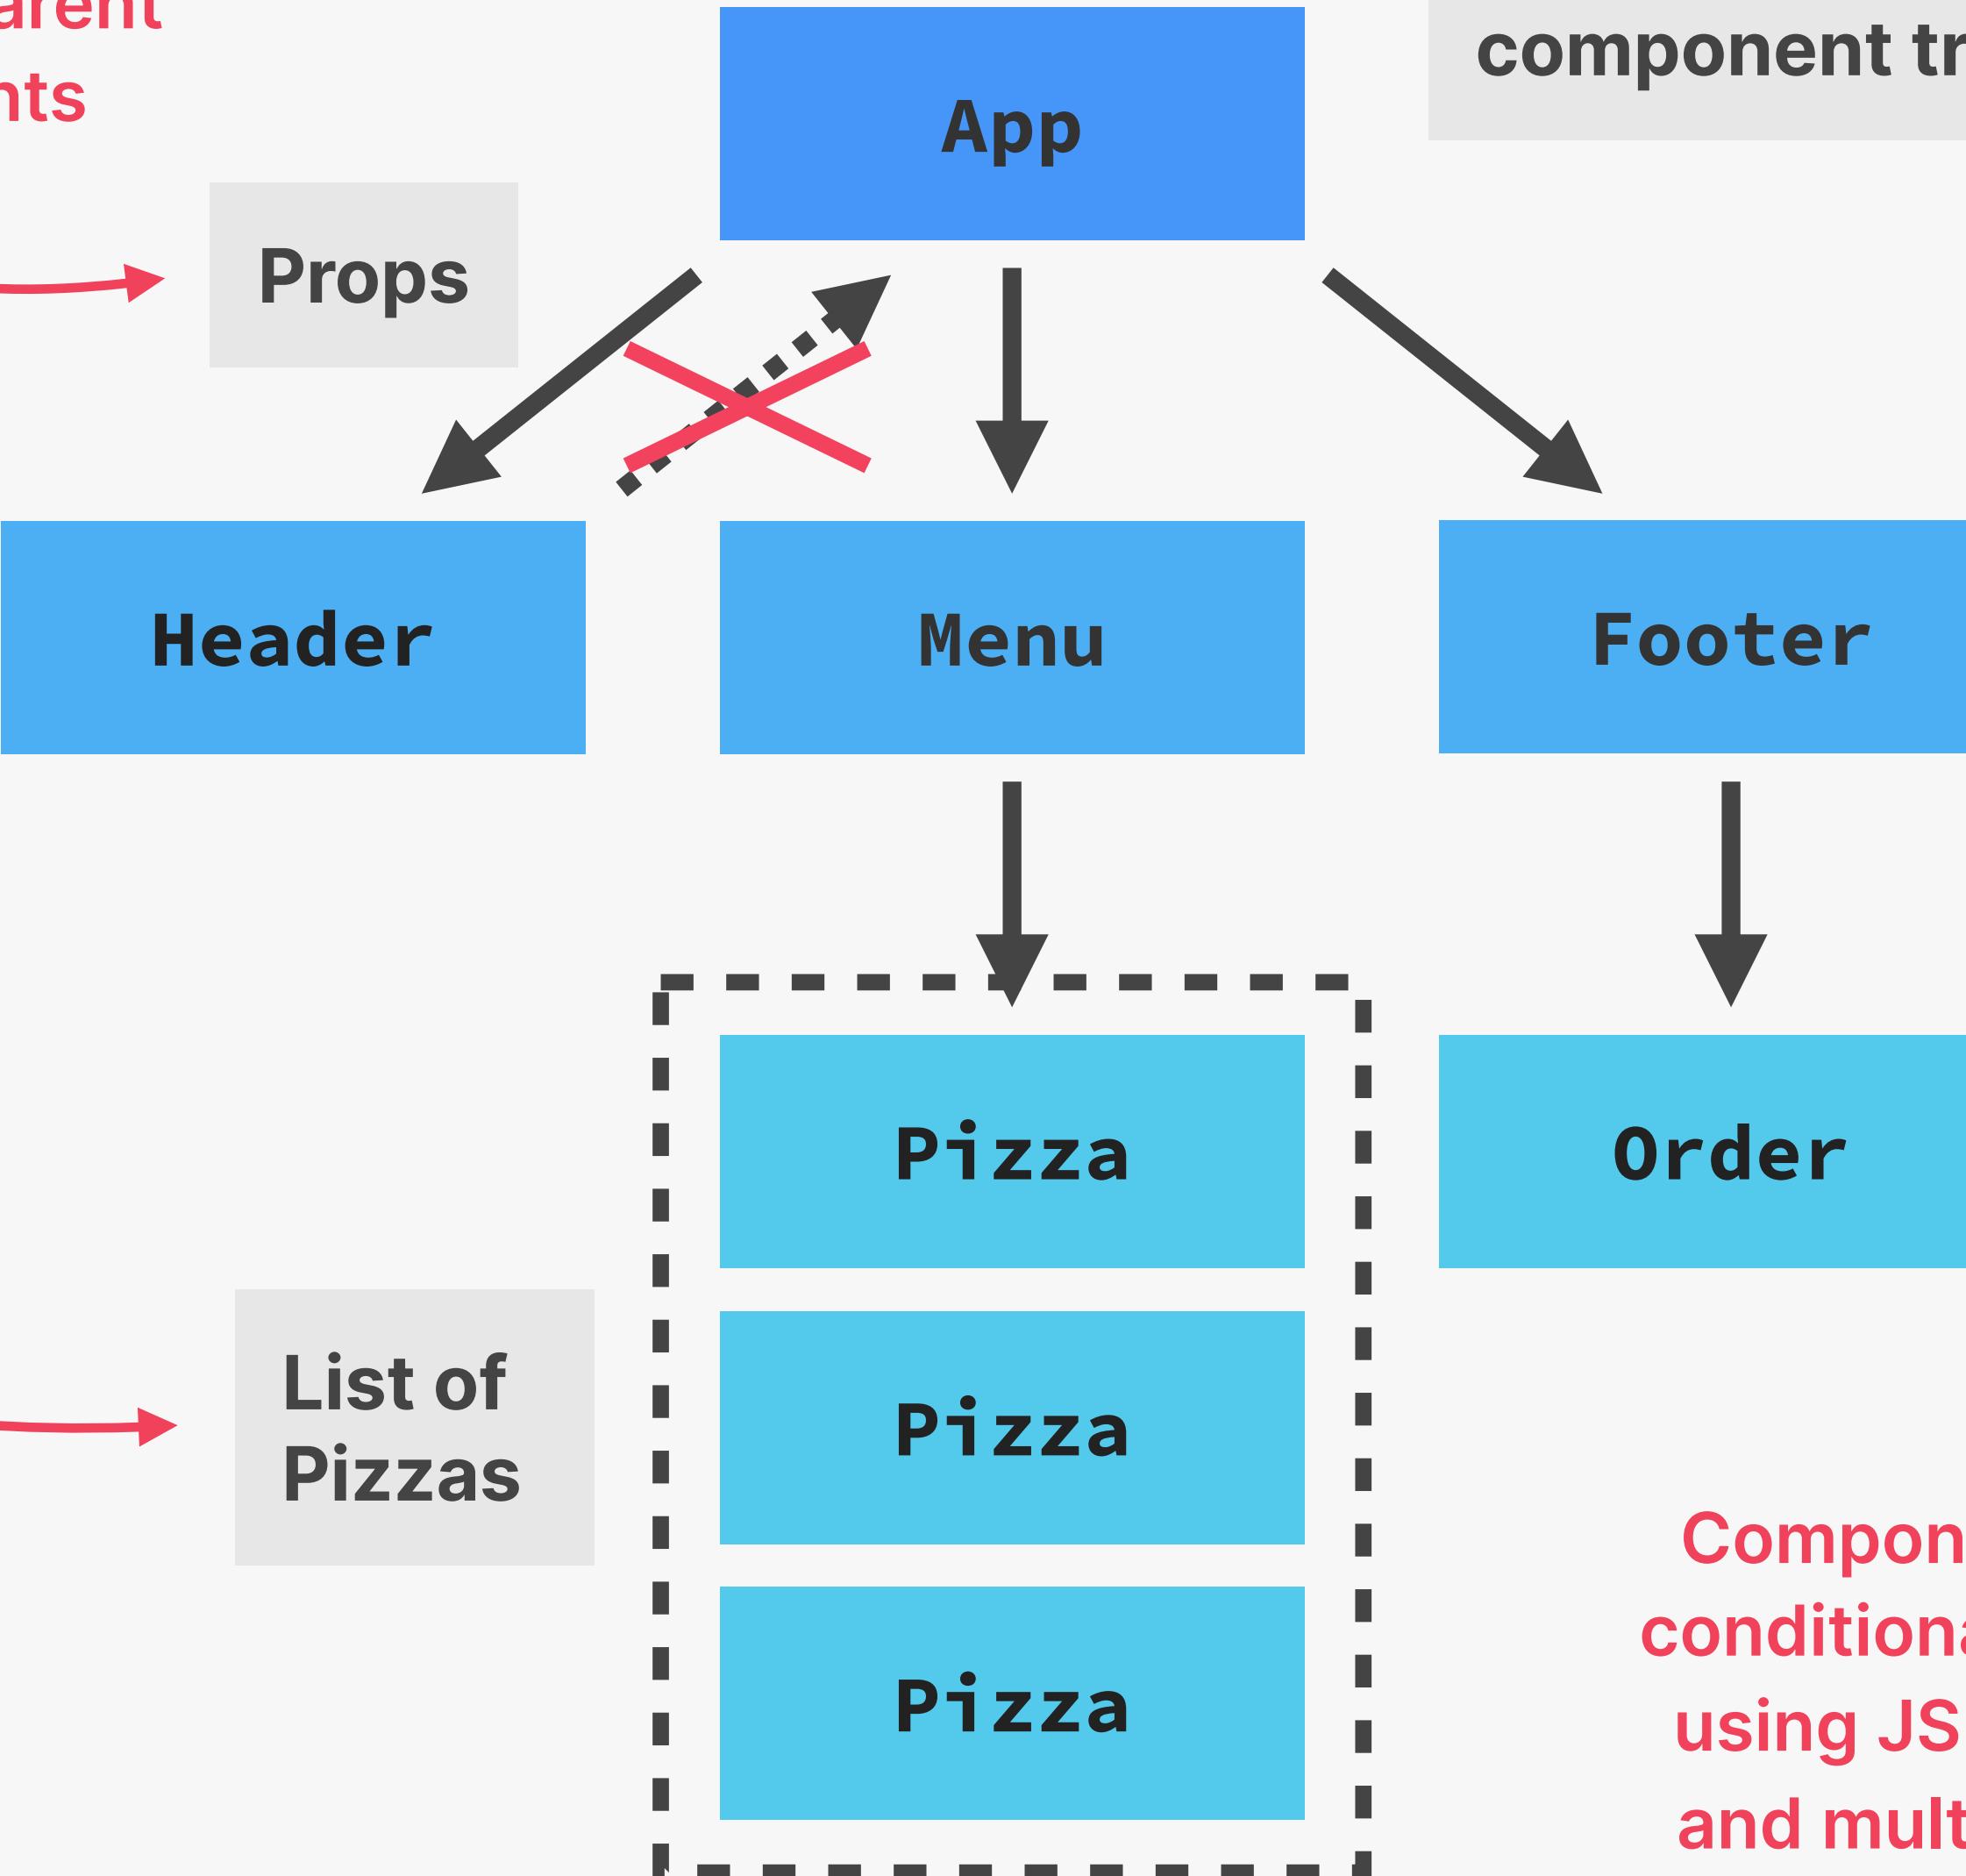

Components in component tree

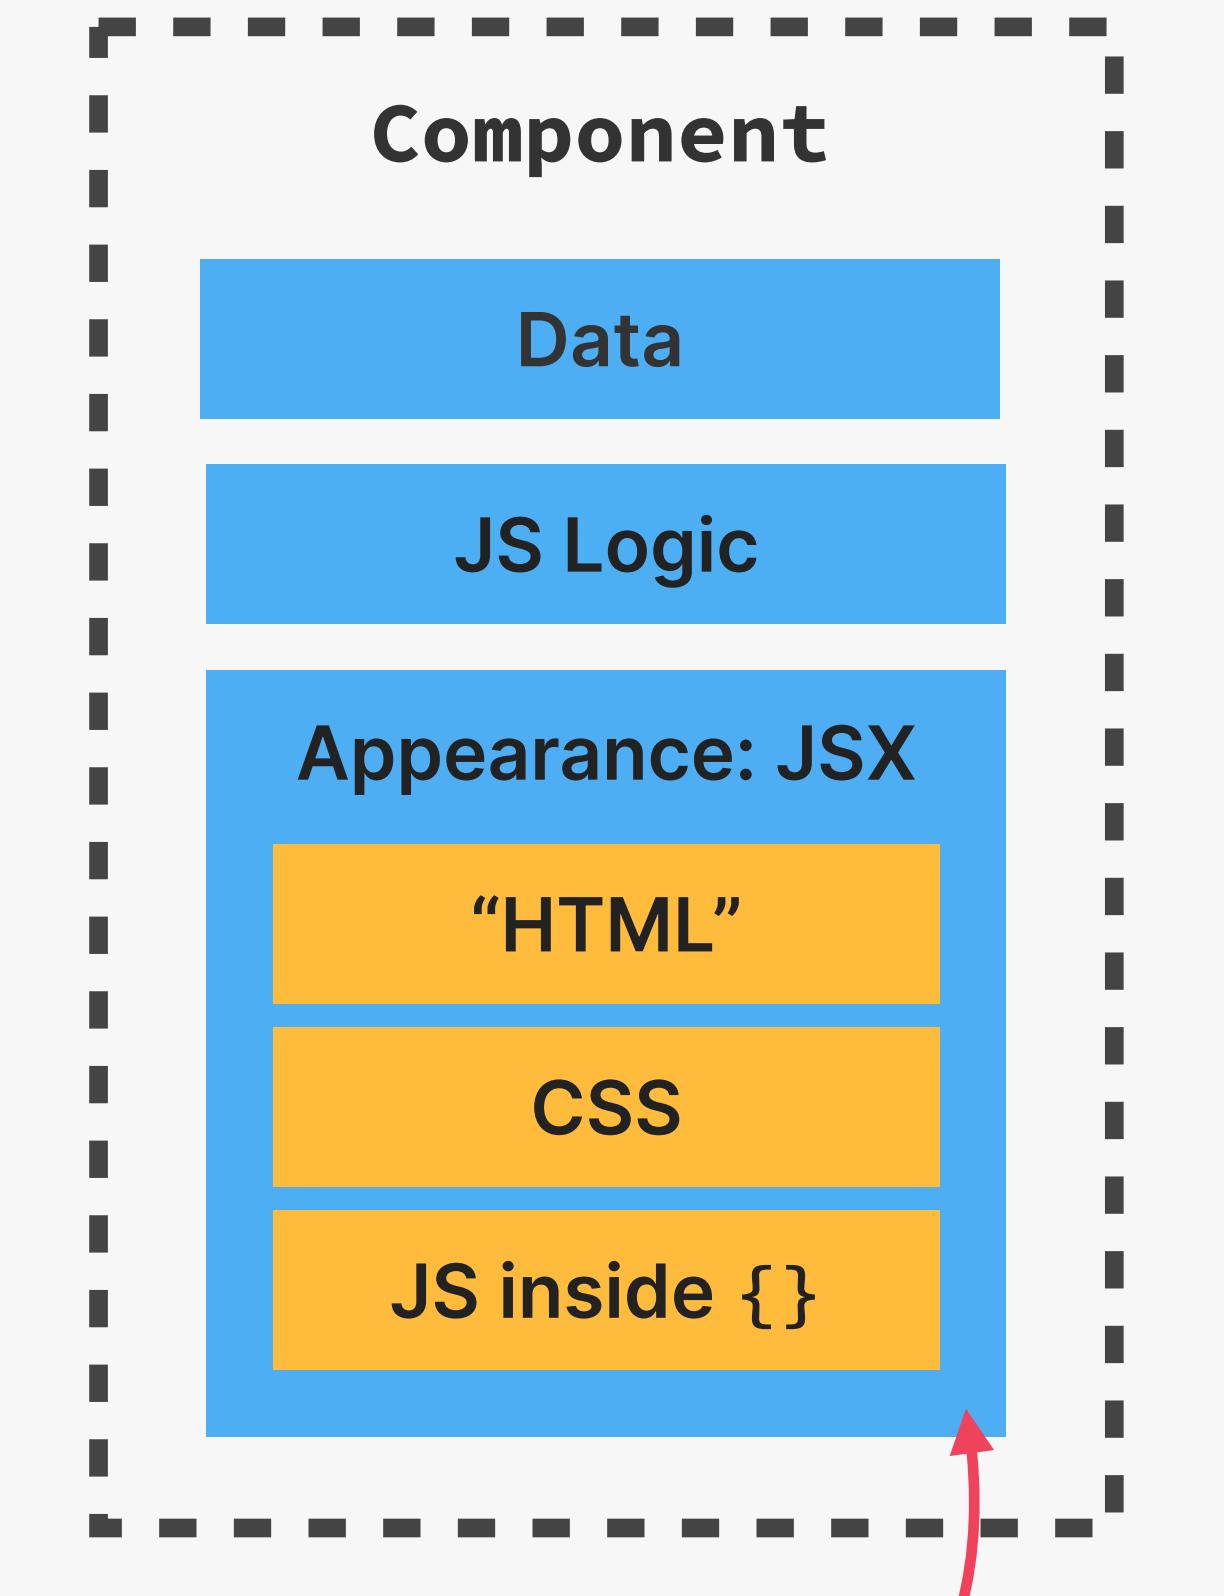

Components can be conditionally rendered using JS tools: &&, ?, and multiple return

JSX block is what we return from a component

STATE, EVENTS, AND FORMS: INTERACTIVE COMPONENTS



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION


STATE, EVENTS, AND FORMS:
INTERACTIVE COMPONENTS

LECTURE

WHAT IS STATE IN REACT?



WHAT WE NEED TO LEARN

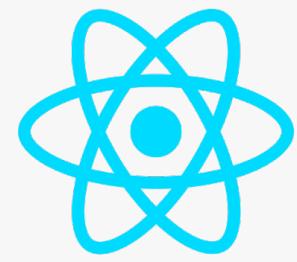

WHAT REACT DEVELOPERS NEED TO LEARN ABOUT STATE:

1

What is state and why do we need it?

This section

2

How to use state in practice?

- 👉 useState
- 👉 useReducer
- 👉 Context API

3

Thinking about state

- 👉 When to use state
- 👉 Where to place state
- 👉 Types of state



Rest of the course...



State is the most important concept in React

(So we will keep learning about state throughout the entire course...)

WHAT IS STATE?

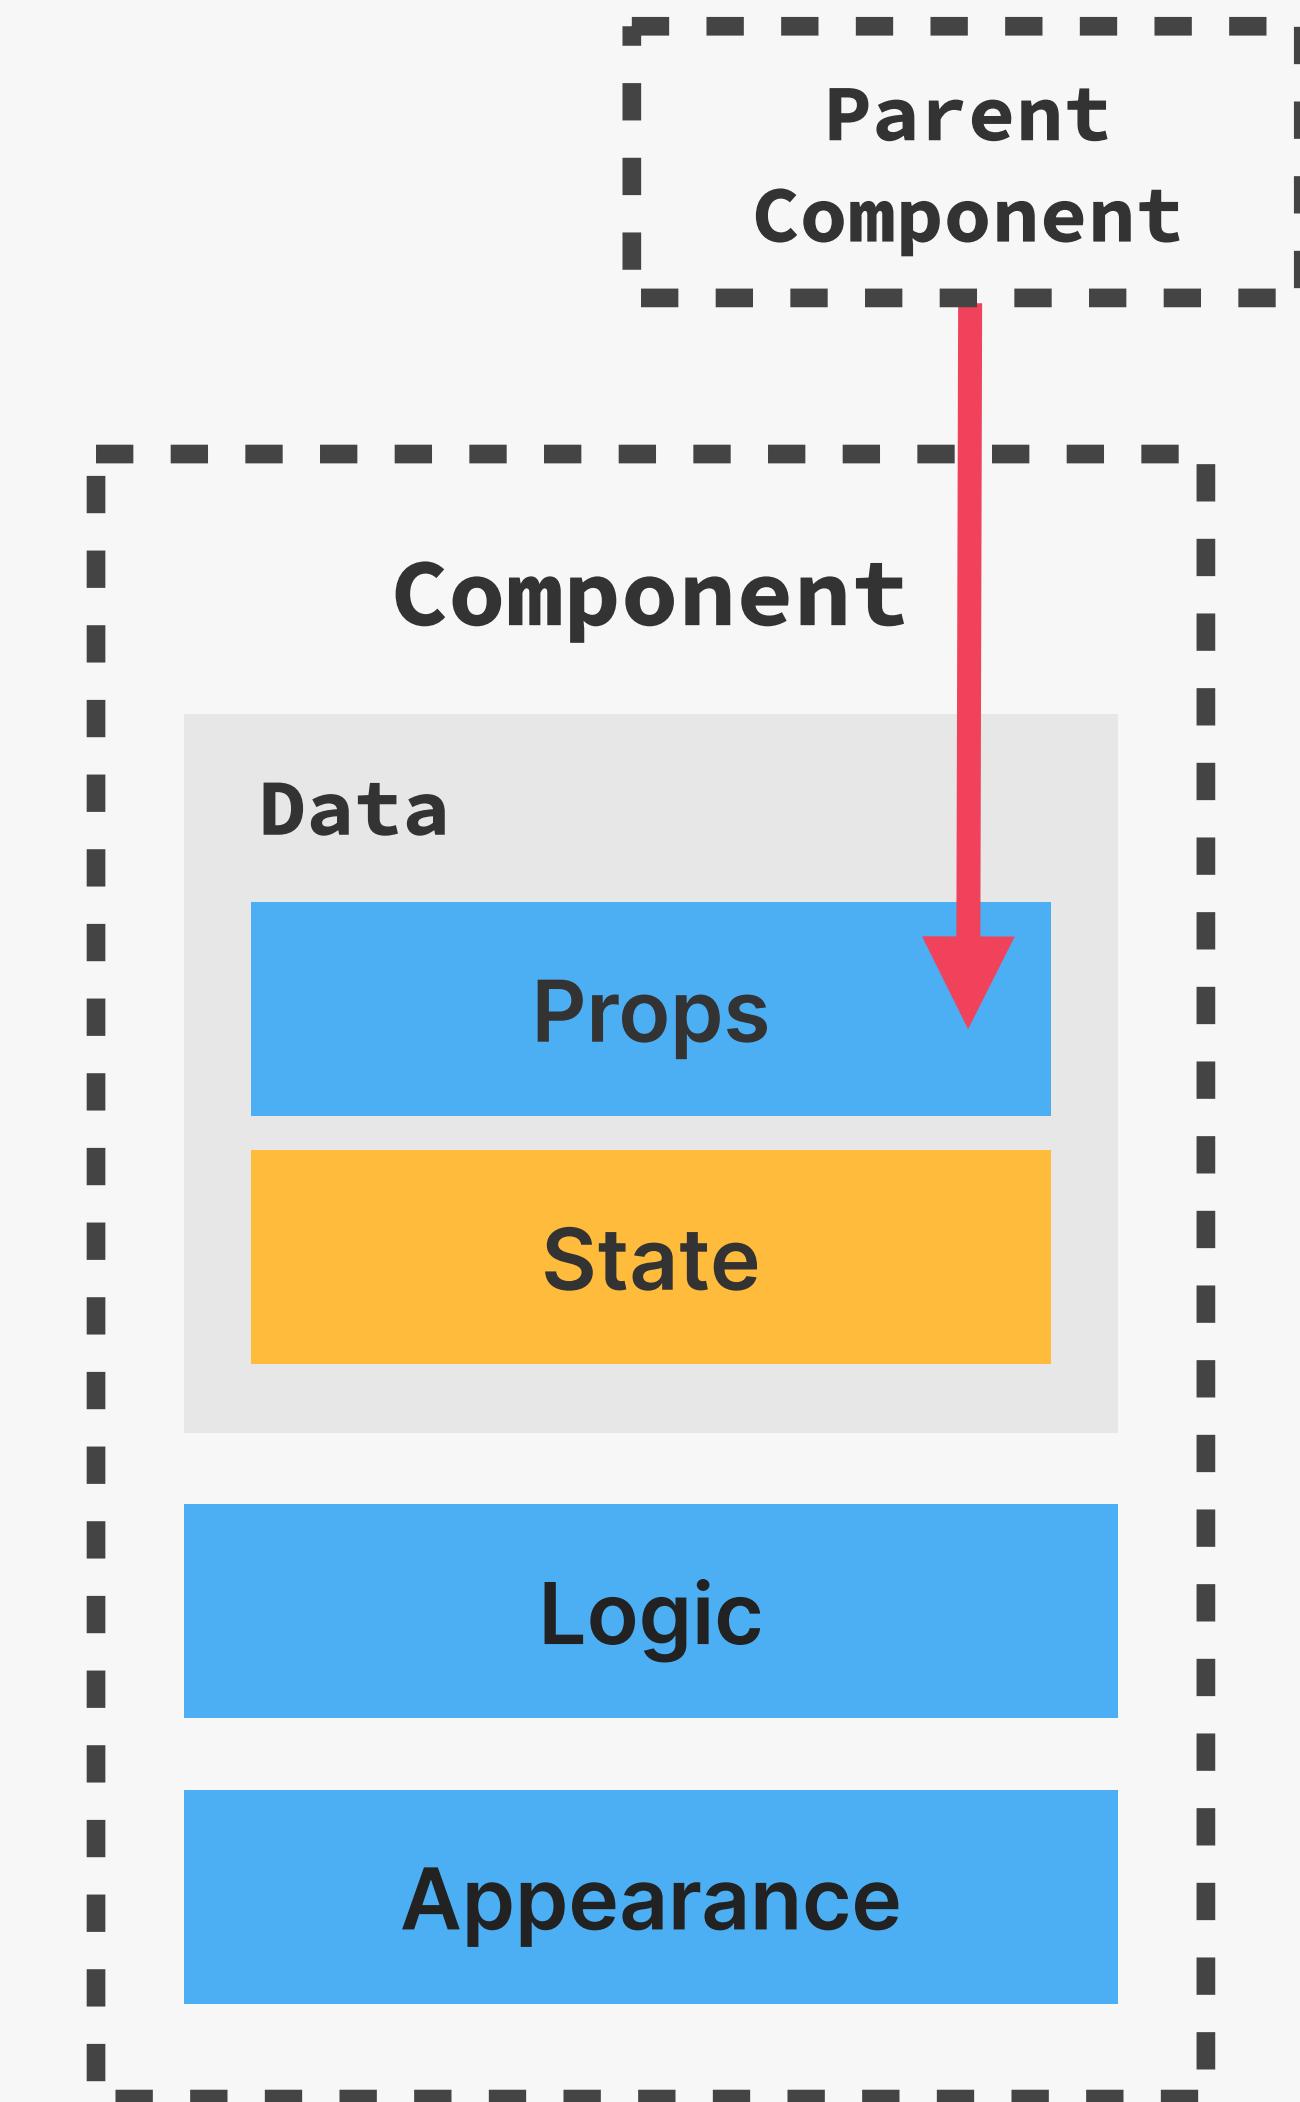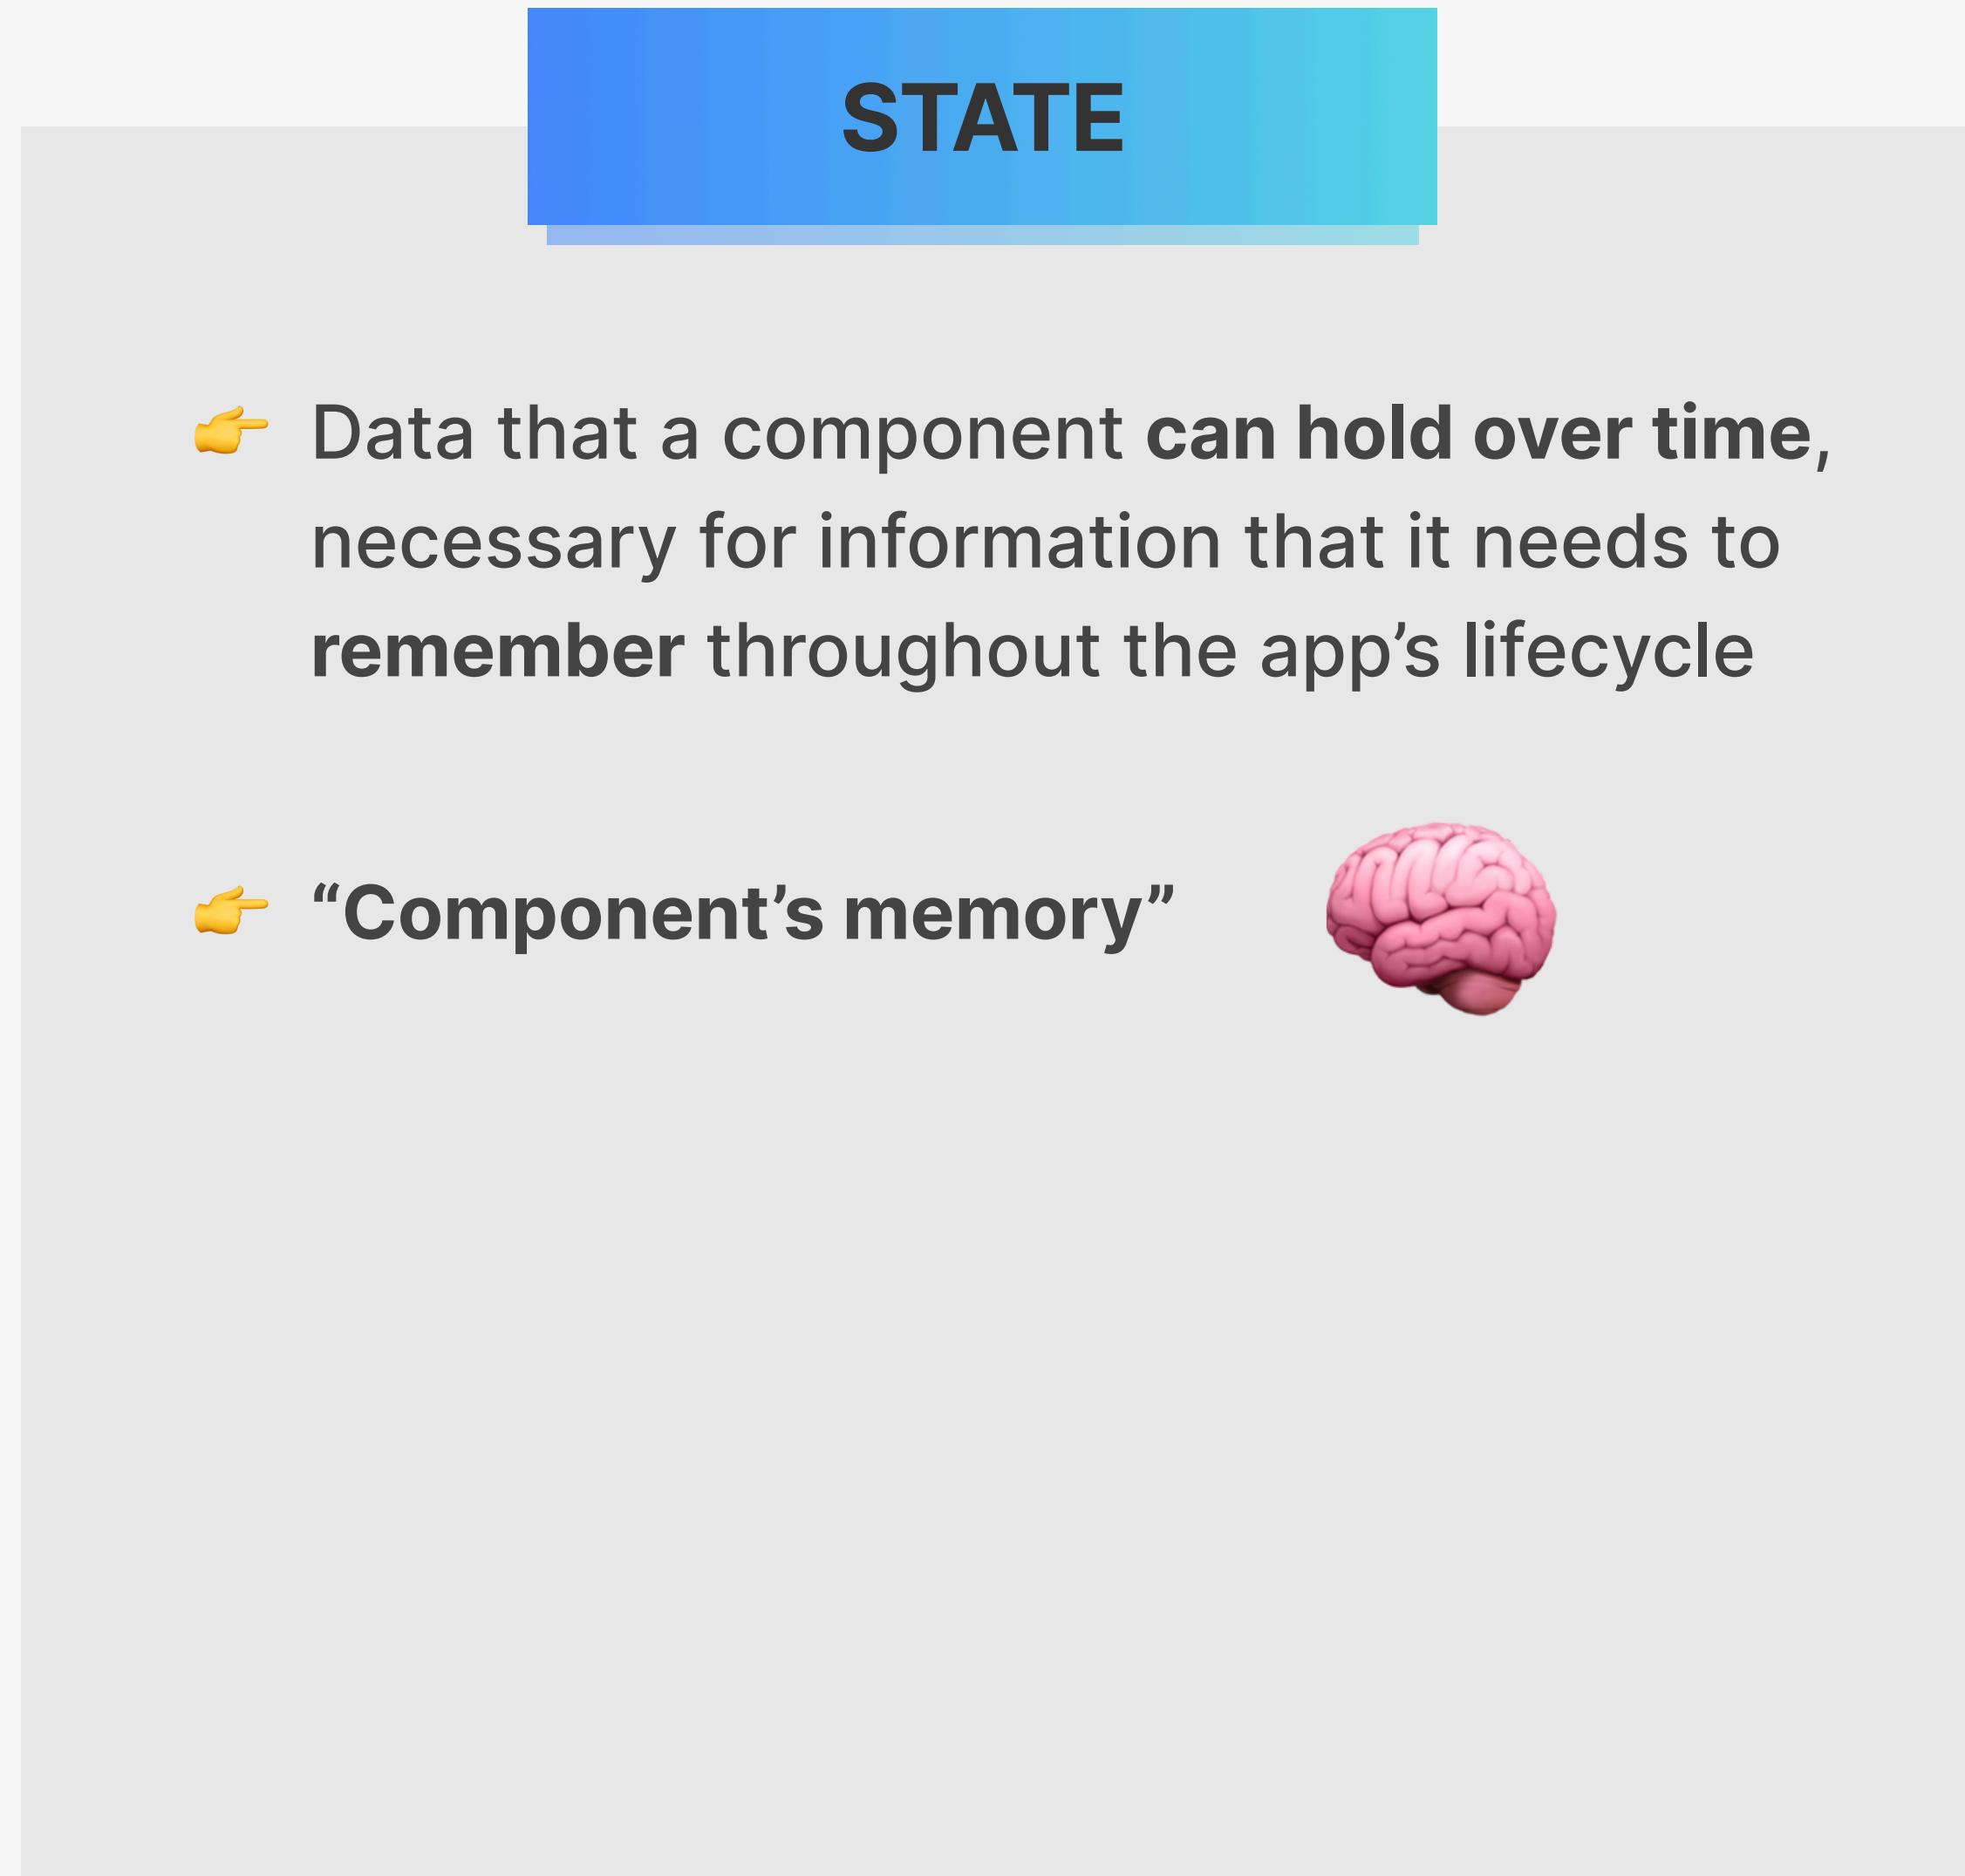

WHAT IS STATE?

STATE

👉 Data that a component **can hold over time**, necessary for information that it needs to **remember throughout the app's lifecycle**

👉 “**Component's memory**”



👉 “**State variable**” / “**piece of state**”: A single variable in a component (component state)

We use these terms interchangeably

Notifications

Messages



javascr

Overview

Q&A

Notes

Announcements

Shopping Cart



2 Courses in Cart

Node.js, Express, MongoDB & More: The Complete Bootcamp 2022 By Jonas Schmedtmann, Web Developer, Designer, and Teacher €12.99 ⚡ Updated Recently
The Complete JavaScript Course 2022: From Zero to Expert! By Jonas Schmedtmann, Web Developer, Designer, and Teacher €12.99 ⚡ Bestseller Updated Recently

WHAT IS STATE?



WHAT IS STATE?

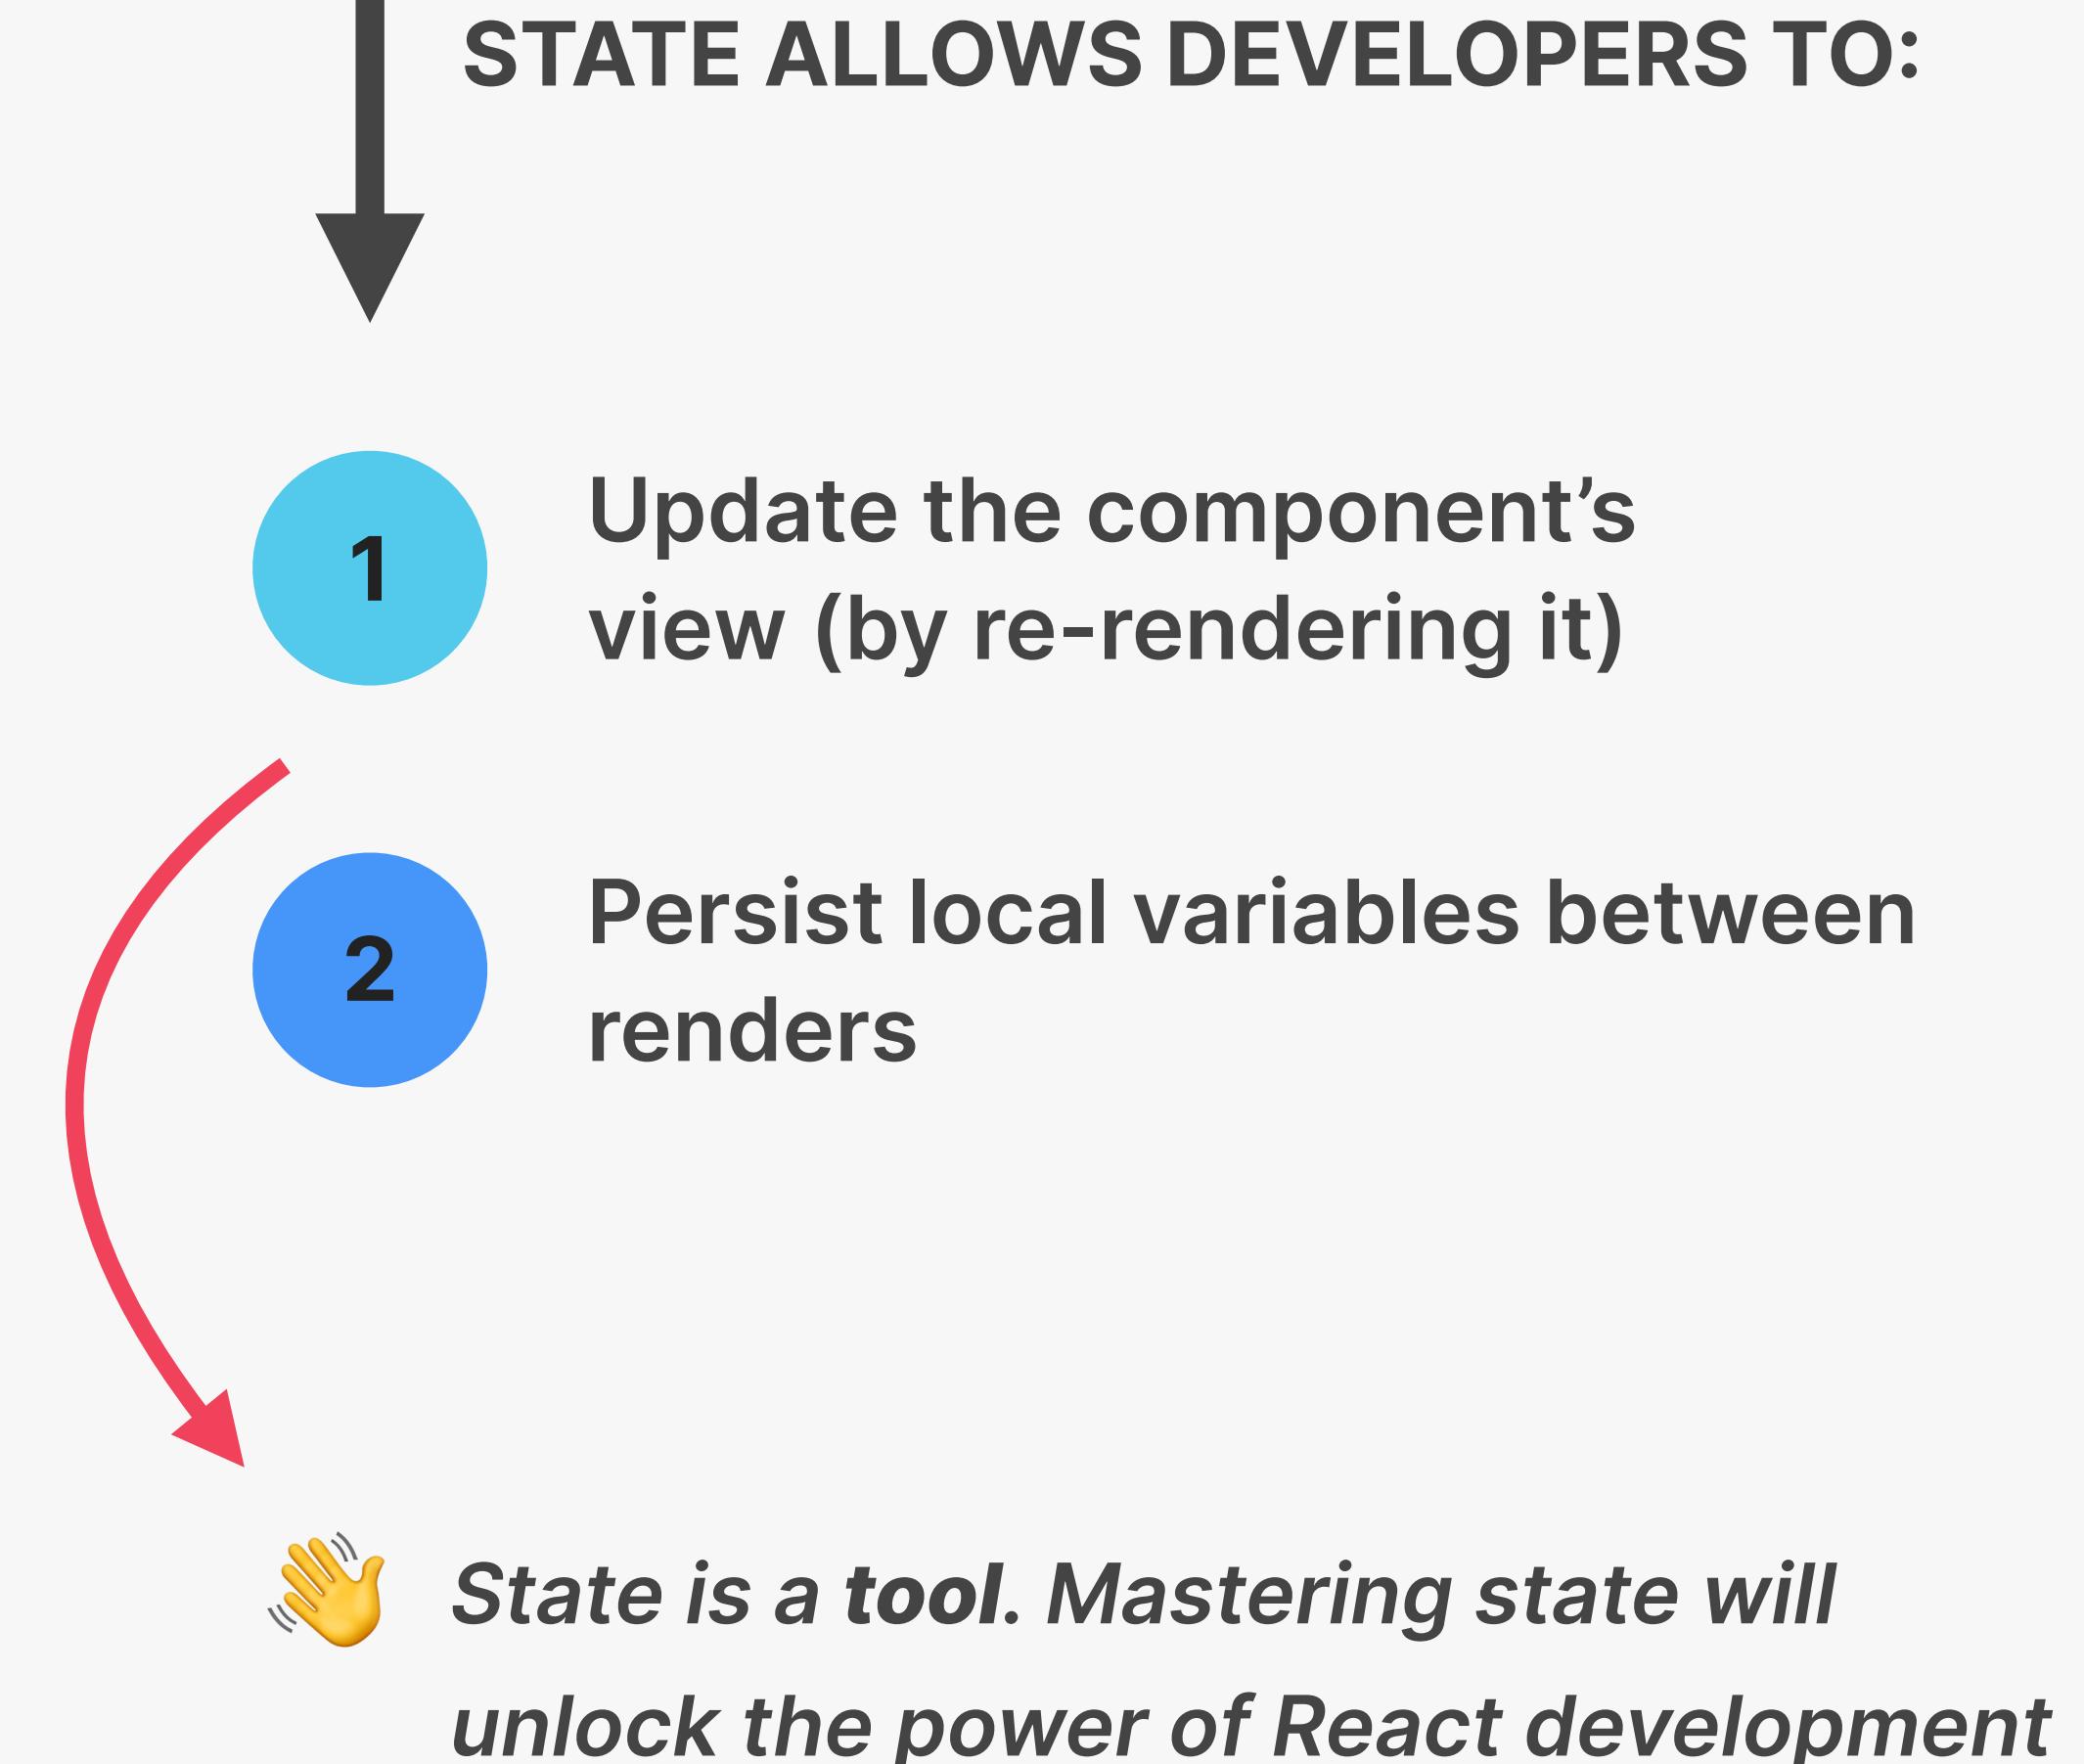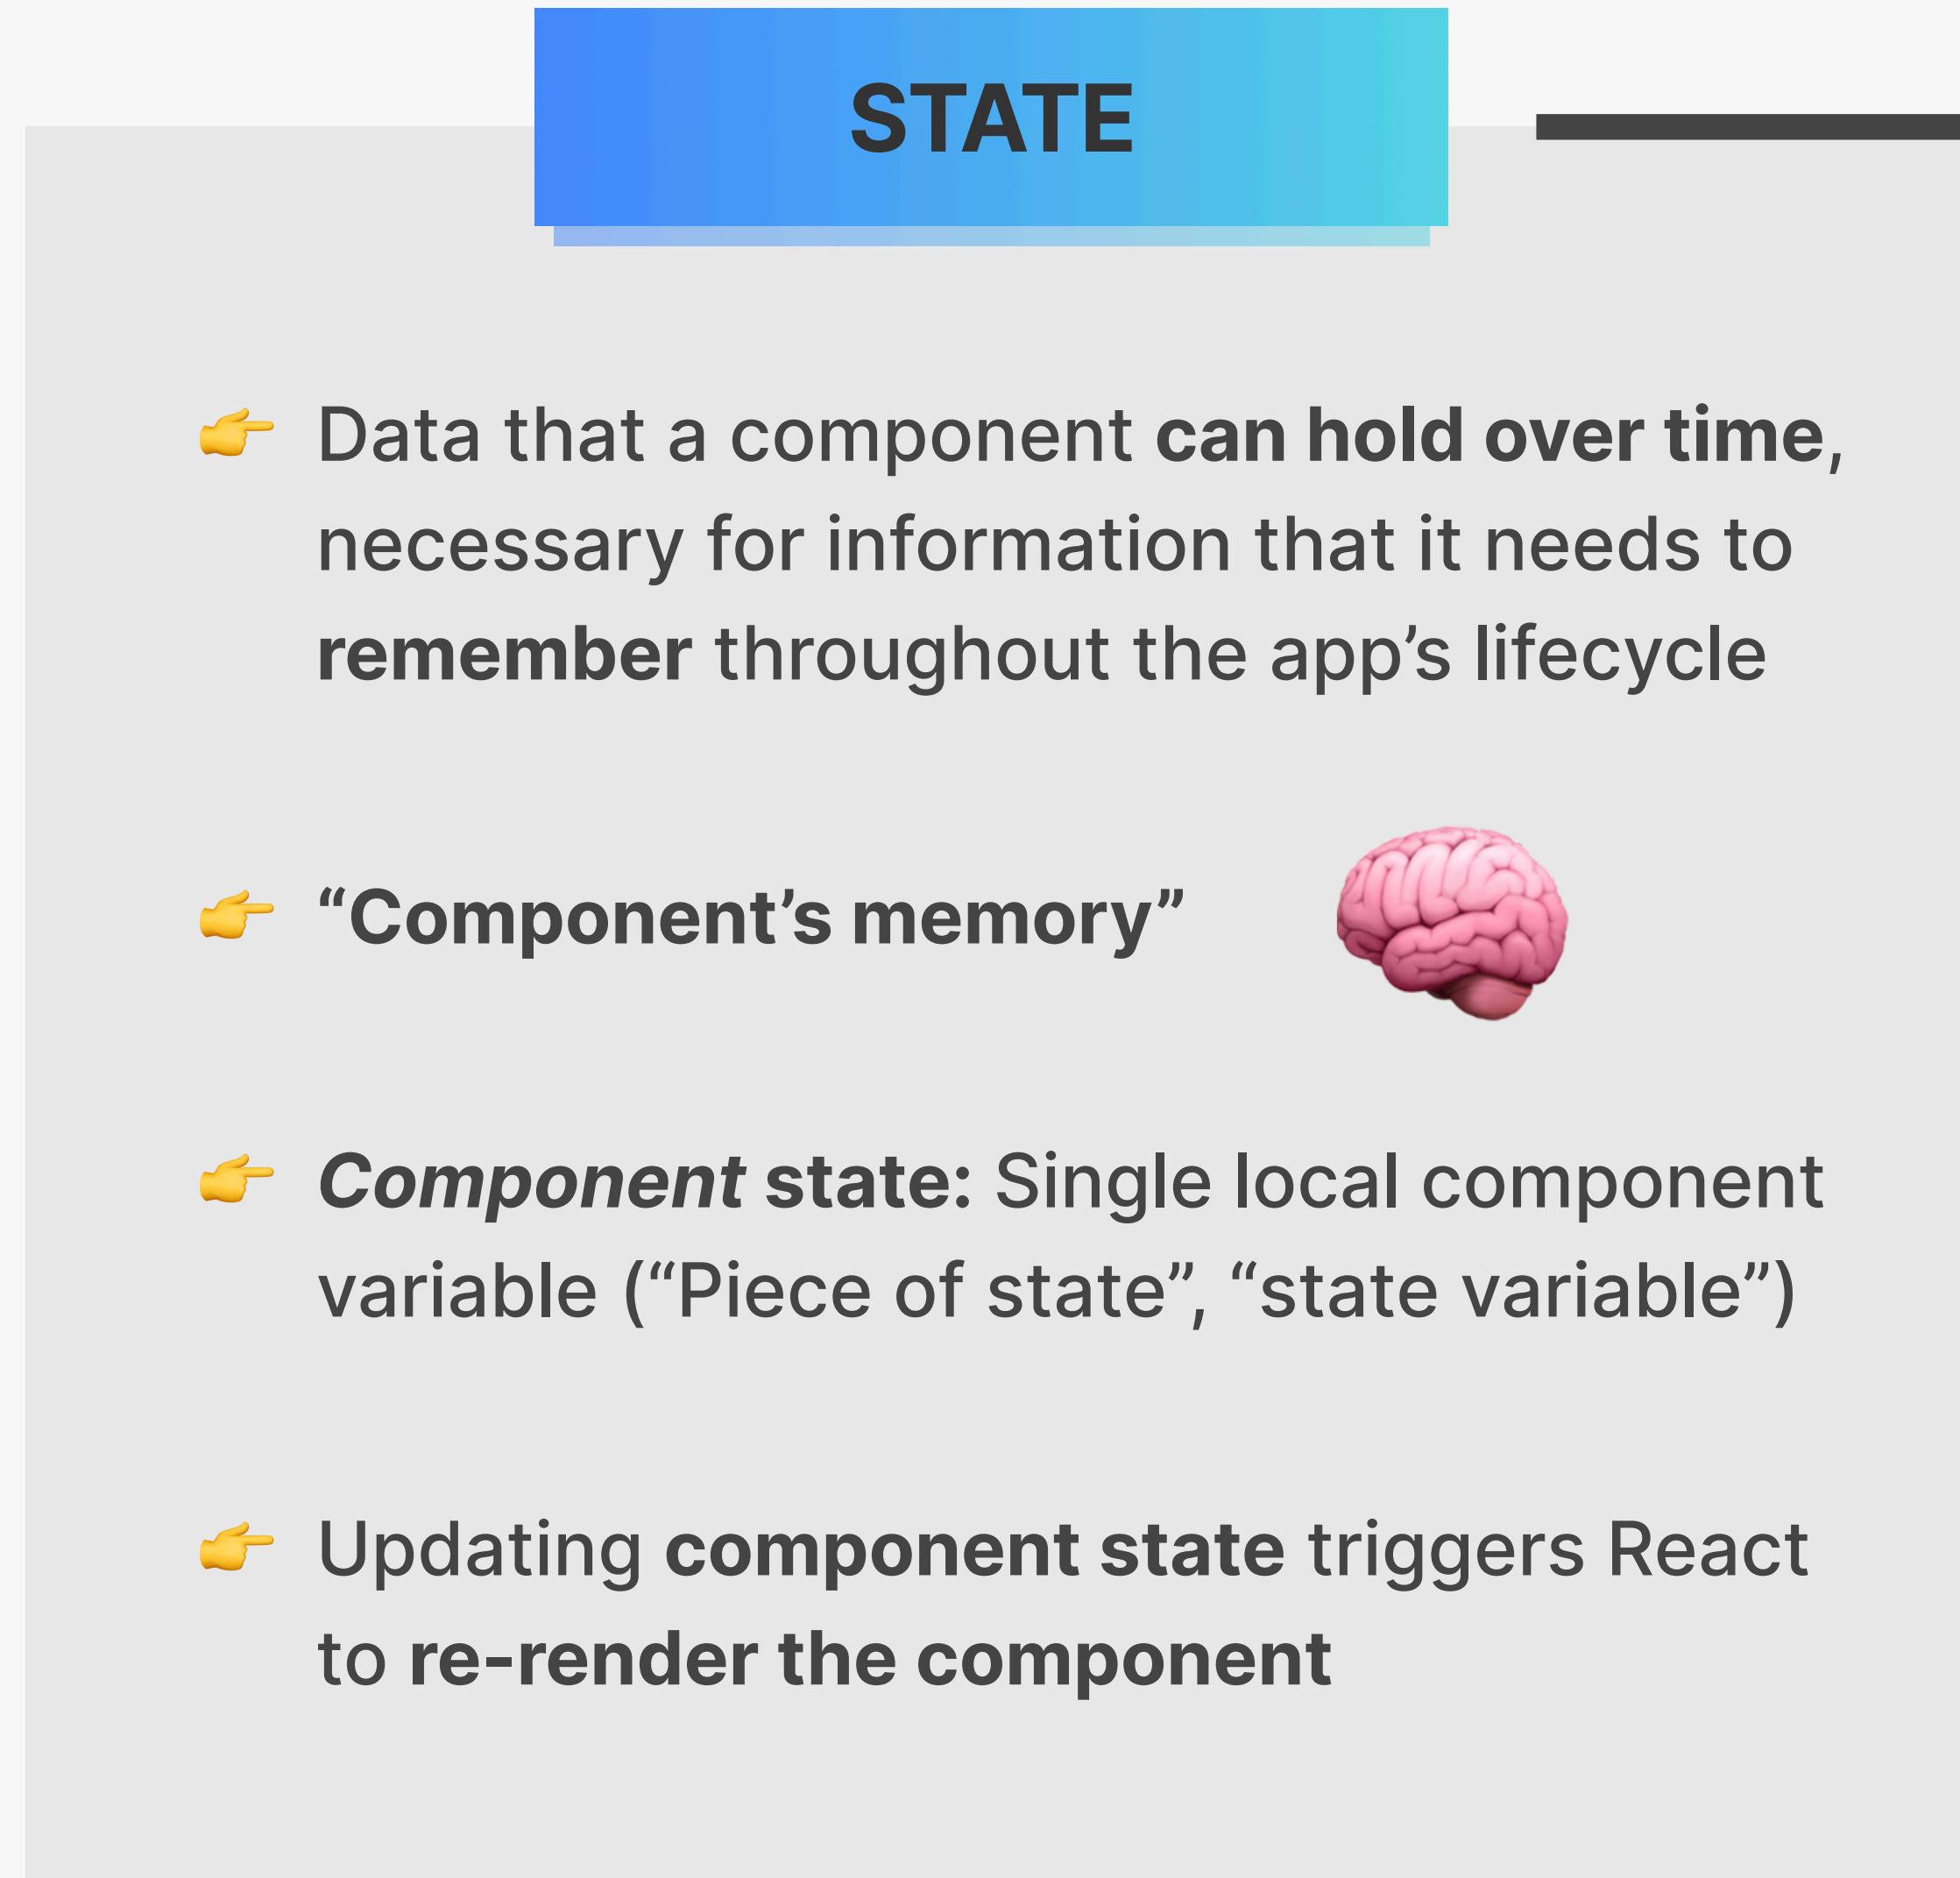



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

STATE, EVENTS, AND FORMS:
INTERACTIVE COMPONENTS


LECTURE

THE MECHANICS OF STATE


THE MECHANICS OF STATE IN REACT

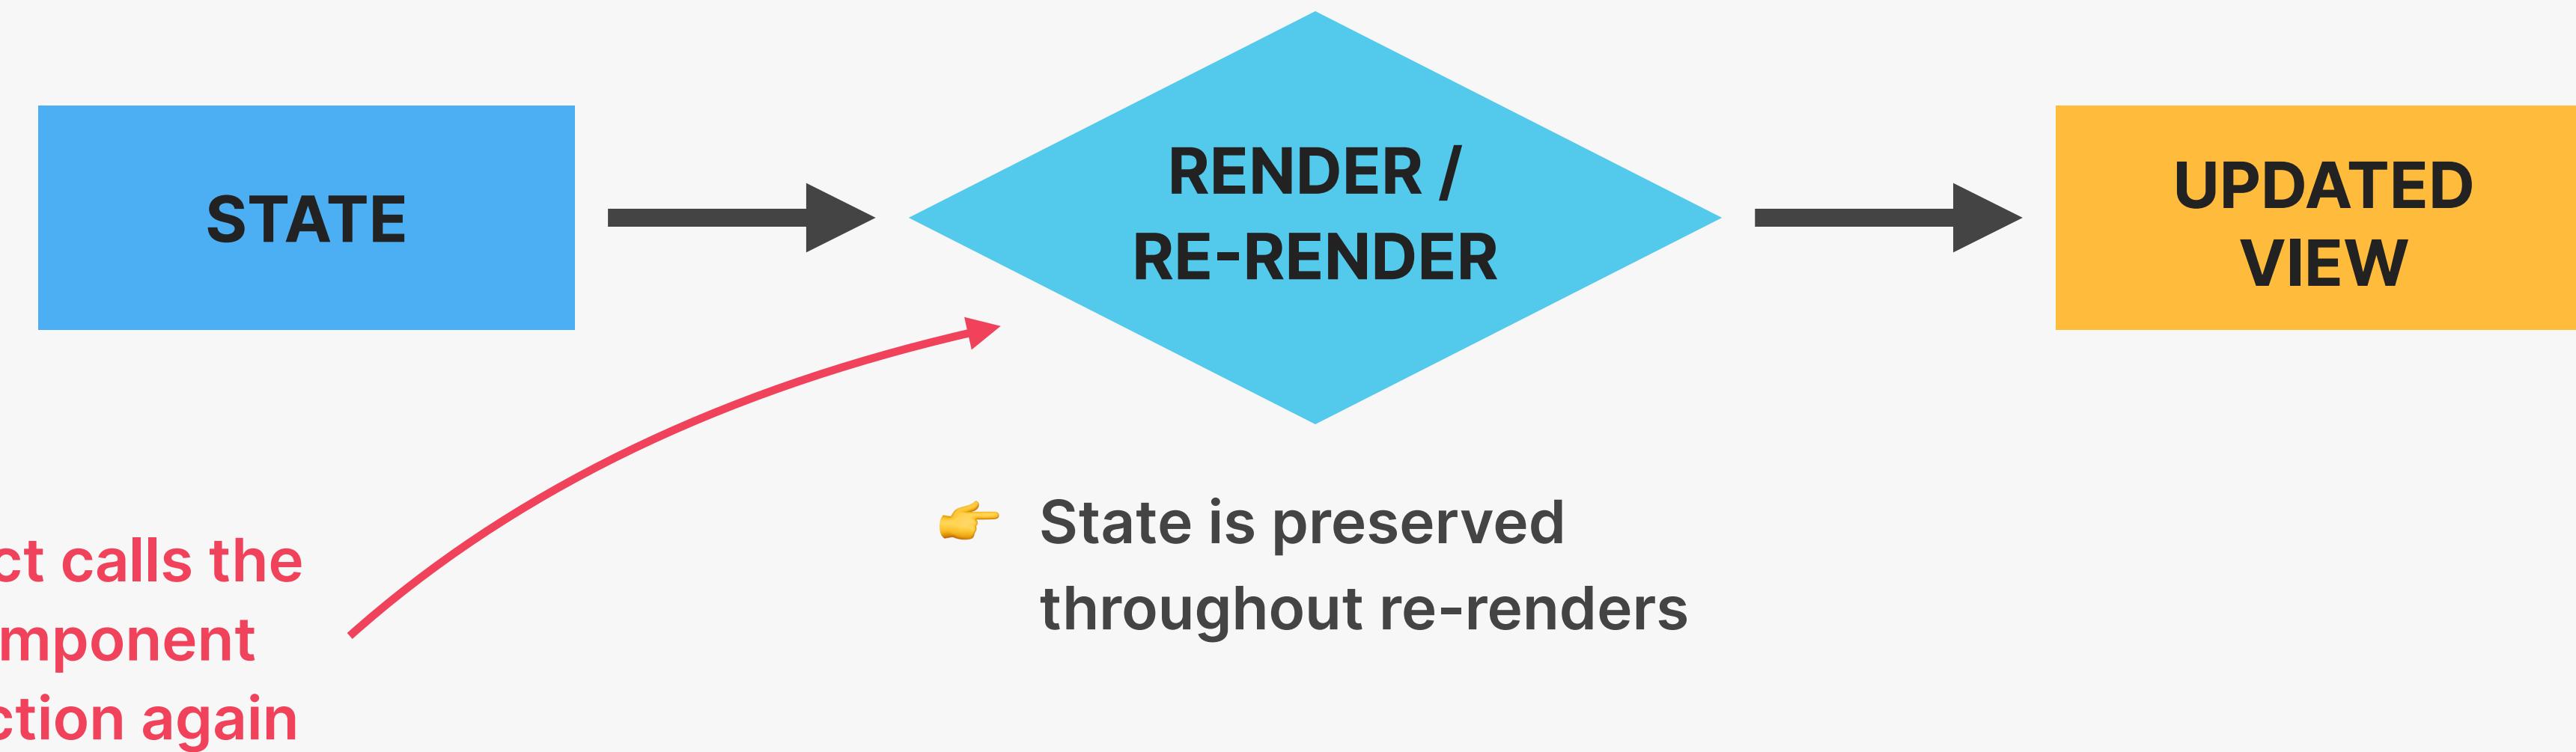

THE MECHANICS OF STATE IN REACT

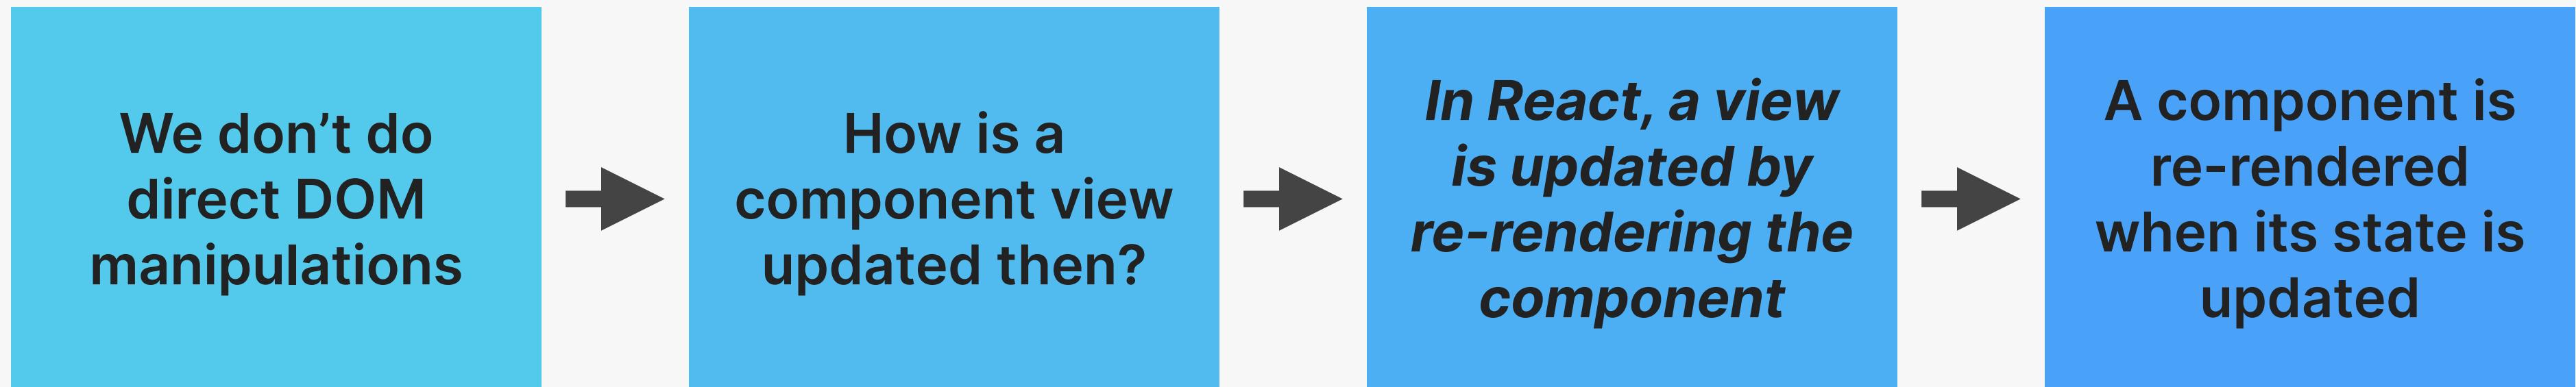

THE MECHANICS OF STATE IN REACT

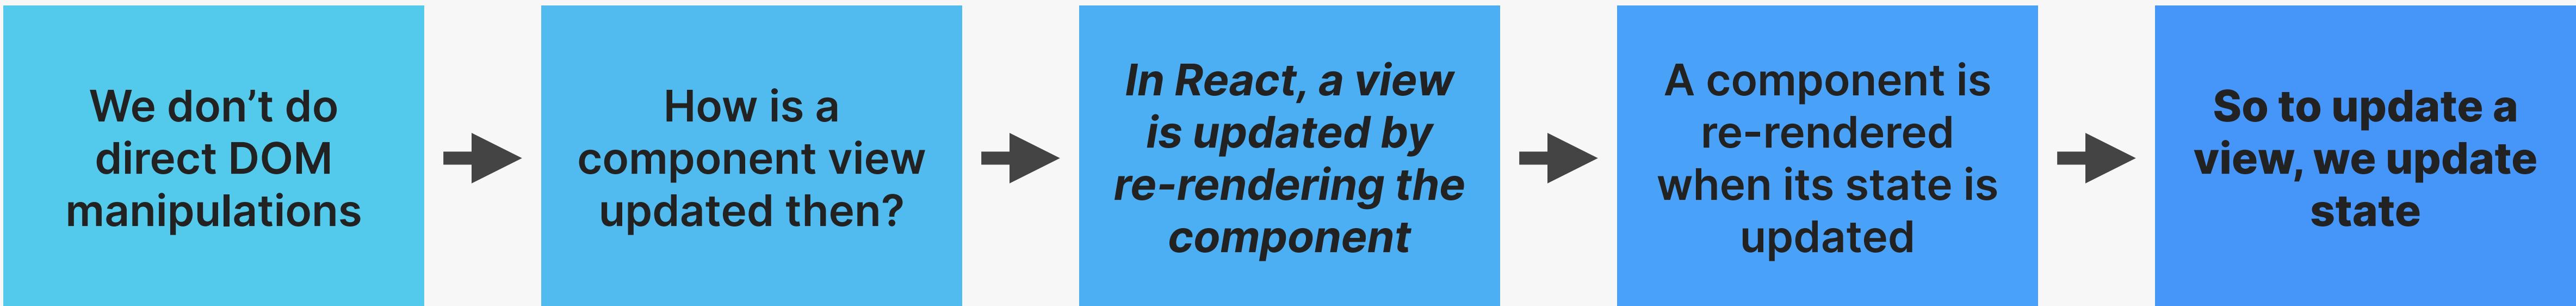

```
const [advice, setAdvice] =  
  useState("Quality beats quantity.");  
const [countAdvice, setCountAdvice] =  
  useState(13);
```


RE-RENDER

UPDATE STATE


```
setAdvice(data.slip.advice);  
setCountAdvice((count) => count + 1);
```



THE MECHANICS OF STATE IN REACT

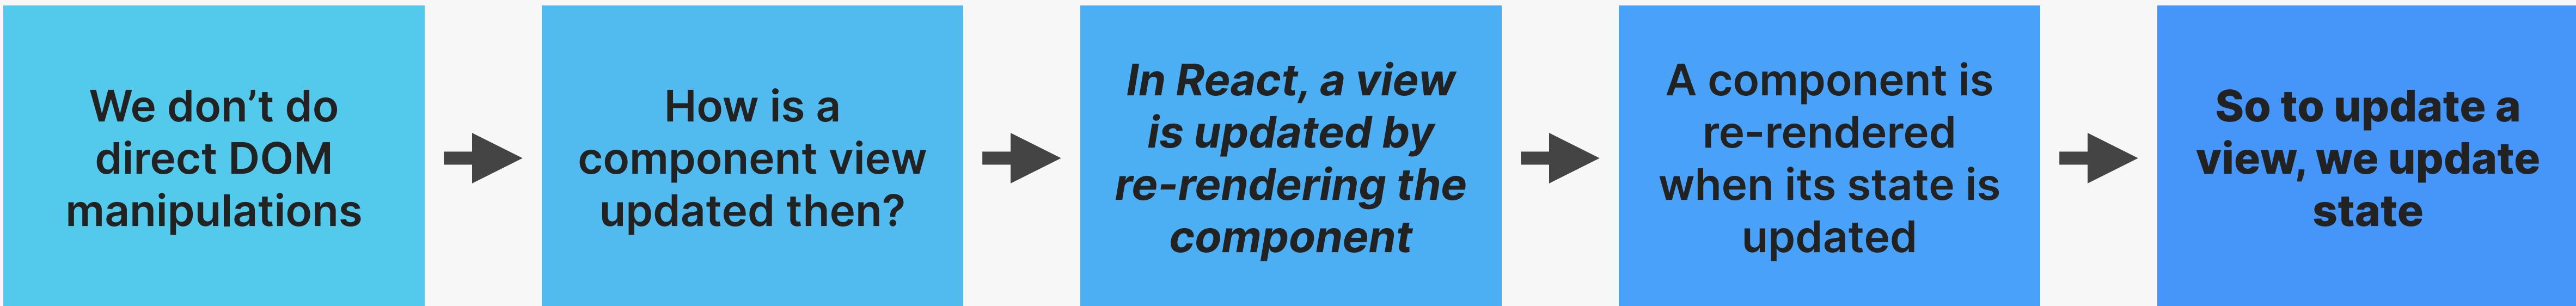

👉 React is called “React” because...

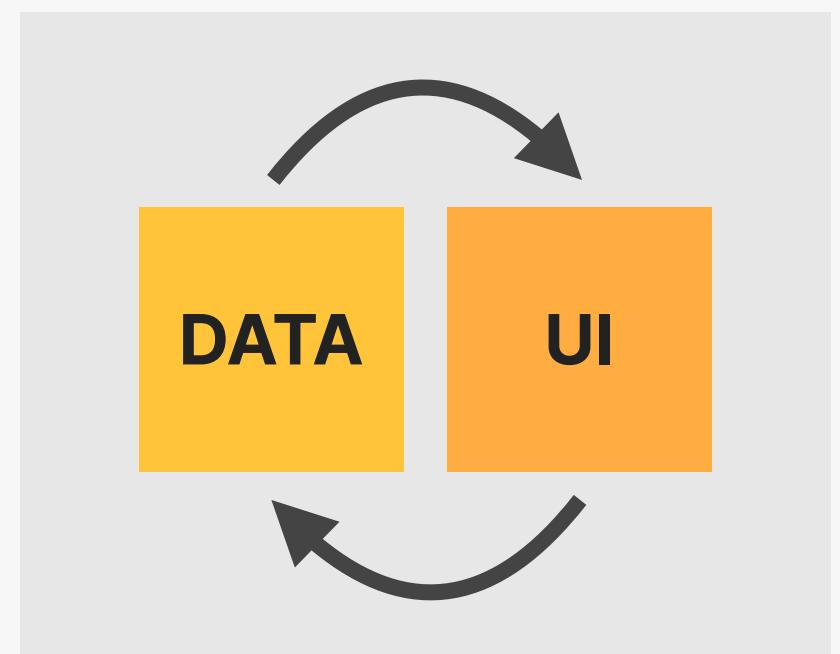



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

STATE, EVENTS, AND FORMS:
INTERACTIVE COMPONENTS


LECTURE

MORE THOUGHTS ABOUT STATE
+ STATE GUIDELINES

ONE COMPONENT, ONE STATE



UI AS A FUNCTION OF STATE

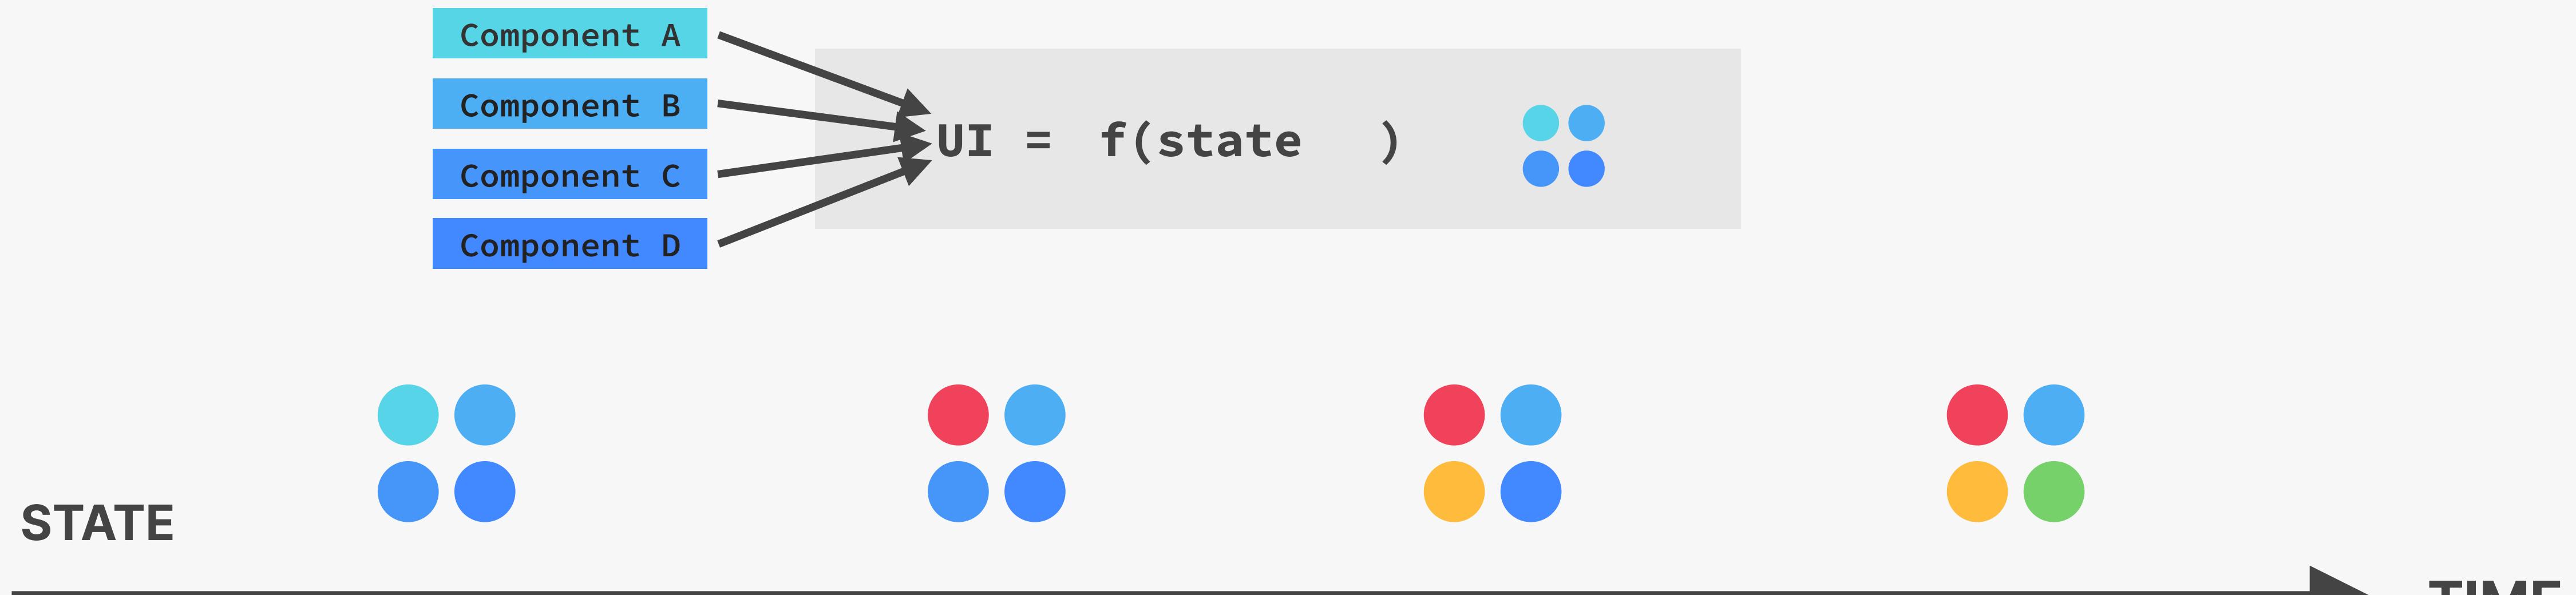

DECLARATIVE, REVISITED

- 👉 With state, we view UI as a **reflection of data changing over time**
- 👉 We **describe** that reflection of data using state, event handlers, and JSX



IN PRACTICAL TERMS...

PRACTICAL GUIDELINES ABOUT STATE

- 👉 Use a state variable for any data that the component should keep track of (“remember”) over time. **This is data that will change at some point.** In Vanilla JS, that’s a `let` variable, or an `[]` or `{}`
- 👉 Whenever you want something in the component to be **dynamic**, create a piece of state related to that “thing”, and update the state when the “thing” should change (aka “be dynamic”)
 - 👉 *Example: A modal window can be open or closed. So we create a state variable `isOpen` that tracks whether the modal is open or not. On `isOpen = true` we display the window, on `isOpen = false` we hide it.*
- 👉 If you want to change the way a component looks, or the data it displays, **update its state.** This usually happens in an **event handler** function.
- 👉 When building a component, imagine its view as a **reflection of state changing over time**
- 👉 For data that should not trigger component re-renders, **don’t use state.** Use a regular variable instead. This is a common **beginner mistake.**



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

STATE, EVENTS, AND FORMS:
INTERACTIVE COMPONENTS



LECTURE

STATE VS. PROPS

STATE VS. PROPS

STATE

- 👉 Internal data, owned by component
- 👉 Component “memory”
- 👉 Can be updated by the component itself
- 👉 Updating state causes component to re-render
- 👉 Used to make components interactive

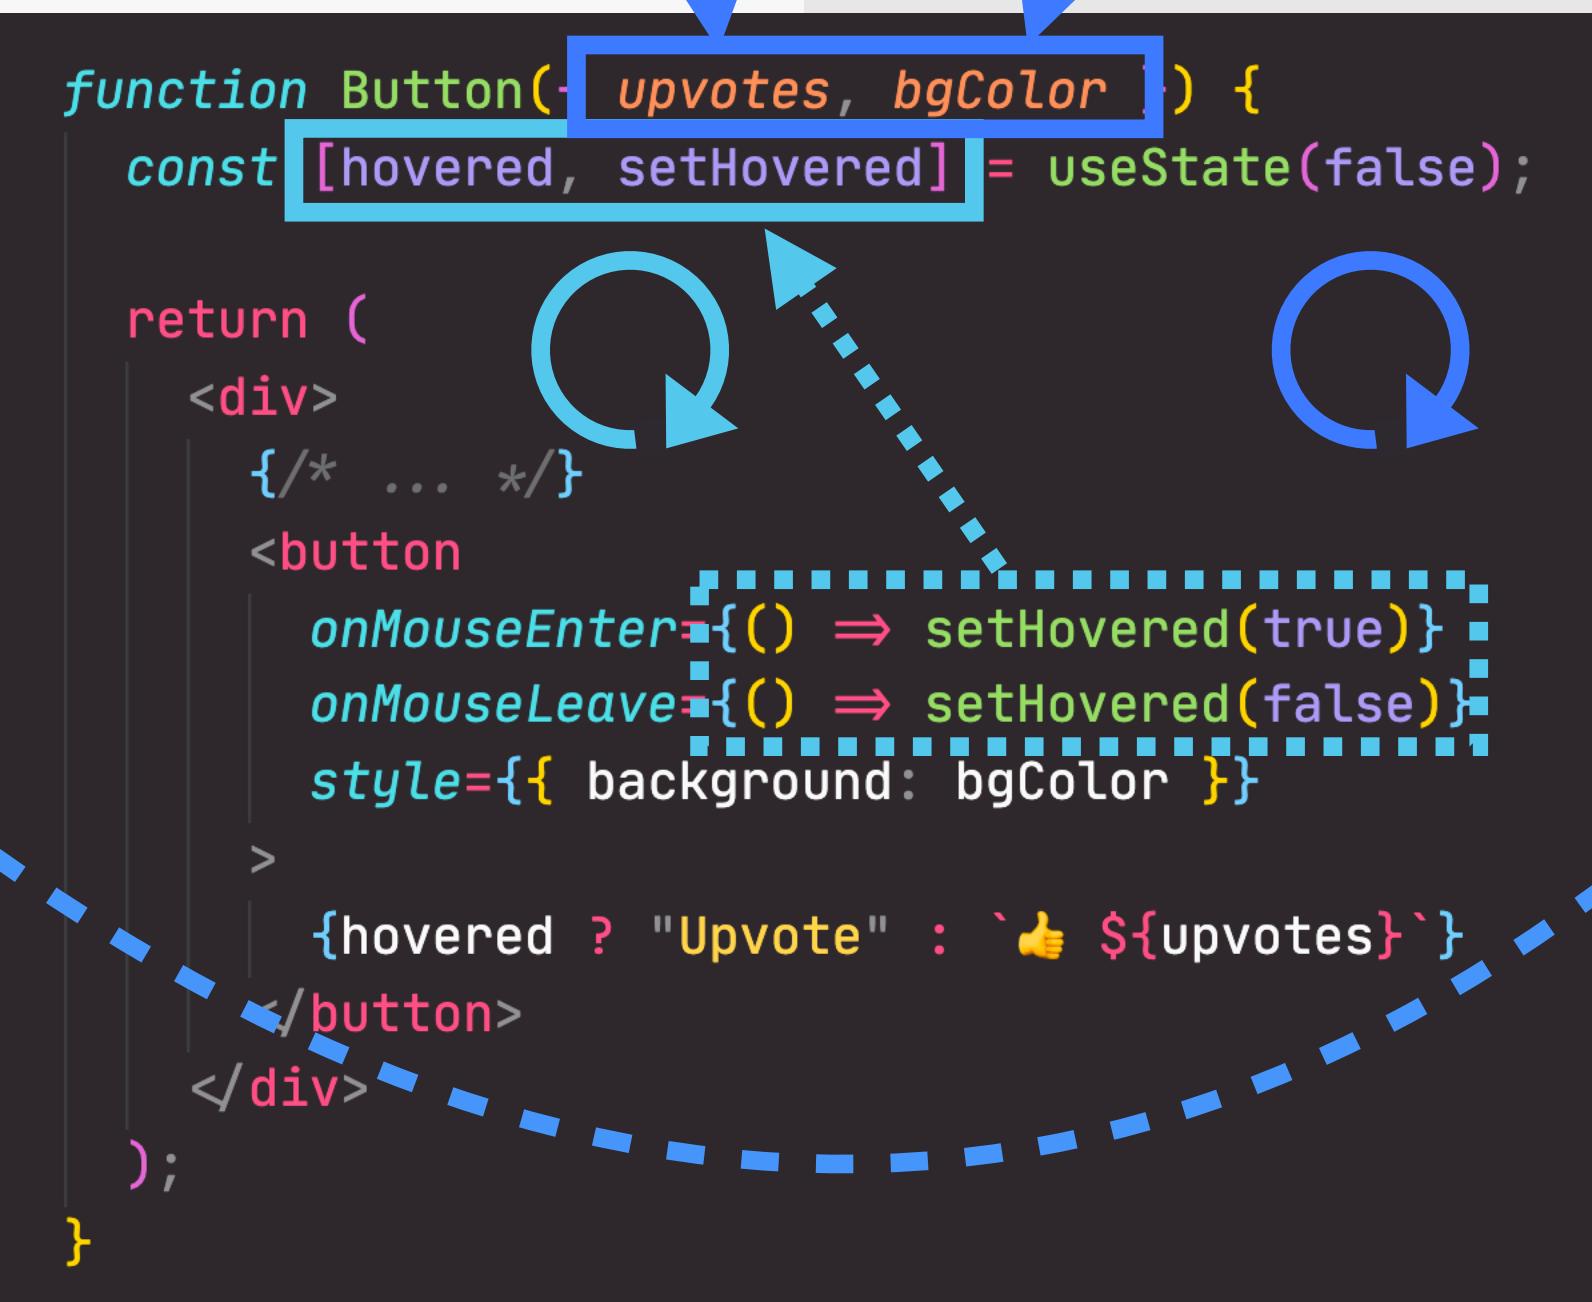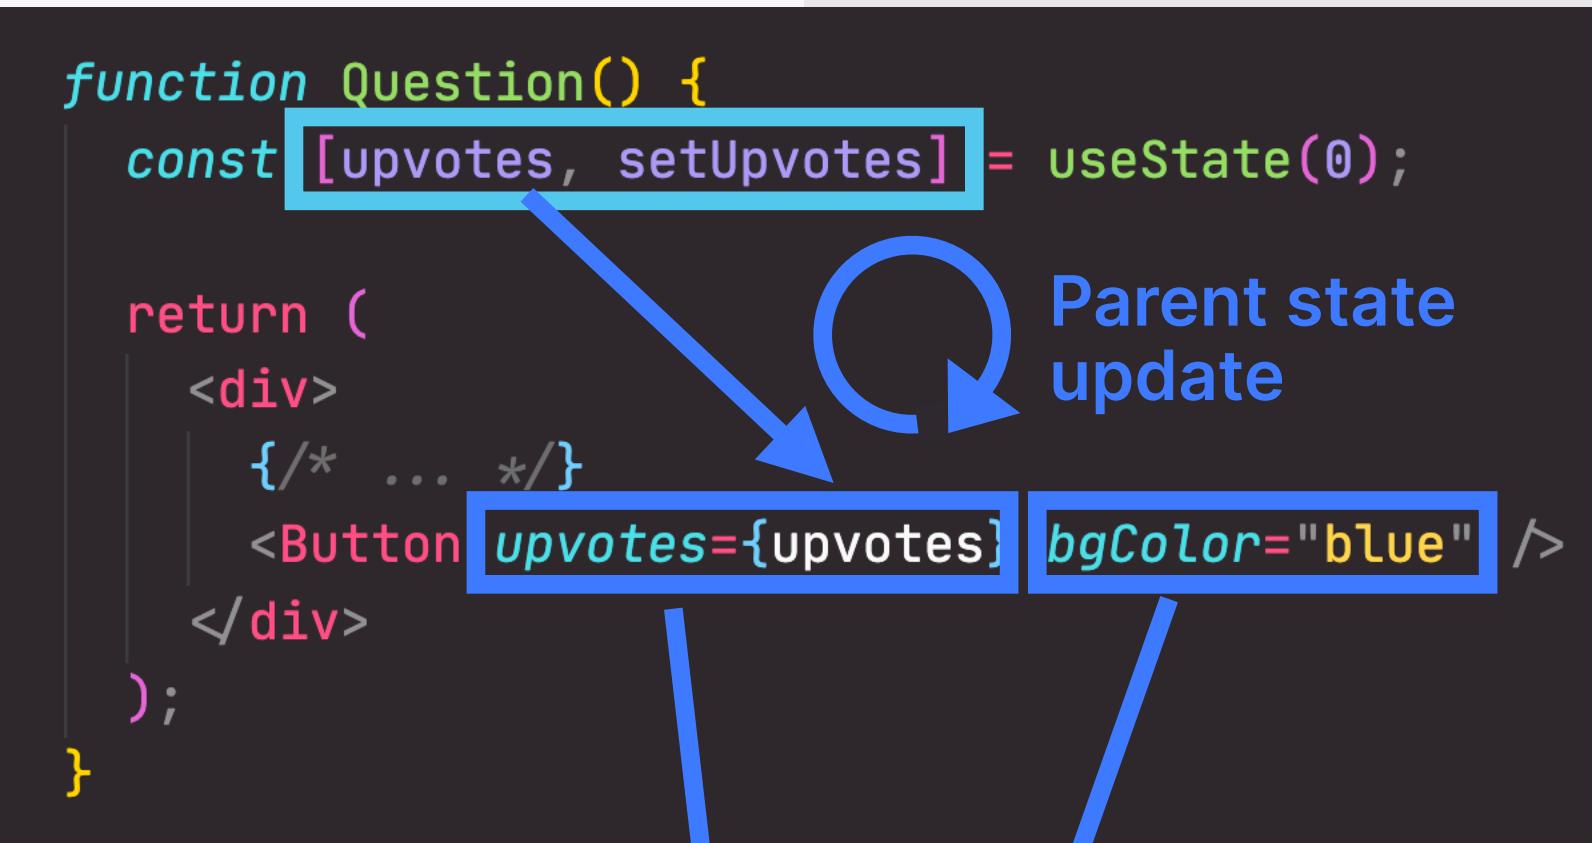

PROPS

- 👉 External data, owned by parent component
- 👉 Similar to function parameters
- 👉 Read-only
- 👉 **Receiving new props causes component to re-render.** Usually when the parent's state has been updated
- 👉 Used by parent to configure child component (“settings”)

THINKING IN REACT: STATE MANAGEMENT



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

THINKING IN REACT: STATE
MANAGEMENT

LECTURE

WHAT IS "THINKING IN REACT"?

“THINKING IN REACT” IS A CORE SKILL

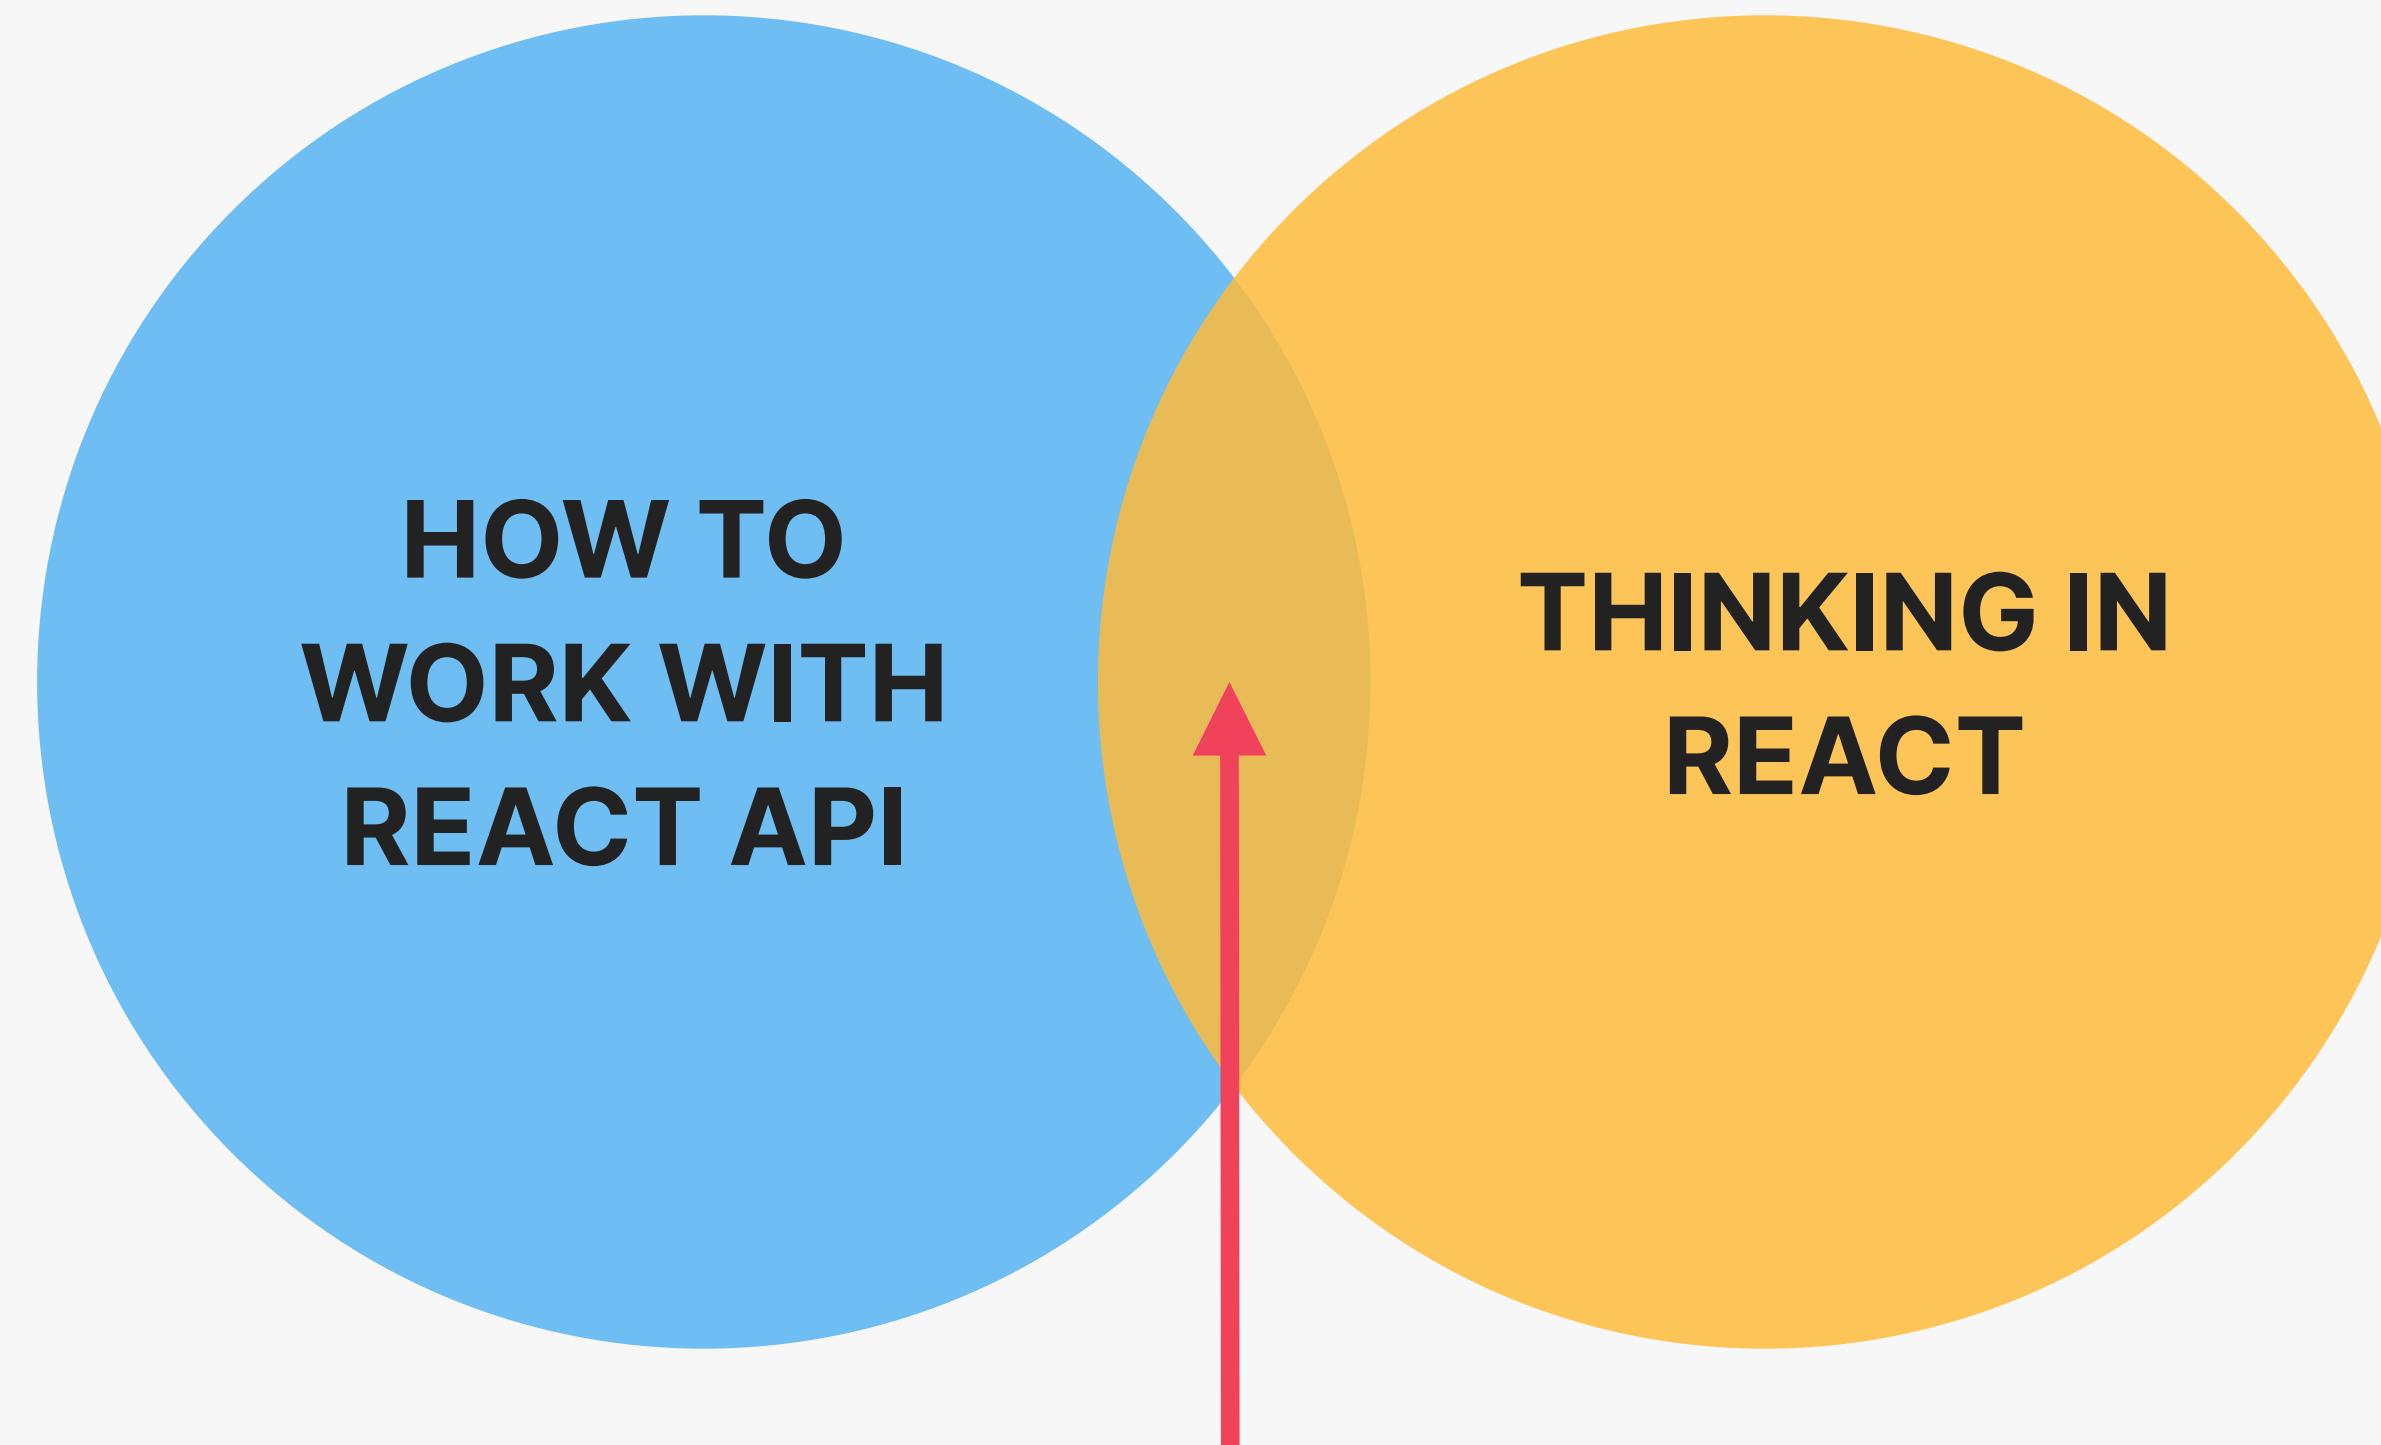

This is where professional
React apps are built

THINKING IN REACT

- 👉 “React Mindset”
- 👉 Thinking about components, state, data flow, effects, etc.
- 👉 Thinking in **state transitions**, not element mutations

“THINKING IN REACT” AS A PROCESS

Not a rigid process

THE “THINKING IN REACT” PROCESS:

- 1 Break the desired UI into **components** and establish the **component tree**
- 2 Build a **static** version in React (without state)
- 3 Think about **state**:
 - 👉 When to use state
 - 👉 Types of state: local vs. global
 - 👉 Where to place each piece of state
- 4 Establish **data flow**:
 - 👉 One-way data flow
 - 👉 Child-to-parent communication
 - 👉 Accessing global state

State
management

WHEN YOU KNOW HOW TO “THINK IN REACT”, YOU WILL BE ABLE TO ANSWER:

- 🤔 How to break up a UI design into components?
- 🤔 How to make some components reusable?
- 🤔 How to assemble UI from reusable components?
- 🤔 What pieces of state do I need for interactivity?
- 🤔 Where to place state? (What component should “own” each piece of state?)
- 🤔 What types of state can or should I use?
- 🤔 How to make data flow through app?



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION


THINKING IN REACT: STATE
MANAGEMENT

LECTURE

FUNDAMENTALS OF STATE
MANAGEMENT

WHAT IS STATE MANAGEMENT?

👉 State management: Deciding **when** to create pieces of state, what **types** of state are necessary, **where** to place each piece of state, and how **data flows** through the app

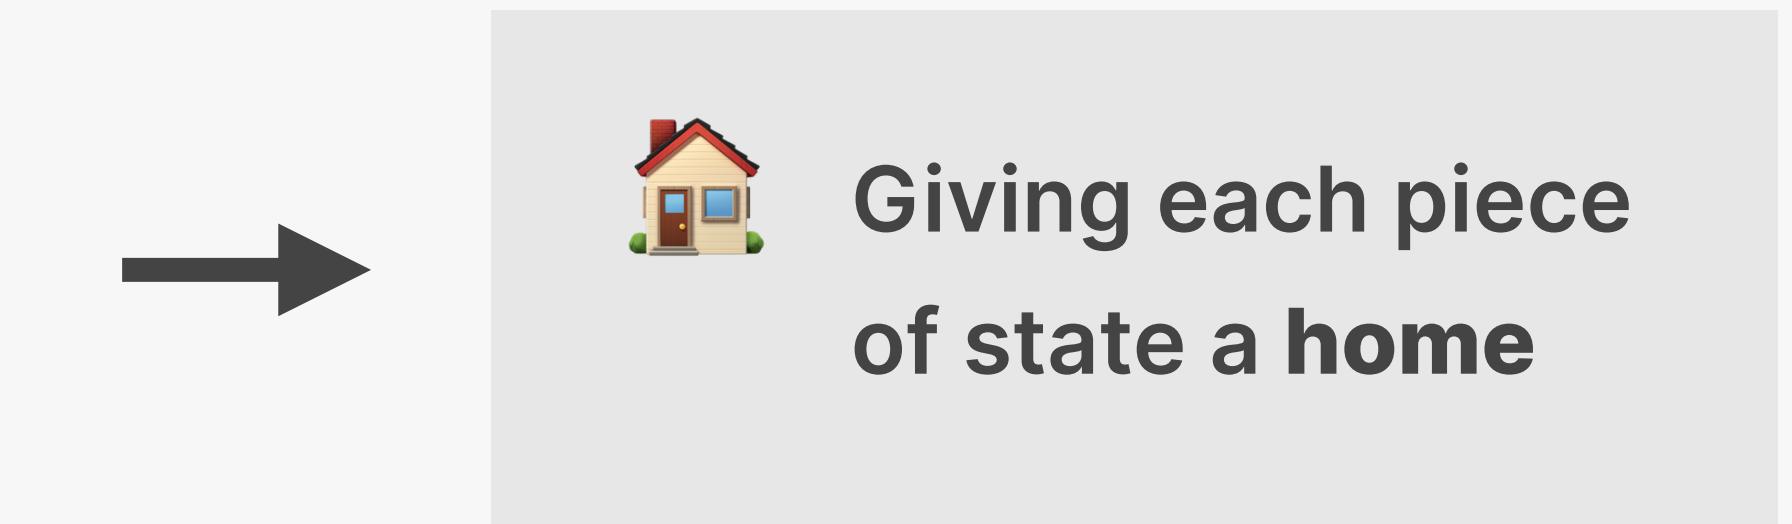

The screenshot shows the Udemy homepage with several red annotations:

- searchQuery**: Points to the search bar containing "javascript".
- shoppingCart**: Points to the "Shopping Cart" section showing 2 Courses in Cart.
- PIECES OF STATE (useState)**: Points to the course list area.
- coupons**: Points to the price breakdown for a course, showing €12.99 and €84.99.
- notifications**: Points to the "Notifications" section with 9+ notifications.
- language**: Points to the "Language" section set to English.
- isOpen**: Points to the user profile of Jonas Schmedtmann.
- user**: Points to the user profile of Jonas Schmedtmann.


TYPES OF STATE: LOCAL VS. GLOBAL STATE

LOCAL STATE

- 👉 State needed **only by one or few components**
- 👉 State that is defined in a component and **only that component and child components have access to it** (by passing via props)
- 👉 **We should always start with local state**

GLOBAL STATE

- 👉 State that **many components** might need
- 👉 **Shared state** that is accessible to **every component** in the entire application



Context API




Redux

A screenshot of the Udemy website's shopping cart page. At the top, there is a search bar with the text "javascript". Below the search bar, the word "Shopping Cart" is displayed. The main content area shows two courses in the cart: "Node.js, Express, MongoDB & More: The Complete Bootcamp 2022" and "The Complete JavaScript Course 2022: From Zero to Expert!". Each course listing includes a small thumbnail, the course title, the instructor's name, ratings, and a brief description. To the right of the course lists, there are "Remove", "Save for Later", and "Move to Wishlist" buttons, along with the original price ("€12.99") and the discounted price ("€84.99"). Further down the page, there is a summary section with the total price ("Total: €25.98"), a promotional message ("€169.98 85% off"), and a "Checkout" button. On the far right, a sidebar shows the user profile of Jonas Schmedtmann and links to "My learning", "Notifications" (with 9+), and "Messages" (with 9+). A blue arrow points from the text "Local state" to the search bar area, and another blue arrow points from the text "Global state" to the sidebar area.

Local state

Global state

STATE: WHEN AND WHERE?

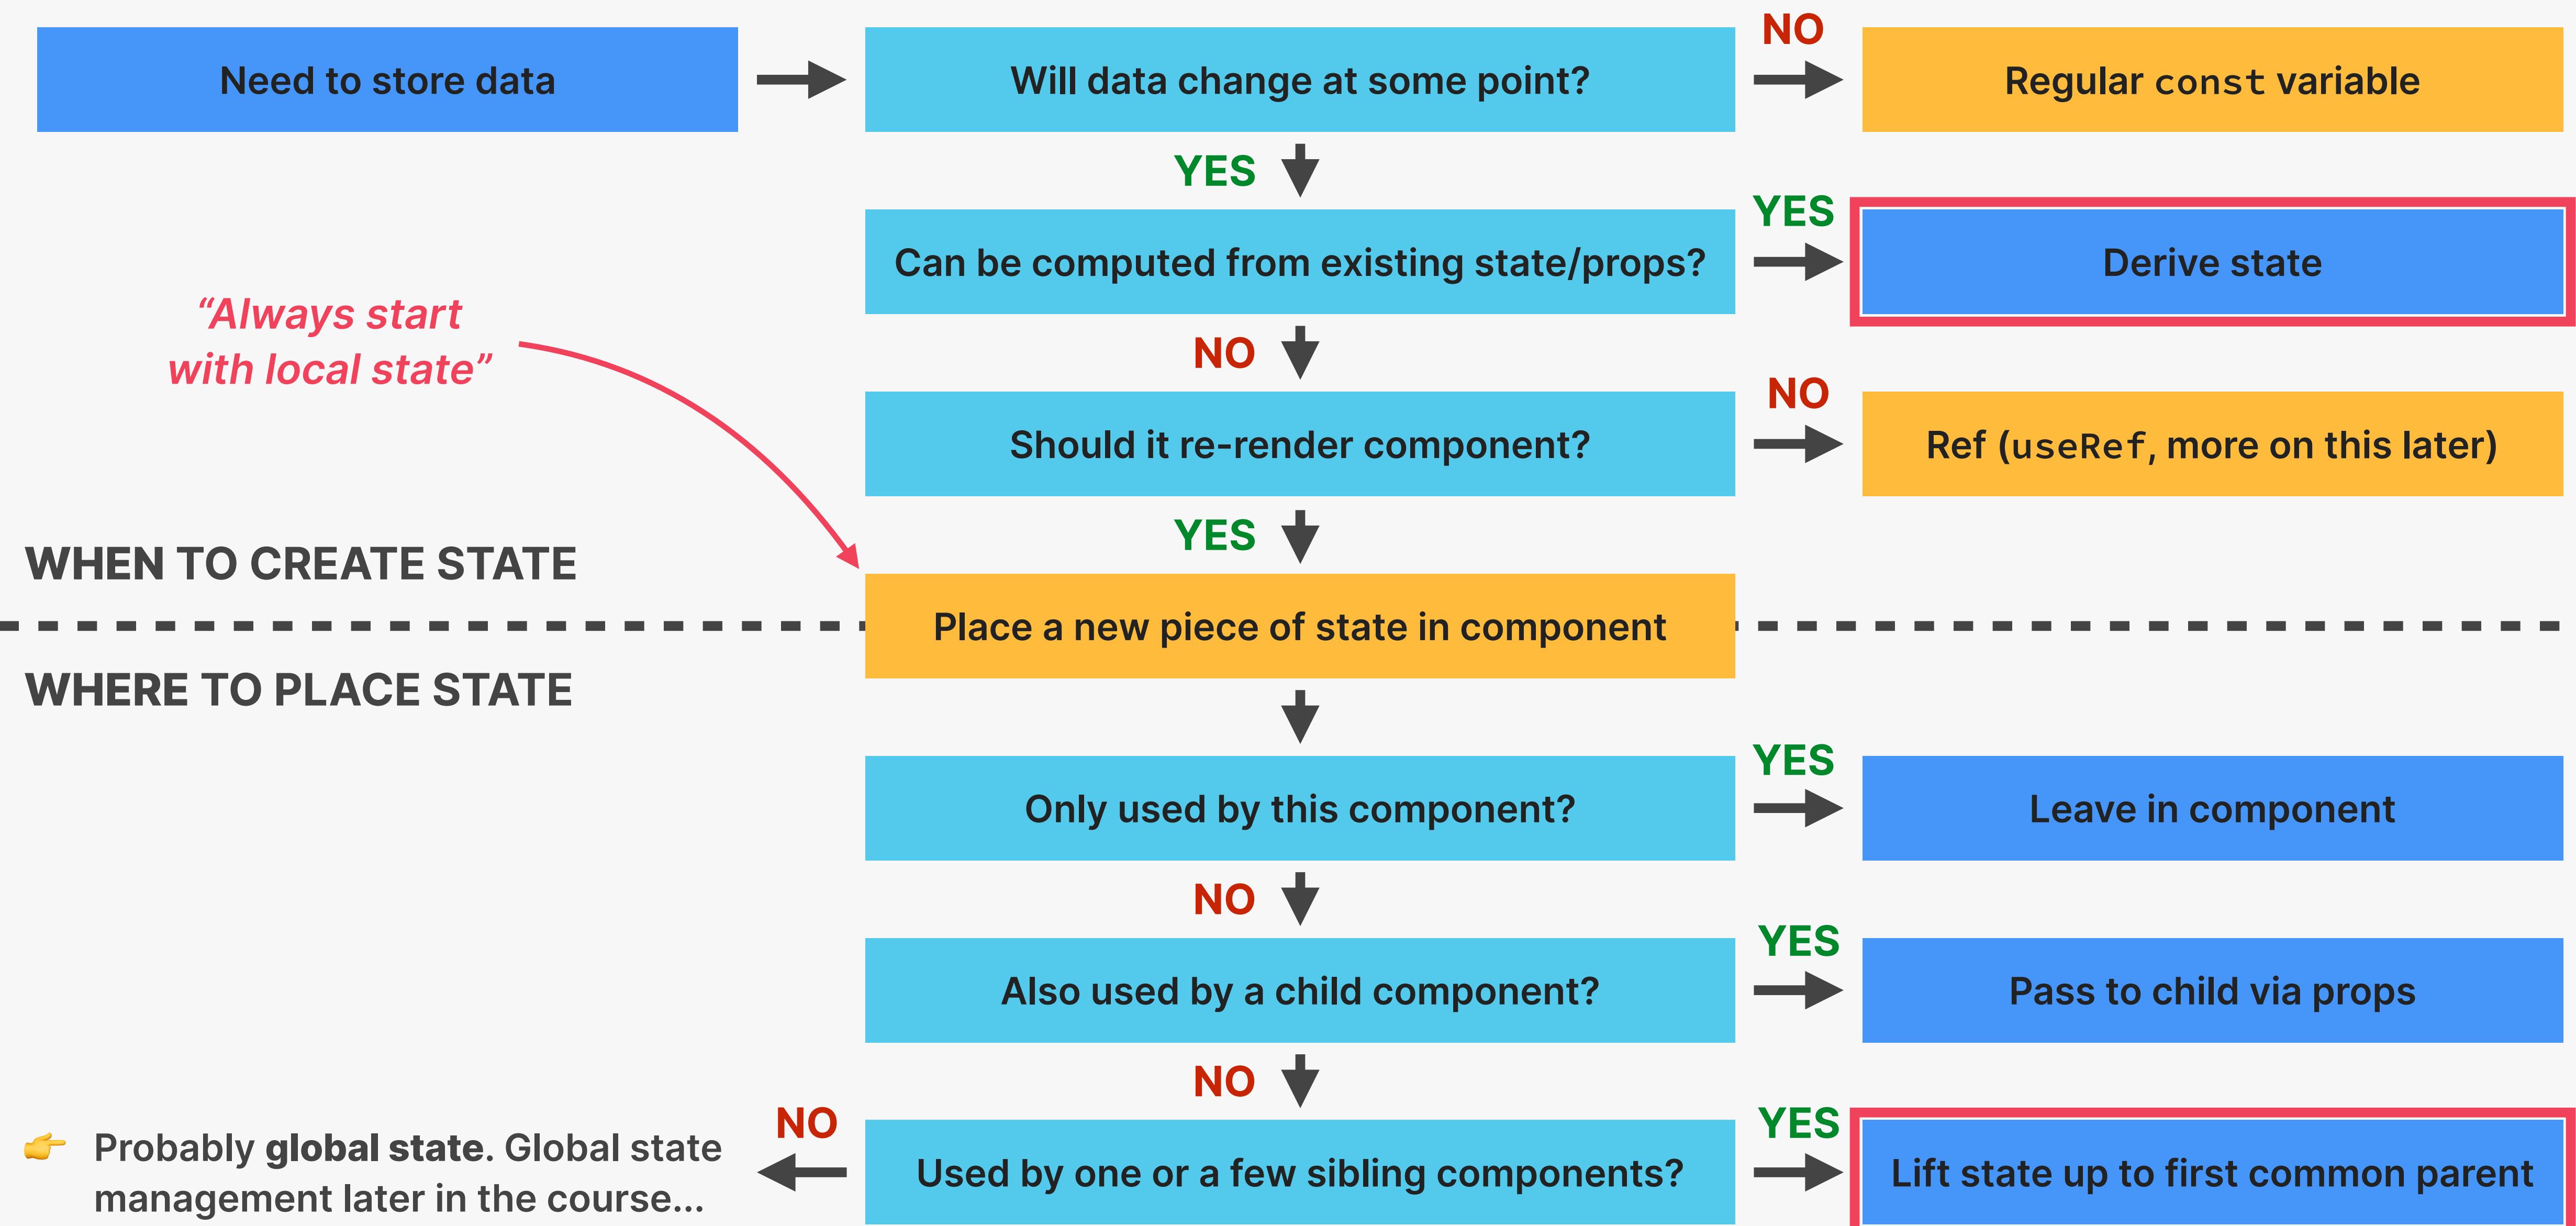



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

THINKING IN REACT: STATE
MANAGEMENT

LECTURE

REVIEWING "LIFTING UP STATE"

PROBLEM: SHARING STATE WITH SIBLING COMPONENT

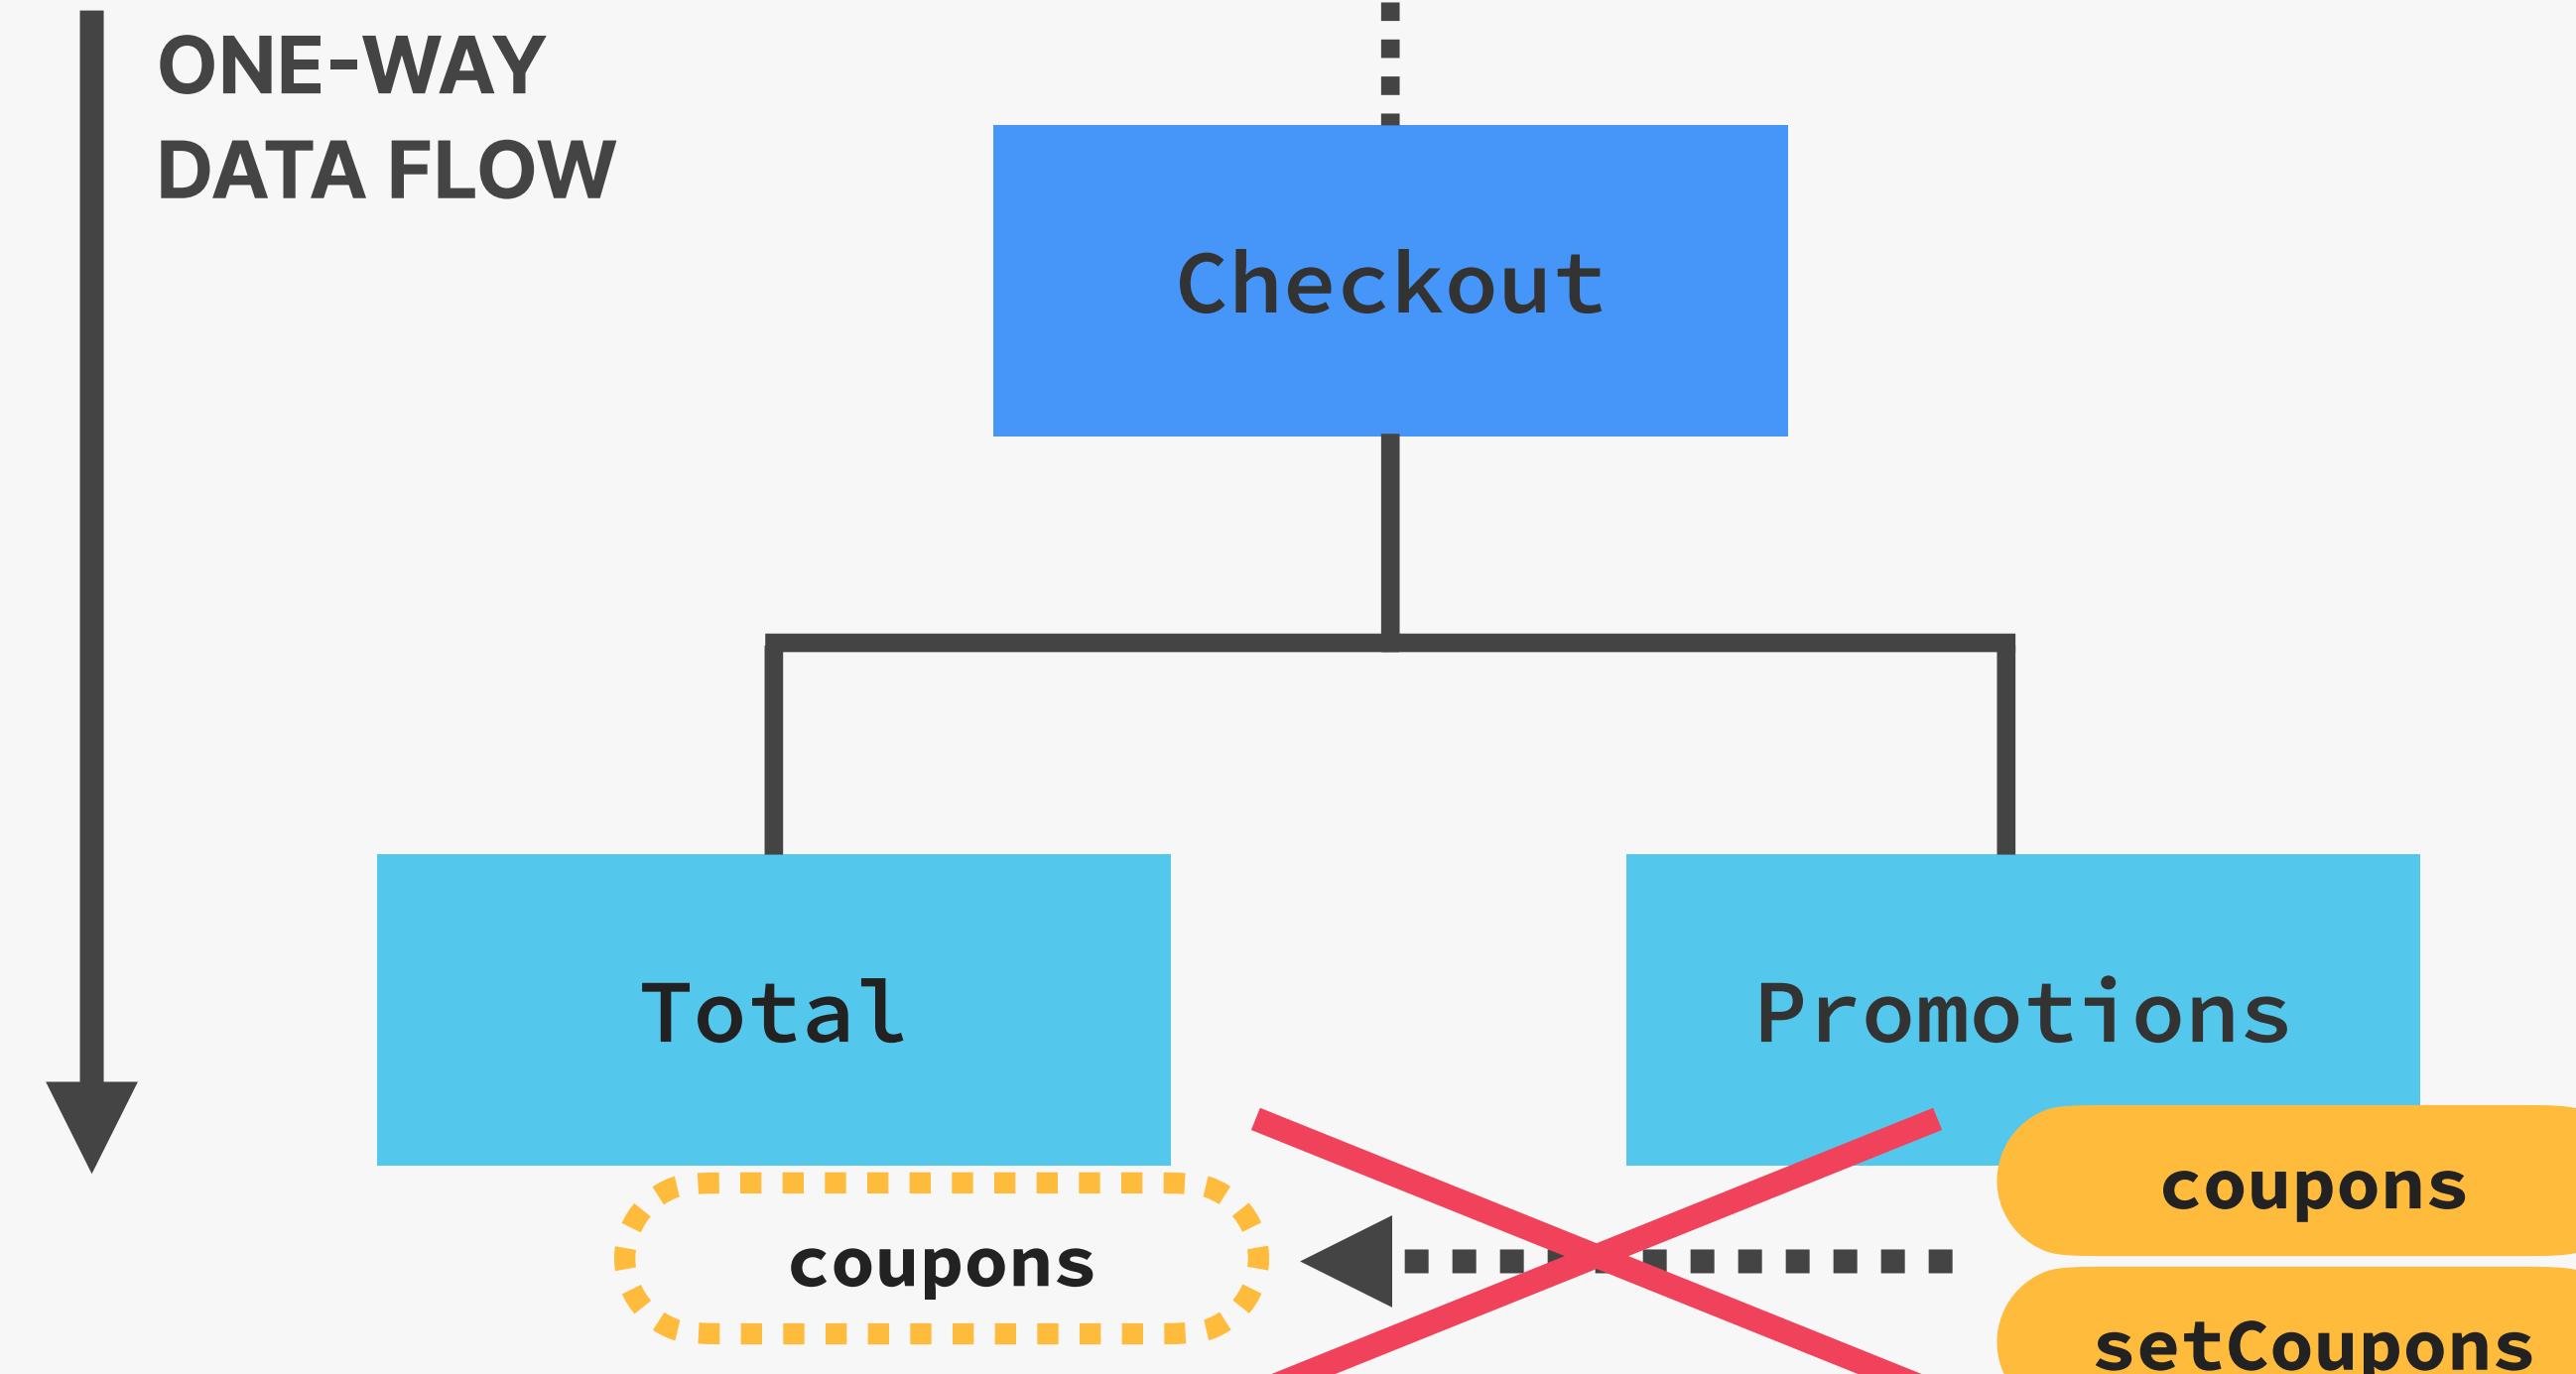


Data can only flow down to children
(via props), not sideways to siblings




How do we share state with other components?


👉 Total component also needs access to coupons state

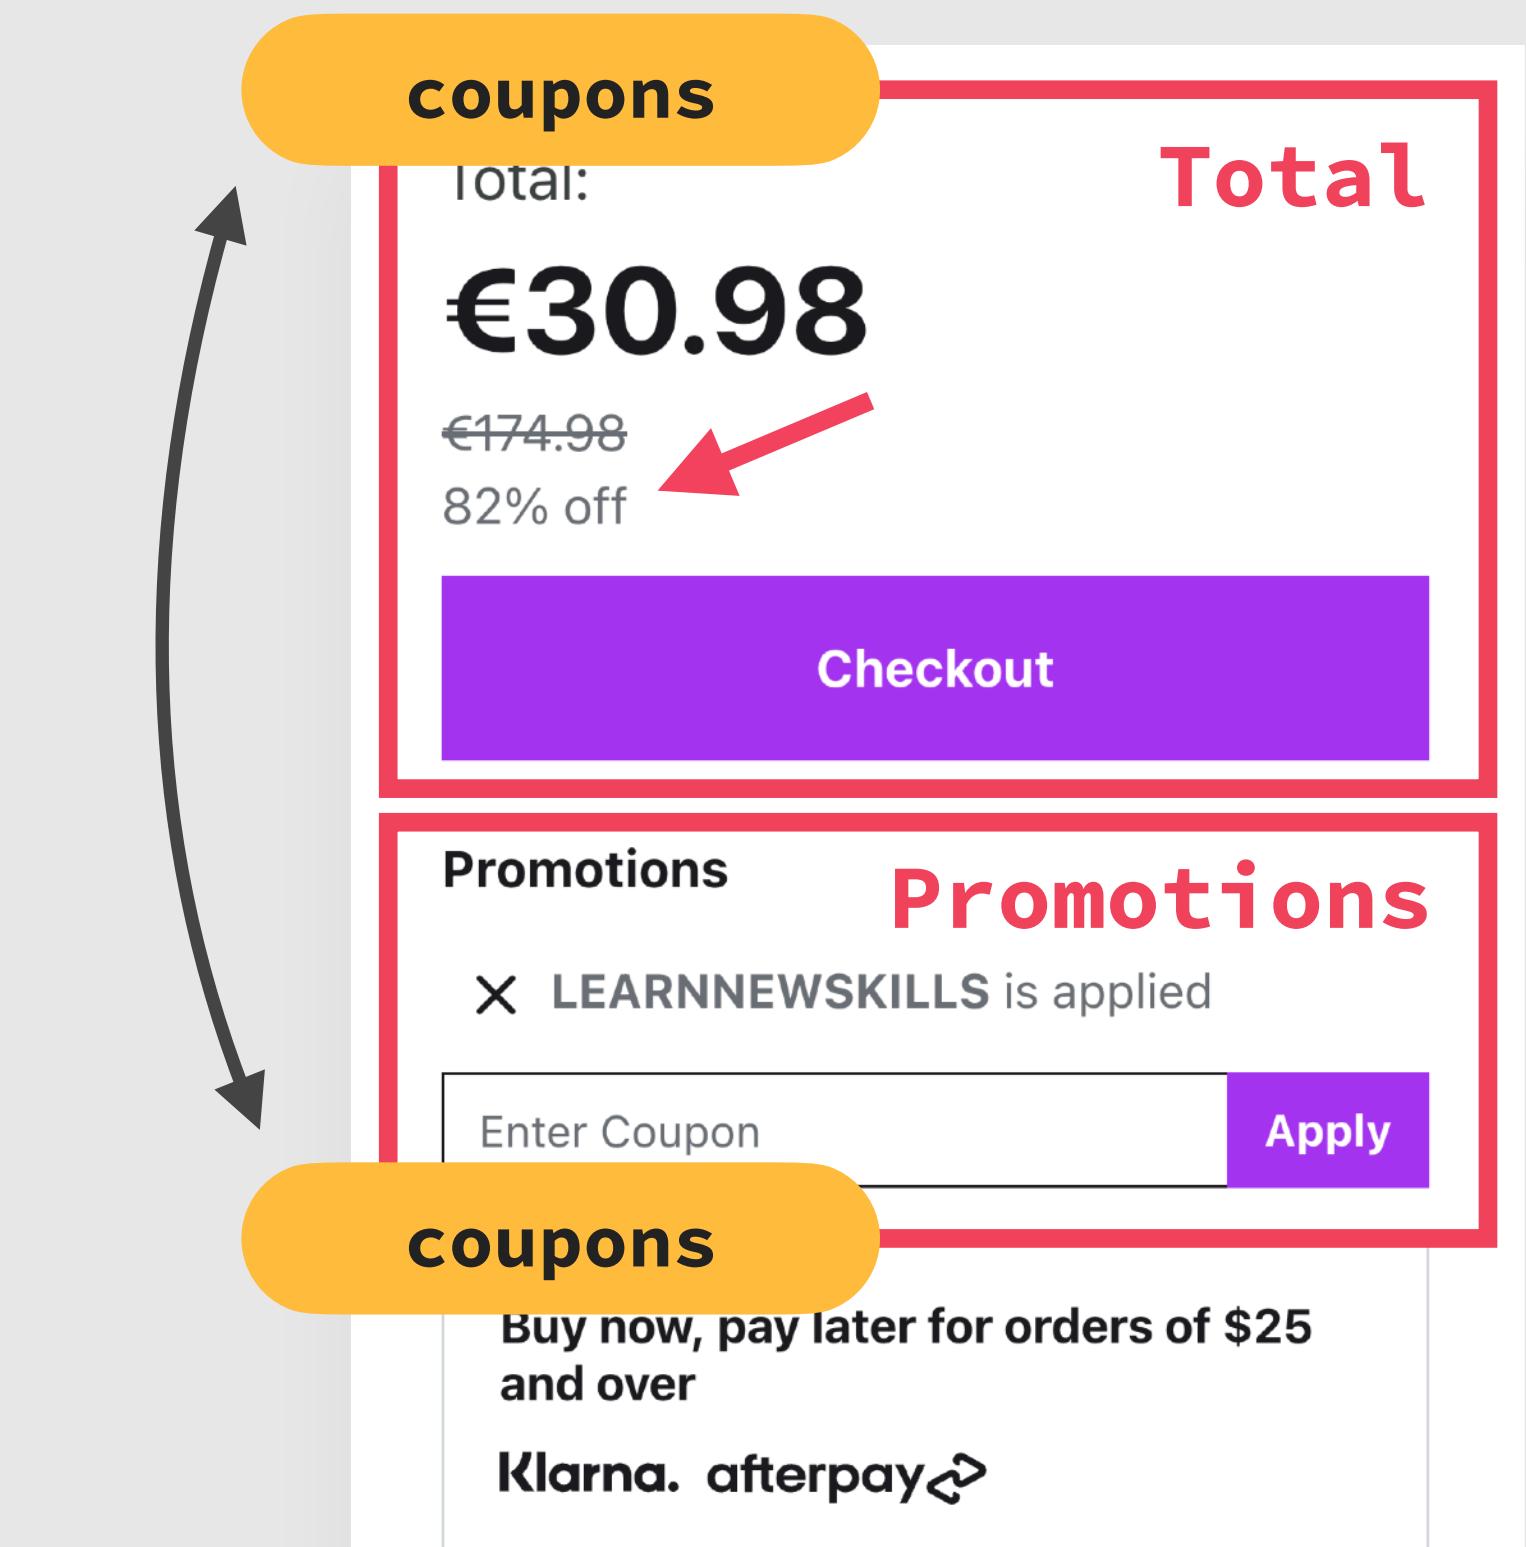

SOLUTION: LIFTING STATE UP

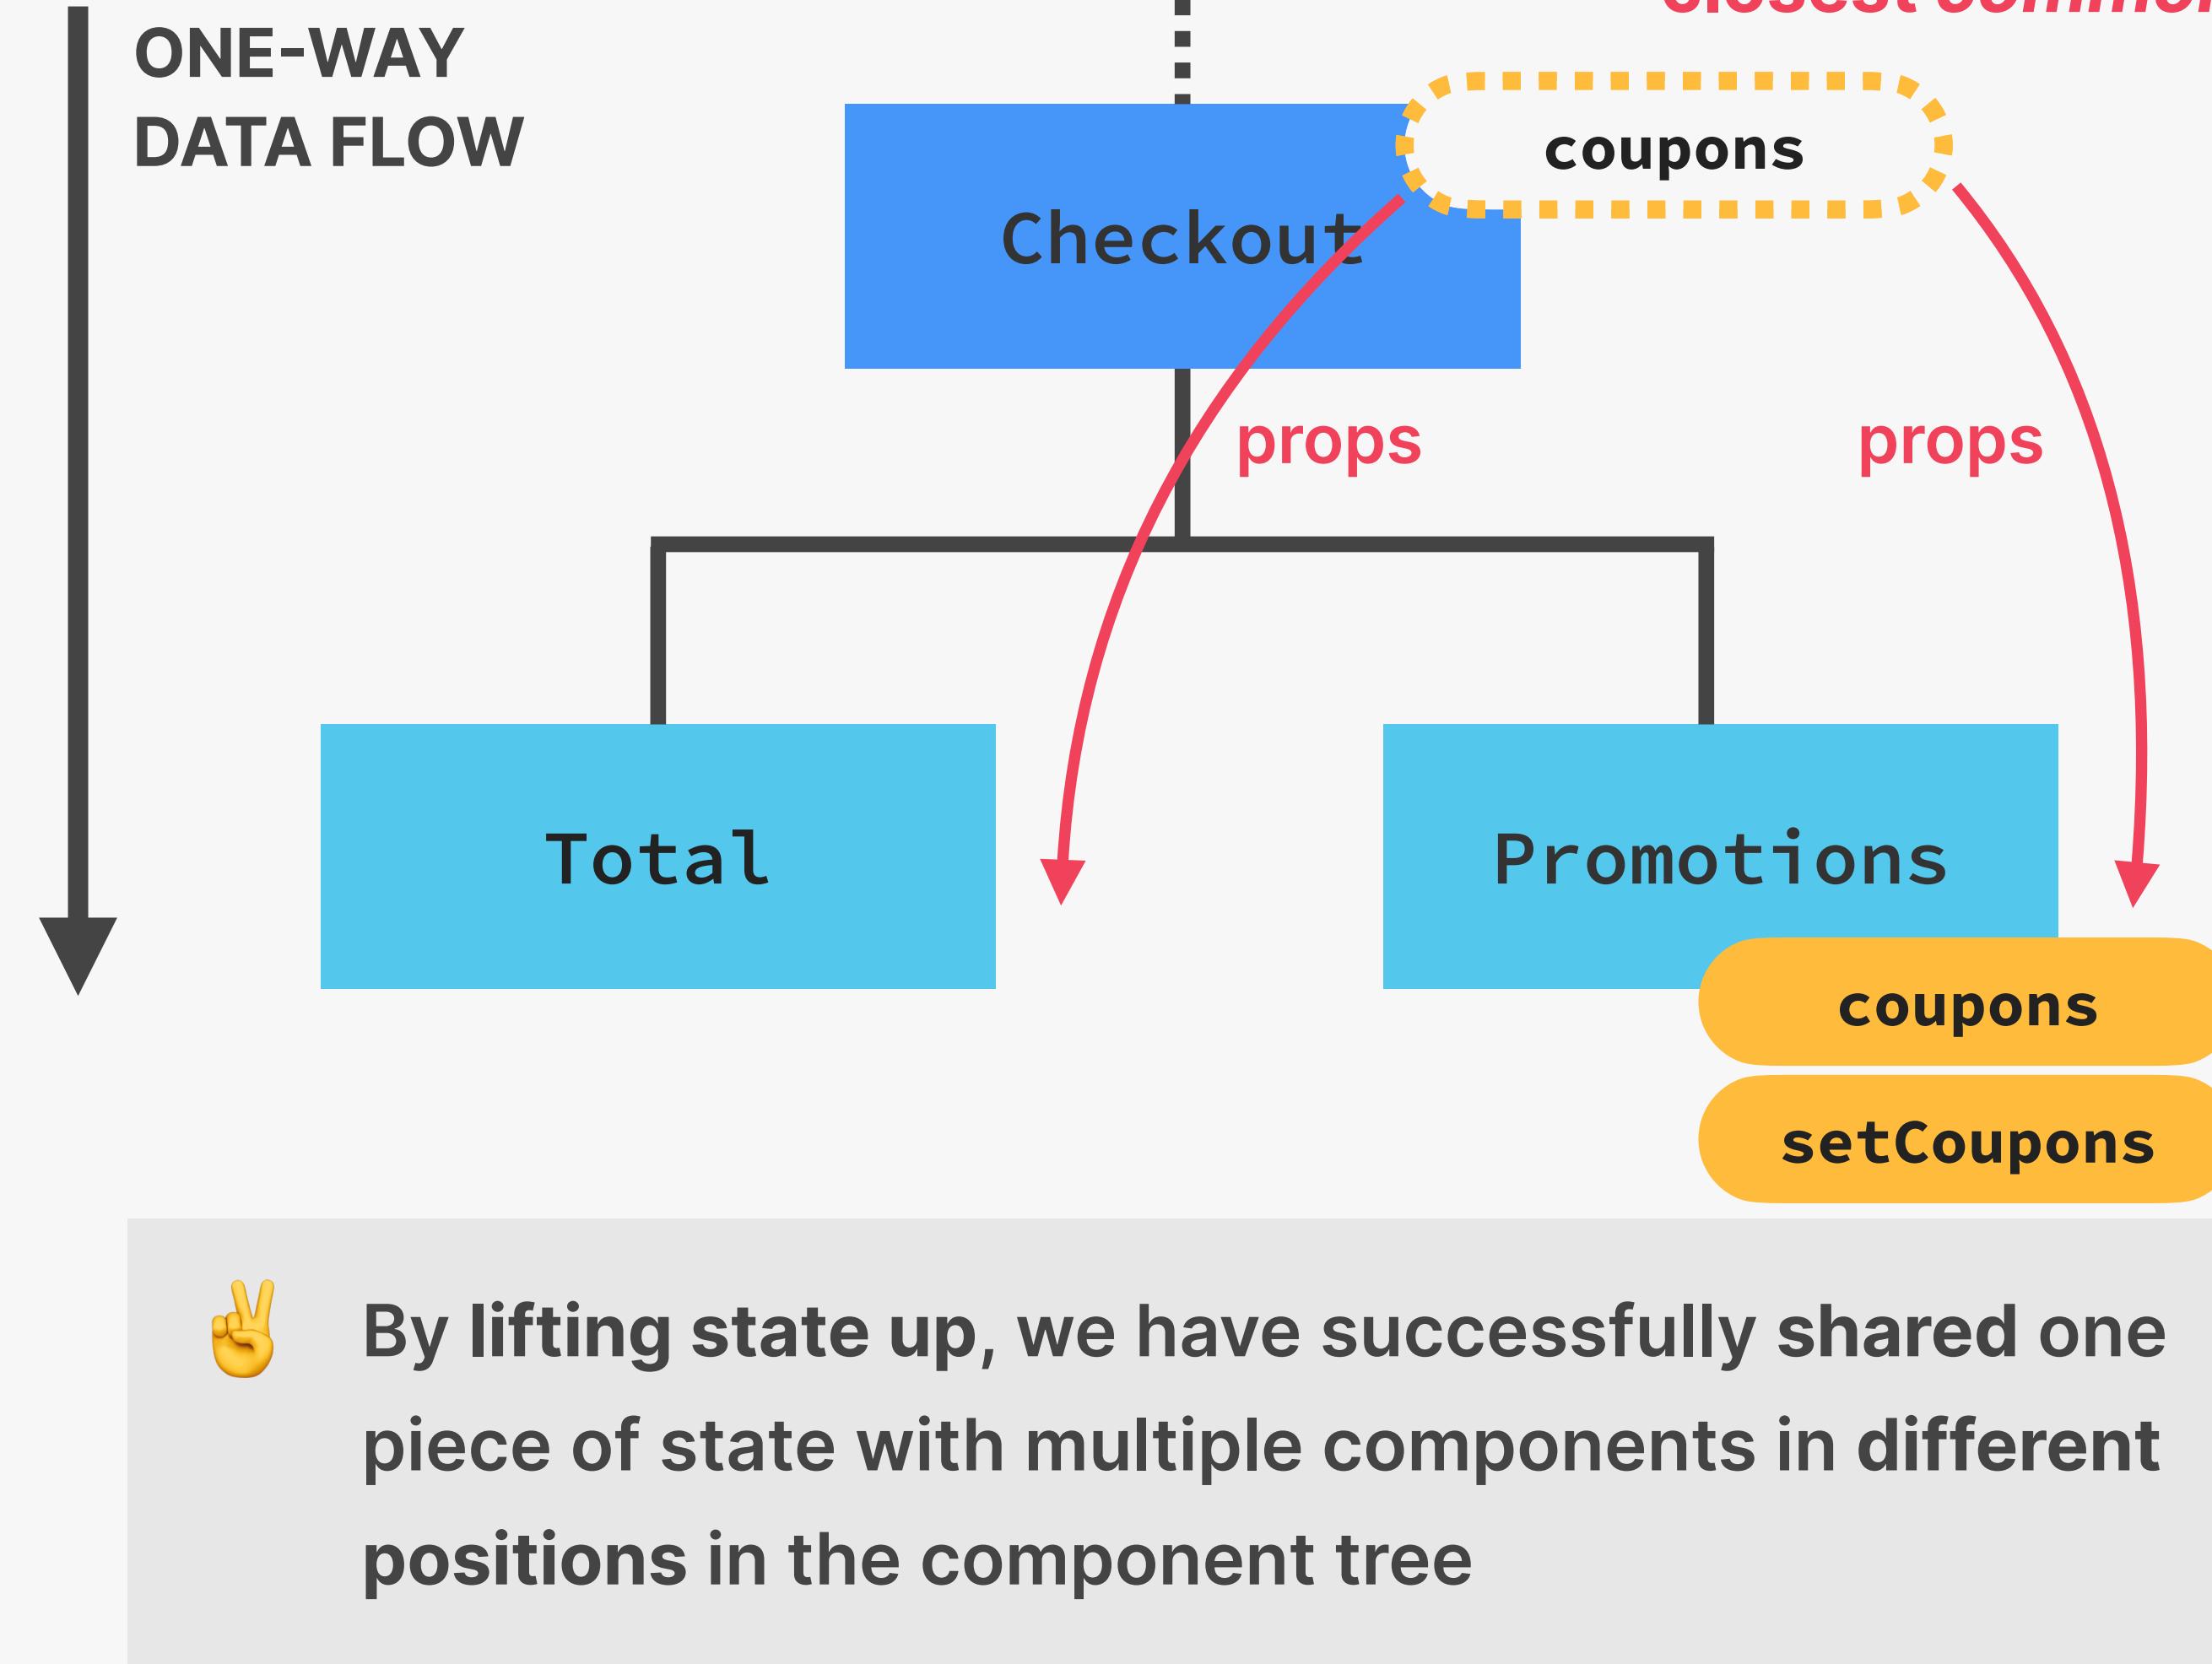


👉 Total component also needs access to coupons state

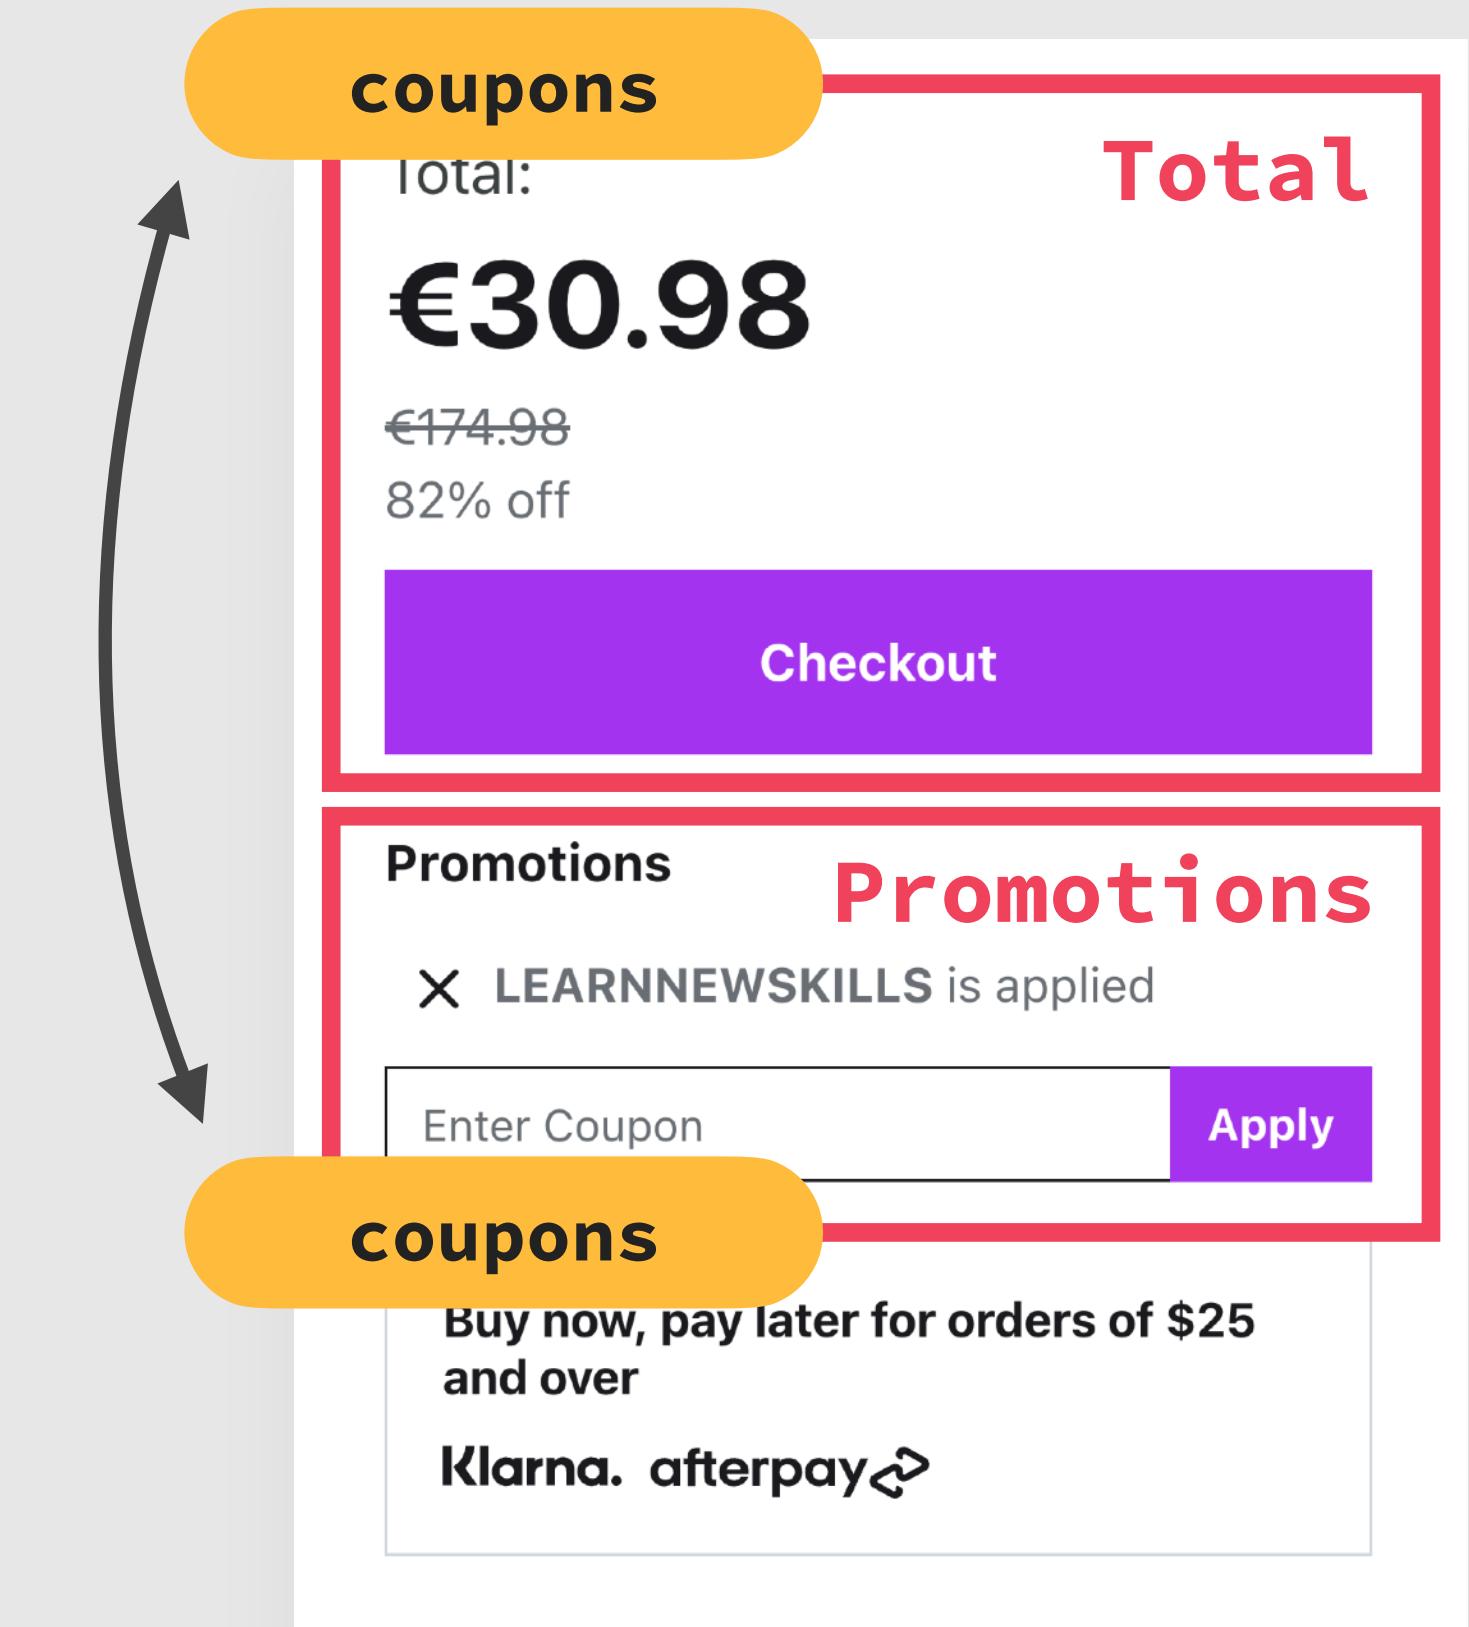


CHILD-TO-PARENT COMMUNICATION

- 👉 Child-to-parent communication (inverse data flow): child updating parent state (data “flowing” up)

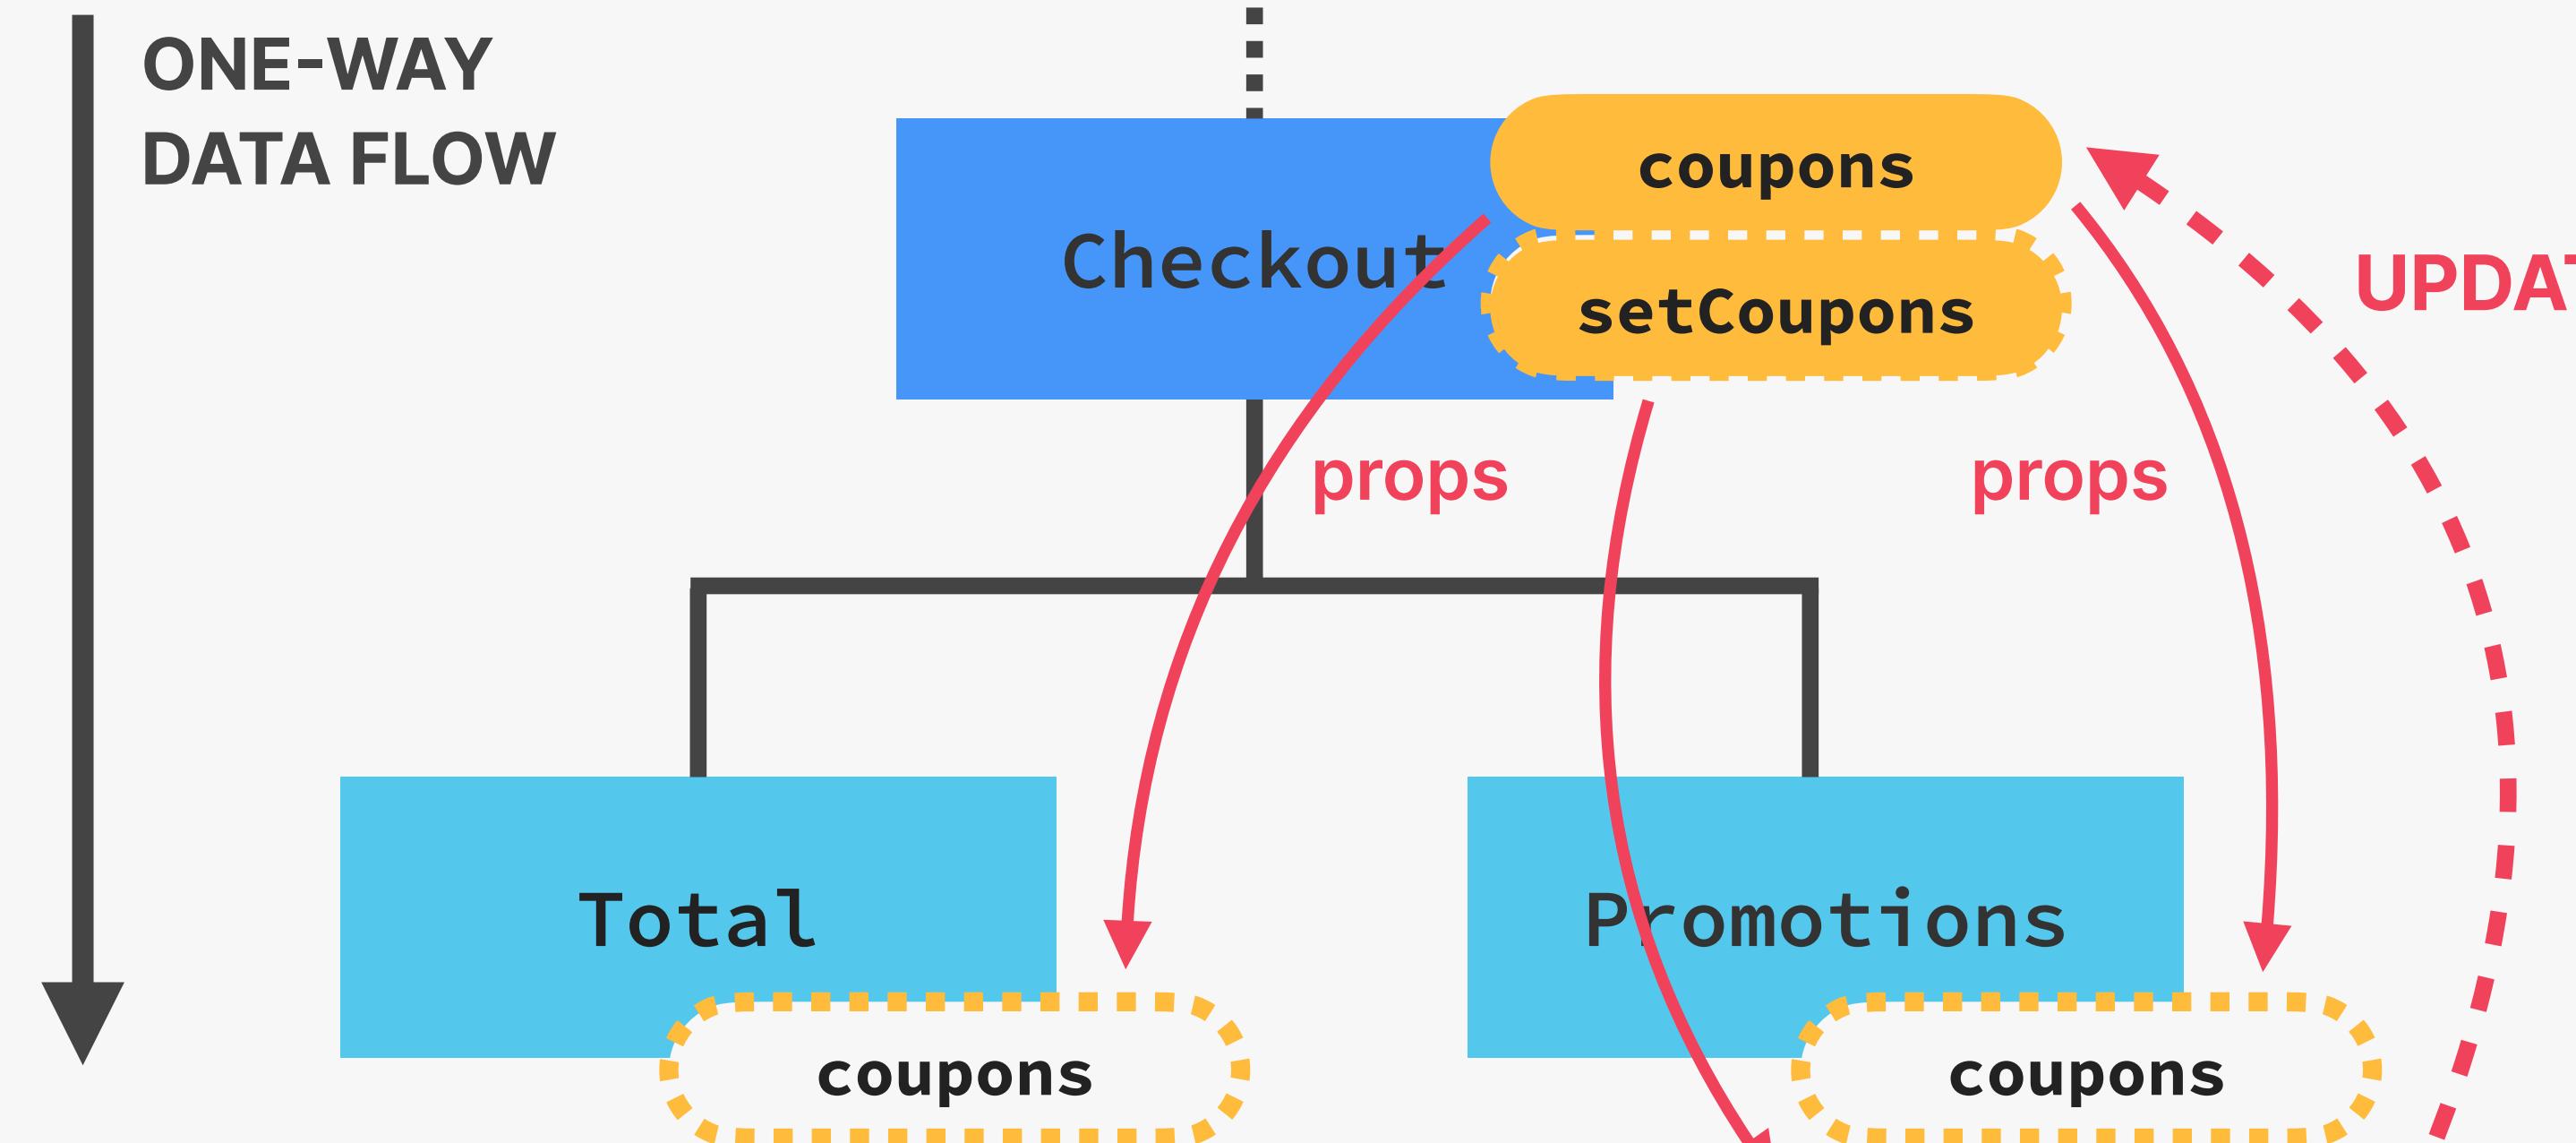

🤔 If data flows from parent to children, how can Promotions (child) update state in Checkout (parent)?

- 👉 Total component also needs access to coupons state

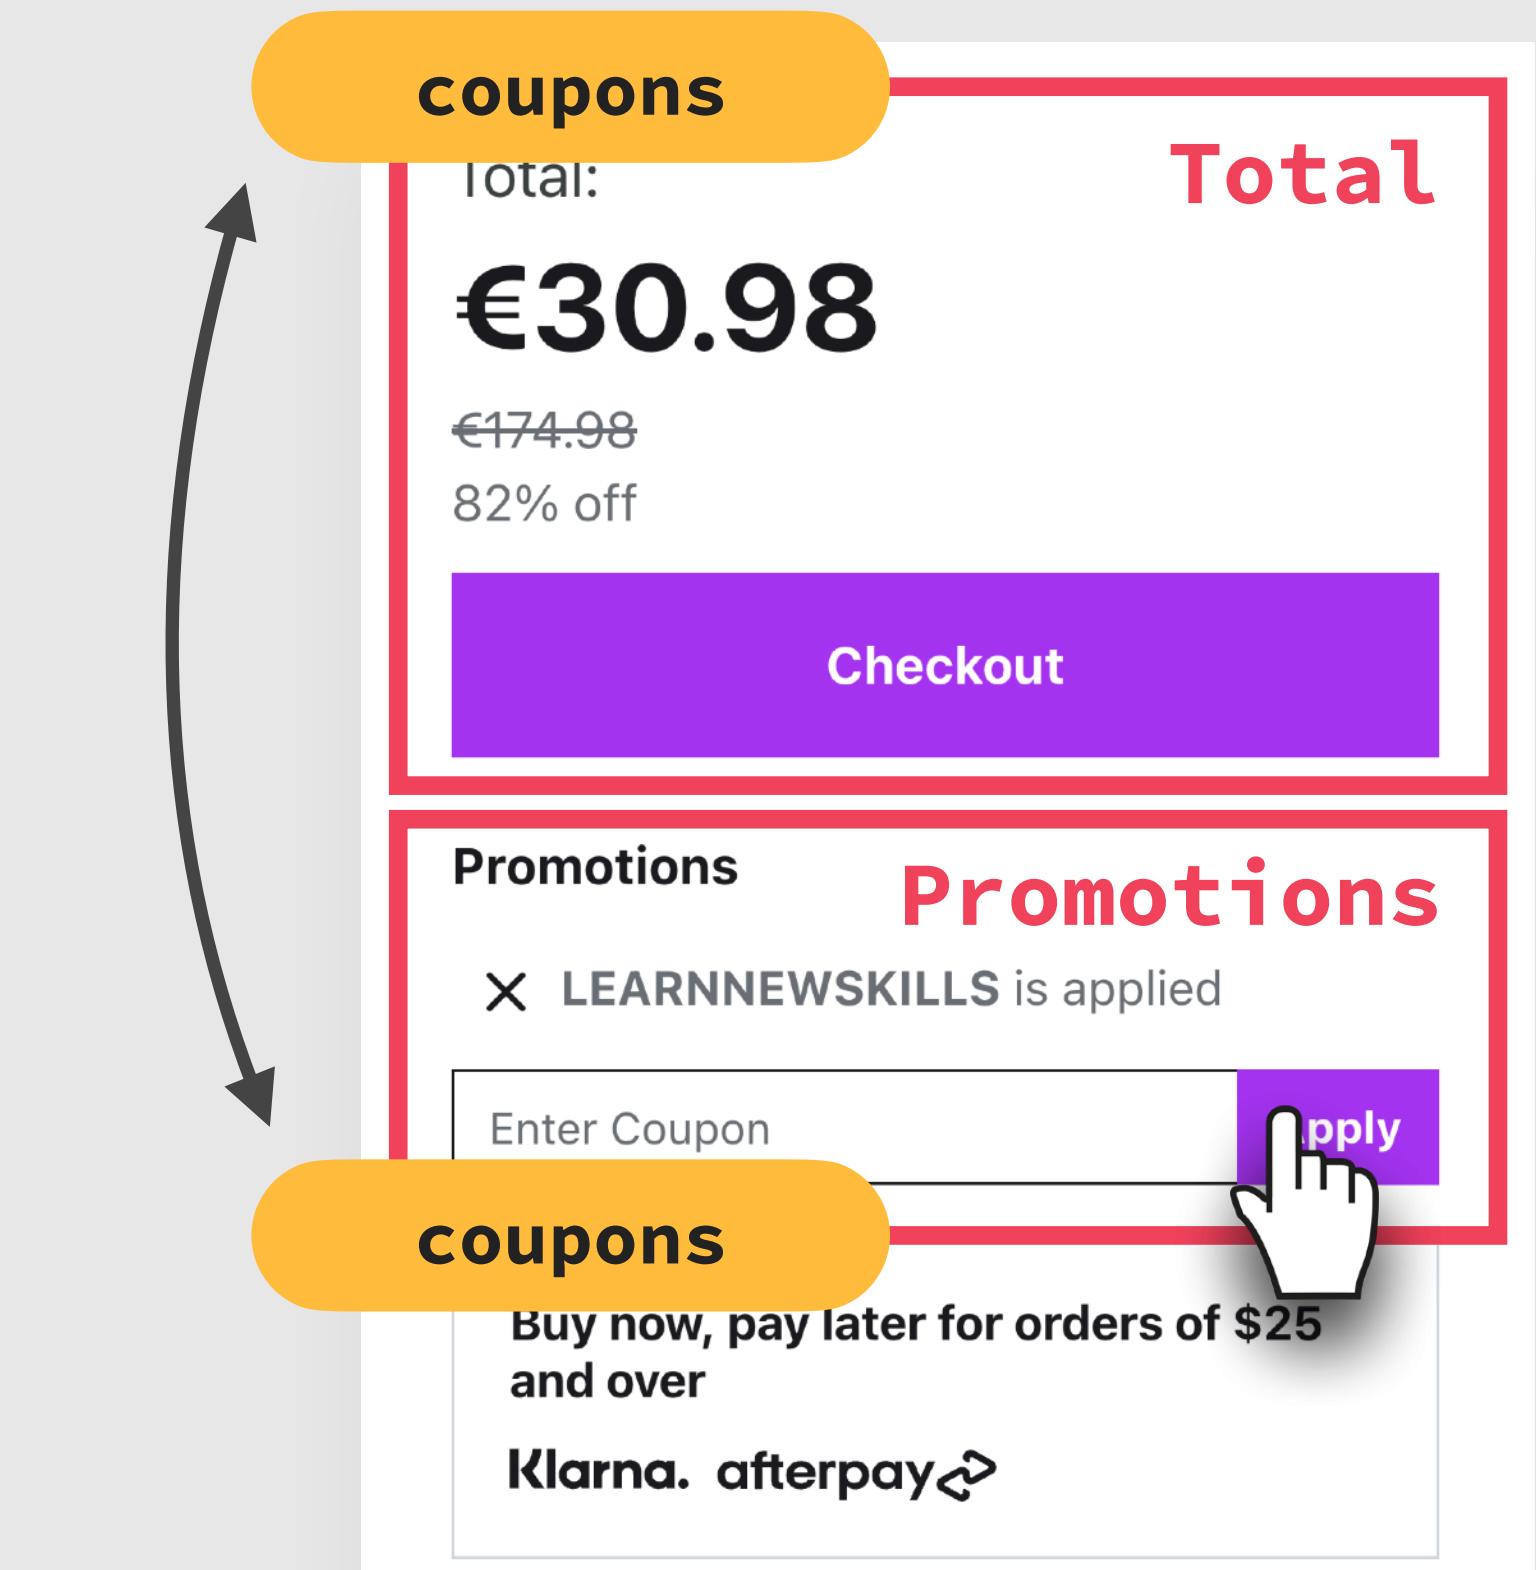



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

THINKING IN REACT: STATE
MANAGEMENT

LECTURE

DERIVED STATE

DERIVING STATE

- 👎 Three separate pieces of state, even though numItems and totalPrice depend on cart
- 👎 Need to keep them in sync (update together)
- 👎 3 state updates will cause 3 re-renders

```
const [cart, setCart] = useState([
  { name: "JavaScript Course", price: 15.99 },
  { name: "Node.js Bootcamp", price: 14.99 },
]);
const [numItems, setNumItems] = useState(2);
const [totalPrice, setTotalPrice] = useState(30.98);
```

- 👍 Derived state: state that is computed from an existing piece of state or from props

- 👍 Just regular variables, no useState
- 👍 cart state is the **single source of truth** for this related data
- 👍 Works because re-rendering component will automatically re-calculate derived state

DERIVING STATE

```
const [cart, setCart] = useState([
  { name: "JavaScript Course", price: 15.99 },
  { name: "Node.js Bootcamp", price: 14.99 },
]);
const numItems = cart.length;
const totalPrice =
  cart.reduce((acc, cur) => acc + cur.price, 0);
```




JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

THINKING IN REACT: STATE
MANAGEMENT

LECTURE

THE CHILDREN PROP: MAKING A
REUSABLE BUTTON

THE CHILDREN PROP

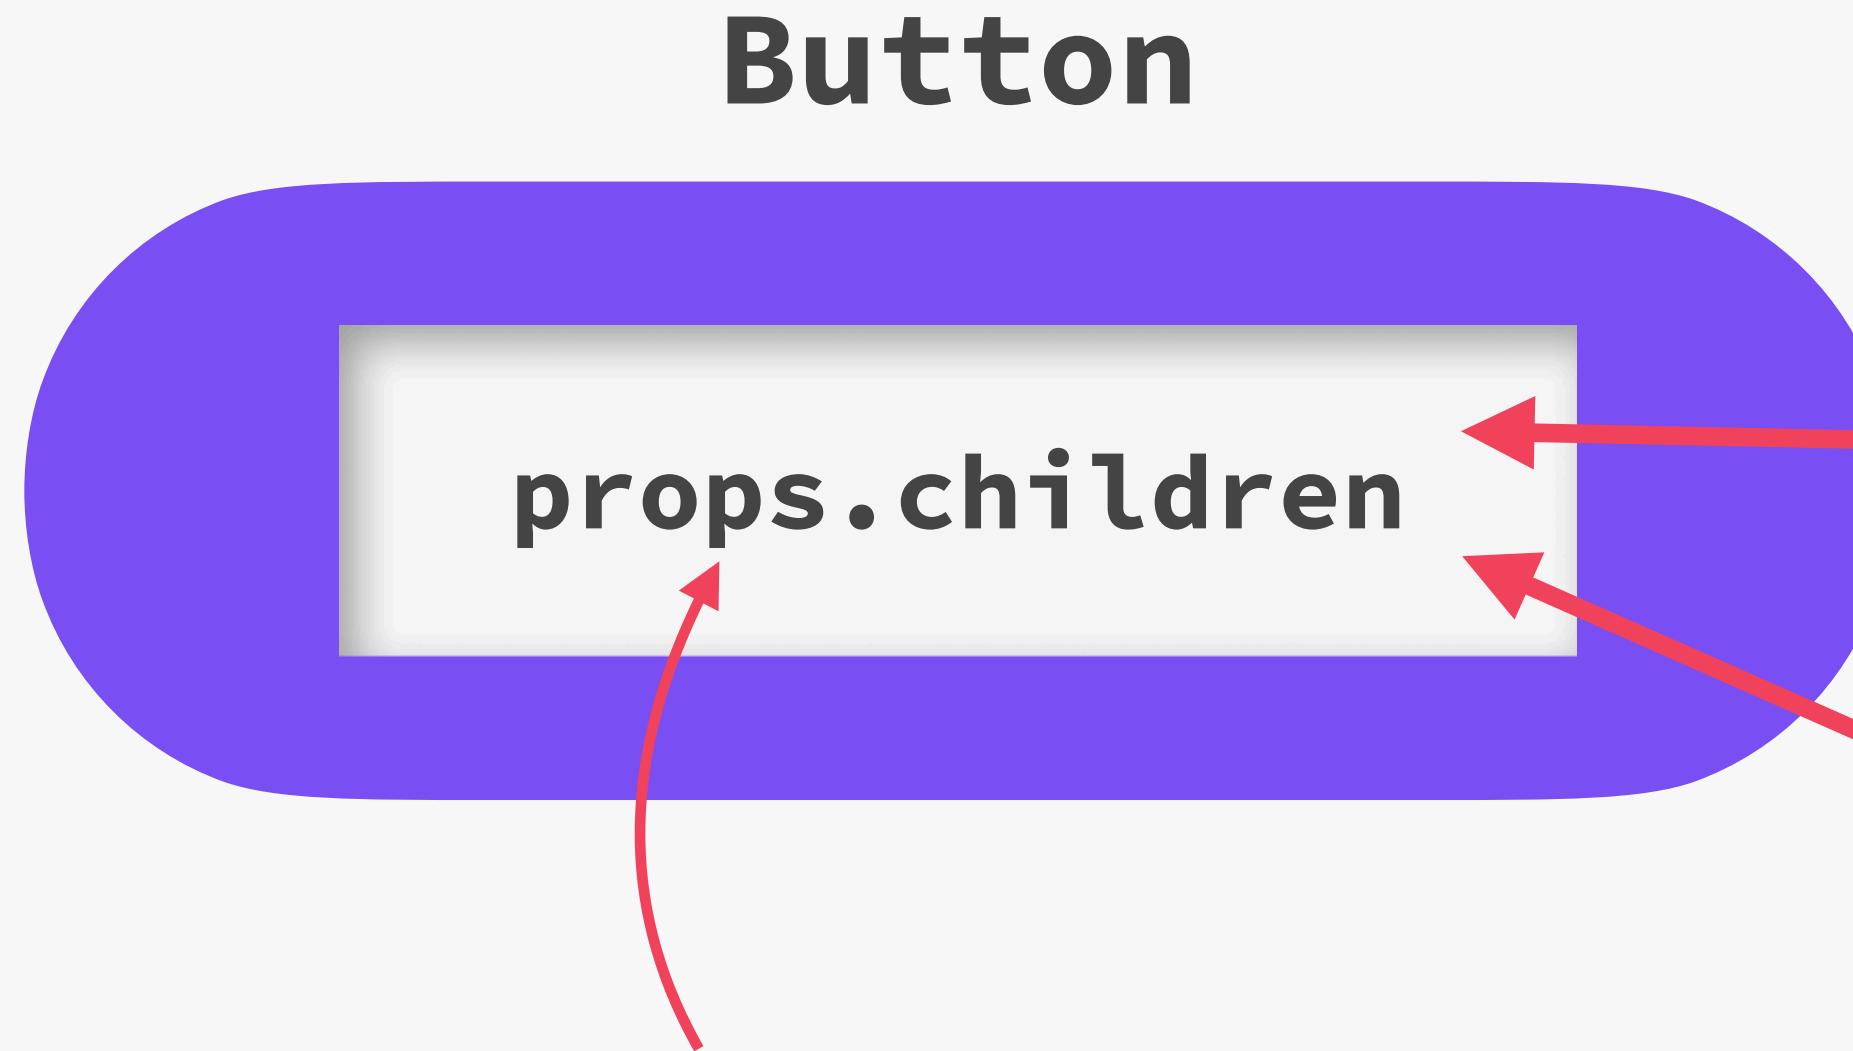

An empty “hole” that can be filled by any JSX the component receives as children

Children of Button,
accessible through
`props.children`

The slide contains two code snippets demonstrating the use of the `children` prop.

Example 1: A button labeled "Previous" with a yellow pointing hand icon. The code shows the button component receiving a child `` element with the text "Previous".

```
<Button onClick={previous}>
  <span>👉</span> Previous
</Button>
```

Example 2: A button labeled "PARTY" with two small party hats icons on either side. The code shows the button component receiving two child `` elements, each containing a party hat icon and the word "PARTY".

```
<Button onClick={next}>
  <span>🎉</span>PARTY<span>🎉</span>
</Button>
```

- 👉 The children prop allow us to pass JSX into an element (besides regular props)
- 👉 Essential tool to make reusable and configurable components (especially component content)
- 👉 Really useful for generic components that don't know their content before being used (e.g. modal)

PART 02

INTERMEDIATE REACT

THINKING IN REACT: COMPONENTS, COMPOSITION, AND REUSABILITY



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

THINKING IN REACT:
COMPONENTS, COMPOSITION,
AND REUSABILITY

LECTURE

HOW TO SPLIT A UI INTO
COMPONENTS

COMPONENT SIZE MATTERS

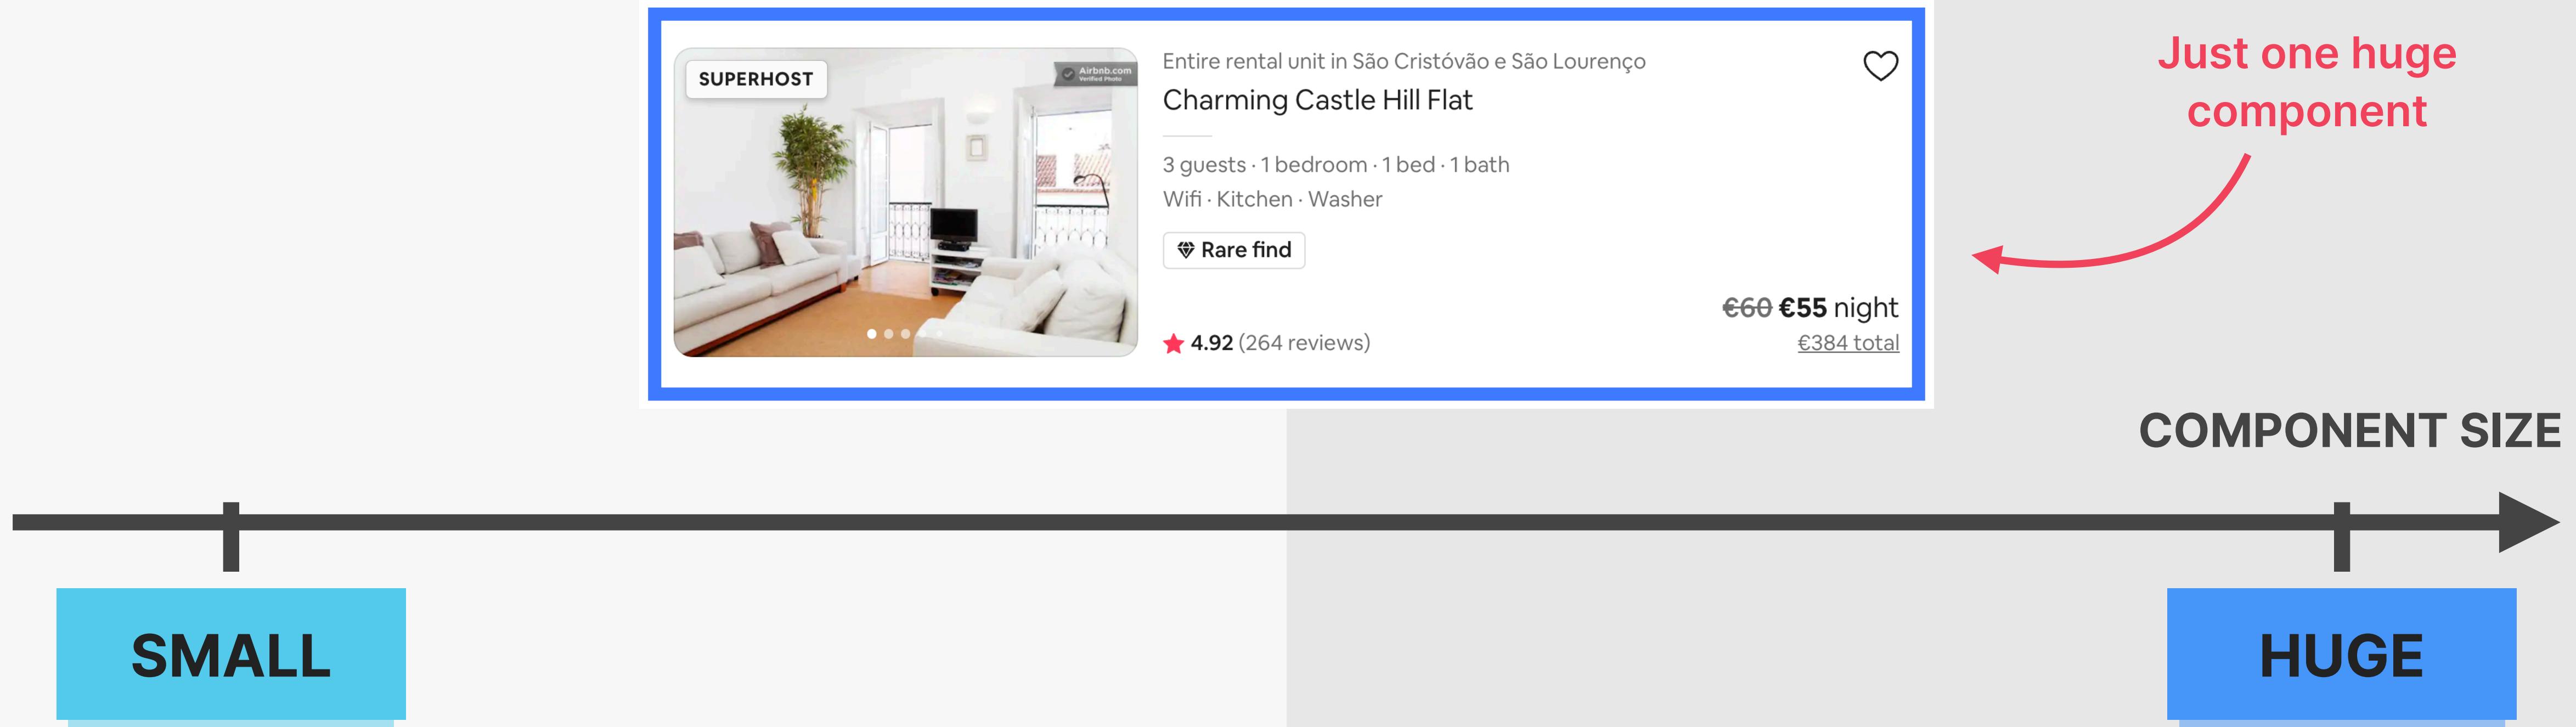

- 👉 Too many **responsibilities**
- 👉 Might need too many **props**
- 👉 Hard to **reuse**
- 👉 Complex code, hard to understand

COMPONENT SIZE MATTERS



HOW TO SPLIT A UI INTO COMPONENTS



👉 The 4 criteria for splitting a UI into components:

1. Logical separation of content/layout

2. Reusability

3. Responsibilities / complexity

4. Personal coding style

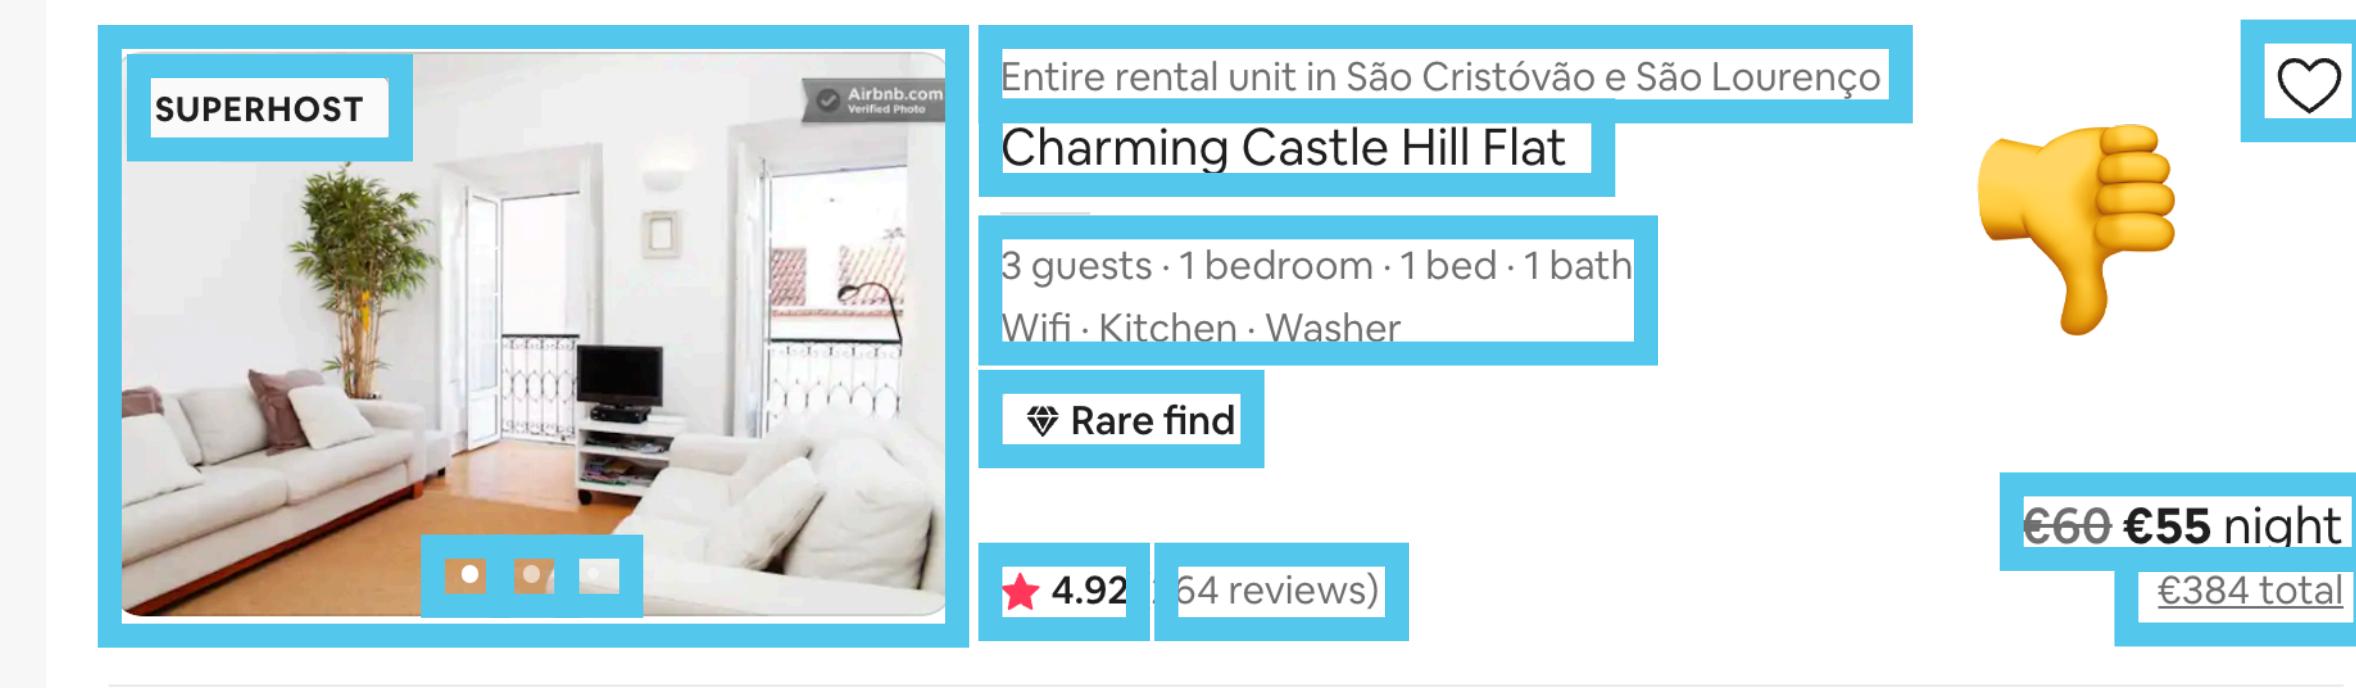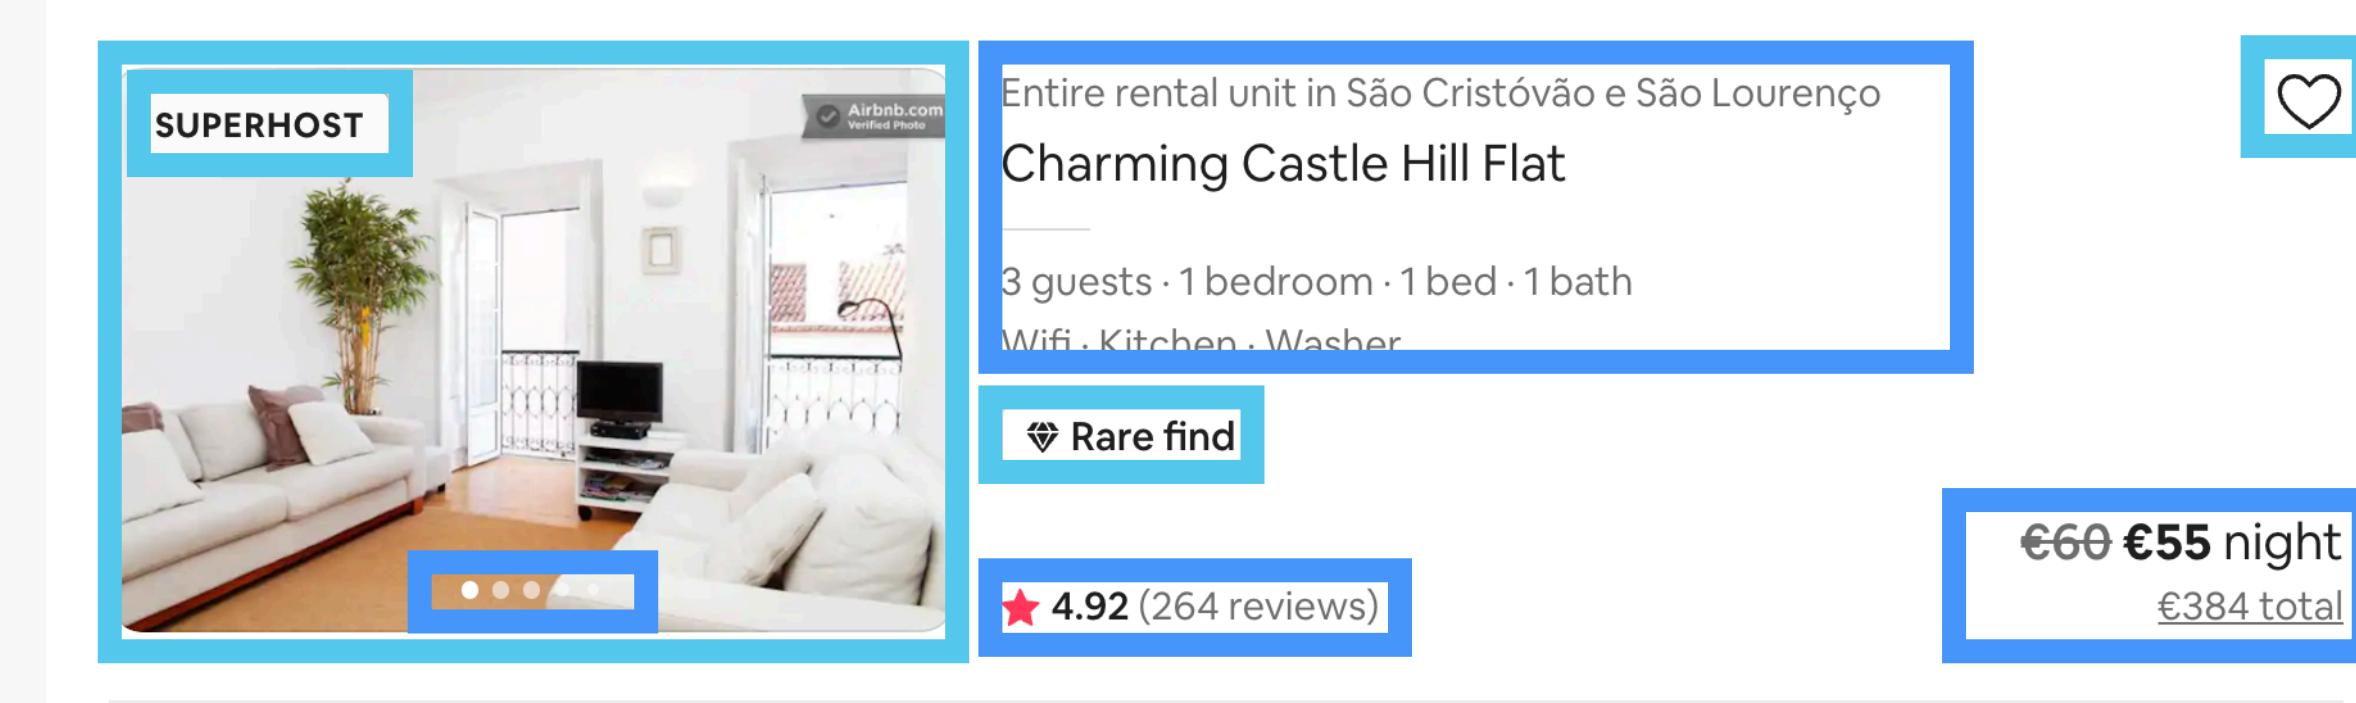

- ✓ Logical separation
- ✓ Some are reusable
- ✓ Low complexity

FRAMEWORK: WHEN TO CREATE A NEW COMPONENT?



SUGGESTION: When in doubt, start with a relatively big component, then split it into smaller components as it becomes necessary

Skip if you're sure you need to reuse. But otherwise, you don't need to focus on reusability and complexity early on

1. Logical separation of content/layout

- 👉 Does the component contain pieces of content or layout that **don't belong together**?

2. Reusability

- 👉 Is it possible to reuse part of the component?
- 👉 Do you **want** or **need** to reuse it?

3. Responsibilities / complexity

- 👉 Is the component doing too **many different things**?
- 👉 Does the component rely on too **many props**?
- 👉 Does the component have too **many pieces of state** and/or effects?
- 👉 Is the code, including JSX, too **complex/confusing**?

4. Personal coding style

- 👉 Do you prefer **smaller functions/components**?



You might need a new component

👏 These are all guidelines... It will become intuitive over time!

SOME MORE GENERAL GUIDELINES

- 💰 Be aware that creating a new component **creates a new abstraction**. Abstractions have a **cost**, because **more abstractions require more mental energy** to switch back and forth between components. So try not to create new components too early
- 🏷️ Name a component according to **what it does or what it displays**. Don't be afraid of using long component names
- 🧩 Never declare a new component **inside another component!**
- 📁 **Co-locate related components inside the same file.** Don't separate components into different files too early
- 🔄 It's completely normal that an app has components of **many different sizes**, including very small and huge ones (See next slide... 👉)

ANY APP HAS COMPONENTS OF DIFFERENT SIZES AND REUSABILITY



- 👉 Some very small components are necessary!
- 👉 Highly reusable
- 👉 Very low complexity

- 👉 Most apps will have a few huge components
- 👉 Not meant to be reused (not a problem!)



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

THINKING IN REACT:
COMPONENTS, COMPOSITION,
AND REUSABILITY

LECTURE


COMPONENT CATEGORIES

COMPONENT CATEGORIES

👉 Most of your components will naturally fall into one of three categories:


**Stateless /
presentational
components**

- 👉 No state
- 👉 Can receive props and simply *present* received data or other content
- 👉 Usually **small** and reusable

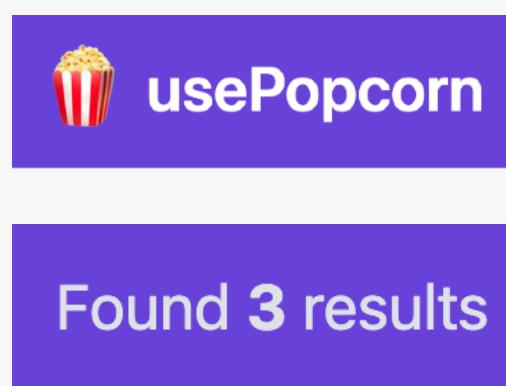


**Stateful
components**

- 👉 Have state
- 👉 Can still be **reusable**

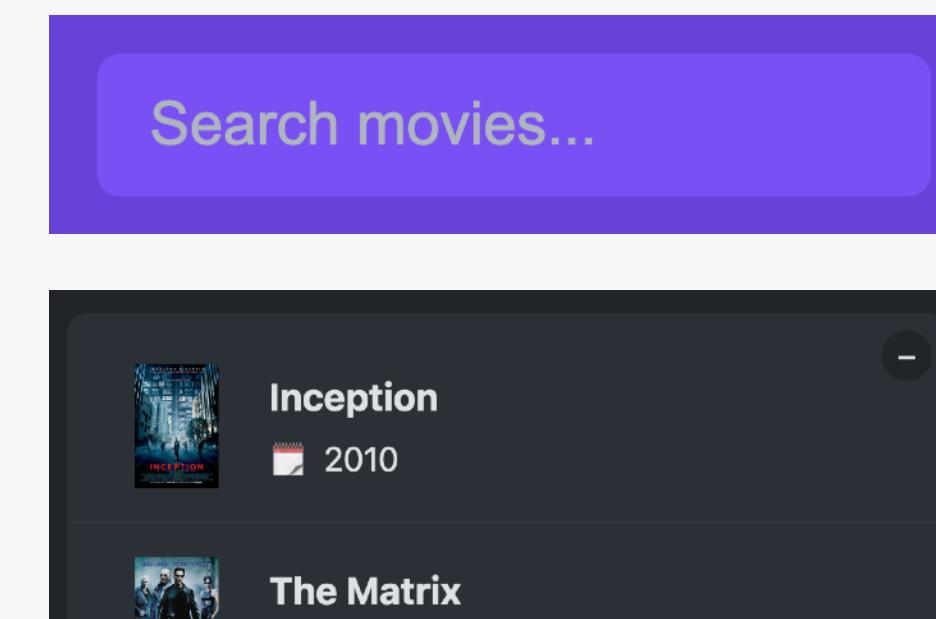

**Structural
components**

- 👉 “Pages”, “layouts”, or “screens” of the app
- 👉 Result of **composition**
- 👉 Can be **huge** and non-reusable (but don't have to)

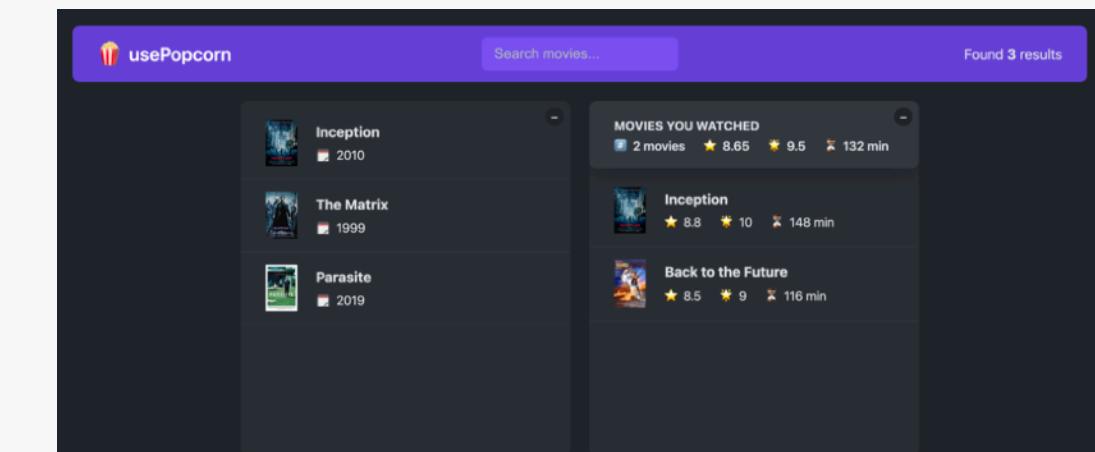



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION


THINKING IN REACT:
COMPONENTS, COMPOSITION,
AND REUSABILITY

LECTURE


COMPONENT COMPOSITION

WHAT IS COMPONENT COMPOSITION?

“USING” A COMPONENT

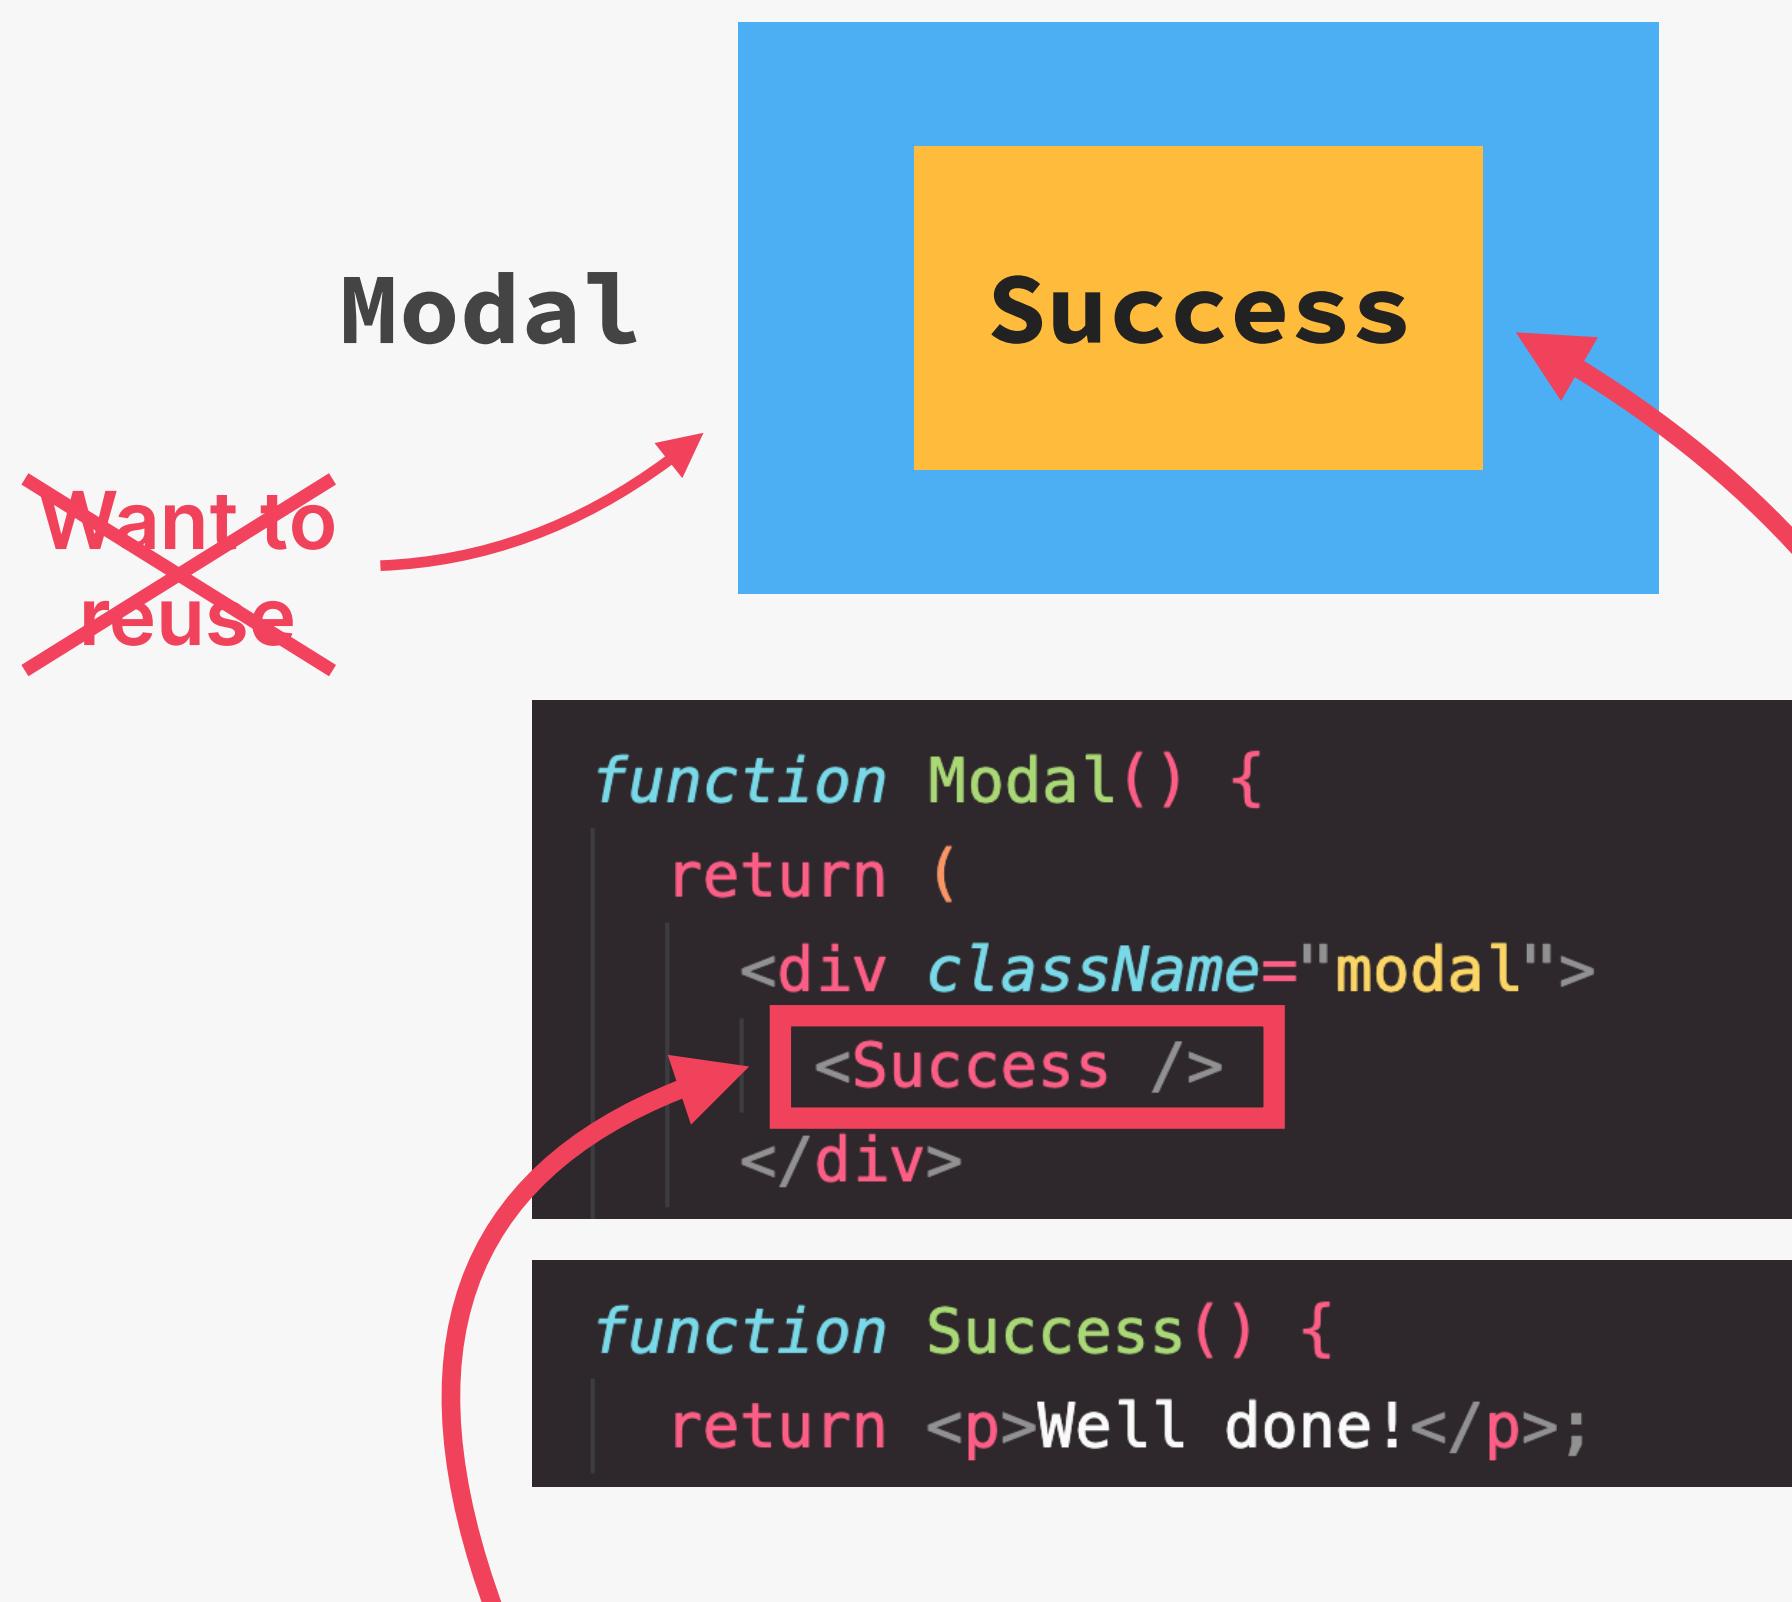

COMPONENT COMPOSITION

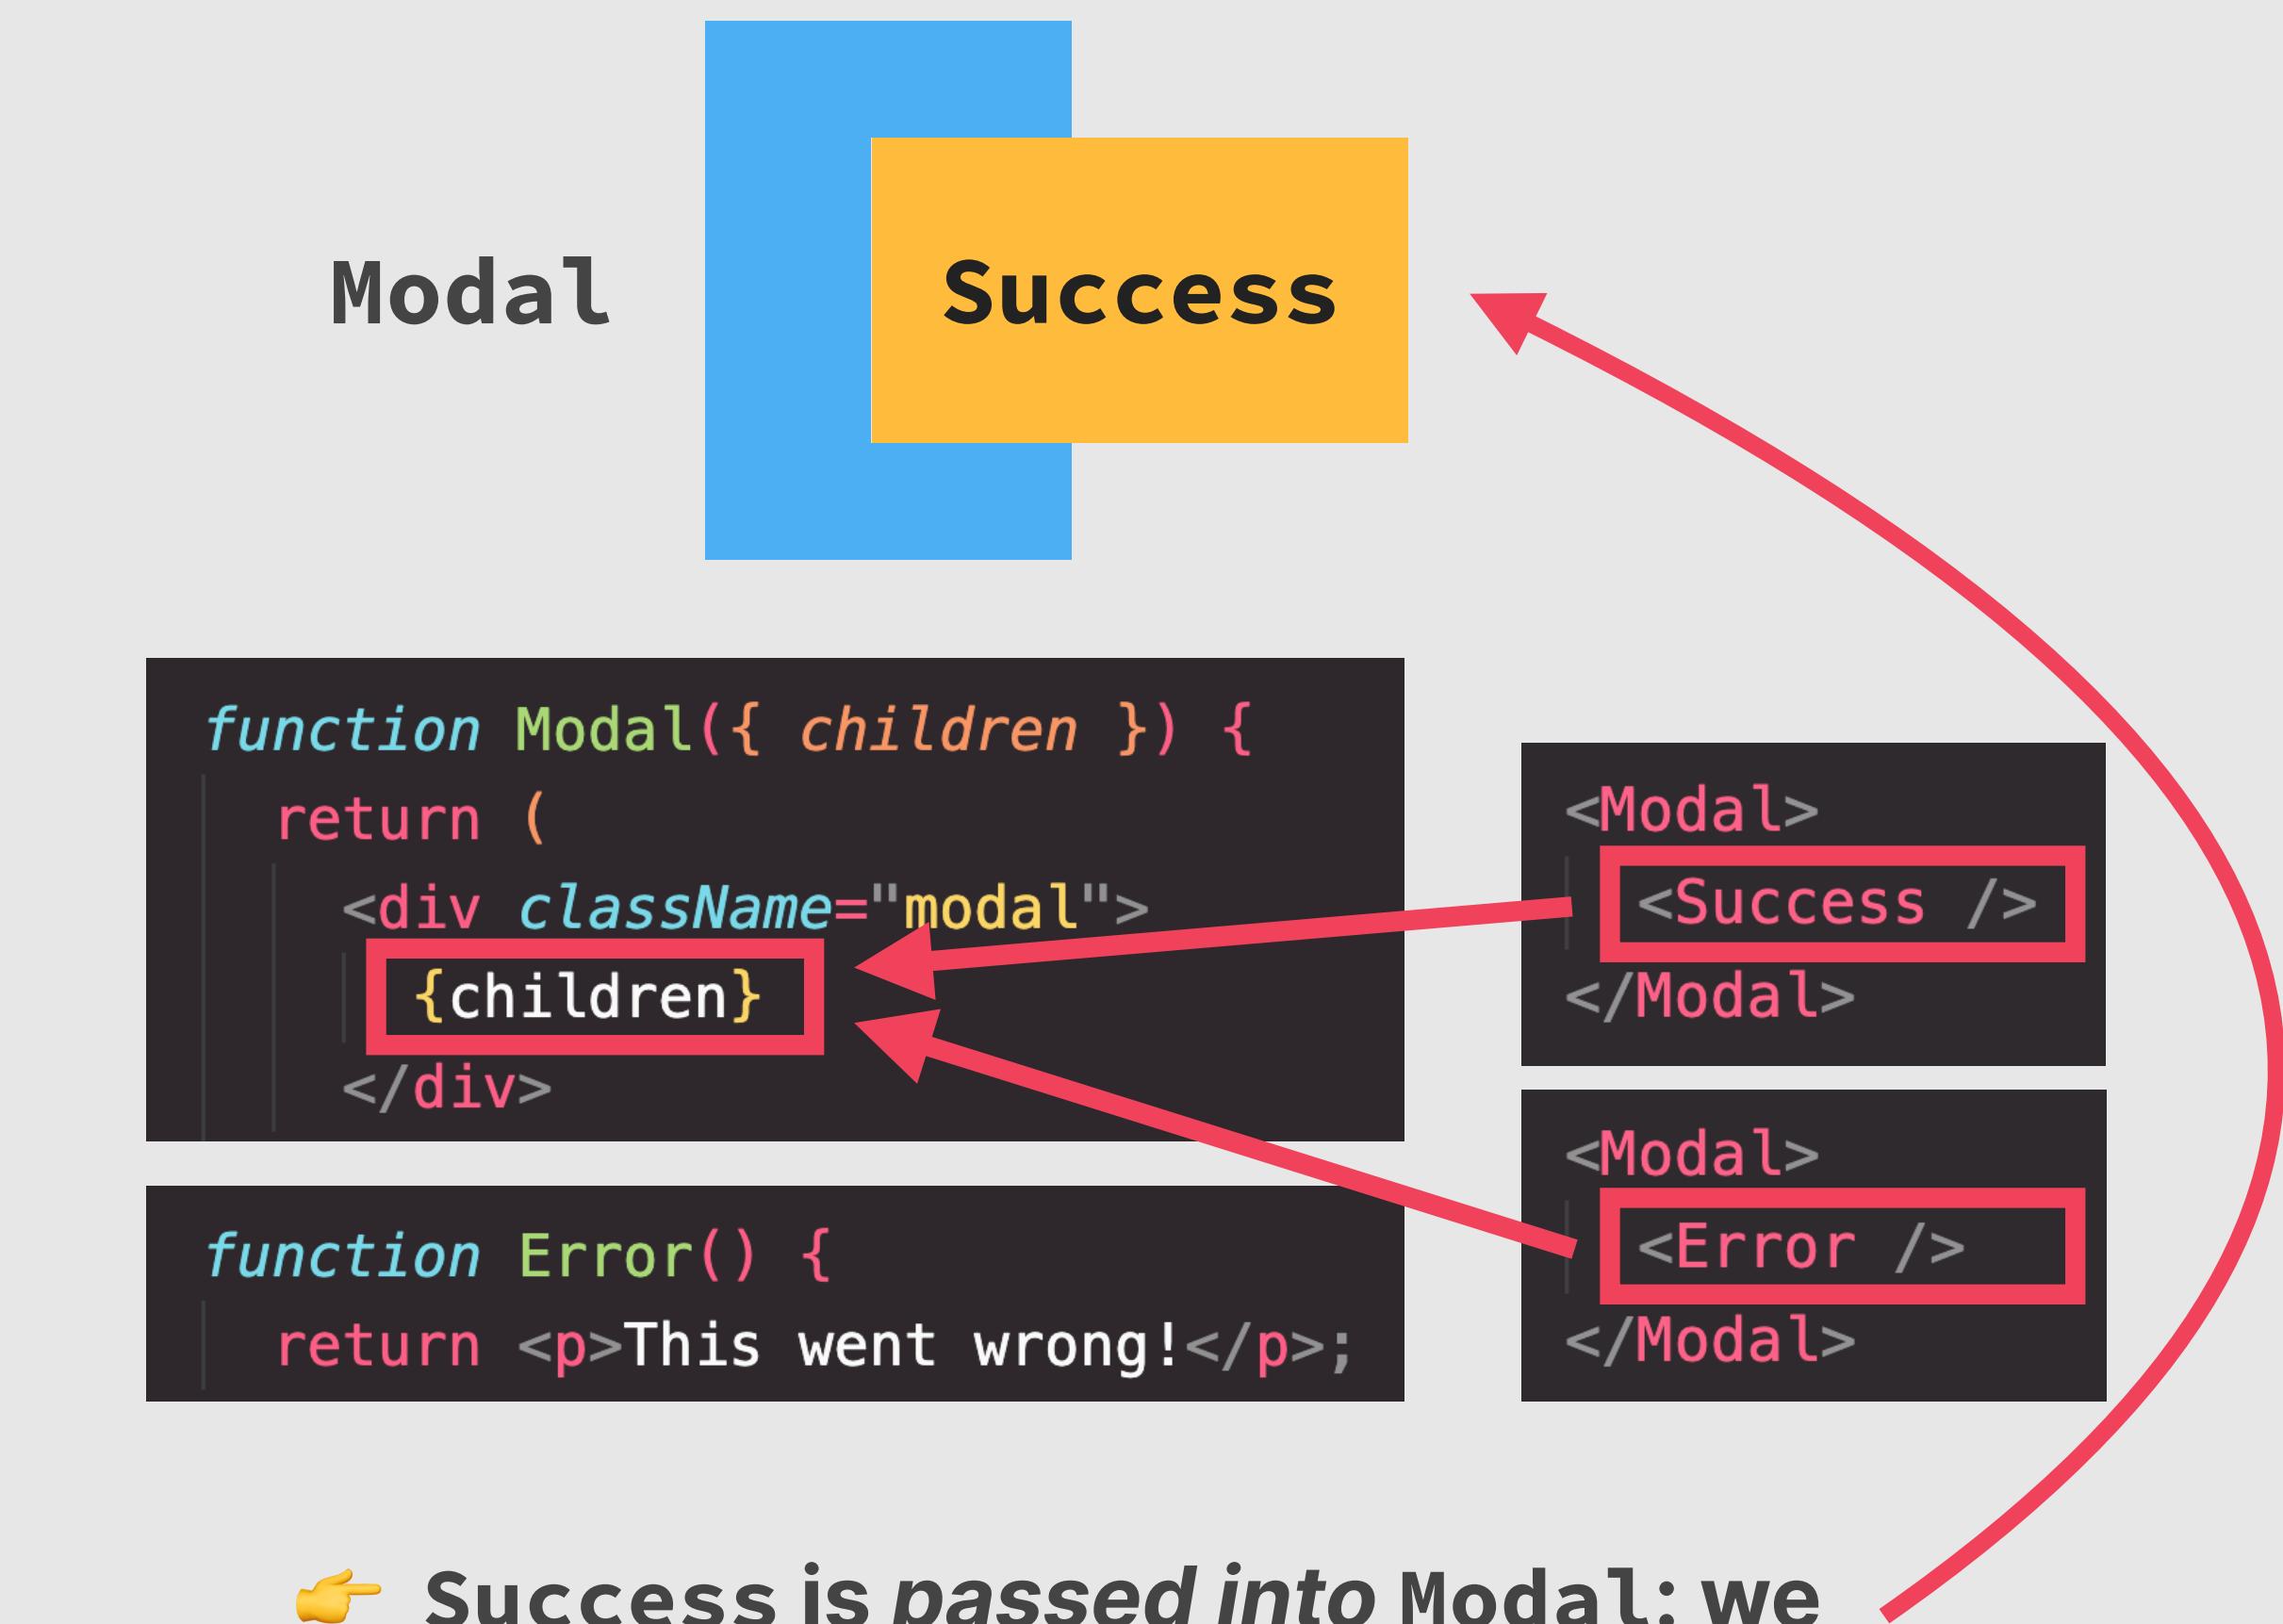

👉 Success is *inside* Modal: we can NOT reuse Modal

👉 Success is *passed into* Modal: we can REUSE Modal

WHAT IS COMPONENT COMPOSITION?

COMPONENT COMPOSITION

Modal



```
function Modal({ children }) {  
  return (  
    <div className="modal">  
      {children}  
    </div>  
  );  
  
function Error() {  
  return <p>This went wrong!</p>;  
}
```

```
<Modal>  
  <Success />  
</Modal>  
  
<Modal>  
  <Error />  
</Modal>
```

👉 Success is passed *into* Modal: we can REUSE Modal

- 👉 Component composition: combining different components using the **children prop** (or explicitly defined **props**)

WE COMPONENT COMPOSITION, WE CAN:

- 1 Create highly reusable and flexible components
- 2 Fix prop drilling (great for layouts)

Possible because components don't need to know their children in advance



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

THINKING IN REACT:
COMPONENTS, COMPOSITION,
AND REUSABILITY

LECTURE

PROPS AS A COMPONENT API

PROPS AS AN API



COMPONENT CONSUMER



Component props = Public API

Consuming component



Abstraction that encapsulates UI and logic

```
function StarRating({  
  maxRating = 5,  
  defaultRating = 0,  
  ...  
} = {}){  
  const [rating, setRating] = useState(defaultRating);  
  
  // Add these in the end  
  const messages = [];  
  const color = "#ffccbc";  
  const size = 16;  
  const className = `star-rating ${rating}`;  
  const onRatingChange = (rating) => useState(rating);  
  
  const handleSetting = function (rating) {  
    setRating(rating);  
  };  
  
  const containerStyle = { display: 'flex', alignItems: 'center', gap: '16px' };  
  
  const starContainerStyle = { display: 'flex' };  
  
  return (  



<div style={starContainerStyle}>  
      {Array.from({ length: maxRating }, (_, i) => {  
        <Star rating={i + 1} onClick={() => handleSetting(i + 1)}  
          onMouseEnter={() => setTempRating(i + 1)}  
          onMouseLeave={() => setTempRating(0)}  
          color={color}  
          size={size}  
        />  
      })</div>  
    </div>  
  );  
}  
  
// Show messages if a message array has been passed in, and has the correct  
// length  
if (messages.length === maxRating - rating) {  
  <p style={textStyle}>  
    {messages.map((message, index) =>   
      ● {message.message}  
    )}  
  </p>  
}


```

Component



COMPONENT CREATOR

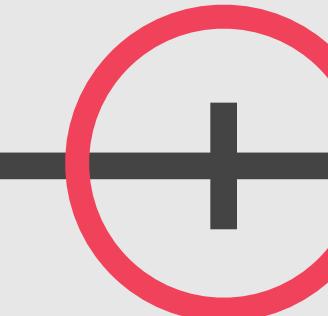

TOO LITTLE PROPS

- 👉 Not flexible enough
- 👉 Might not be useful

We need to find the right balance between too little and too many props, that works for both the consumer and the creator

TOO MANY PROPS

- 👉 Too hard to use
- 👉 Exposing too much complexity
- 👉 Hard-to-write code
- 👉 Provide good default values



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

GOT QUESTIONS? FEEDBACK?

JUST POST IT IN THE Q&A OF
THIS VIDEO, AND YOU WILL
GET HELP THERE!

HOW REACT WORKS BEHIND THE SCENES



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

HOW REACT WORKS BEHIND THE SCENES

LECTURE

COMPONENTS, INSTANCES, AND ELEMENTS

COMPONENT VS. INSTANCE VS. ELEMENT

Component

```
function Tab({ item }) {  
  return (  
    <div className='tab-content'>  
      <h4>All contacts</h4>  
      <p>Your post will be visible</p>  
    </div>  
  );  
}
```

- 👉 Description of a piece of UI
- 👉 A component is a function that **returns React elements** (element tree), usually written as JSX
- 👉 “Blueprint” or “Template”

COMPONENT VS. INSTANCE VS. ELEMENT



```
function App() {  
  return (  
    <div className='tabs'>  
      <Tab item={content[0]} />  
      <Tab item={content[1]} />  
      <Tab item={content[2]} />  
    </div>  
  );  
}
```




- 👉 Instances are created when we “use” components
- 👉 React internally calls Tab()
- 👉 Actual “physical” manifestation of a component
- 👉 Has its own state and props
- 👉 Has a **lifecycle** (can “be born”, “live”, and “die”)

COMPONENT VS. INSTANCE VS. ELEMENT



- 👉 JSX is converted to `React.createElement()` function calls
- 👉 A React element is the **result of these function calls**
- 👉 Information necessary to create DOM elements

COMPONENT VS. INSTANCE VS. ELEMENT

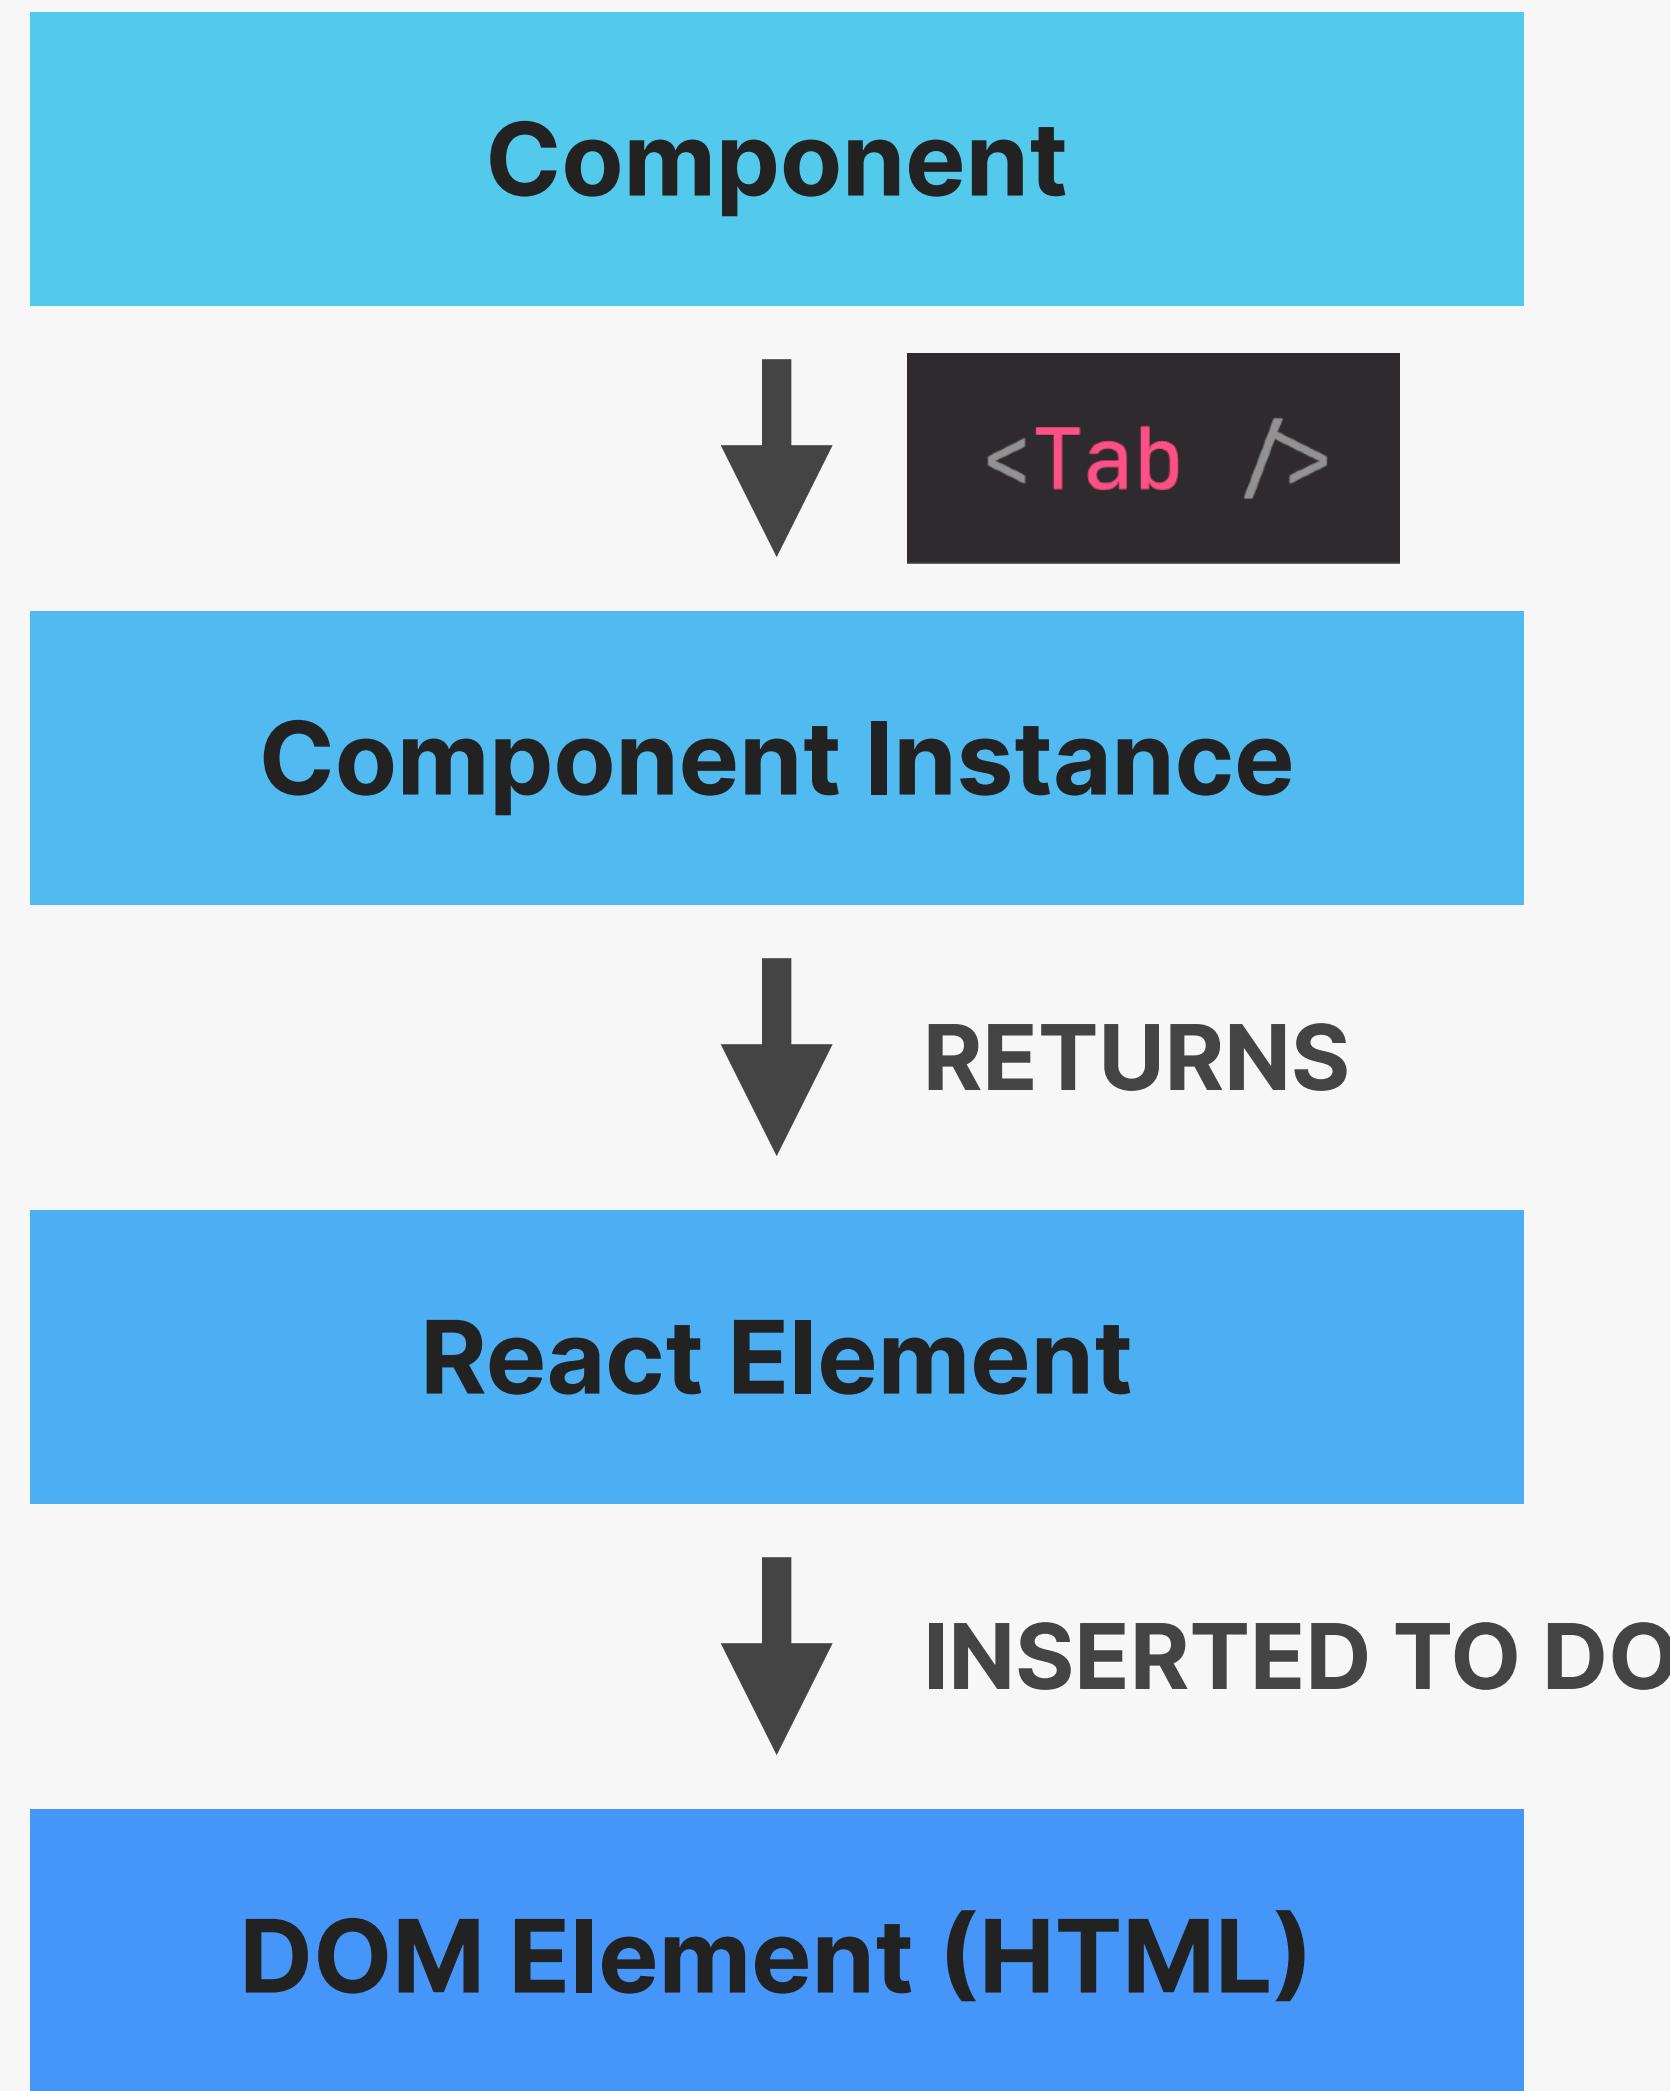

```
▼<div class="tab-content">
  <h4>All contacts</h4>
  <p>Your post will be visible</p>
</div>
```

All contacts
Your post will be visible to all your contacts

👉 Actual **visual representation** of the component instance in the browser



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

HOW REACT WORKS BEHIND THE SCENES

LECTURE


HOW RENDERING WORKS:
OVERVIEW

QUICK RECAP BEFORE WE GET STARTED

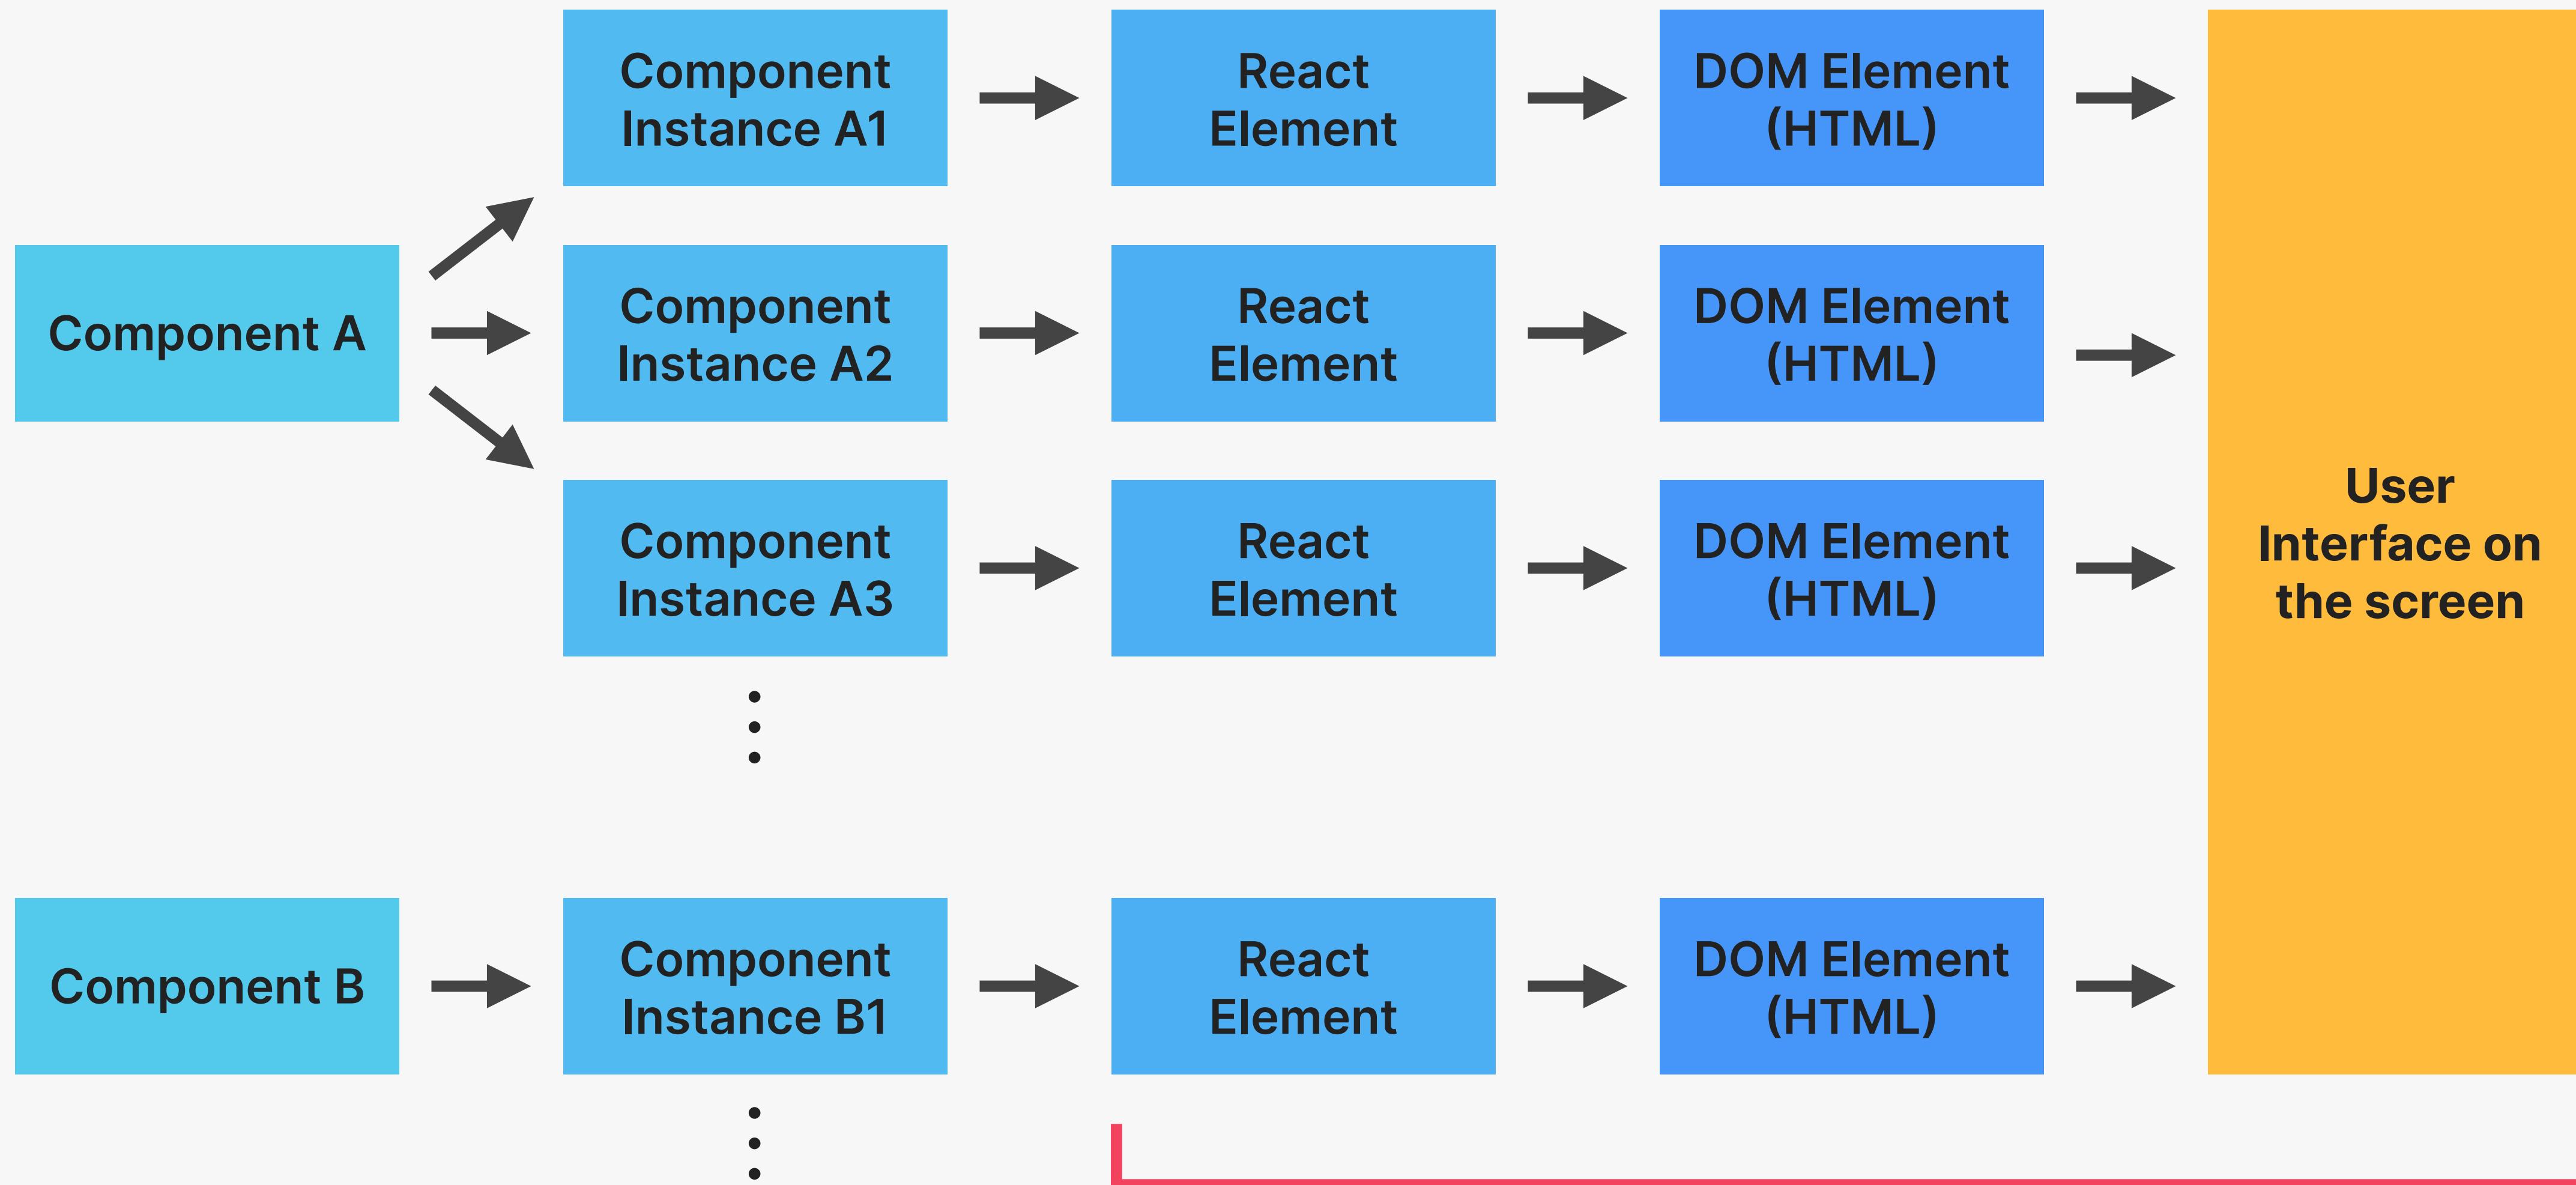

How does this process *actually* work?

OVERVIEW: HOW COMPONENTS ARE DISPLAYED ON THE SCREEN

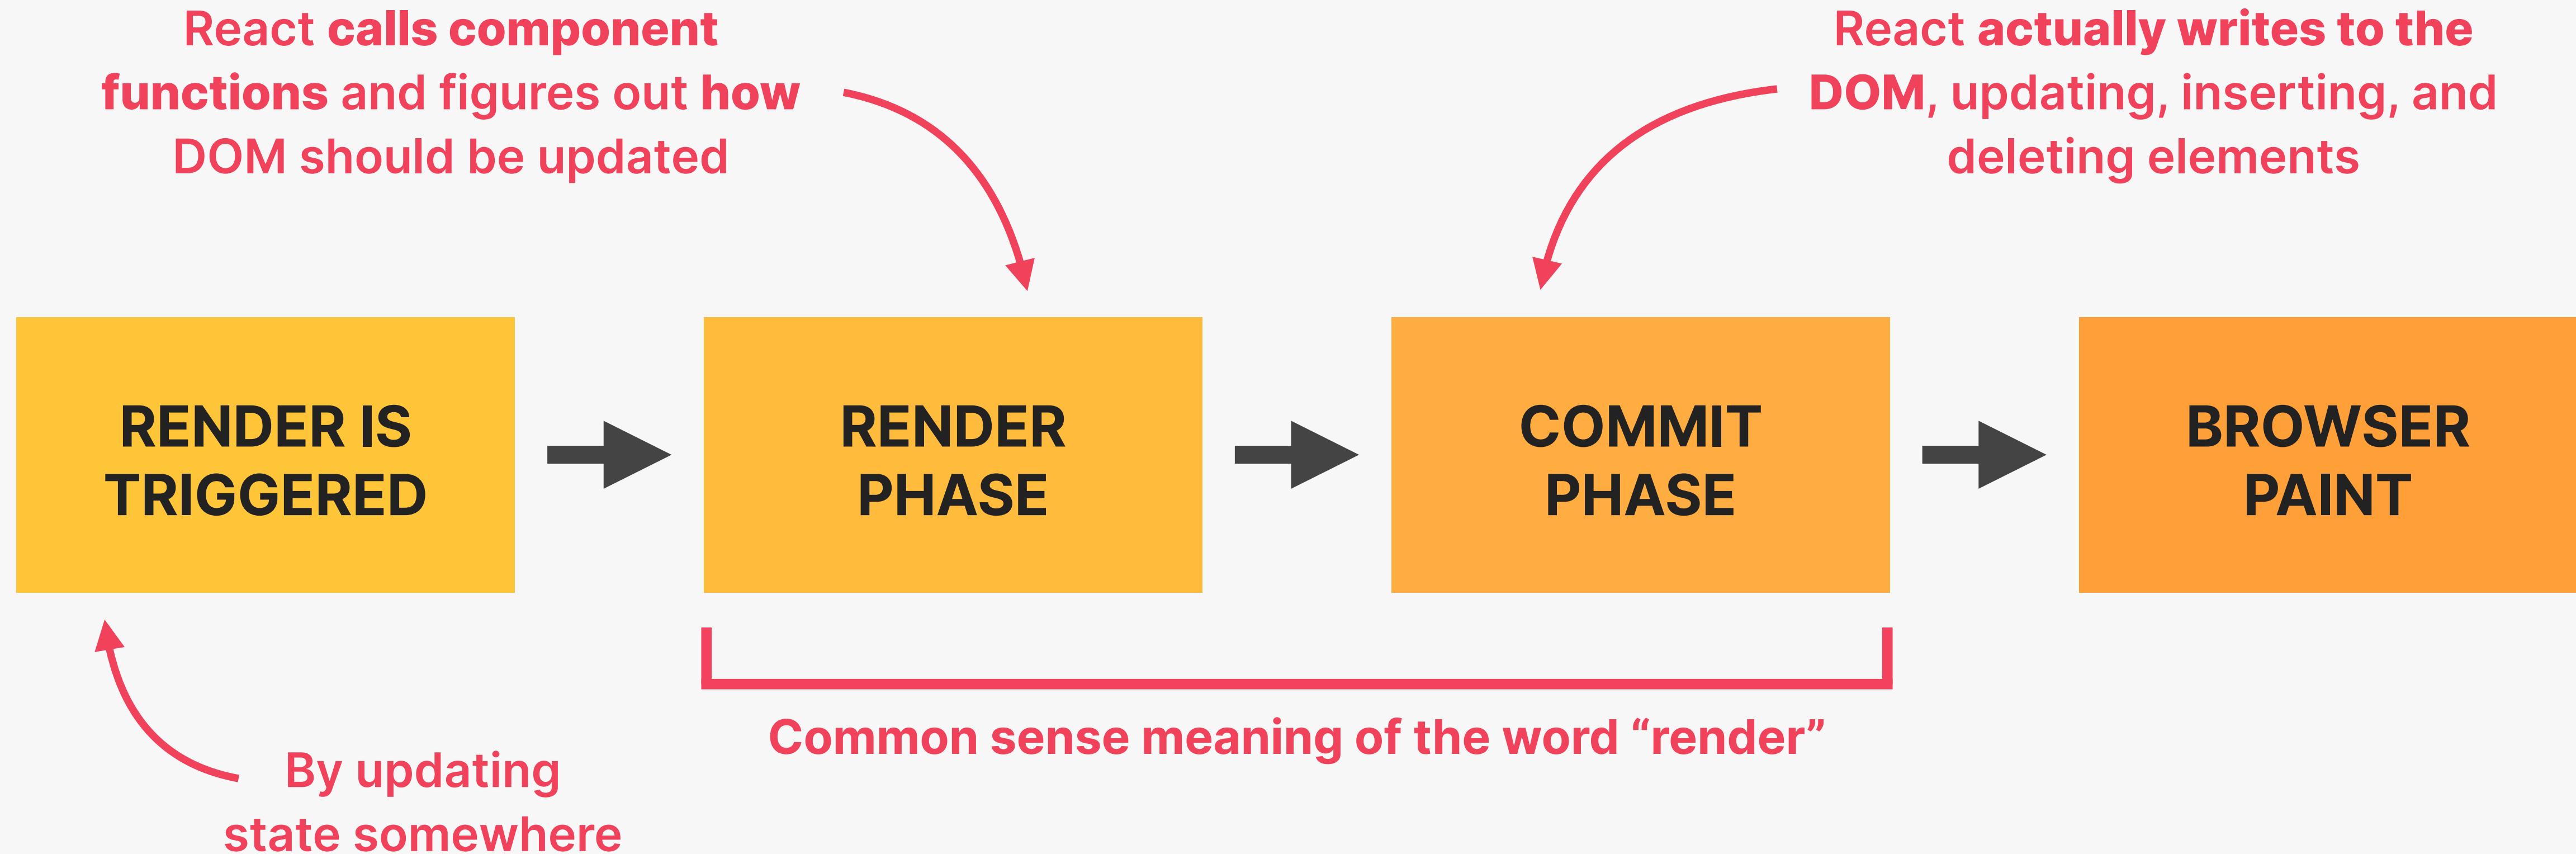

- 👉 In React, rendering is **NOT** updating the DOM or displaying elements on the screen. Rendering only happens **internally** inside React, it does not produce **visual changes**.

HOW RENDERS ARE TRIGGERED

[1] RENDER IS TRIGGERED

THE TWO SITUATIONS THAT TRIGGER RENDERS:

- 1 Initial render of the application
- 2 State is updated in one or more component instances (re-render)

- 👉 The render process is triggered for the **entire application**
- 👉 In practice, it looks like React only re-renders the component where the state update happens, but that's not how it **works behind the scenes**
- 👉 Renders are **not** triggered immediately, but **scheduled** for when the JS engine has some “free time”. There is also batching of multiple `setState` calls in event handlers



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

HOW REACT WORKS BEHIND THE SCENES

LECTURE

HOW RENDERING WORKS: THE RENDER PHASE


REVIEW: THE MECHANICS OF STATE IN REACT




NOT TRUE #1: RENDERING IS UPDATING THE SCREEN / DOM

NOT TRUE #2: REACT COMPLETELY DISCARDS OLD VIEW (DOM) ON RE-RENDER


THE RENDER PHASE

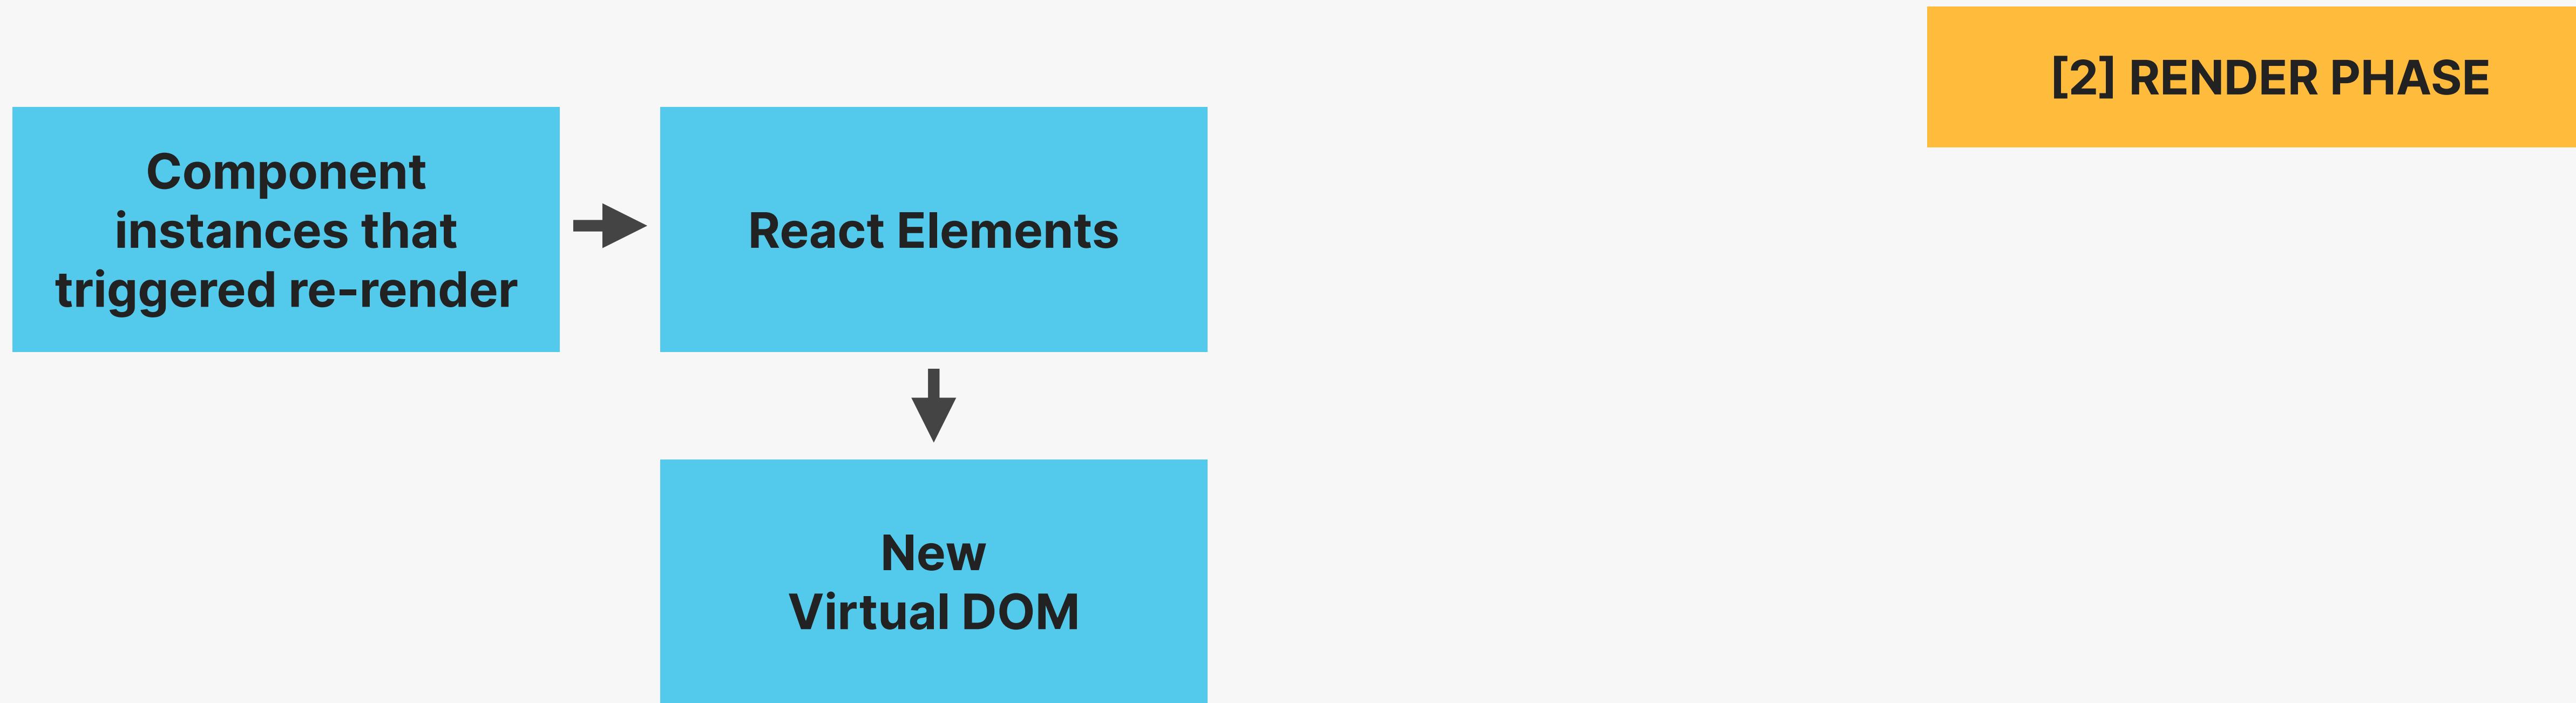

THE VIRTUAL DOM (REACT ELEMENT TREE)

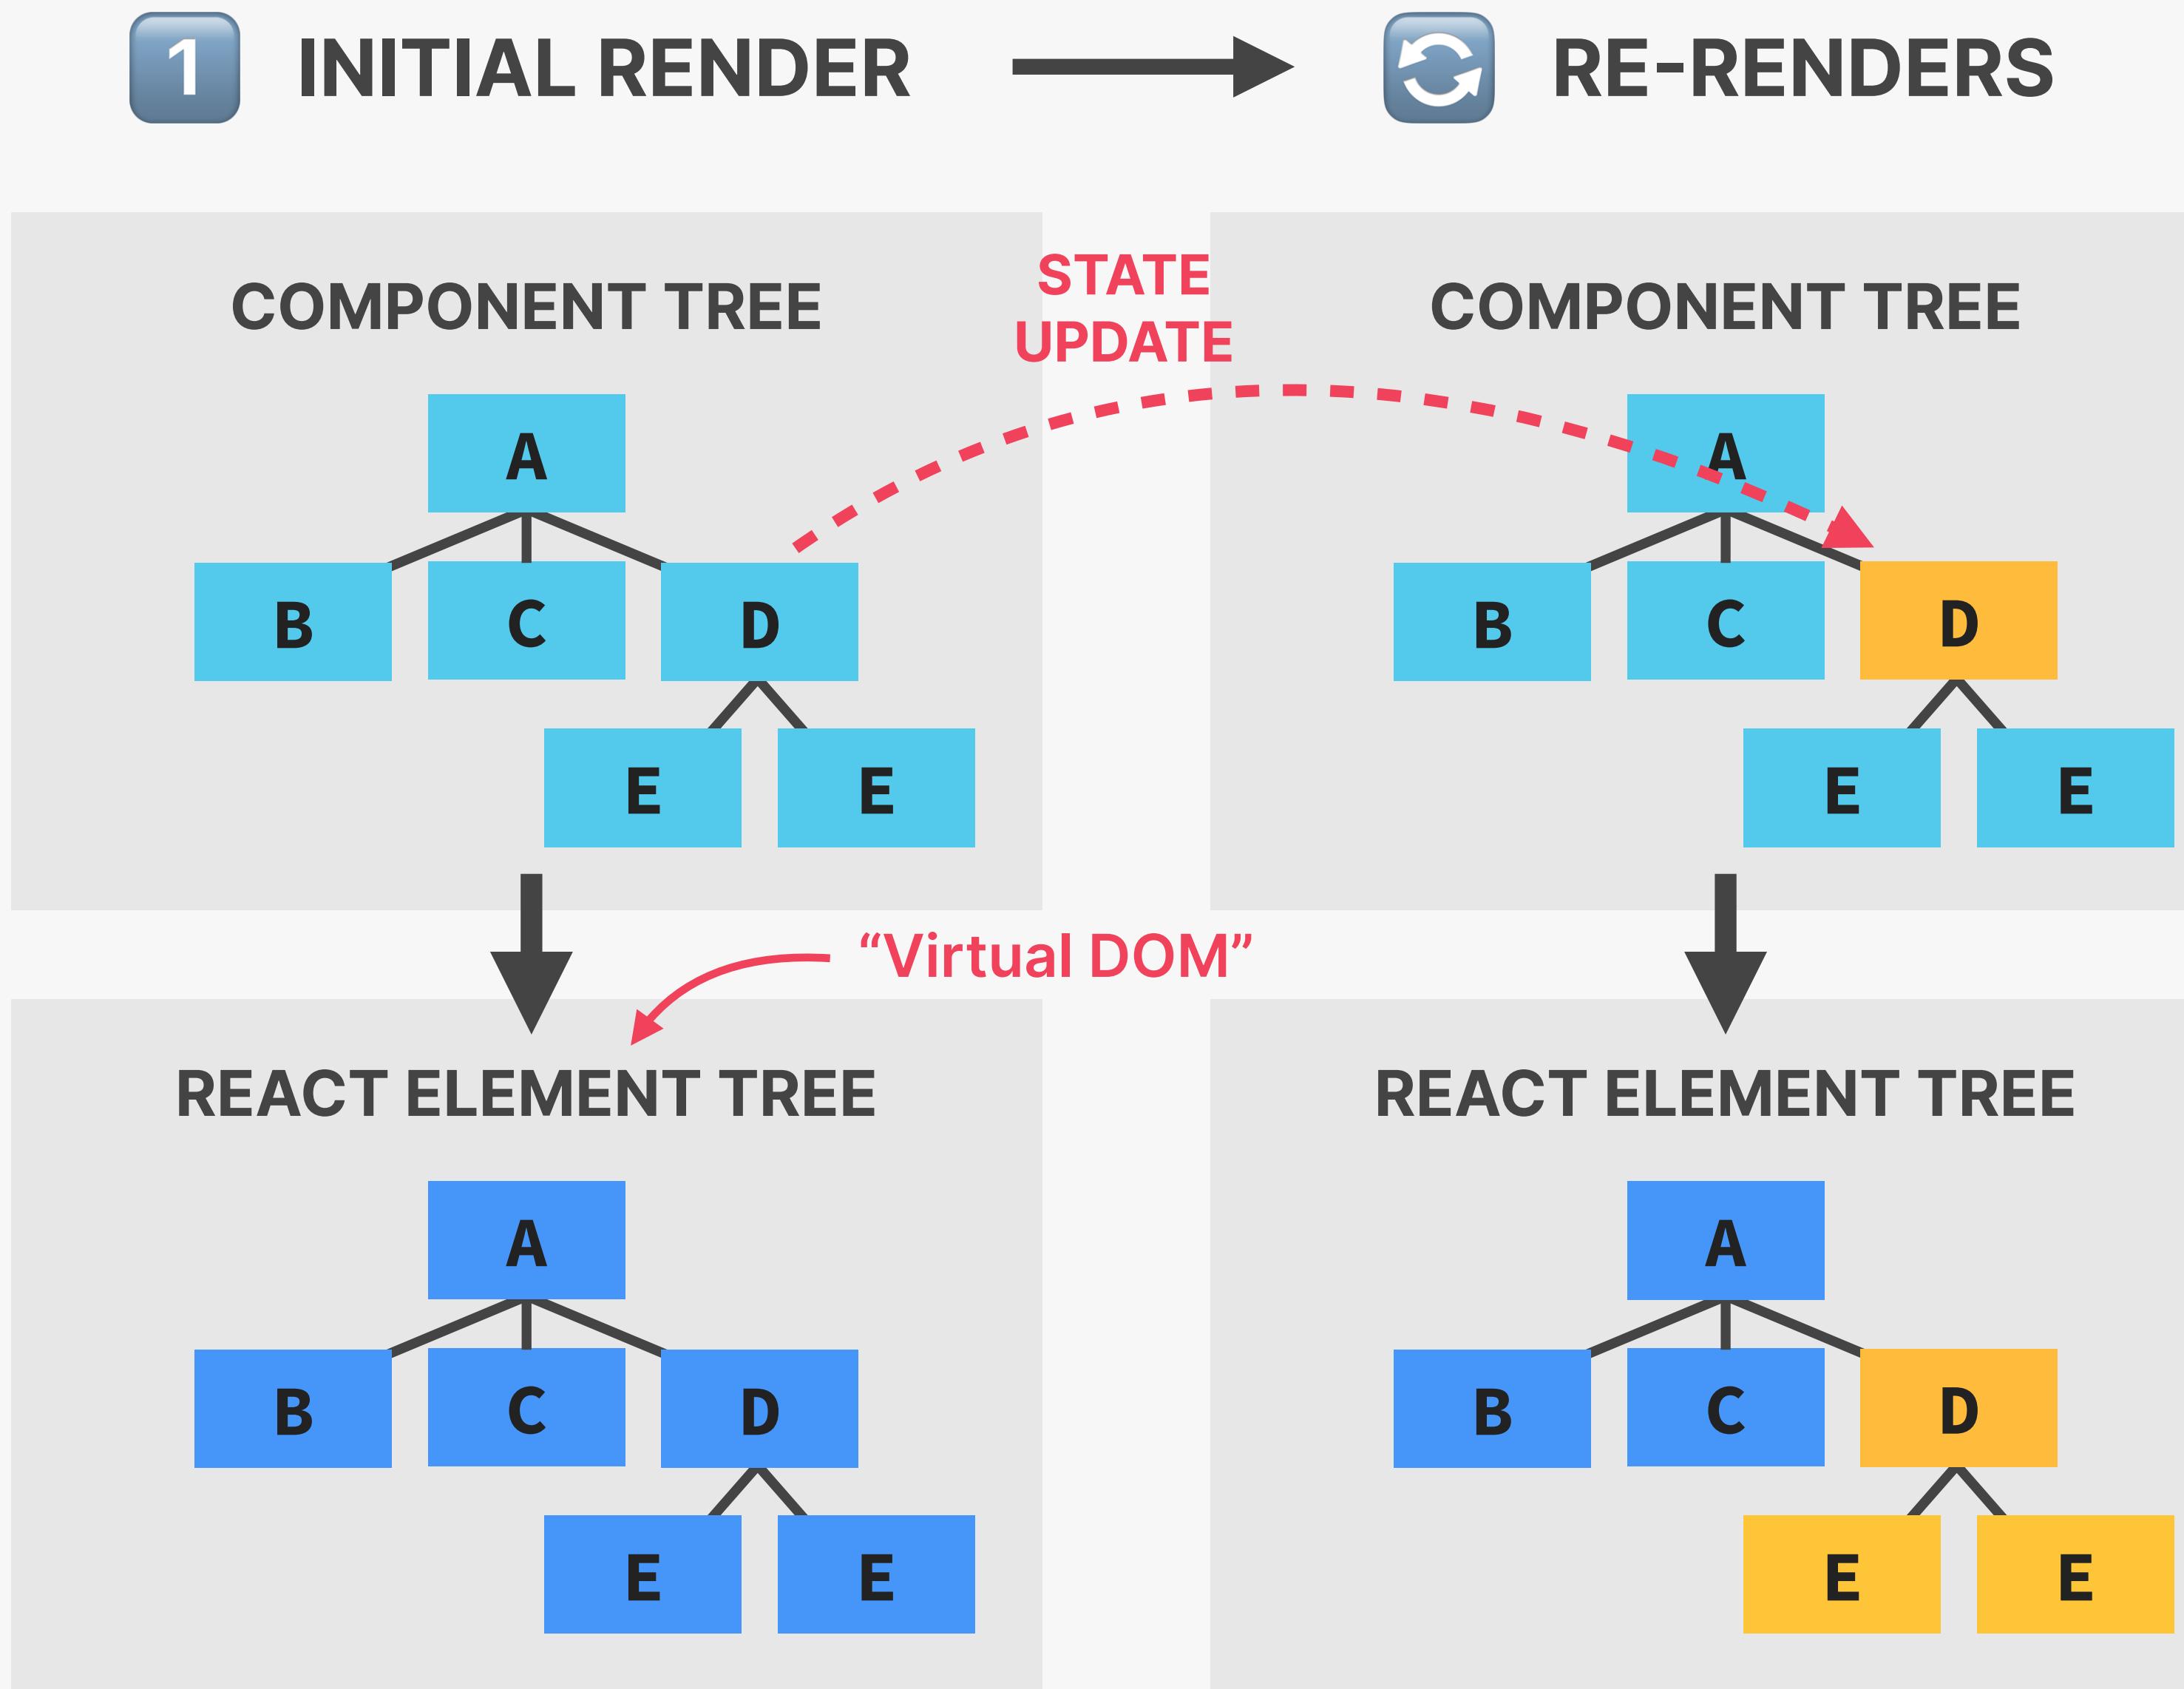

THE VIRTUAL DOM (REACT ELEMENT TREE)

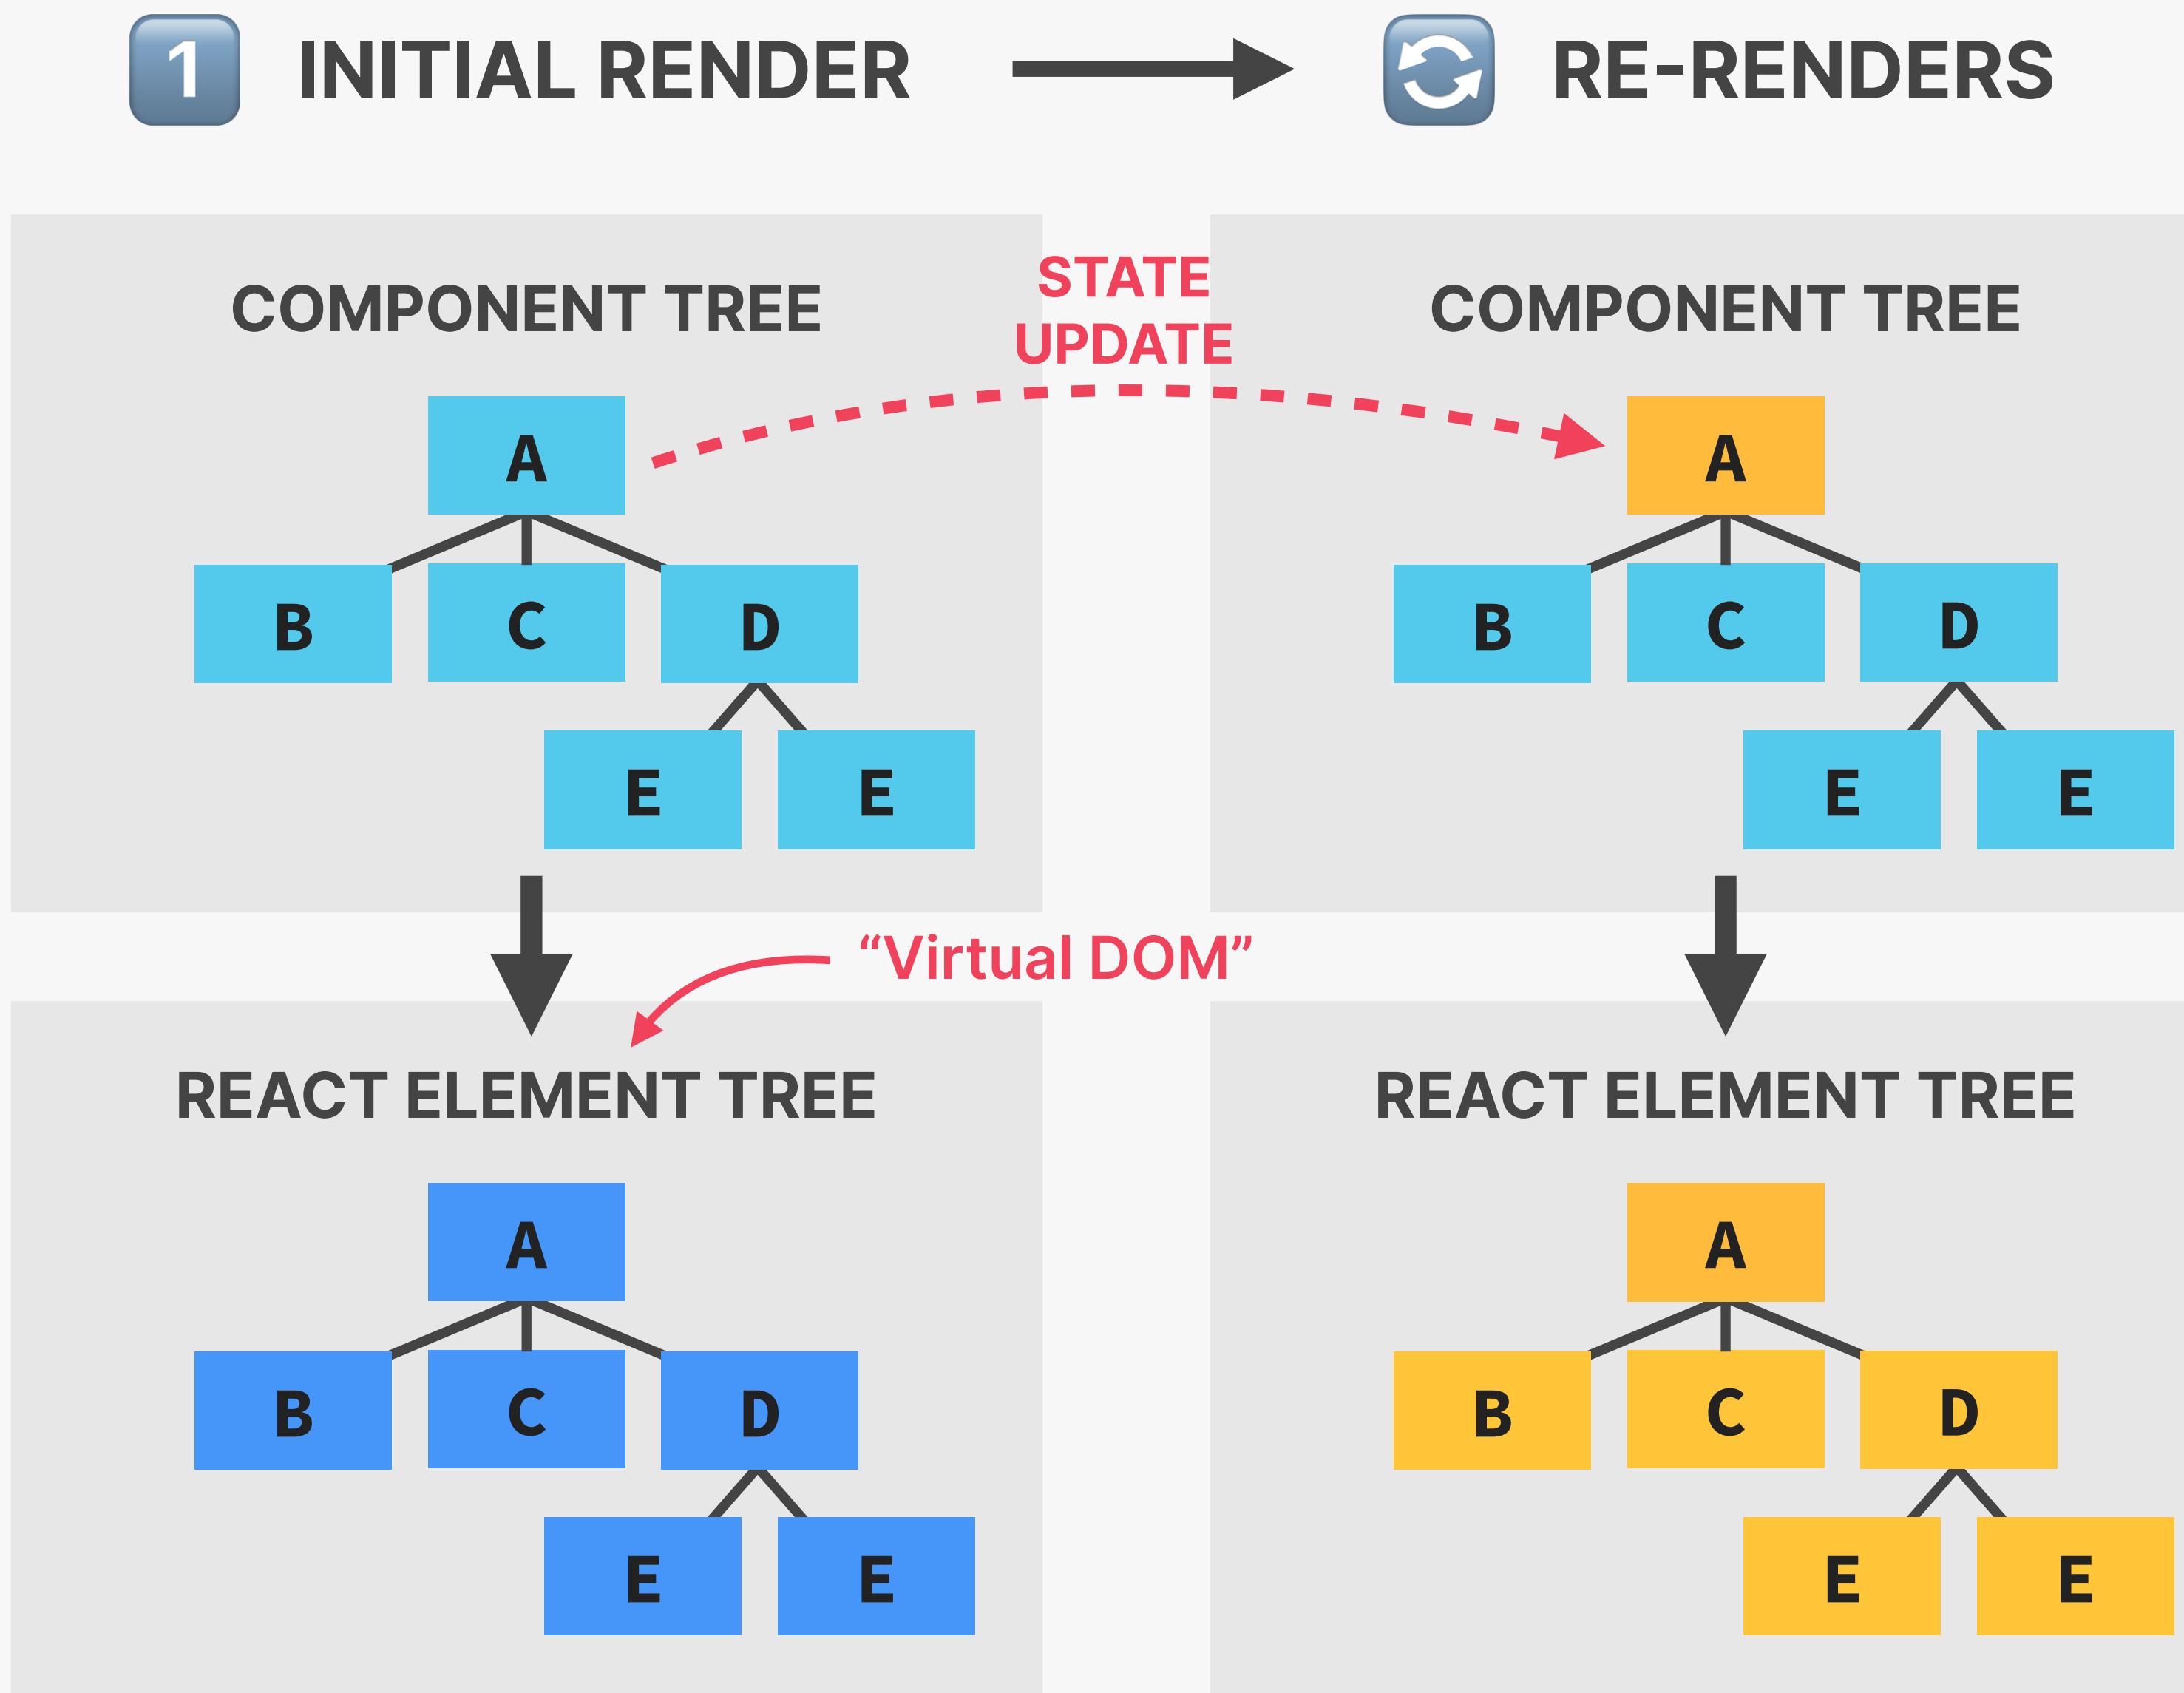

- 👉 Virtual DOM: Tree of all React elements created from all instances in the component tree
- 👉 Cheap and fast to create multiple trees
- 👉 Nothing to do with “shadow DOM”
- 🌟 Rendering a component will cause **all of its child components to be rendered as well** (no matter if props changed or not)
 - ↓
Necessary because React doesn't know whether children will be affected

THE RENDER PHASE



WHAT IS RECONCILIATION AND WHY DO WE NEED IT?



Why not update the entire DOM whenever state changes somewhere in the app?



BECAUSE

👉 That would be inefficient and wasteful:

- 1
- 2

Writing to the DOM is (relatively) **slow**

Usually only a **small part of the DOM** needs to be updated

👉 React **reuses** as much of the existing DOM as possible



HOW?



Reconciliation: Deciding which DOM elements actually need to be inserted, deleted, or updated, in order to reflect the latest state changes


A screenshot of a Udemy course page titled "Build Responsive Real-World Websites with HTML and CSS". A large black modal window is overlaid on the page, containing a play button icon and some text. A white hand cursor is pointing at the top right corner of the modal. Below the modal, there is a navigation bar with links: Overview, Q&A, Notes, Announcements, Reviews, and Learning tools.

A screenshot of a Udemy course page showing a rating modal. The modal has a title "How would you rate this course?", a subtitle "Select Rating", and a row of five yellow stars. A red arrow points from the text "Only these new DOM elements are created" down to the fourth star in the row. The background shows the course content sidebar with various lessons listed.


Only these new DOM elements are created

THE RECONCILER: FIBER

REACT
ELEMENT
TREE
(VIRTUAL
DOM)

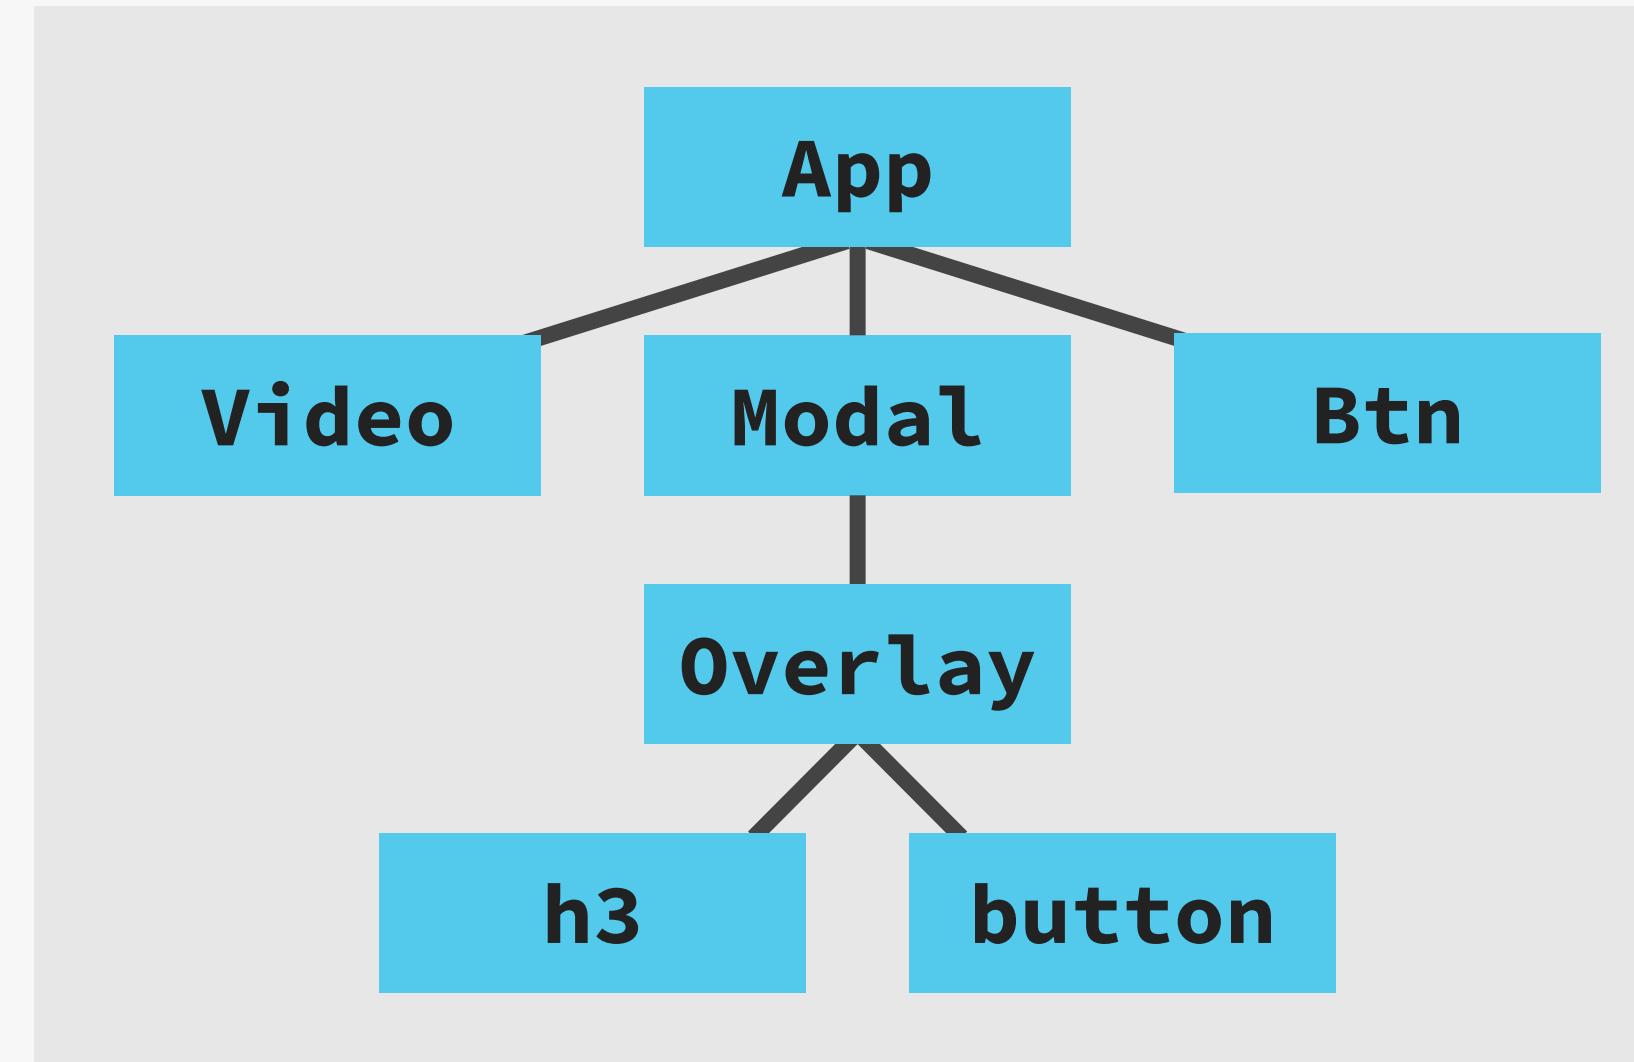

ON INITIAL
RENDER

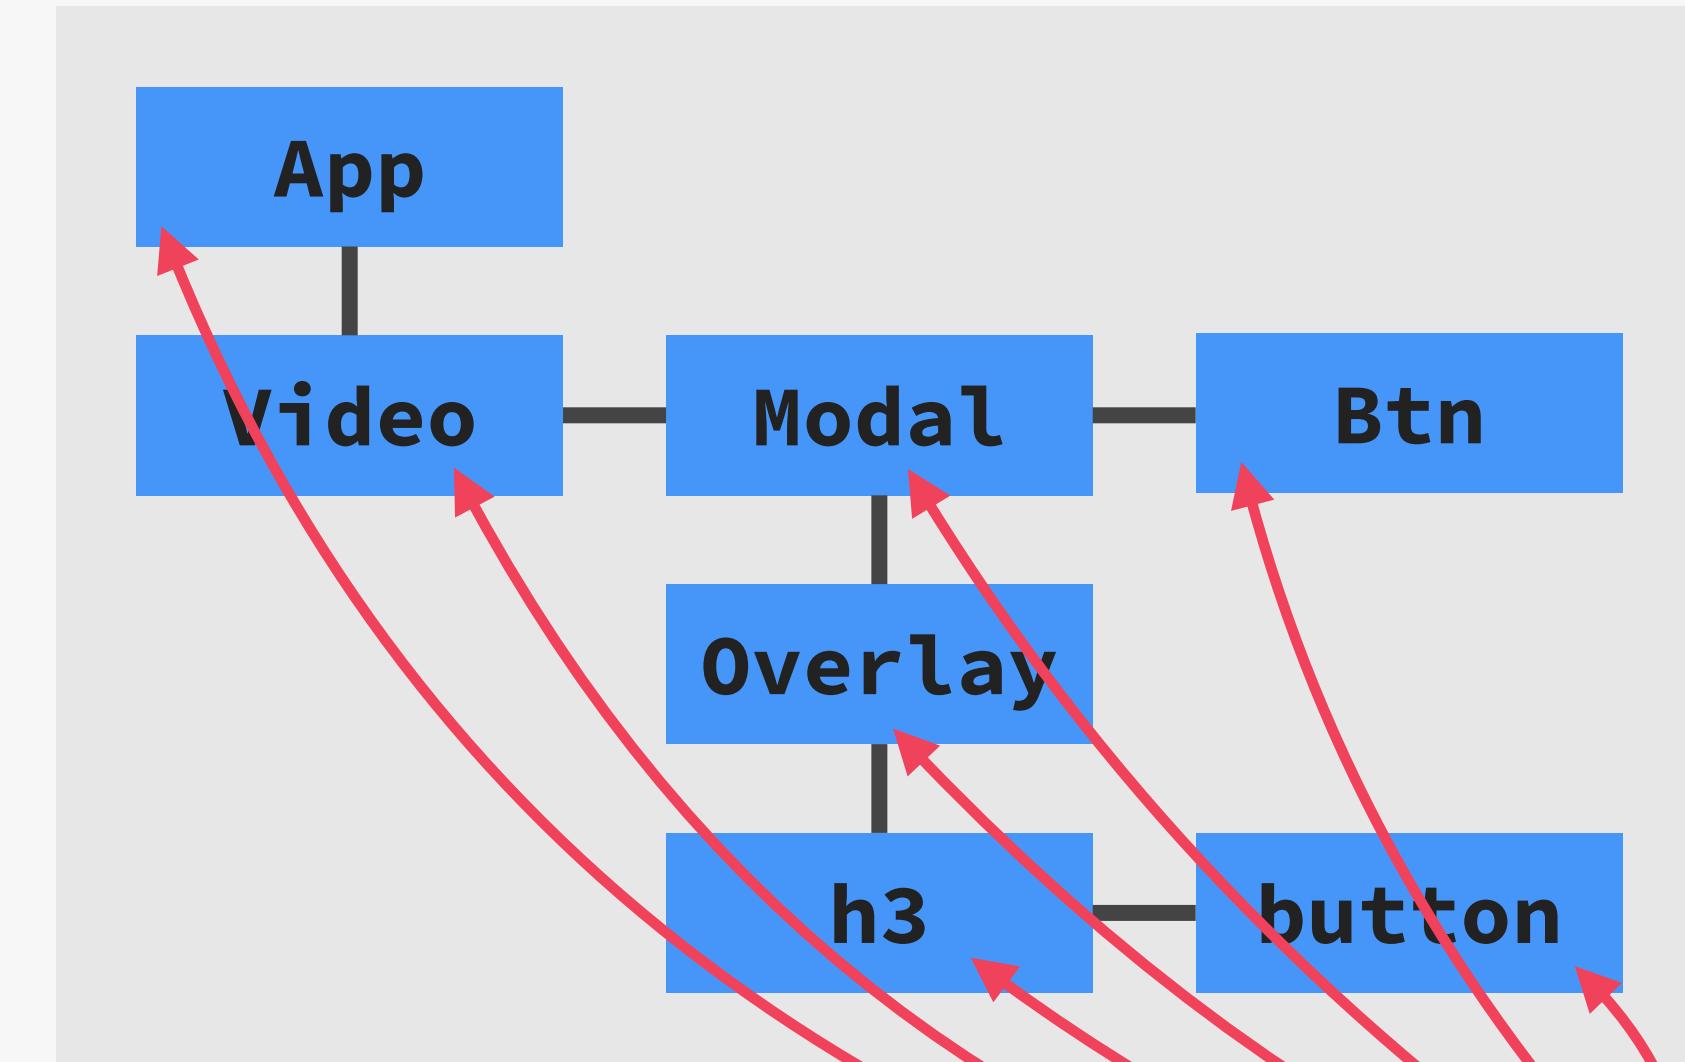


FIBER
TREE

- 👉 Fiber tree: internal tree that has a “fiber” for each component instance and DOM element
- 👉 Fibers are **NOT** re-created on every render
- 👉 Work can be done **asynchronously**


- 👉 Rendering process can be split into chunks, tasks can be prioritized, and work can be **paused, reused, or thrown away**
- 👉 Enables **concurrent features** like Suspense or transitions
- 👉 Long renders **won't block** JS engine

Current state
Props
Side effects
Used hooks
Queue of work

RECONCILIATION IN ACTION

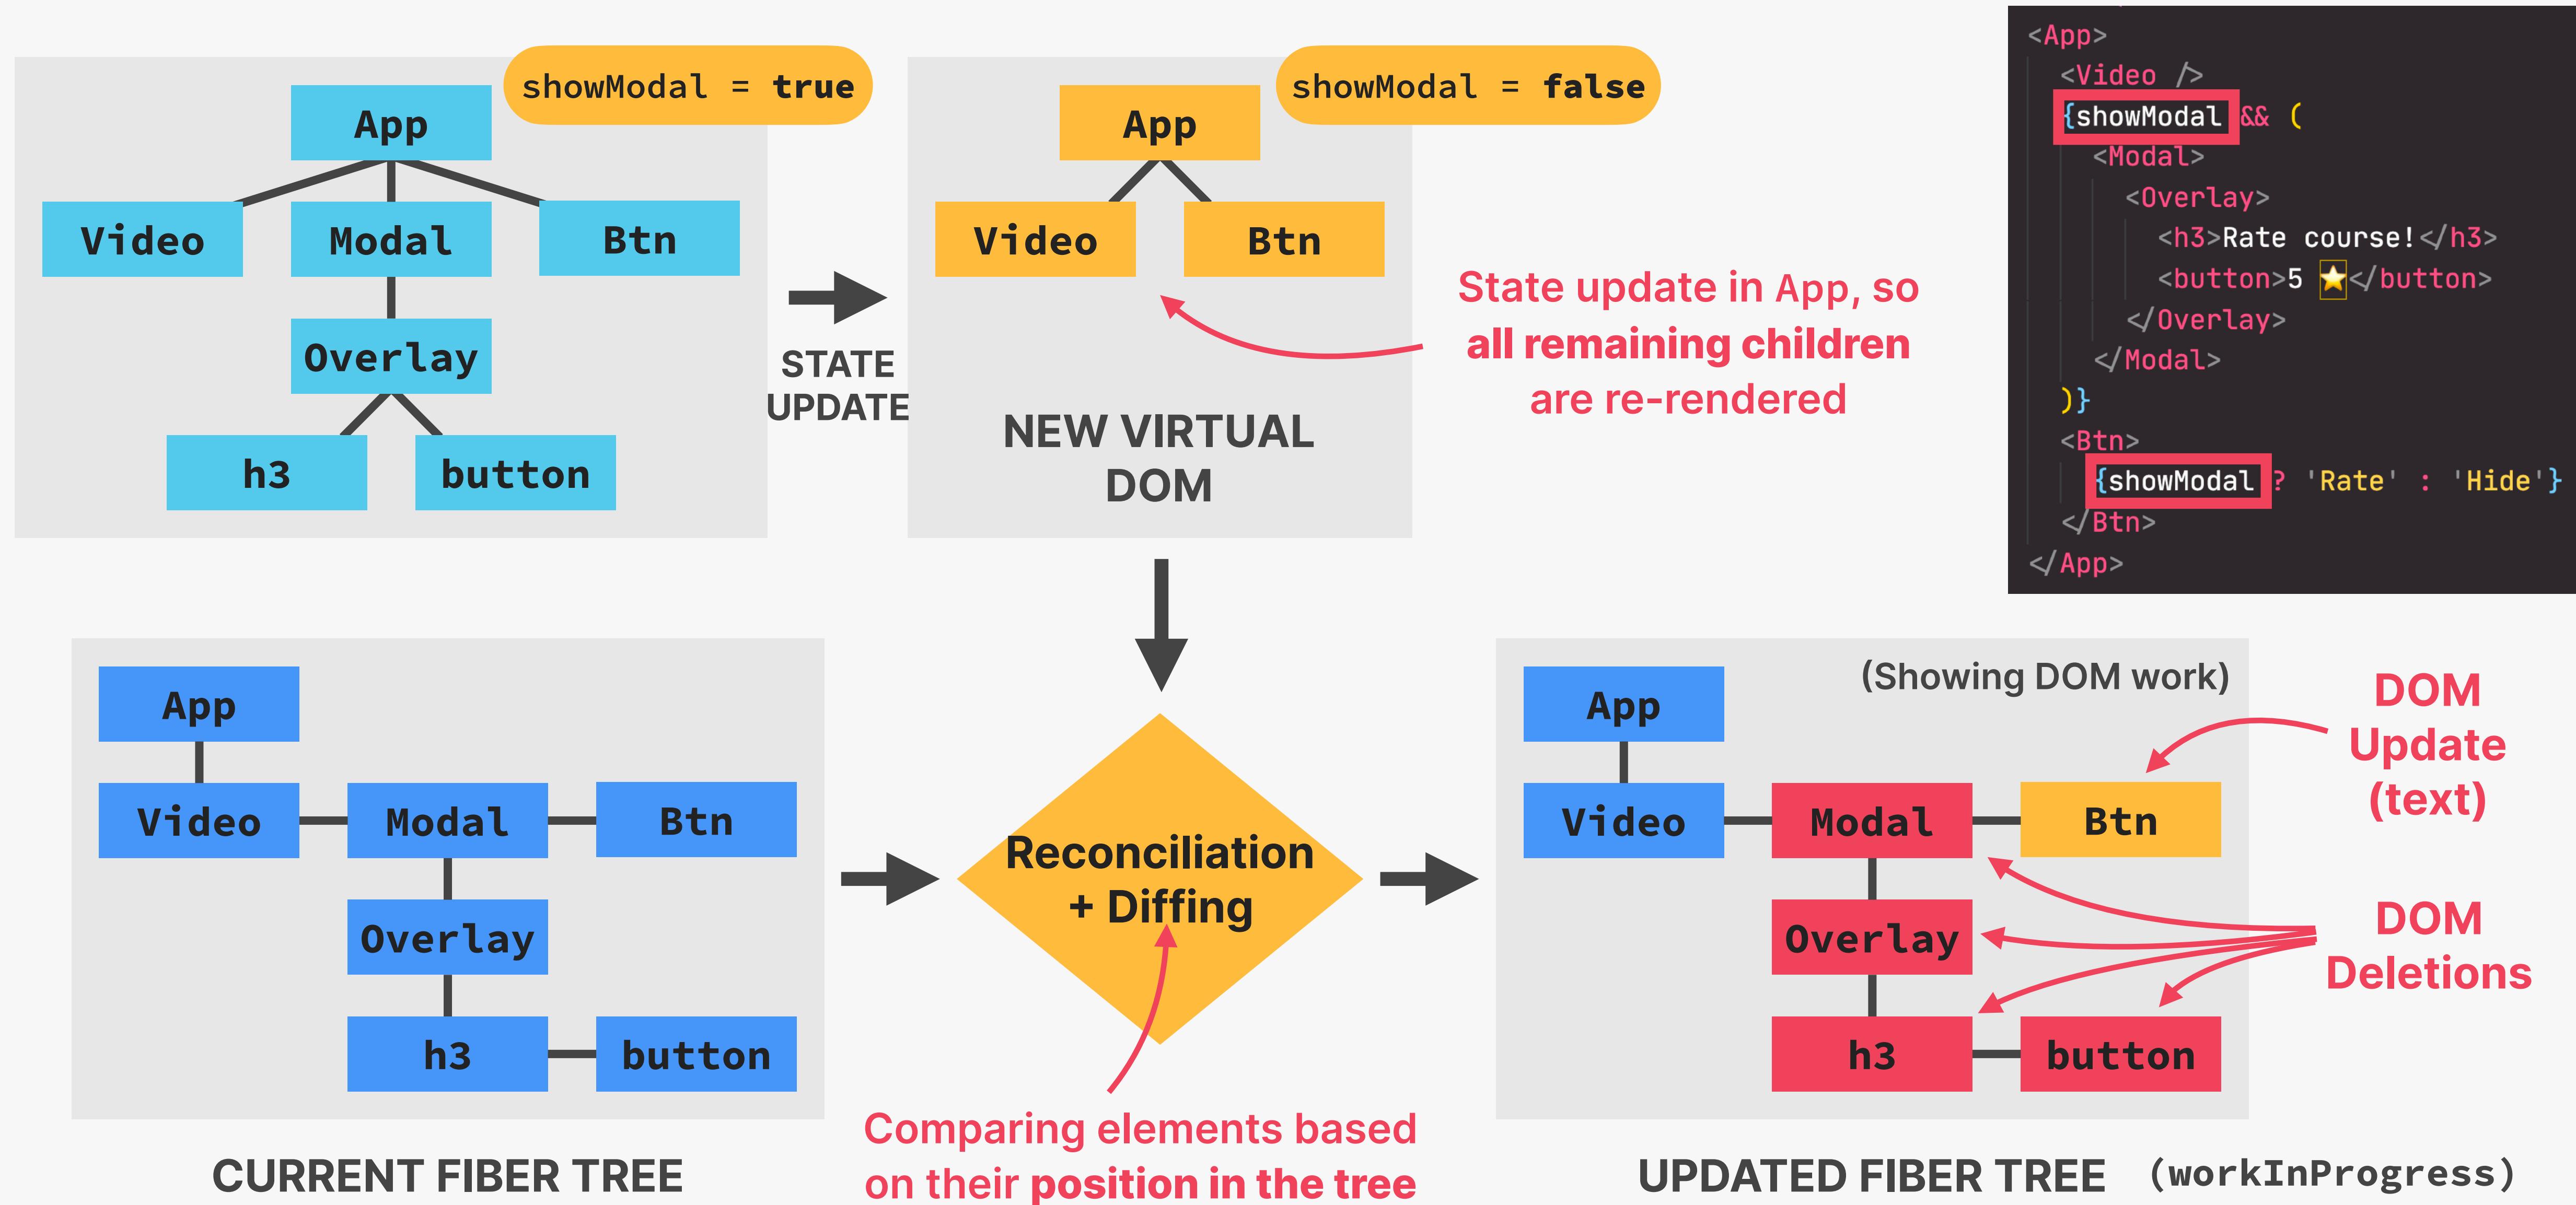

THE RENDER PHASE

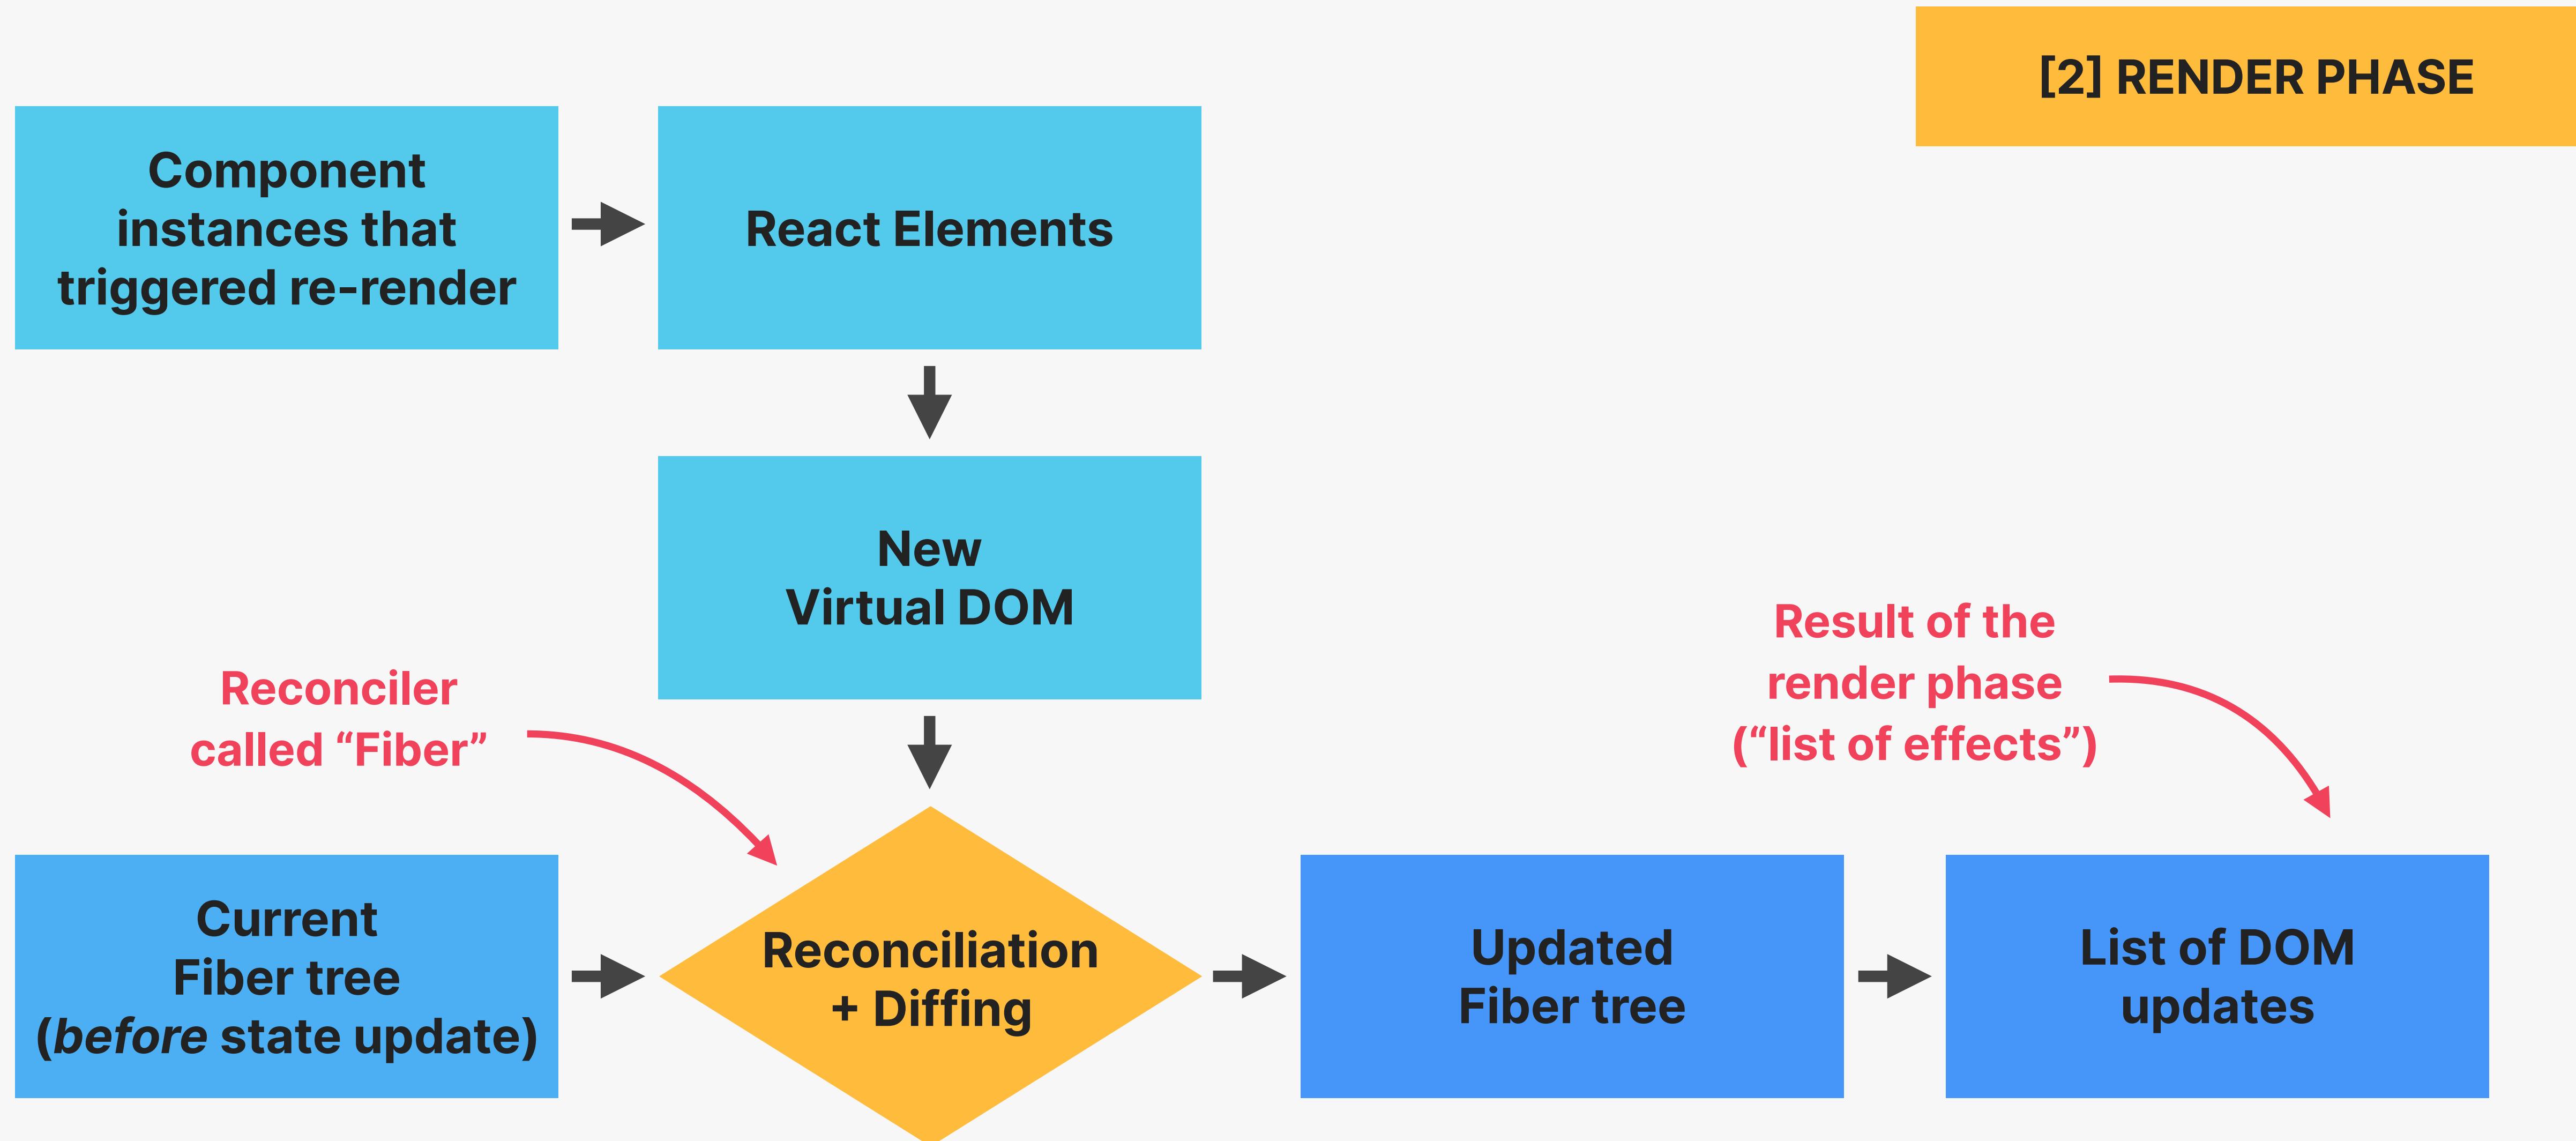



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

HOW REACT WORKS BEHIND THE SCENES

LECTURE


HOW RENDERING WORKS: THE COMMIT PHASE

THE COMMIT PHASE AND BROWSER PAINT

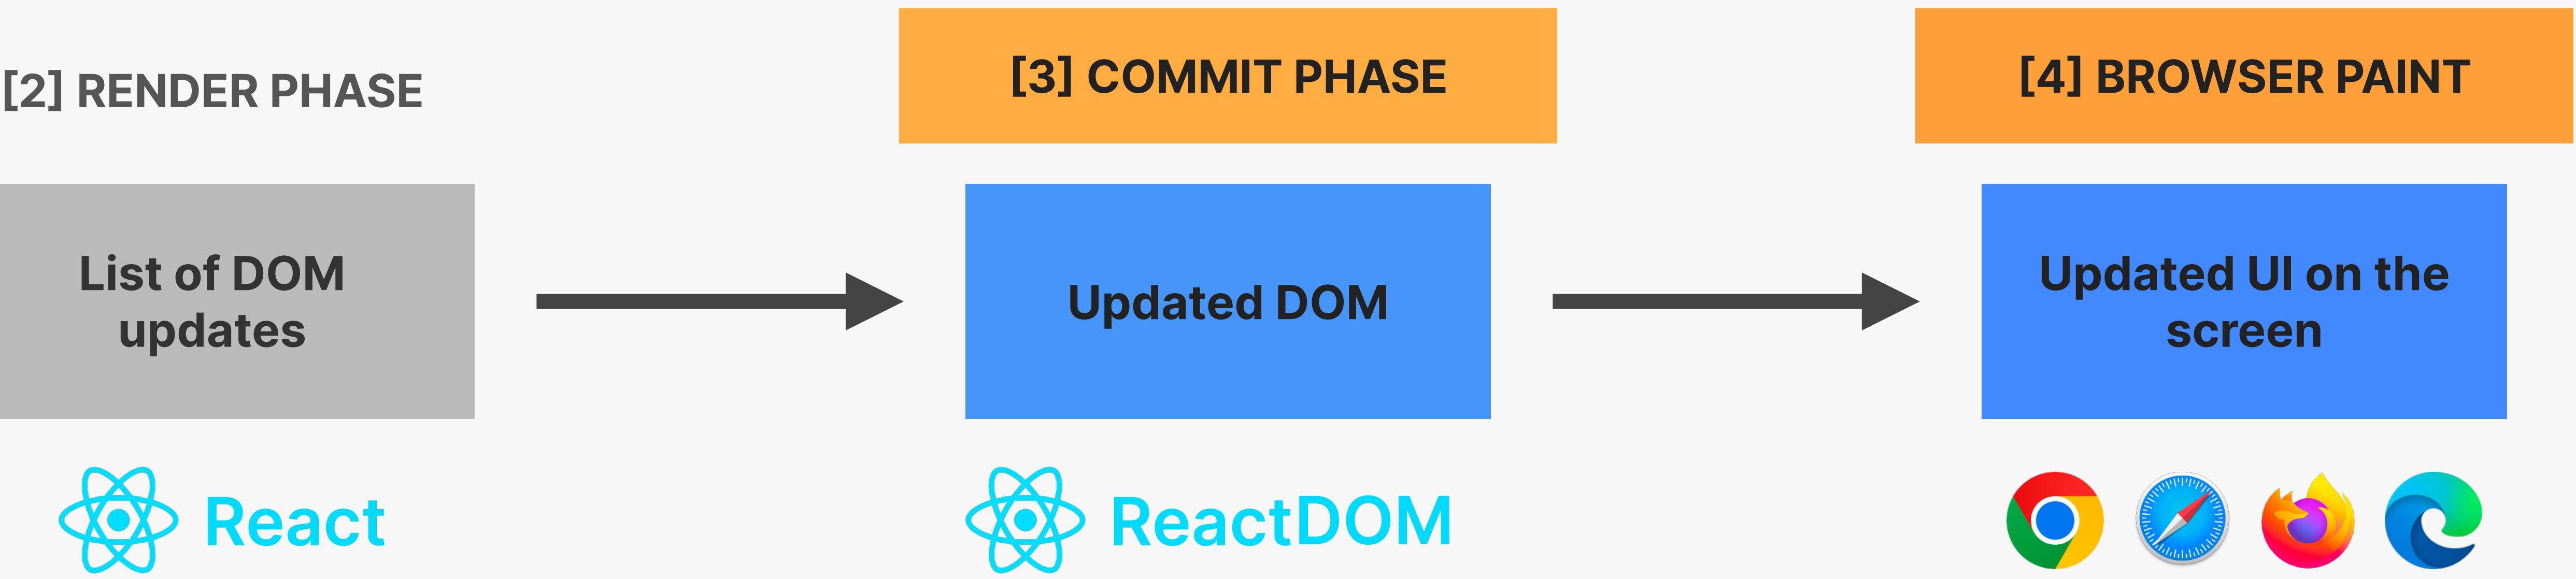


- 👉 **React writes to the DOM:** insertions, deletions, and updates (list of DOM updates are “flushed” to the DOM)
- 👉 **Committing is synchronous:** DOM is updated in one go, it can’t be interrupted. This is necessary so that the DOM never shows partial results, ensuring a consistent UI (in sync with state at all times)
- 👉 After the commit phase completes, the `workInProgress` fiber tree becomes the current tree for the next render cycle

THE COMMIT PHASE AND BROWSER PAINT

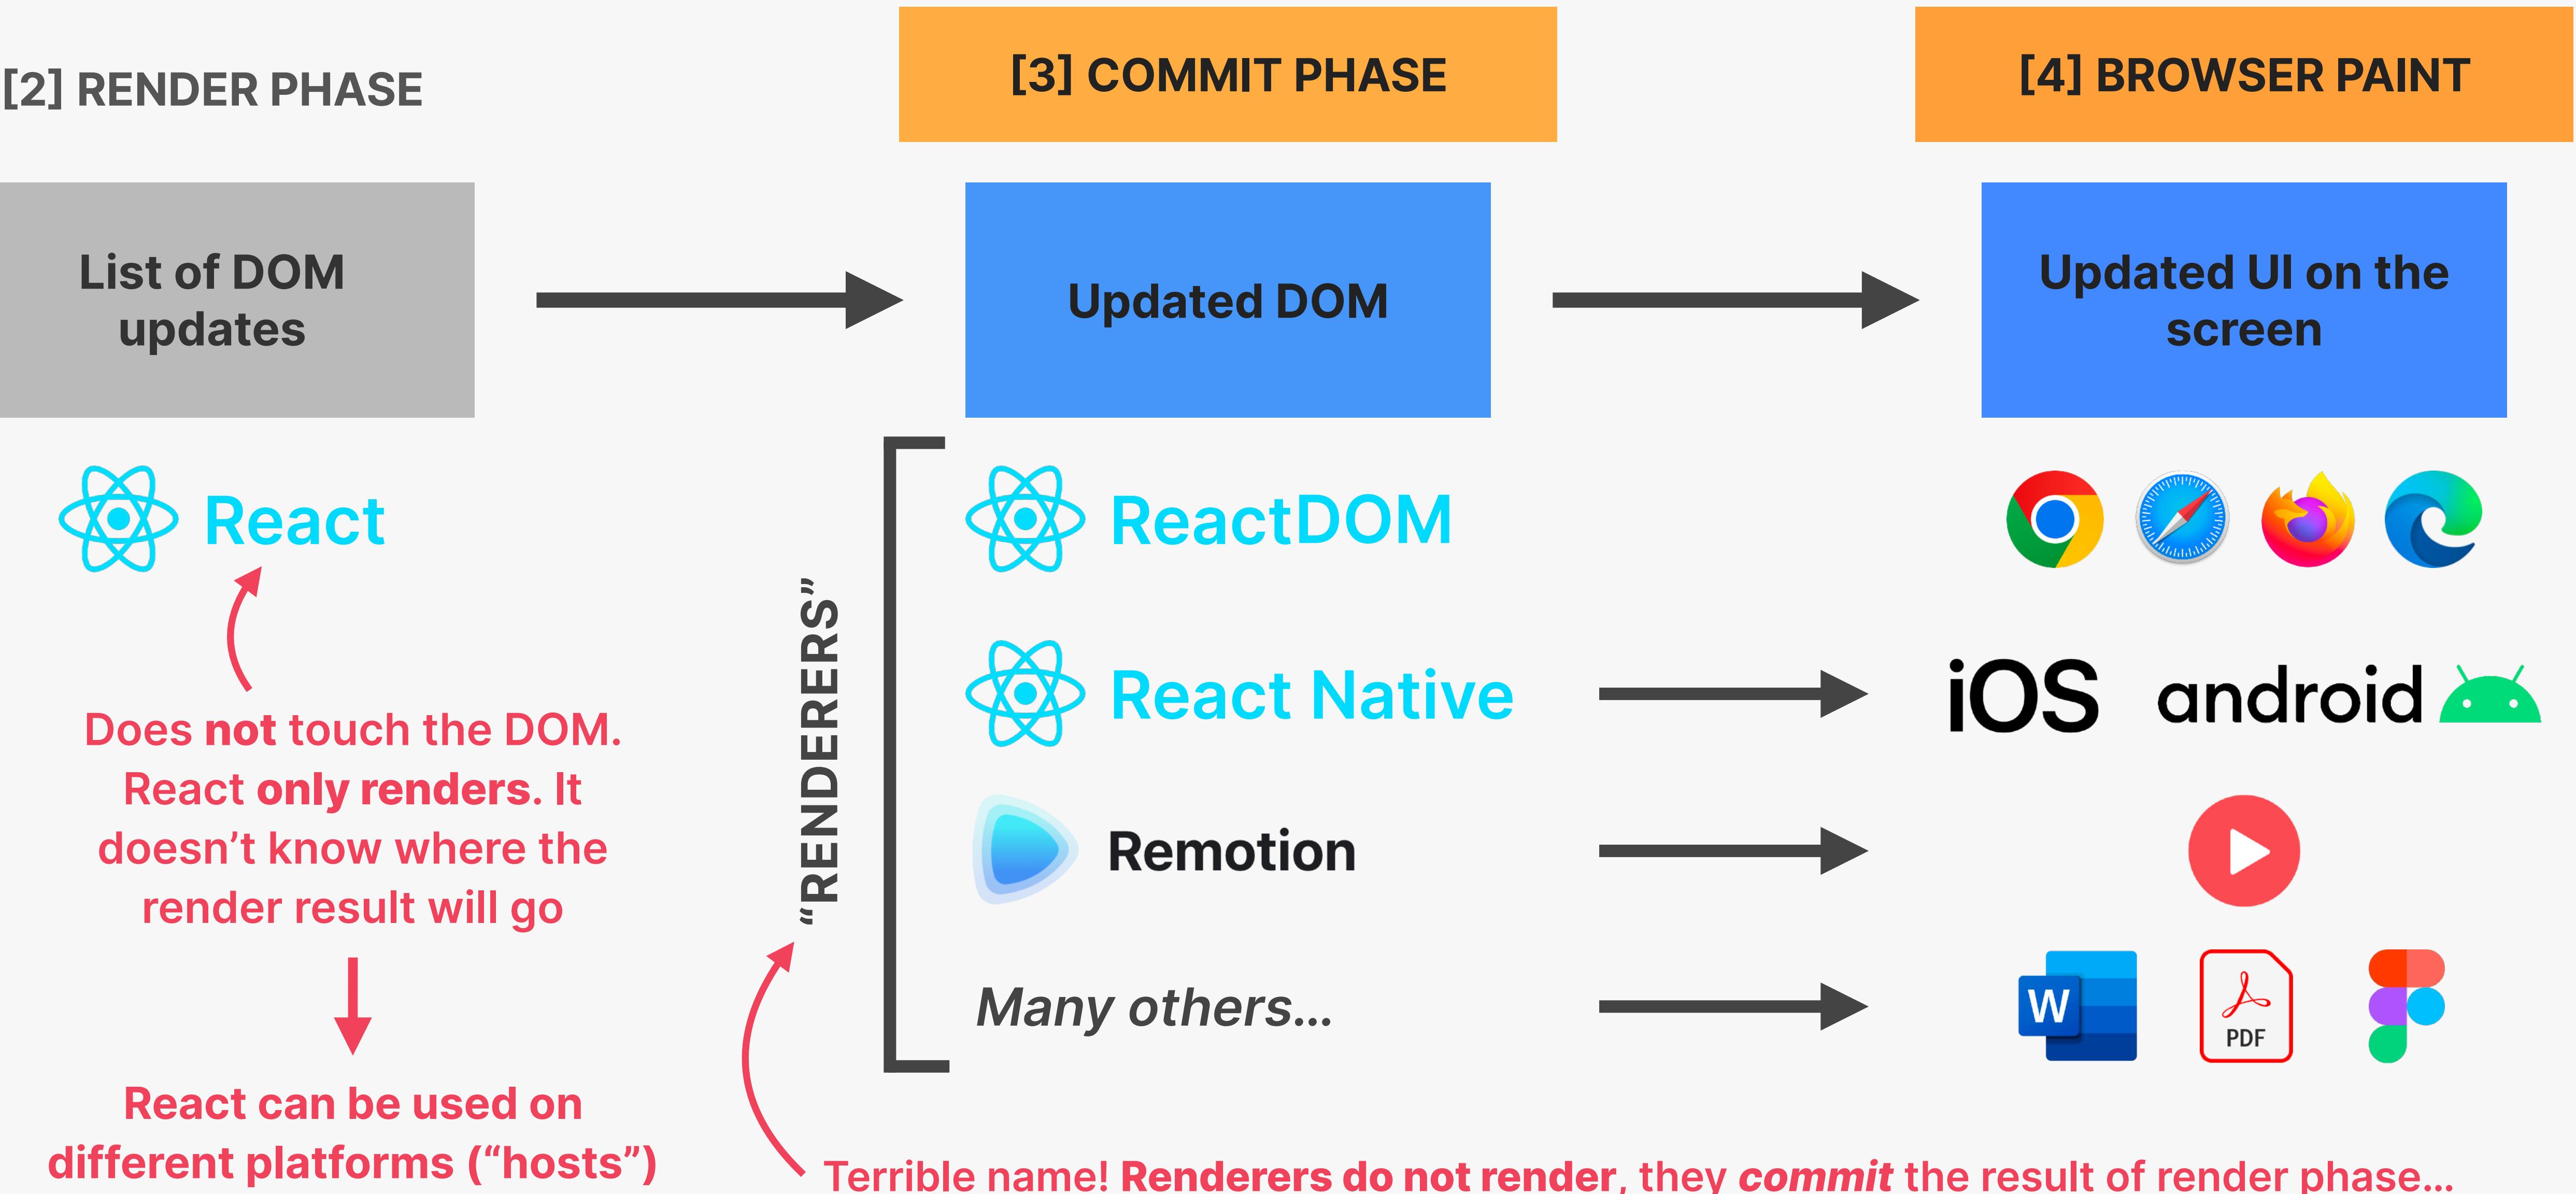

RECAP: PUTTING IT ALL TOGETHER

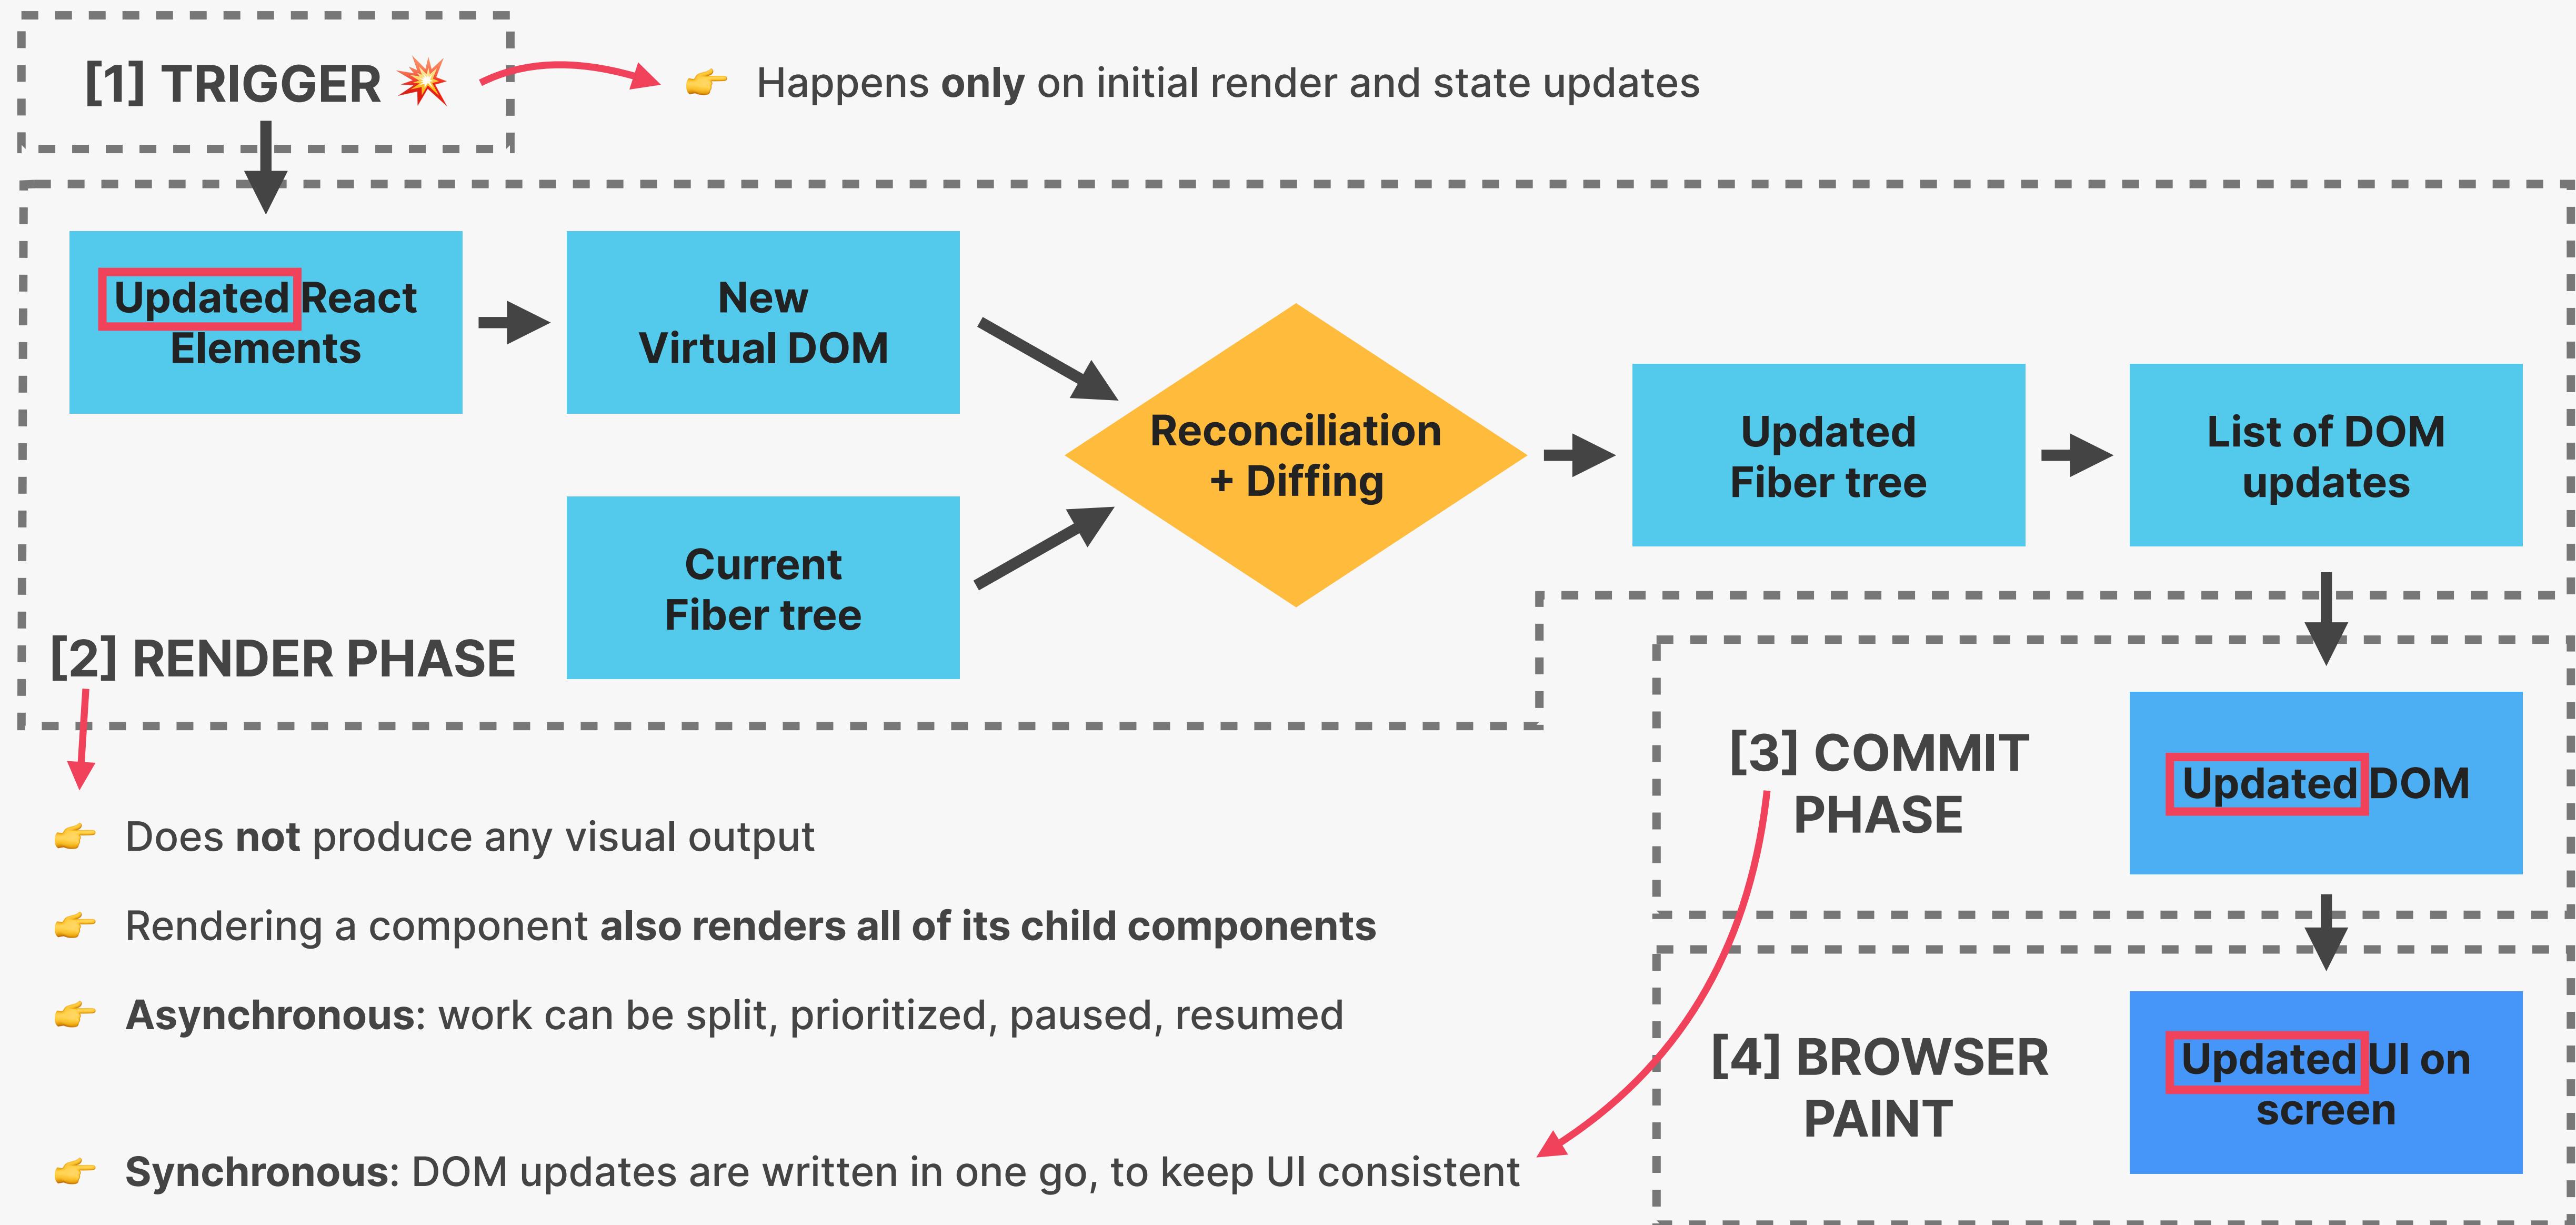



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

HOW REACT WORKS BEHIND THE
SCENES

LECTURE

HOW DIFFING WORKS

THE RENDER PHASE



HOW DIFFING WORKS

- 👉 Diffing uses 2 fundamental assumptions (rules):

1 Two elements of different types will produce different trees

2 Elements with a stable key prop stay the same across renders

👉 This allows React to go from 1,000,000,000 $[O(n^3)]$ to 1000 $[O(n)]$ operations per 1000 elements

1. SAME POSITION, DIFFERENT ELEMENT

```
<div>  
| <SearchBar />  
</div>  
<main> ... </main>
```



Different DOM element

```
<header>  
| <SearchBar />  
</header>  
<main> ... </main>
```

```
<div>  
| <SearchBar />  
</div>  
<main> ... </main>
```



Different React element (component instance)

```
<div>  
| <ProfileMenu />  
</div>  
<main> ... </main>
```

👉 React assumes entire sub-tree is no longer valid

👉 Old components are destroyed and removed from DOM, including state

👉 Tree might be rebuilt if children stayed the same (state is reset)

HOW DIFFING WORKS

- 👉 Diffing uses 2 fundamental assumptions (rules):

1 Two elements of different types will produce different trees

2 Elements with a stable key prop stay the same across renders

👉 This allows React to go from 1,000,000,000 $[O(n^3)]$ to 1000 $[O(n)]$ operations per 1000 elements

2. SAME POSITION, SAME ELEMENT

```
<div className="hidden">  
| <SearchBar />  
</div>  
<main> ... </main>
```

→ Same DOM element

```
<div className="active">  
| <SearchBar />  
</div>  
<main> ... </main>
```

```
<div>  
| <SearchBar wait={1} />  
</div>  
<main> ... </main>
```

→ Same React element (component instance)

```
<div>  
| <SearchBar wait={5} />  
</div>  
<main> ... </main>
```

- 👉 Element will be kept (as well as child elements), **including state**
- 👉 **New props / attributes** are passed if they changed between renders
- 👉 Sometimes this is **not** what we want... Then we can use the key prop



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

HOW REACT WORKS BEHIND THE
SCENES

LECTURE

THE KEY PROP

WHAT IS THE KEY PROP?

KEY PROP

- 👉 Special prop that we use to tell the diffing algorithm that an element is **unique**
- 👉 Allows React to **distinguish** between multiple instances of the same component type
- 👉 When a key **stays the same across renders**, the element will be kept in the DOM
(even if the position in the tree changes)

1 Using keys in lists

- 👉 When a key **changes between renders**, the element will be destroyed and a new one will be created *(even if the position in the tree is the same as before)*

2 Using keys to reset state

1. KEYS IN LISTS [STABLE KEY]



NO KEYS

```
<ul>
  <Question question={q[1]} />
  <Question question={q[2]} />
</ul>
```



ADDING NEW LIST ITEM

```
<ul>
  <Question question={q[0]} />
  <Question question={q[1]} />
  <Question question={q[2]} />
</ul>
```



👉 Same elements, but different position in tree, so they are removed and recreated in the DOM (*bad for performance*)



WITH KEYS

```
<ul>
  <Question key='q1' question={q[1]} />
  <Question key='q2' question={q[2]} />
</ul>
```



ADDING NEW LIST ITEM

```
<ul>
  <Question key='q0' question={q[0]} />
  <Question key='q1' question={q[1]} />
  <Question key='q2' question={q[2]} />
</ul>
```



👉 Different position in the tree, but the key stays the same, so the elements will be kept in the DOM 👉 **Always use keys!**

2. KEY PROP TO RESET STATE [CHANGING KEY]

👉 If we have the same element at the same position in the tree, the **DOM element and state** will be kept

```
<QuestionBox>
  <Question
    question={{
      title: 'React vs JS',
      body: 'Why should we use React?',
    }}
    key="q23"
  />
</QuestionBox>
```



**NEW QUESTION IN
SAME POSITION**

```
<QuestionBox>
  <Question
    question={{
      title: 'Best course ever :D',
      body: 'This is THE React course!',
    }}
  />
</QuestionBox>
```

Question state (answer):

React allows us to build apps faster |

**State was
preserved. NOT
what we want**

Question state (answer):

React allows us to build apps faster |

2. KEY PROP TO RESET STATE [CHANGING KEY]

👍 WITH KEY

👉 If we have the same element at the same position in the tree, the **DOM element and state will be kept**

```
<QuestionBox>
  <Question
    question={{
      title: 'React vs JS',
      body: 'Why should we use React?',
    }}
    key="q23"
  />
</QuestionBox>
```

NEW QUESTION IN
SAME POSITION


```
<QuestionBox>
  <Question
    question={{
      title: 'Best course ever :D',
      body: 'This is THE React course!',
    }}
    key="q89"
  />
</QuestionBox>
```

Question state (answer):

React allows us to build apps faster |

State was
RESET

Question state (answer):

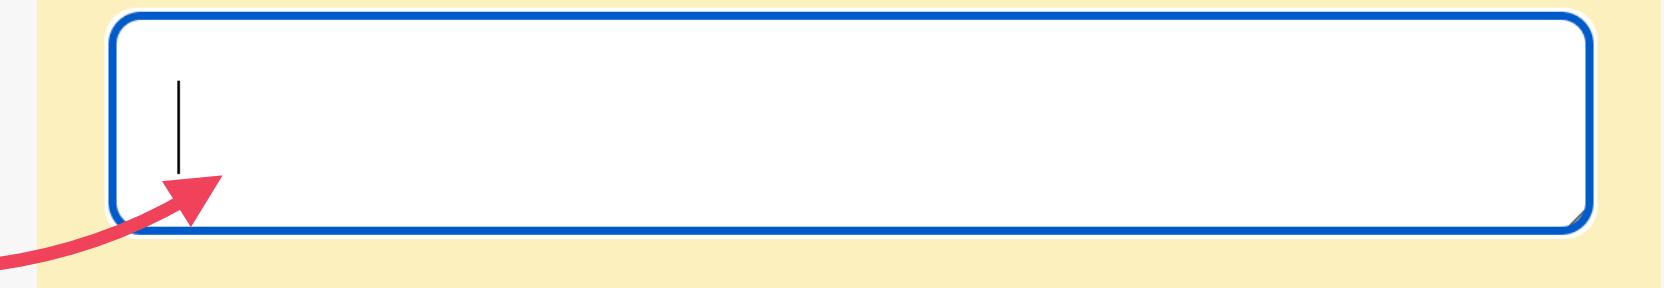



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

HOW REACT WORKS BEHIND THE SCENES

LECTURE

RULES FOR RENDER LOGIC: PURE COMPONENTS

THE TWO TYPES OF LOGIC IN REACT COMPONENTS

1. RENDER LOGIC

- 👉 Code that lives at the **top level** of the component function
- 👉 Participates in **describing** how the component view looks like
- 👉 Executed **every time** the component renders

2. EVENT HANDLER FUNCTIONS

- 👉 Executed as a **consequence of the event** that the handler is listening for (change event in this example)
- 👉 Code that actually **does things**: update state, perform an HTTP request, read an input field, navigate to another page, etc.

```
function Question({ question }) {  
  const [newAnswer, setNewAnswer] = useState('');  
  const numAnswers = question.answers.length ?? 0;  
  
  const handleNewAnswer = function (e) {  
    if (question.closed) return;  
    setNewAnswer(e.target.value);  
  };  
  
  const createList = function () {  
    return (  
      <ul>  
        {question.answers.map((q) => (  
          <li>{q}</li>  
        ))}  
      </ul>  
    );  
  };  
  
  return (  
    <div>  
      <h3>{question.title}</h3>  
      <p>{question.body}</p>  
      {question.hasAnswer ? (  
        createList()  
      ) : (  
        <input  
          value={newAnswer}  
          onChange={handleNewAnswer}  
        />  
      )}  
    </div>  
  );  
}
```

REFRESHER: FUNCTIONAL PROGRAMMING PRINCIPLES

- 👉 **Side effect:** dependency on or modification of any data outside the function scope. “*Interaction with the outside world*”. Examples: mutating external variables, HTTP requests, writing to DOM.

👋 Side effects are not bad! A program can only be useful if it has some interaction with the outside world

Side effect: Outside variable mutation

- 👉 **Pure function:** a function that has **no side effects**.
 - 👉 Does **not** change any variables outside its scope
 - 👉 Given the **same input**, a pure function always returns the **same output**

Unpredictable output (date changes)

✓ Pure function

```
function circleArea(r) {  
  return 3.14 * r * r;  
}
```

👉 Impure function

```
const areas = {};  
  
function circleArea(r) {  
  areas.circle = 3.14 * r * r;  
}
```

👉 Impure function

```
function circleArea(r) {  
  const date = Date.now();  
  const area = 3.14 * r * r;  
  return `${date}: ${area}`;  
}
```

RULES FOR RENDER LOGIC

- 👉 **Components must be pure when it comes to render logic:** given the same props (input), a component instance should always return the same JSX (output)
- 👉 **Render logic must produce no side effects:** no interaction with the “outside world” is allowed. So, in render logic:
 - 👉 Do NOT perform **network requests** (API calls)
 - 👉 Do NOT start **timers**
 - 👉 Do NOT directly **use the DOM API**
 - 👉 Do NOT **mutate objects or variables** outside of the function scope
 - 👉 Do NOT **update state (or refs)**: this will create an infinite loop!

This is why we can't
mutate props!

👉 Side effects are allowed (and encouraged) in **event handler functions!**
There is also a special hook to **register side effects** (`useEffect`)



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

HOW REACT WORKS BEHIND THE
SCENES

LECTURE

STATE UPDATE BATCHING

HOW STATE UPDATES ARE BATCHED

- 👉 Renders are **not** triggered immediately, but **scheduled** for when the JS engine has some “free time”. There is also batching of multiple `setState` calls in event handlers

```
const [answer, setAnswer] = useState('');
const [best, setBest] = useState(true);
const [solved, setSolved] = useState(false);

const reset = function () {
  setAnswer('');
  console.log(answer);
  setBest(true);
  setSolved(false);
};


return (
  <div>
    <button onClick={reset}>Reset</button>
    {/* ... */}
  </div>
);
```

**Event
handler
function**

A red arrow points from the text "Event handler function" to the `onClick={reset}` prop of the `<button>` element in the JSX code.


HOW STATE UPDATES ARE BATCHED

EVENT HANDLER FUNCTION

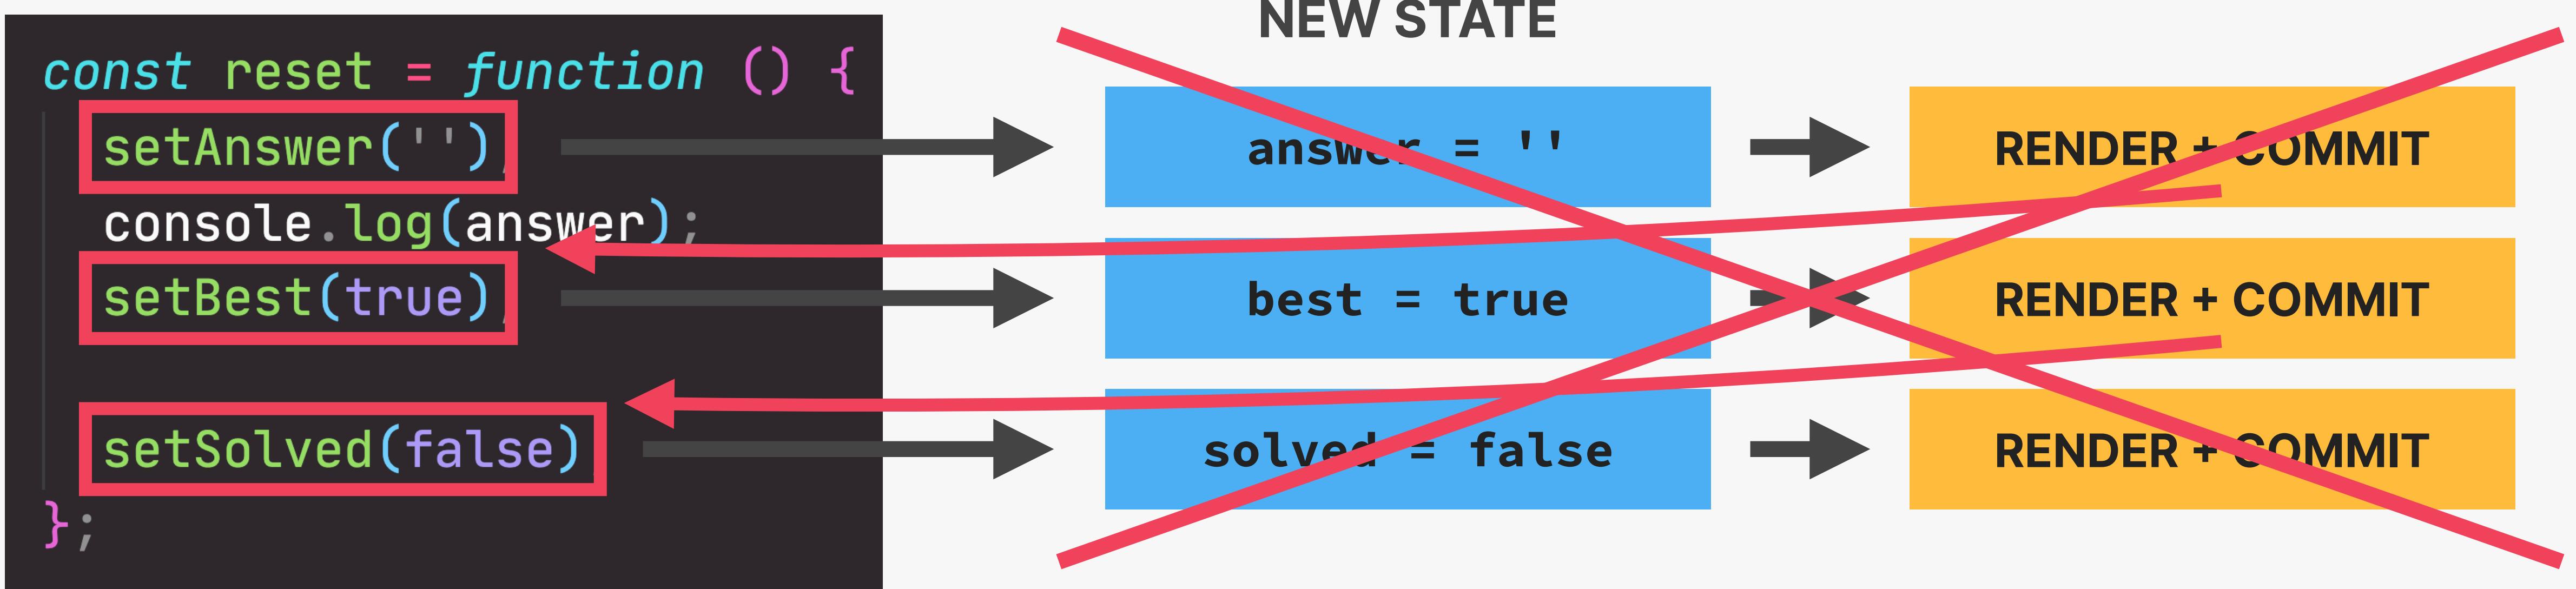

This is NOT how React updates
multiple pieces of state in the
same event handler

HOW STATE UPDATES ARE BATCHED

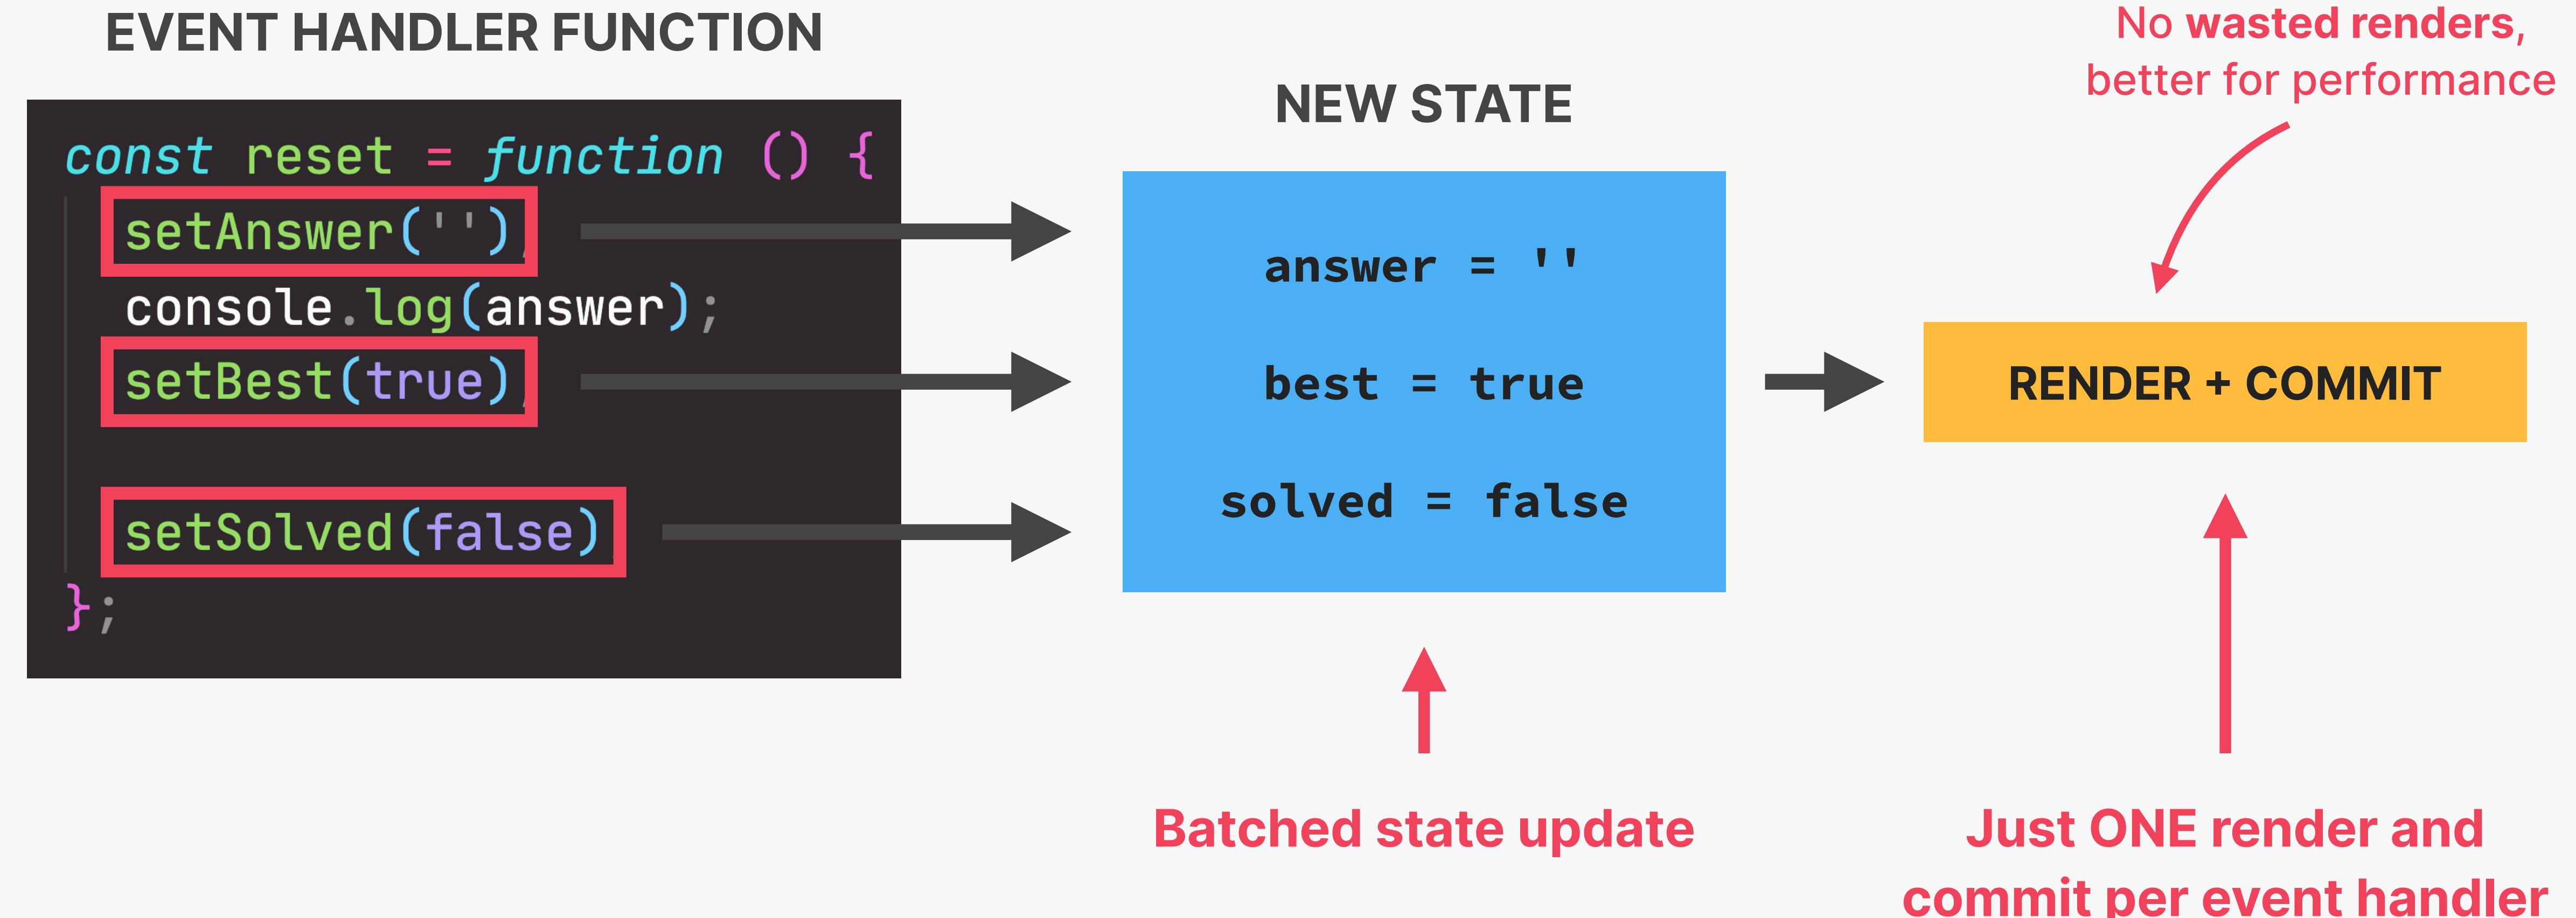

UPDATING STATE IS ASYNCHRONOUS

EVENT HANDLER FUNCTION

```
const reset = function () {  
  setAnswer('')  
  console.log(answer)  
  setBest(true)  
  
  setSolved(false)  
};
```



What will the value of answer be at this point?

State is stored in the Fiber tree during render phase

At this point, re-render has not happened yet

Therefore, answer still contains current state, not the updated state ('')

“Stale state”

- 👉 Updated state variables are **not** immediately available after setState call, but only after the re-render
- 👉 This also applies when **only one** state variable is updated
- 👉 If we need to update state based on previous update, we use setState with callback (setAnswer(answer=>...))

UPDATING STATE IN REACT IS ASYNCHRONOUS

BATCHING BEYOND EVENT HANDLER FUNCTIONS

- 👉 We can **opt out** of automatic batching by wrapping a state update in `ReactDOM.flushSync()` (*but you will never need this*)

```
const reset = function () {  
  setAnswer('');  
  console.log(answer);  
  setBest(true);  
  
  setSolved(false);  
};
```

We now get automatic batching at all times, everywhere

👉 **AUTOMATIC BATCHING IN...**

REACT 17

REACT 18+

EVENT HANDLERS

```
<button onClick={reset}>Reset</button>
```



TIMEOUTS

```
setTimeout(reset, 1000);
```



PROMISES

```
fetchStuff().then(reset);
```



NATIVE EVENTS

```
el.addEventListener('click', reset);
```





JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

HOW REACT WORKS BEHIND THE SCENES

LECTURE

HOW EVENTS WORK IN REACT


DOM REFRESHER: EVENT PROPAGATION AND DELEGATION

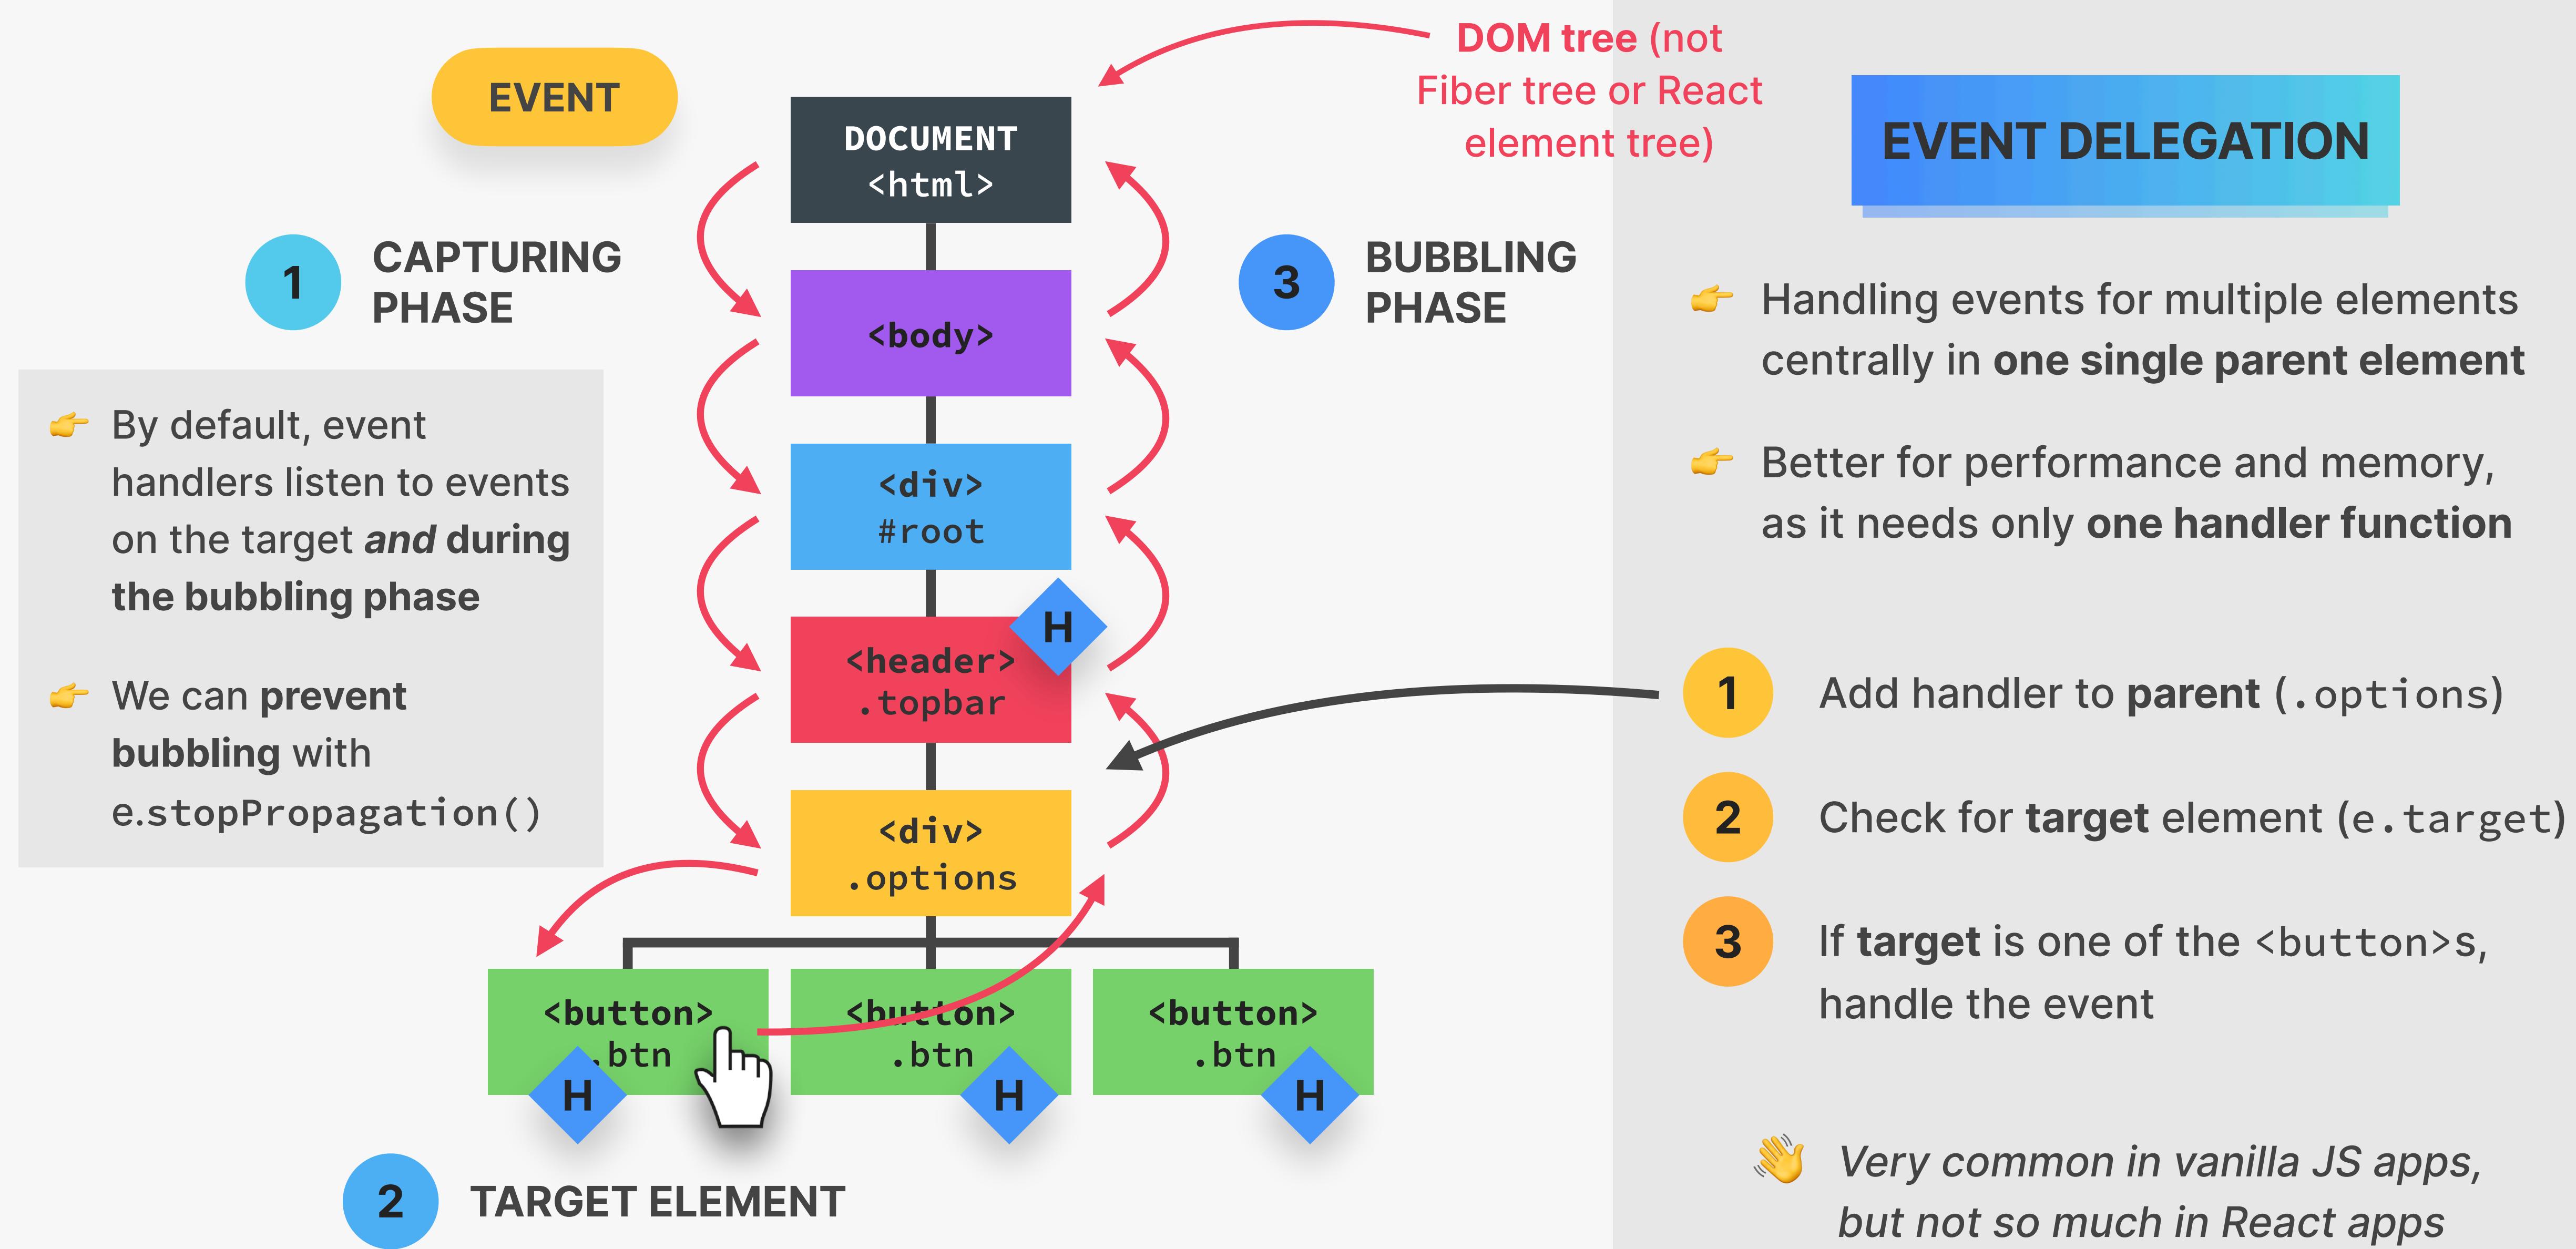

HOW REACT HANDLES EVENTS



INSIDE REACT
FIBER TREE

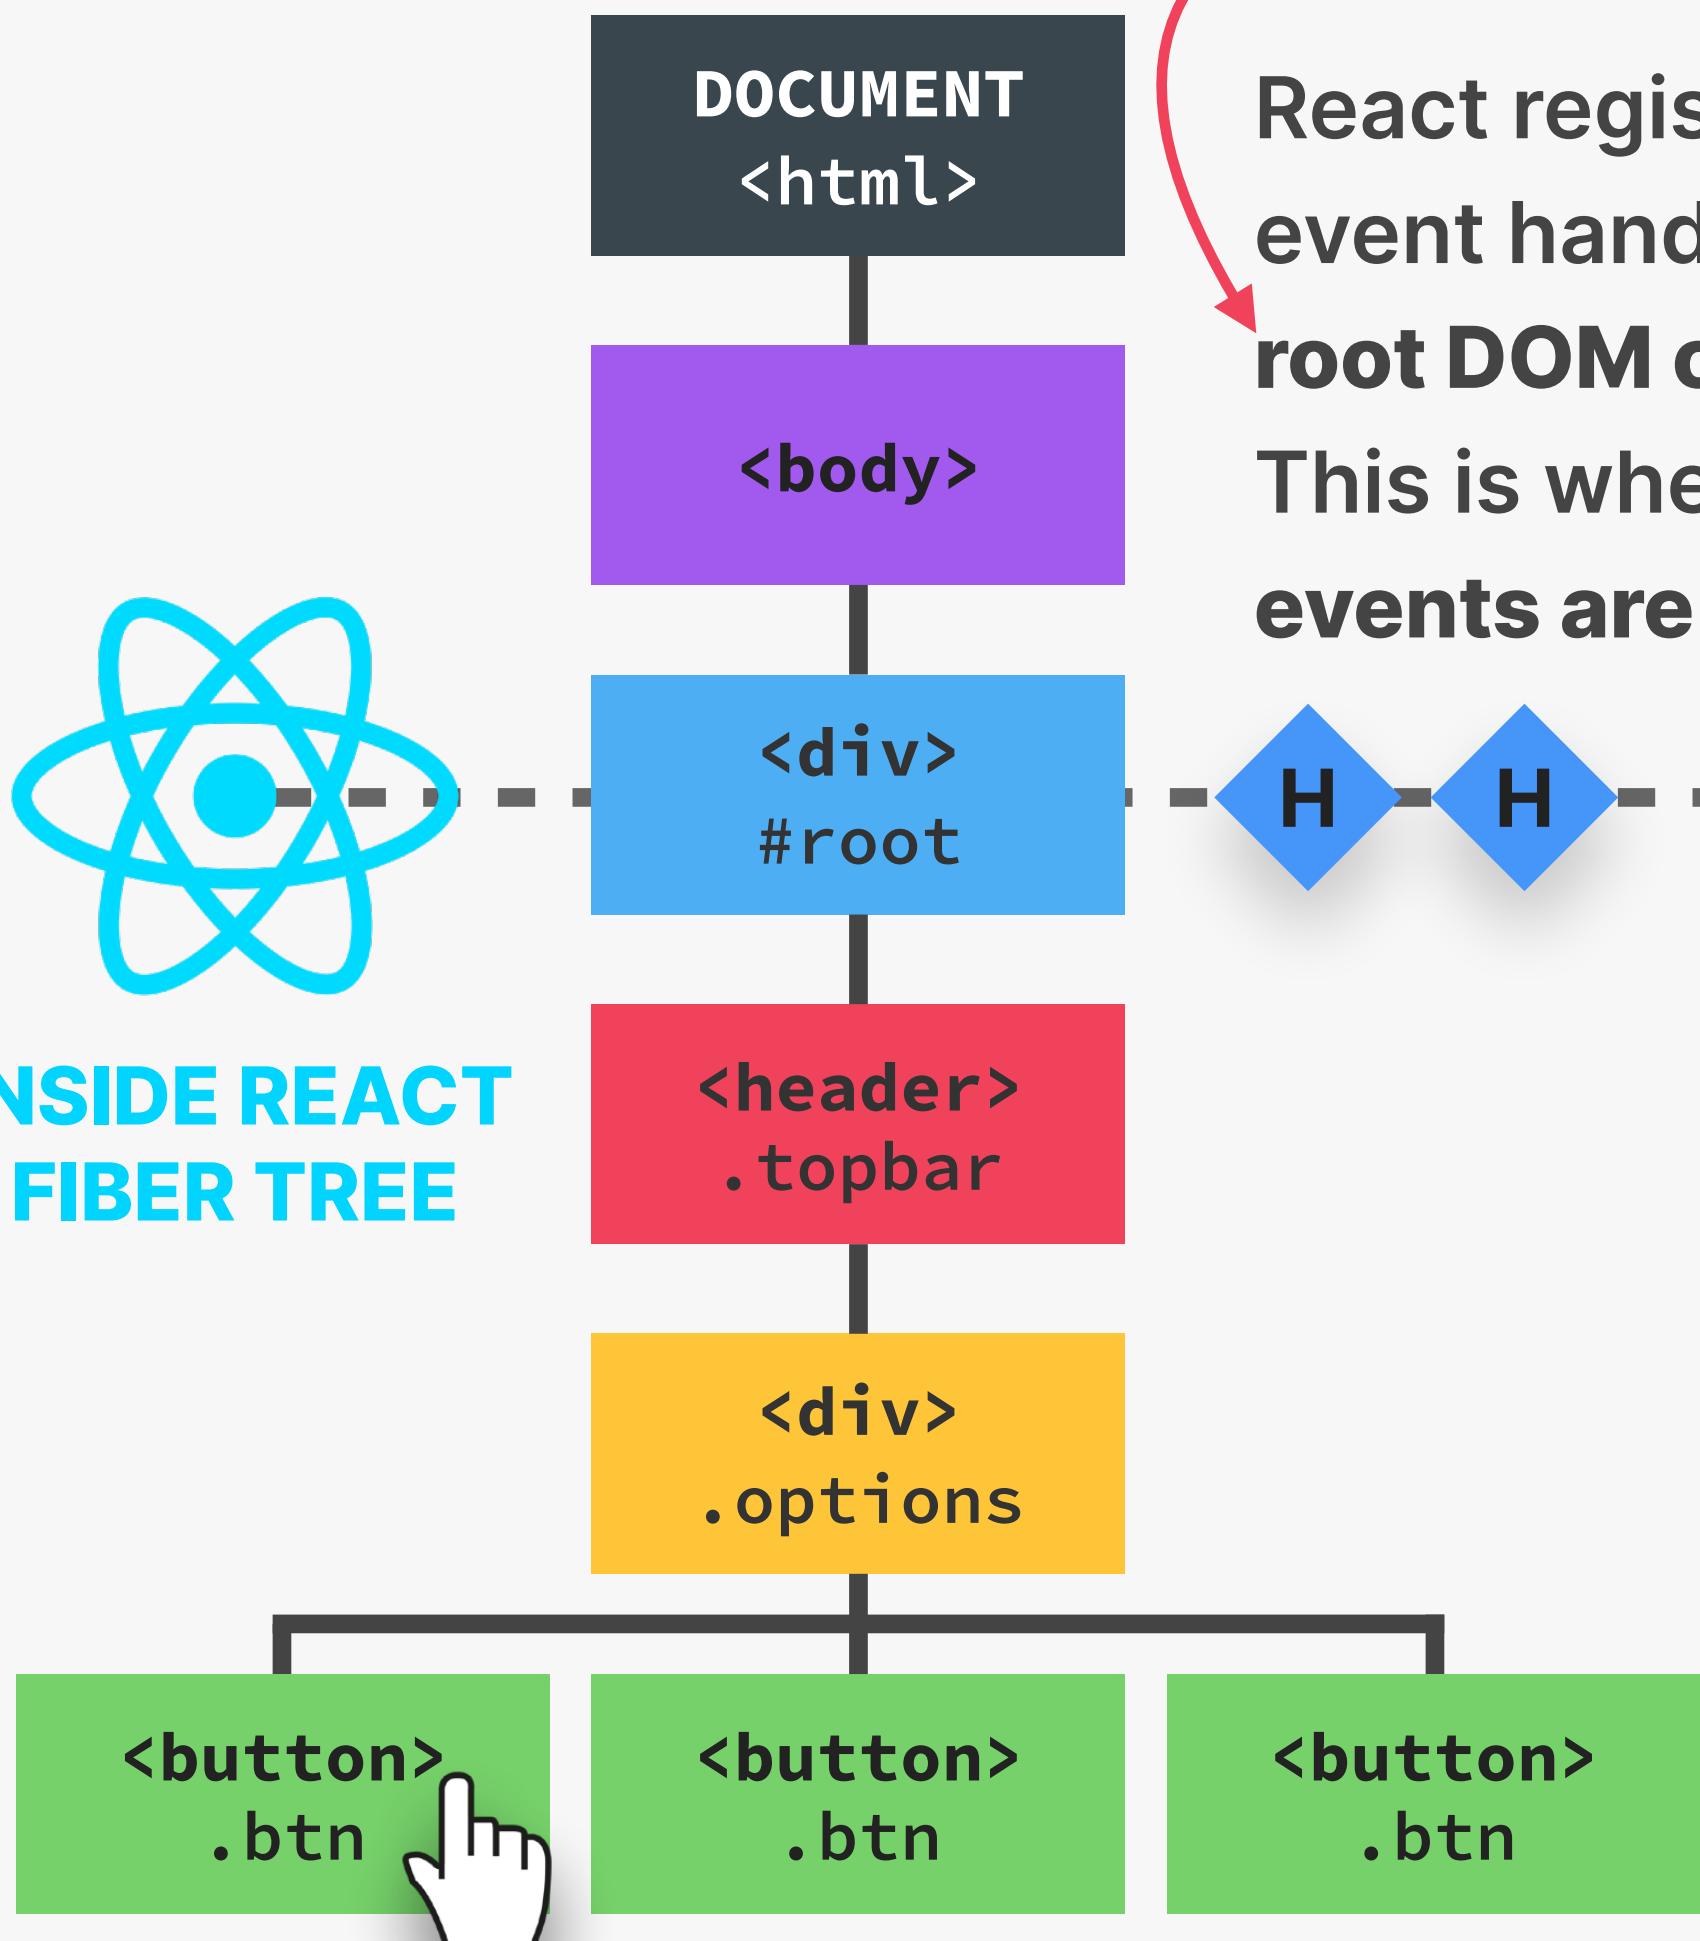

Usually `div#root`, but
can be **any DOM element**

React registers all
event handlers on the
root DOM container.
This is where **all**
events are handled

WHEN WE ATTACH AN EVENT HANDLER...

```
<button  
  className="btn"  
  onClick={() => setLoading(true)}  
/>
```

~~document
.querySelector('.btn')
.addEventListener(
'click',
(() => setLoading(true))
)~~


🚫 ... **WHAT APPEARS
TO BE HAPPENING**

document
.querySelector('#root')
.addEventListener(
'click',
(() => setLoading(true))
)

✓ ... **WHAT ACTUALLY
HAPPENS INTERNALLY**

👉 Behind the scenes, React performs **event delegation** for all events in our applications

SYNTHETIC EVENTS

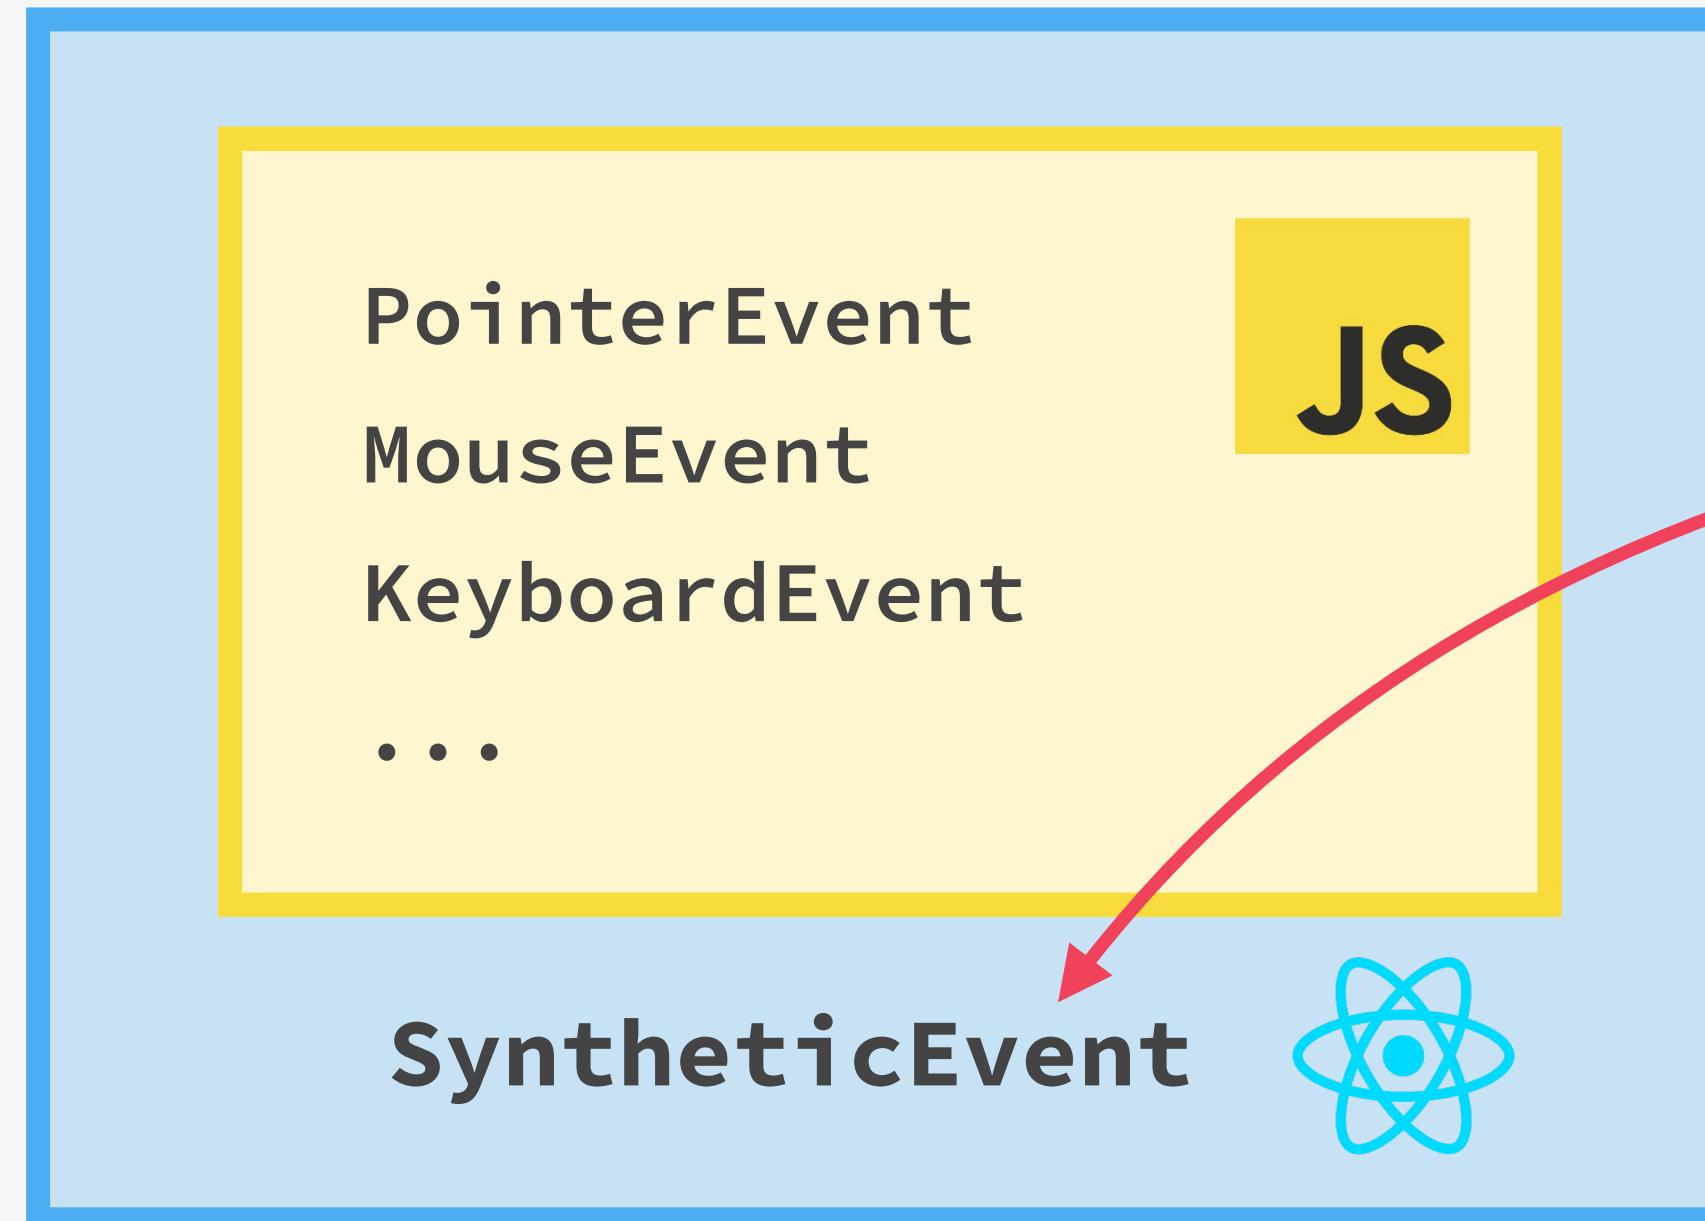

```
<input onChange={e => setText(e.target.value)} />
```

- 👉 Wrapper around the DOM's native event object
- 👉 Has **same interface** as native event objects, like `stopPropagation()` and `preventDefault()`
- 👉 Fixes browser inconsistencies, so that events work in the exact **same way in all browsers**
- 👉 **Most synthetic events bubble** (including focus, blur, and change), except for scroll

EVENT

- 👉 Attributes for event handlers are named using **camelCase** (`onClick` instead of `onclick` or `click`)

HANDLERS IN



- 👉 Default behavior can **not** be prevented by returning `false` (only by using `preventDefault()`)

- 👉 Attach “Capture” if you need to handle during **capture phase** (example: `onClickCapture`)



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

HOW REACT WORKS BEHIND THE SCENES

LECTURE

LIBRARIES VS. FRAMEWORKS & THE REACT ECOSYSTEM


FIRST, AN ANALOGY



ALL-IN-ONE KIT



SEPARATE INGREDIENTS

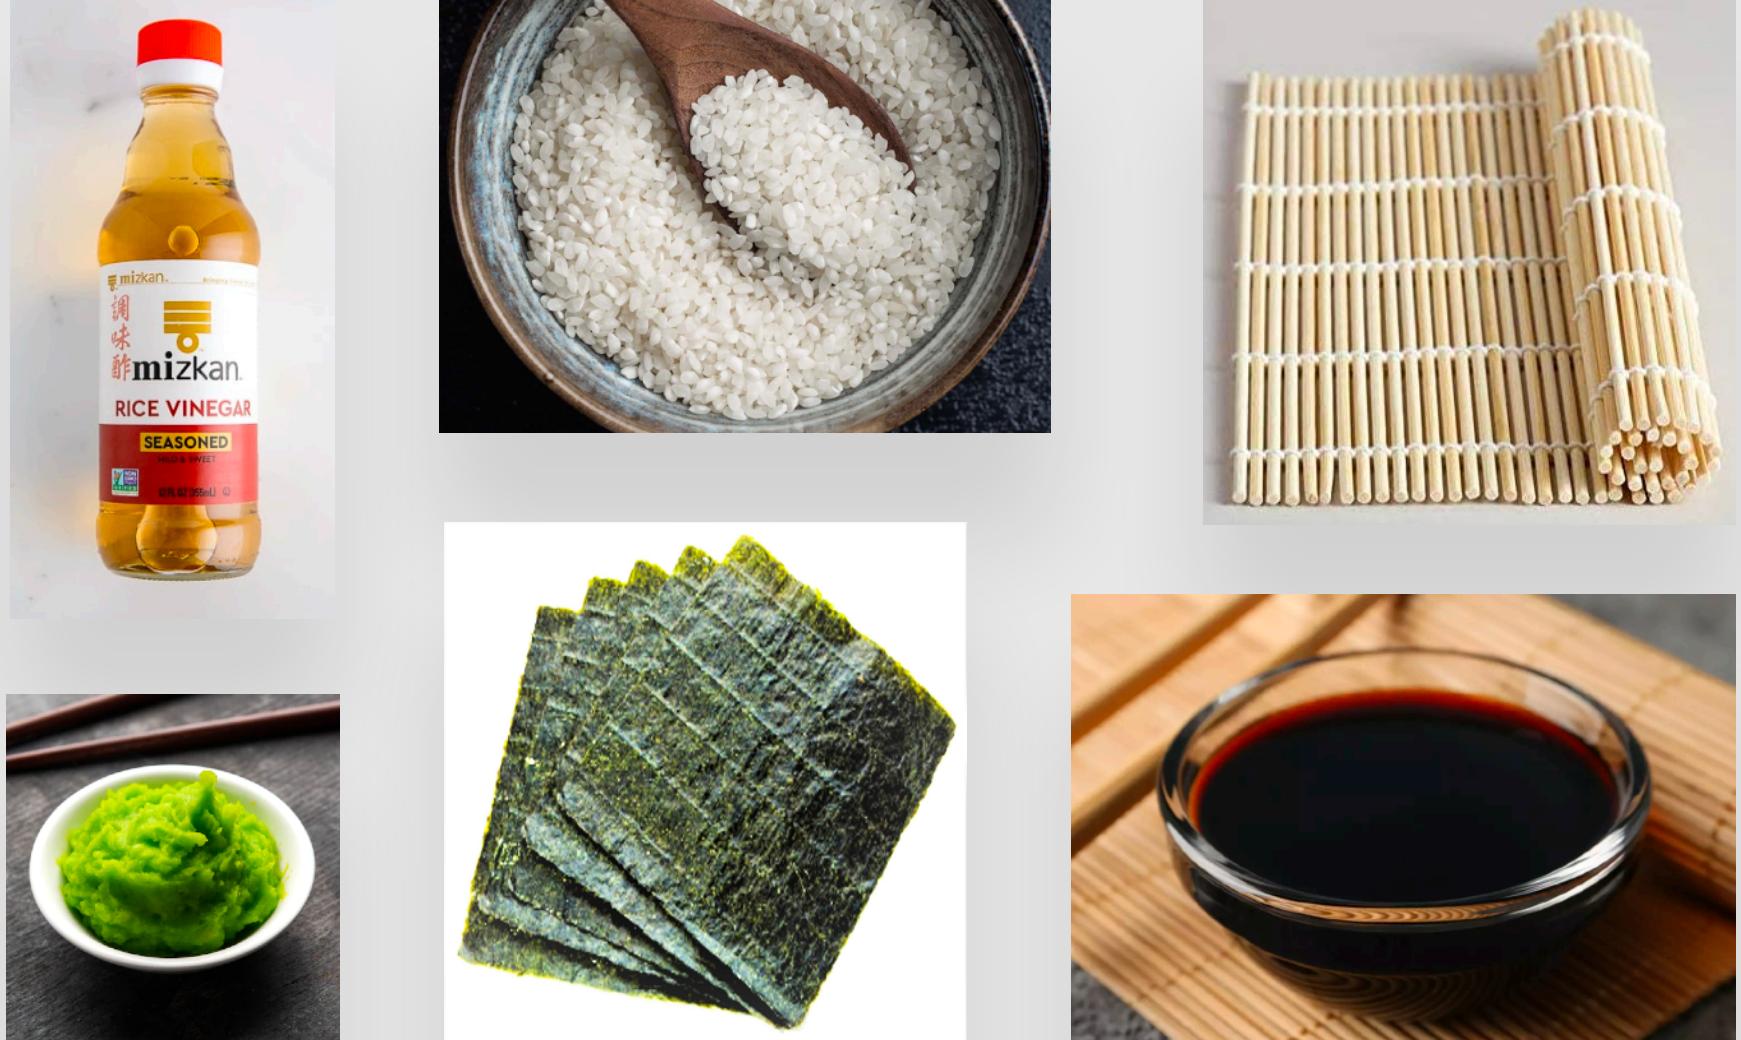

👍 **Ease of mind:** All ingredients are included

👎 **No choice:** You're stuck with the kit's ingredients

👍 **Freedom:** You can choose the best ingredients

👎 **Decision fatigue:** You need to research and buy all ingredients separately


FIRST, AN ANALOGY



ALL-IN-ONE KIT




SEPARATE INGREDIENTS

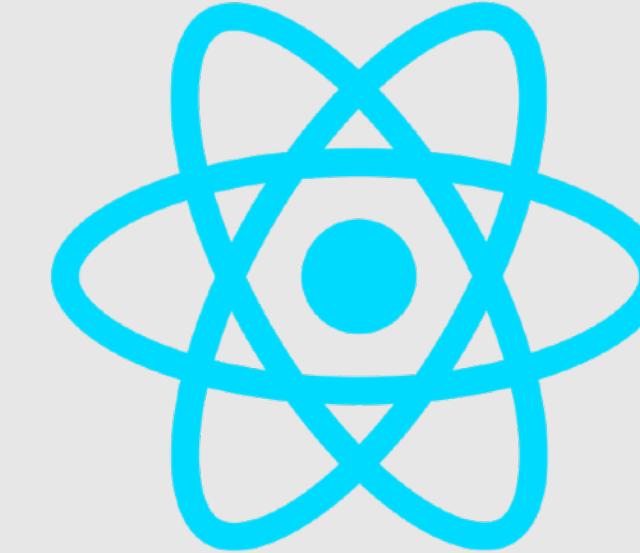

- 👍 **Ease of mind:** All ingredients are included
- 👎 **No choice:** You're stuck with the kit's ingredients

- 👍 **Freedom:** You can choose the best ingredients
- 👎 **Decision fatigue:** You need to research and buy all ingredients separately

FRAMEWORK VS. LIBRARY

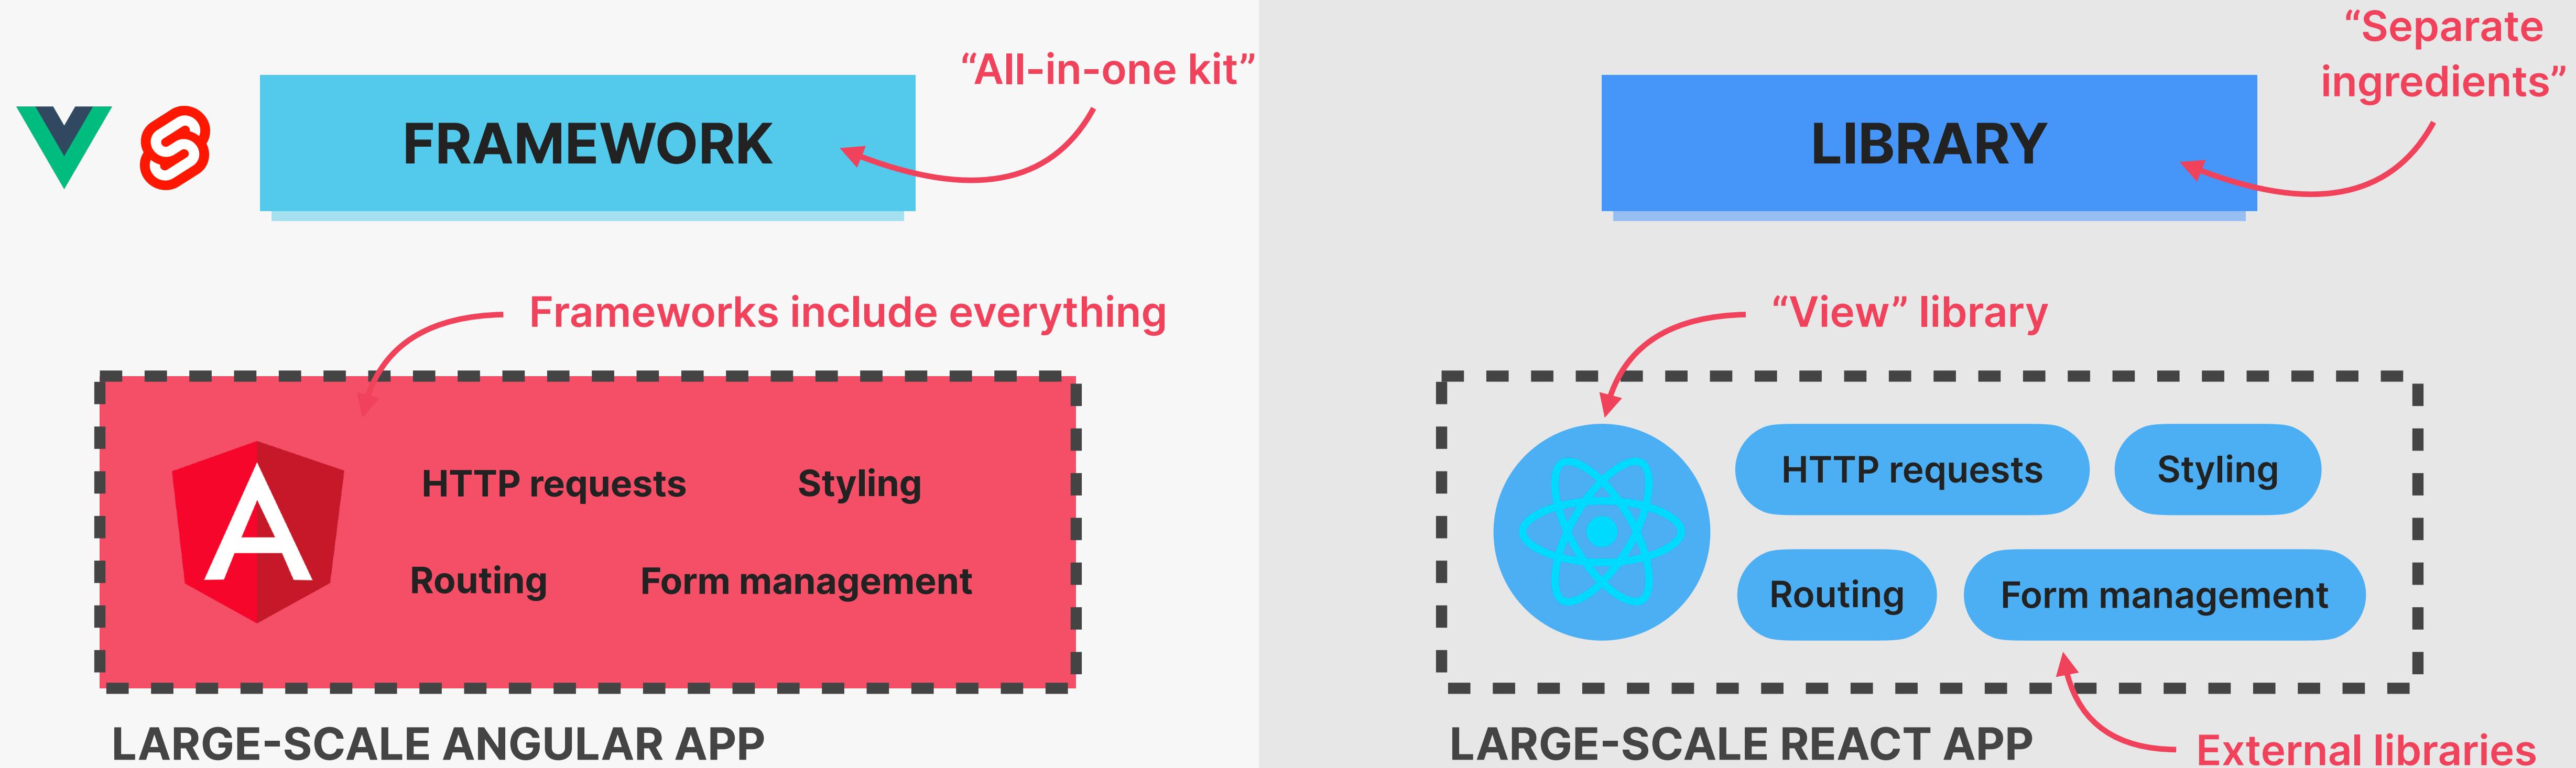

- 👍 **Ease of mind:** Everything you need to build a complete application **is included** in the framework ("batteries included")
- 👎 **No choice:** You're stuck with the framework's tools and conventions (which is not always bad!)

- 👍 **Freedom:** You can (or *need to*) **choose multiple 3rd-party libraries** to build a complete application
- 👎 **Decision fatigue:** You need to **research, download, learn, and stay up-to-date** with multiple external libraries

REACT 3RD-PARTY LIBRARY ECOSYSTEM

1 Routing (for SPAs)



React Router



React Location

👉 Library options
for different React
application needs

2 HTTP requests



JS fetch()

A X I O S

3 Remote state management




React Query

S W R

A P O L L O

4 Global state management



Context API



Redux



Zustand

5 Styling



**CSS
MODULES**



**< >
styled
components**



tailwindcss

6 Form management



React Hook Form




FORMIK

7 Animations/transitions



Motion

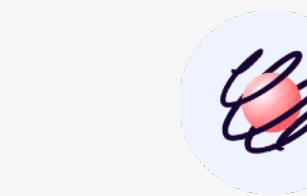


react-spring

8 UI components



chakra

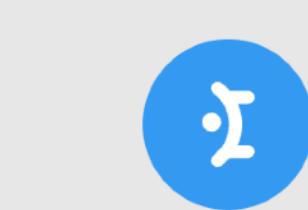


Mantine

FRAMEWORKS BUILT ON TOP OF REACT

NEXT.js

Remix


 **Gatsby**

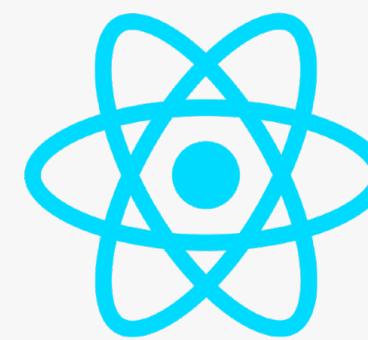

Full-stack frameworks!

“Opinionated”
React frameworks

“VANILLA” REACT APP

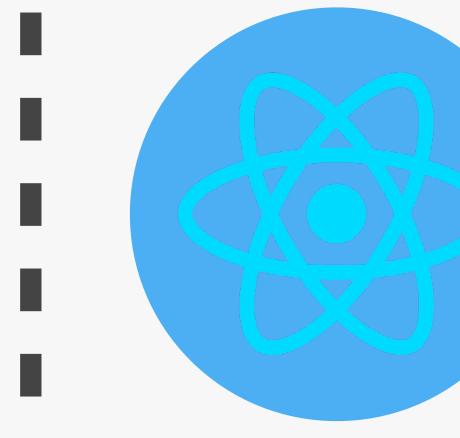

HTTP requests

Styling


Routing

Form management

NEXT.js **Remix**

External libraries

Included out of the box

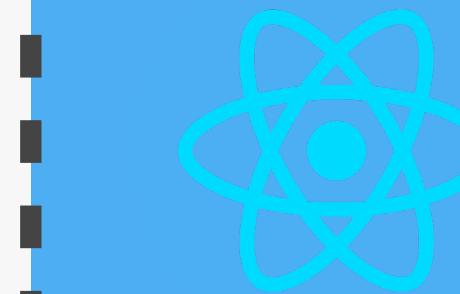

HTTP requests

Styling

Routing

Form management

👉 React frameworks offer many other features: server-side rendering (SSR), static site generation (SSG), better developer experience (DX), etc.



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

HOW REACT WORKS BEHIND THE SCENES

LECTURE

SECTION SUMMARY: PRACTICAL TAKEAWAYS



PRACTICAL SUMMARY



A **component** is like a blueprint for a piece of UI that will eventually exist on the screen. When we “use” a component, React creates a **component instance**, which is like an actual physical manifestation of a component, containing props, state, and more. A component instance, when rendered, will return a **React element**

<Question />

function Question()



“Rendering” only means **calling component functions** and calculating what DOM elements need to be inserted, deleted, or updated. It has nothing to do with writing to the DOM. Therefore, **each time a component instance is rendered and re-rendered, the function is called again**



Only the **initial app render** and **state updates** can cause a render, which happens for the **entire application**, not just one single component



When a component instance gets re-rendered, **all its children will get re-rendered as well**. This doesn’t mean that all children will get updated in the DOM, thanks to reconciliation, which checks which elements have actually changed between two renders. But all this re-rendering can still have an impact on performance (more on that later in the course ➡)



PRACTICAL SUMMARY



Diffing is how React decides which DOM elements need to be added or modified. If, between renders, a certain React element **stays at the same position in the element tree**, the corresponding DOM element and component state will stay the same. If the element **changed to a different position**, or if it's a **different element type**, the DOM element and state will be destroyed



Giving elements a key prop allows React to distinguish between multiple component instances. **When a key stays the same across renders**, the element is kept in the DOM. This is why we need to use keys in lists. **When we change the key between renders**, the DOM element will be destroyed and rebuilt. We use this as a **trick to reset state**




Never declare a new component inside another component! Doing so will re-create the nested component every time the parent component re-renders. React will always see the nested component as **new**, and therefore **reset its state** each time the parent state is updated



The logic that produces JSX output for a component instance ("render logic") is **not allowed to produce any side effects**: no API calls, no timers, no object or variable mutations, no state updates. **Side effects are allowed in event handlers and useEffect** (next section ➡)



PRACTICAL SUMMARY



The DOM is updated in the commit phase, **but not by React, but by a “renderer” called ReactDOM**. That’s why we always need to include both libraries in a React web app project. We can use other renderers to use React on different platforms, for example to build mobile or native apps



Multiple state updates inside an event handler function are **batched**, so they happen all at once, **causing only one re-render**. This means we can **not access a state variable immediately after updating it**: state updates are **asynchronous**. Since React 18, batching also happens in timeouts, promises, and native event handlers.



When using events in event handlers, we get access to a **synthetic event object**, not the browser’s native object, so that **events work the same way across all browsers**. The difference is that **most synthetic events bubble**, including focus, blur, and change, which do not bubble as native browser events. Only the scroll event does not bubble



React is a library, not a framework. This means that you can assemble your application using your favorite third-party libraries. The downside is that you need to find and learn all these additional libraries. No problem, as you will learn about the most commonly used libraries in this course

EFFECTS AND DATA FETCHING



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

EFFECTS AND DATA FETCHING

LECTURE

THE COMPONENT LIFECYCLE

COMPONENT (INSTANCE) LIFECYCLE

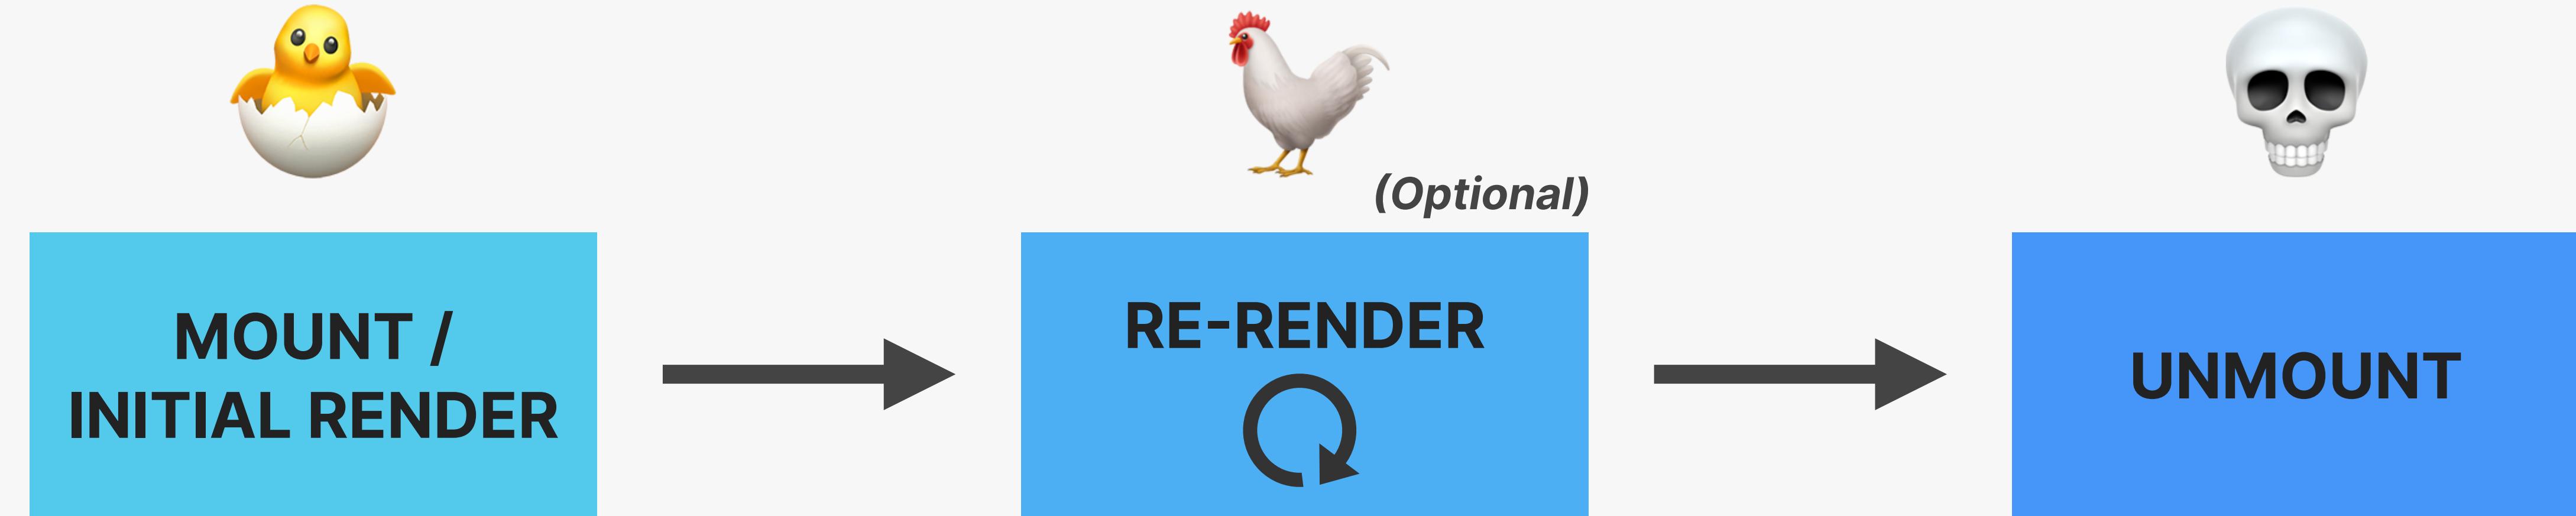

- 👉 Component instance is rendered for the **first time**
- 👉 Fresh state and props are created

HAPPENS WHEN:

- 👉 State changes
- 👉 Props change
- 👉 Parent re-renders
- 👉 Context changes

- 👉 Component instance is **destroyed and removed**
- 👉 State and props are **destroyed**

👉 We can define code to run at these specific **points in time**



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

EFFECTS AND DATA FETCHING

LECTURE

A FIRST LOOK AT EFFECTS

WHERE TO CREATE SIDE EFFECTS

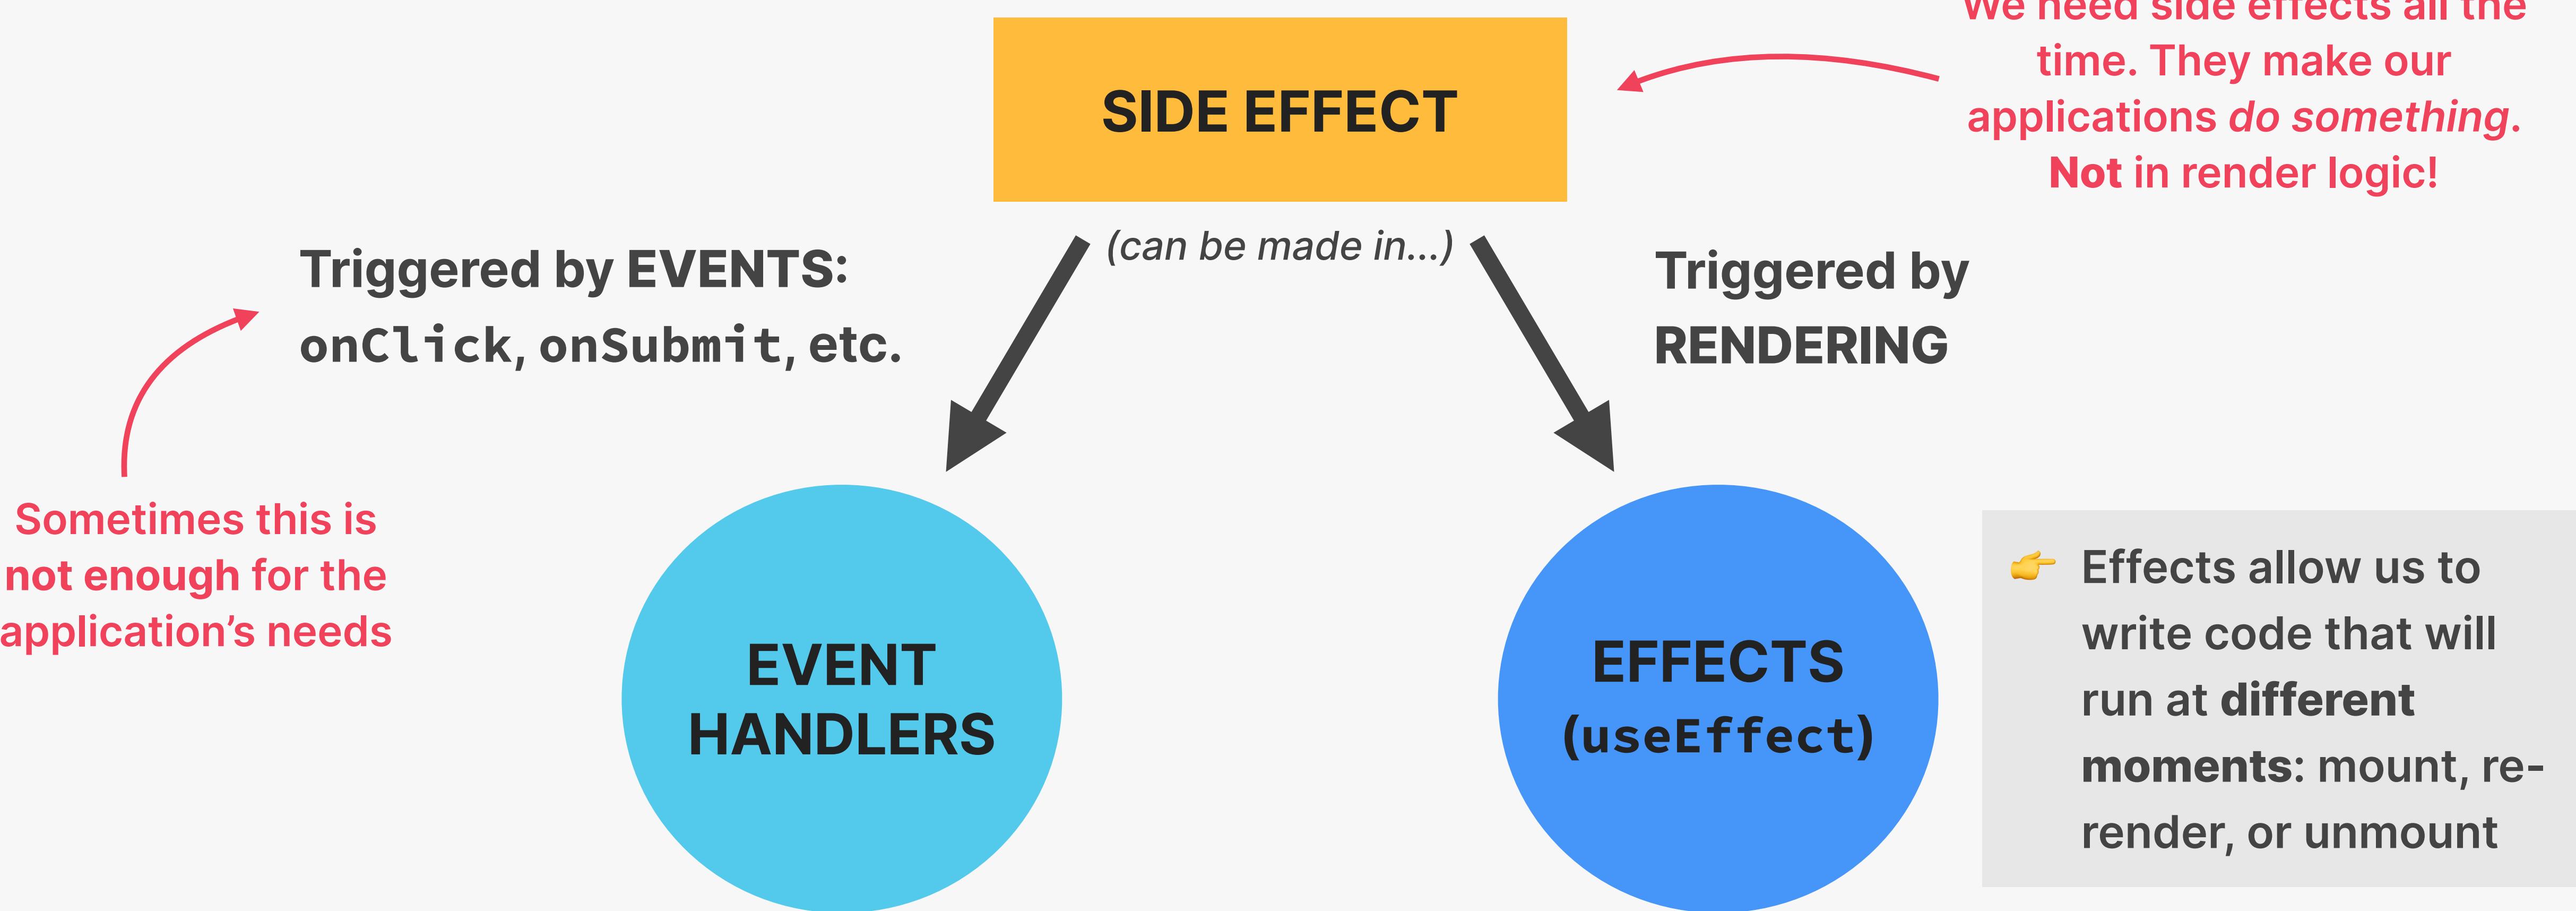

👉 Effects allow us to write code that will run at **different moments**: mount, re-render, or unmount

👉 **REVIEW:** A **side effect** is basically any “*interaction between a React component and the world outside the component*”. We can also think of a side as “*code that actually does something*”. Examples: Data fetching, setting up subscriptions, setting up timers, manually accessing the DOM, etc.

EVENT HANDLERS VS. EFFECTS

EVENT HANDLERS

```
function handleClick() {  
  fetch(`http://www.omdbapi.com/?s=inception`)  
    .then((res) => res.json())  
    .then((data) => setMovies(data.Search));  
}
```

- 👉 Executed when the **corresponding event** happens
- 👉 Used to **react** to an event
- 👉 Preferred way of creating side effects!

Produce the same result,
but at **different moments**

EFFECTS (useEffect)

```
useEffect(function () {  
  fetch(`http://www.omdbapi.com/?s=inception`)  
    .then((res) => res.json())  
    .then((data) => setMovies(data.Search));  
  
  return () => console.log('Cleanup');  
}, []);
```

Effect

Cleanup
function

When?

Thinking about
synchronization,
not lifecycles

Dependency array

- 👉 Executed **after the component mounts** (initial render), and **after subsequent re-renders** (according to dependency array)
- 👉 Used to keep a component **synchronized with some external system** (in this example, with the API movie data)

(We'll come back to all this after using `useEffect` in practice...)



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

EFFECTS AND DATA FETCHING

LECTURE

THE USEEFFECT DEPENDENCY
ARRAY


WHAT'S THE USEEFFECT DEPENDENCY ARRAY?

THE DEPENDENCY ARRAY

- 👉 By default, effects run **after every render**. We can prevent that by passing a **dependency array**
- 👉 Without the dependency array, React doesn't know **when** to run the effect
- 👉 ***Each time one of the dependencies changes, the effect will be executed again***
- 👉 Every **state variable** and **prop** used inside the effect **MUST** be included in the dependency array

```
const title = props.movie.Title;
const [userRating, setUserRating] = useState('');

useEffect(
  function () {
    if (!title) return;
    document.title = `${title} ${userRating} && `Rated ${userRating} ⭐`;
  },
  [title, userRating]
);
```

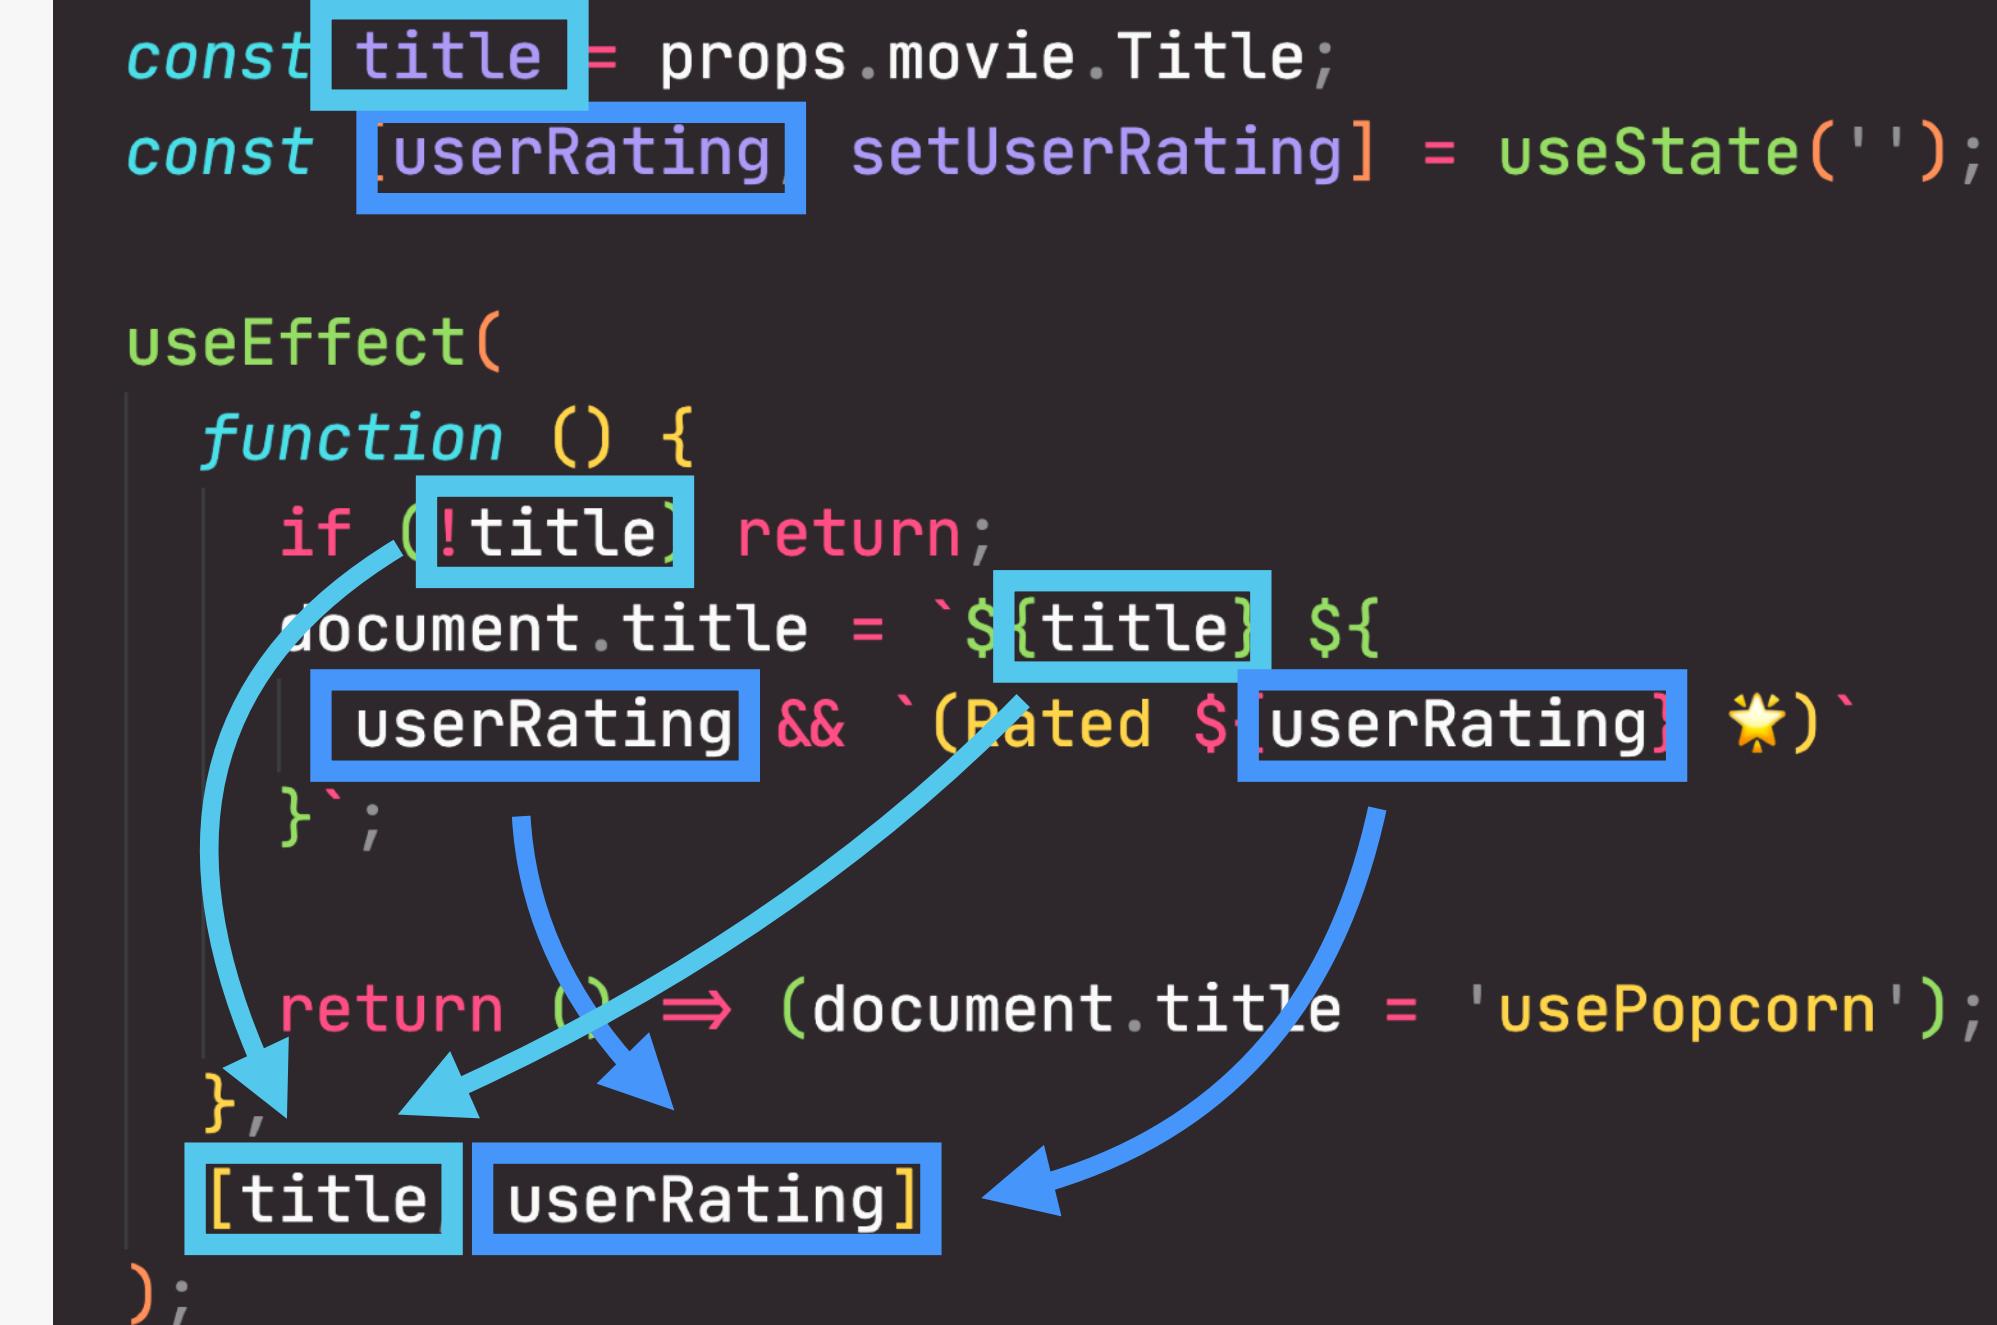


Otherwise, we get a “**stale closure**”. We will go more into depth in a future section 👉

USEEFFECT IS A SYNCHRONIZATION MECHANISM


THE MECHANICS OF EFFECTS

- 👉 **useEffect** is like an **event listener** that is listening for one dependency to change. **Whenever a dependency changes, it will execute the effect again**
- 👉 Effects **react** to updates to state and props used inside the effect (the dependencies). So **effects are “reactive”** (like state updates re-rendering the UI)

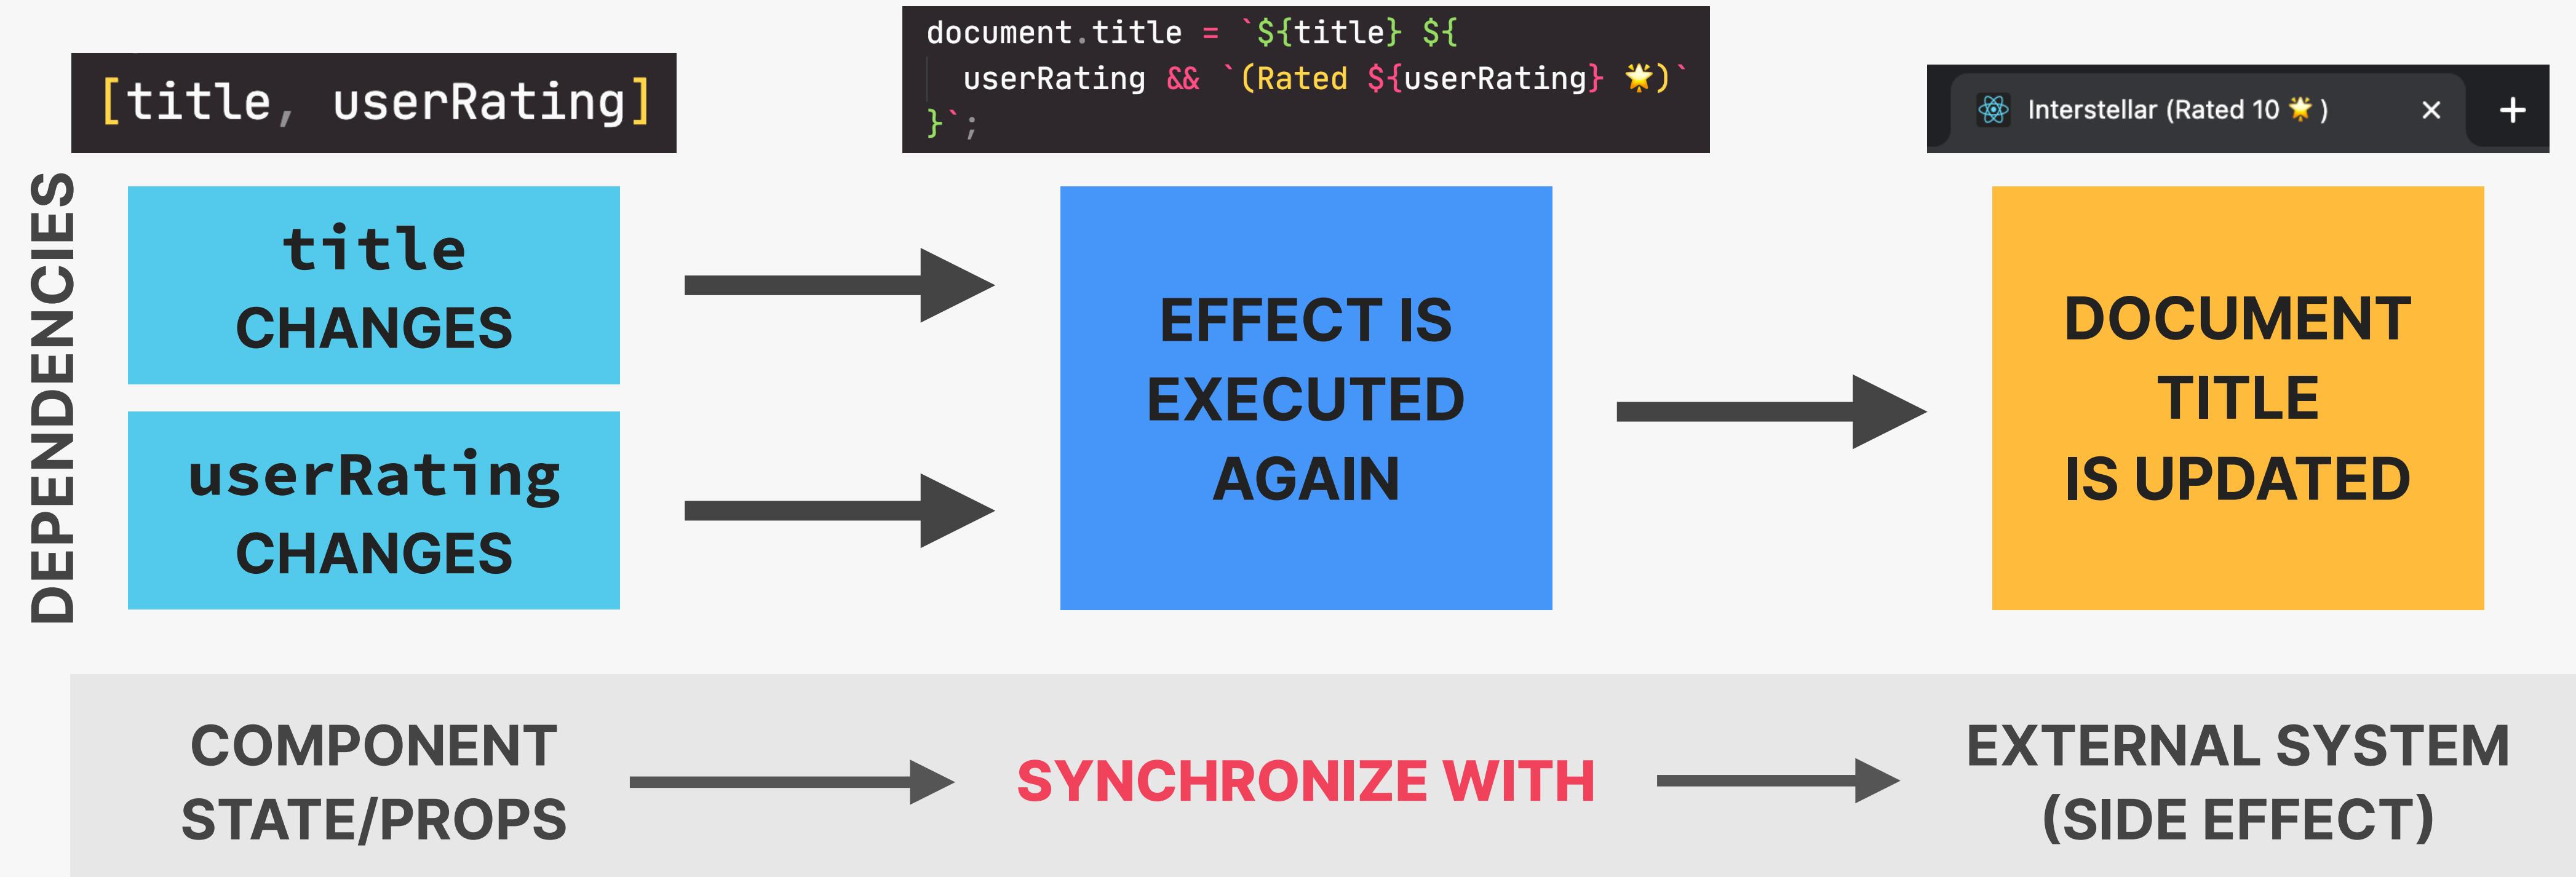

SYNCHRONIZATION AND LIFECYCLE

DEPENDENCY
(STATE OR PROPS)
CHANGES

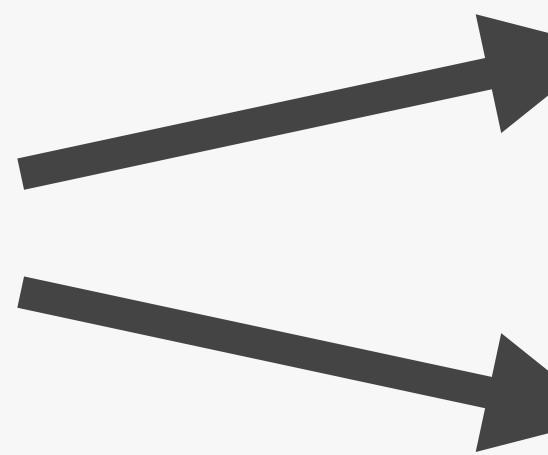

EFFECT IS
EXECUTED AGAIN

COMPONENT IS
RE-RNDERED

Effects and
component lifecycle
are deeply connected

👉 We can use the dependency array to run effects when the component renders or re-renders



SYNCHRONIZATION

`useEffect(fn, [x, y, z]);`



Effect synchronizes with x, y, and z

`useEffect(fn, []);`



Effect synchronizes with no state/props

`useEffect(fn);`



Effect synchronizes with everything



LIFECYCLE


Runs on mount and re-renders triggered by updating x, y, or z

Runs only on mount (initial render)



Runs on every render (usually bad 🚫)

WHEN ARE EFFECTS EXECUTED?

`title = 'Interstellar'`

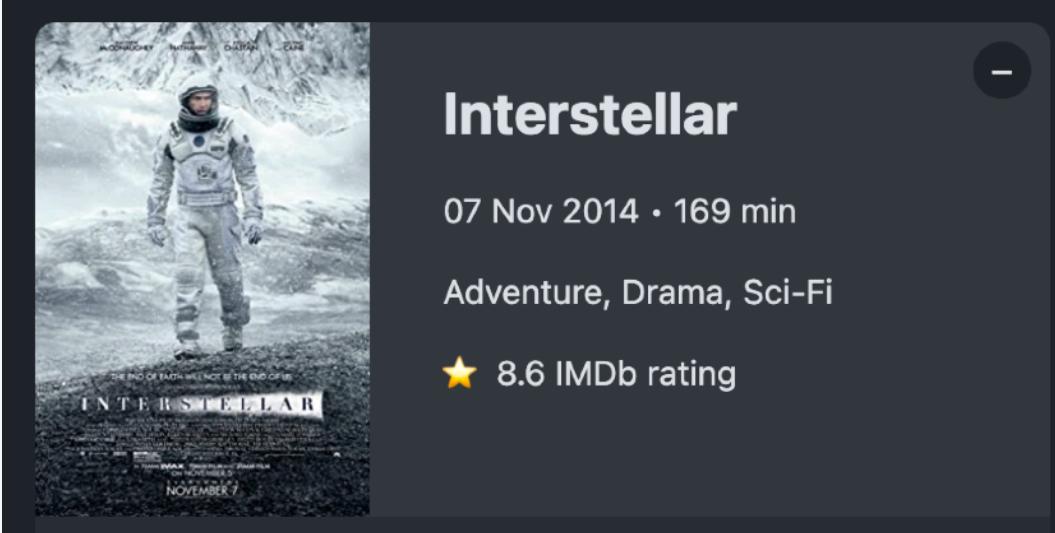

`title = 'Interstellar Wars'`

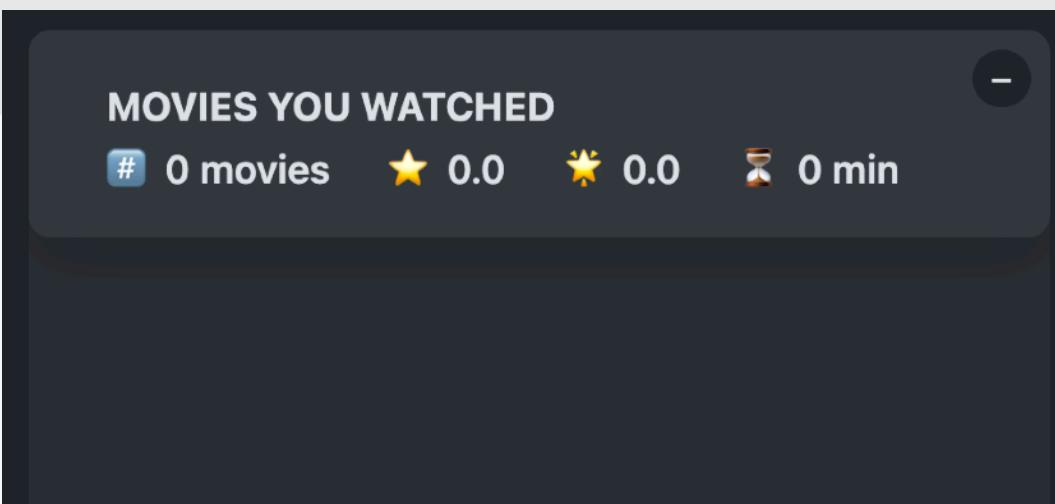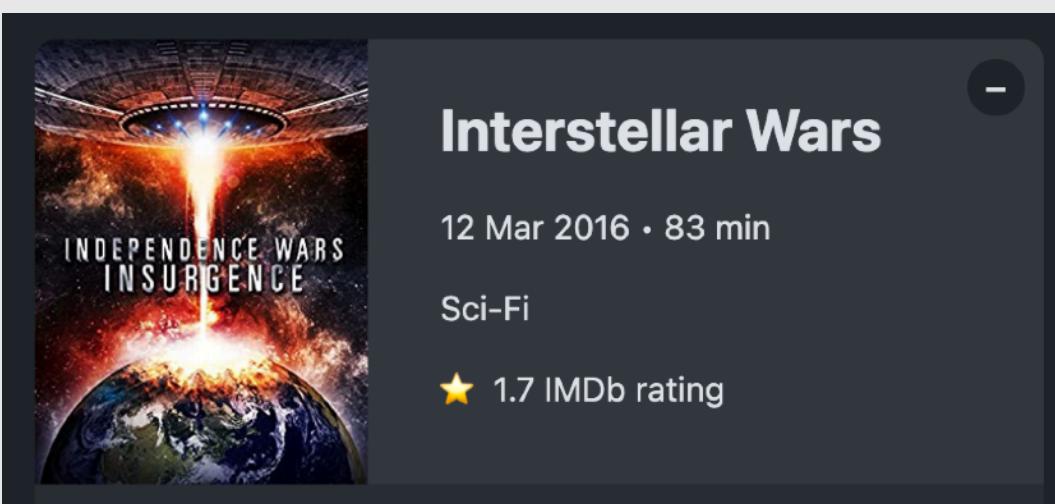

time

MOUNT (INITIAL RENDER)

COMMIT

BROWSER PAINT

EFFECT ✨

title CHANGES

RE-RENDER

COMMIT

LAYOUT EFFECT

BROWSER PAINT



EFFECT ✨

UNMOUNT



`<MovieDetails />`

If an effect sets state, an additional render will be required

```
document.title = `${title} ${userRating && `Rated ${userRating} ★`}`;
```

Interstellar × +

Another type of effect that is very rarely necessary (useLayoutEffect)

`[title, userRating]`

```
document.title = `${title} ${userRating && `Rated ${userRating} ★`}`;
```

Interstellar Wars × +



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

EFFECTS AND DATA FETCHING

LECTURE

THE USEEFFECT CLEANUP
FUNCTION

WHEN ARE EFFECTS EXECUTED?

`title = 'Interstellar'`



`title = 'Interstellar Wars'`



time

MOUNT (INITIAL RENDER)

COMMIT

BROWSER PAINT

EFFECT ✨

title CHANGES

RE-RENDER

COMMIT

LAYOUT EFFECT

BROWSER PAINT

CLEANUP 🪢

EFFECT ✨

UNMOUNT

CLEANUP 🪢

<MovieDetails />

```
document.title = `${title} ${userRating && `Rated ${userRating} ⭐`}`;
```

Interstellar

```
() => (document.title = 'usePopcorn');
```

usePopcorn

```
document.title = `${title} ${userRating && `Rated ${userRating} ⭐`}`;
```

Interstellar Wars


```
() => (document.title = 'usePopcorn');
```

usePopcorn

THE CLEANUP FUNCTION

USEEFFECT CLEANUP FUNCTION

- 👉 Function that we can return from an effect (*optional*)
- 👉 Runs on two different occasions:
 - 1 Before the effect is **executed again**
 - 2 After a component has **unmounted**
- 👉 Necessary whenever the side effect **keeps happening after the component has been re-rendered or unmounted**
- 👉 Each effect should do **only one thing!** Use **one useEffect hook for each side effect.** This makes effects easier to clean up

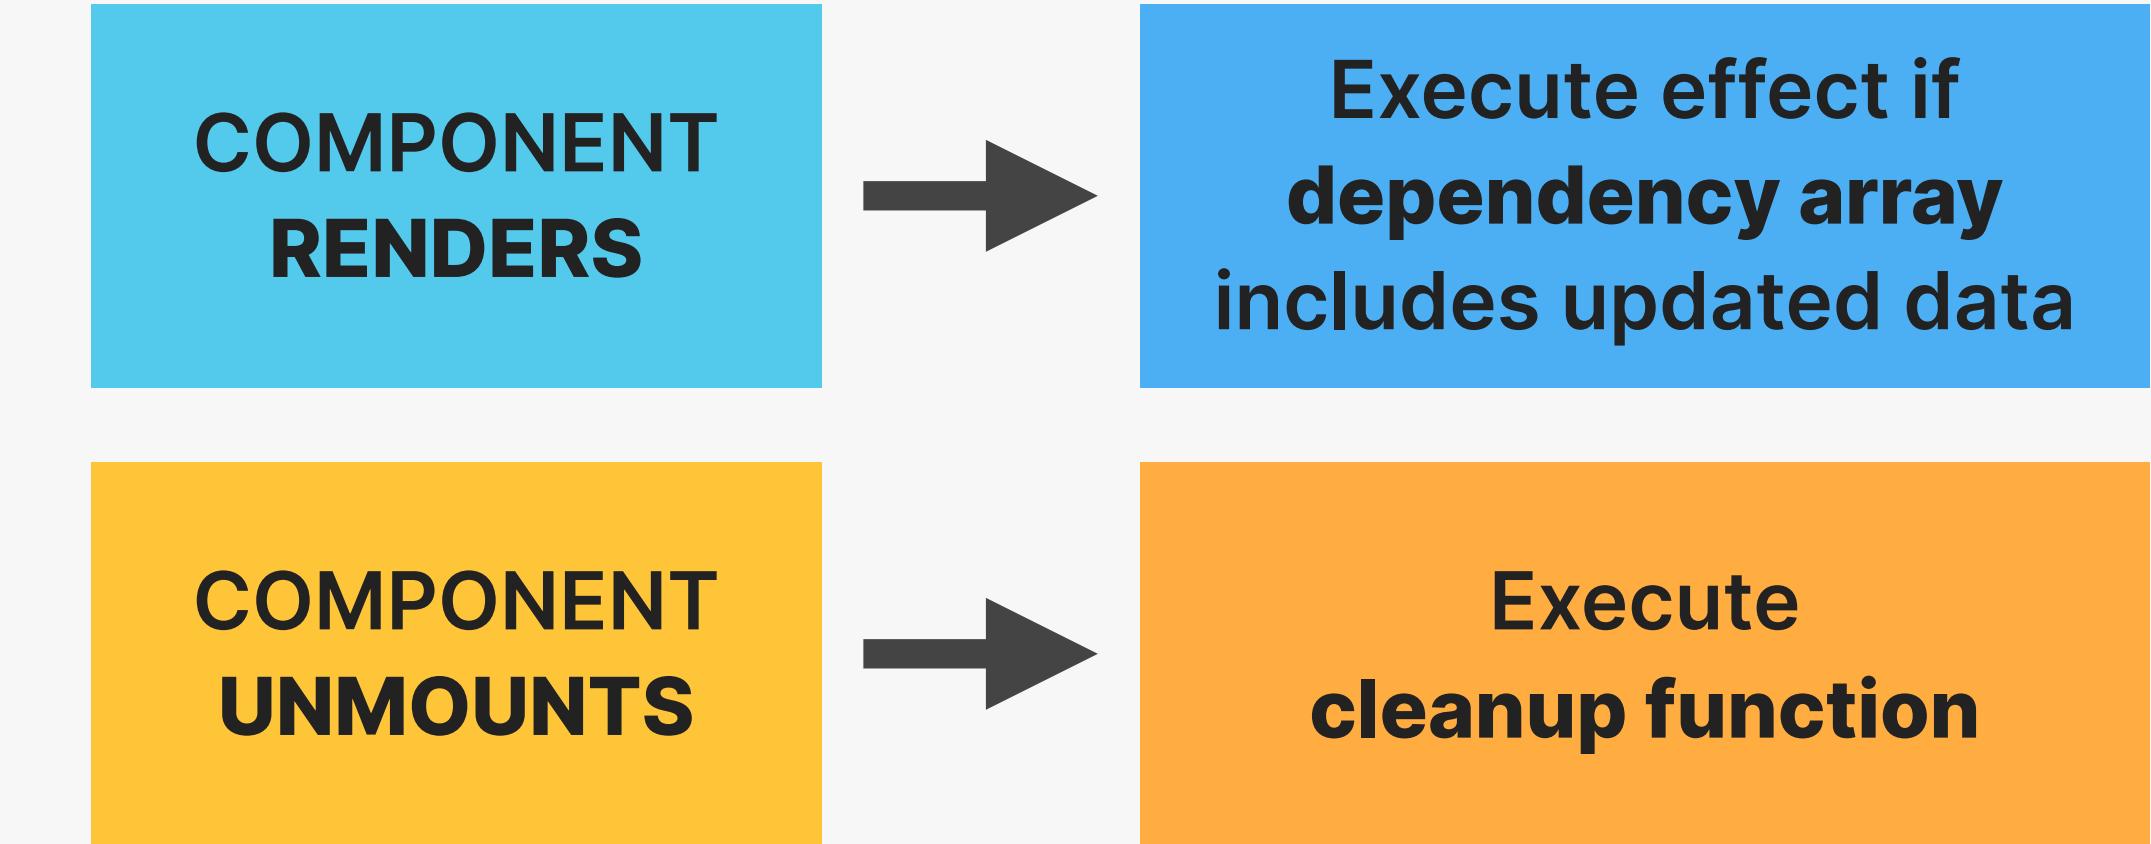

Examples →

EFFECT

- 👉 HTTP request → Cancel request
- 👉 API subscription → Cancel subscription
- 👉 Start timer → Stop timer
- 👉 Add event listener → Remove listener



POTENTIAL CLEANUP

CUSTOM HOOKS,
REFS, AND MORE
STATE



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

CUSTOM HOOKS, REFS, AND
MORE STATE

LECTURE

REACT HOOKS AND THEIR RULES

WHAT ARE REACT HOOKS?

REACT HOOKS

- 👉 Special built-in functions that allow us to “hook” into React internals:
 - 👉 Creating and accessing **state** from Fiber tree
 - 👉 Registering **side effects** in Fiber tree
 - 👉 Manual **DOM selections**
 - 👉 Many more...
- 👉 Always start with “use” (`useState`, `useEffect`, etc.)
- 👉 Enable easy **reusing of non-visual logic**: we can compose multiple hooks into our own **custom hooks**
- 👉 Give **function components** the ability to own state and run side effects at different lifecycle points (before v16.8 only available in **class components**)

OVERVIEW OF ALL BUILT-IN HOOKS



MOST USED

✓ useState

✓ useEffect

👉 useReducer

👉 useContext



LESS USED

👉 useRef

👉 useCallback

👉 useMemo

👉 useTransition

👉 useDeferredValue

✗ useLayoutEffect

✗ useDebugValue

✗ useImperativeHandle

✗ useId



ONLY FOR LIBRARIES

✗ useSyncExternalStore

✗ useInsertionEffect

✓ Have learned

👉 Will learn

✗ Will not learn

👋 As of React v18.x

THE RULES OF HOOKS

RULES OF HOOKS

1

Only call hooks at the top level

- 👉 Do NOT call hooks inside **conditionals, loops, nested functions**, or after an **early return**
- 👉 This is necessary to ensure that hooks are always called in the **same order** (hooks rely on this)

2


Only call hooks from React functions

- 👉 Only call hooks inside a **function component** or a **custom hook**



These rules are automatically enforced by React's ESLint rules

HOOKS RELY ON CALL ORDER

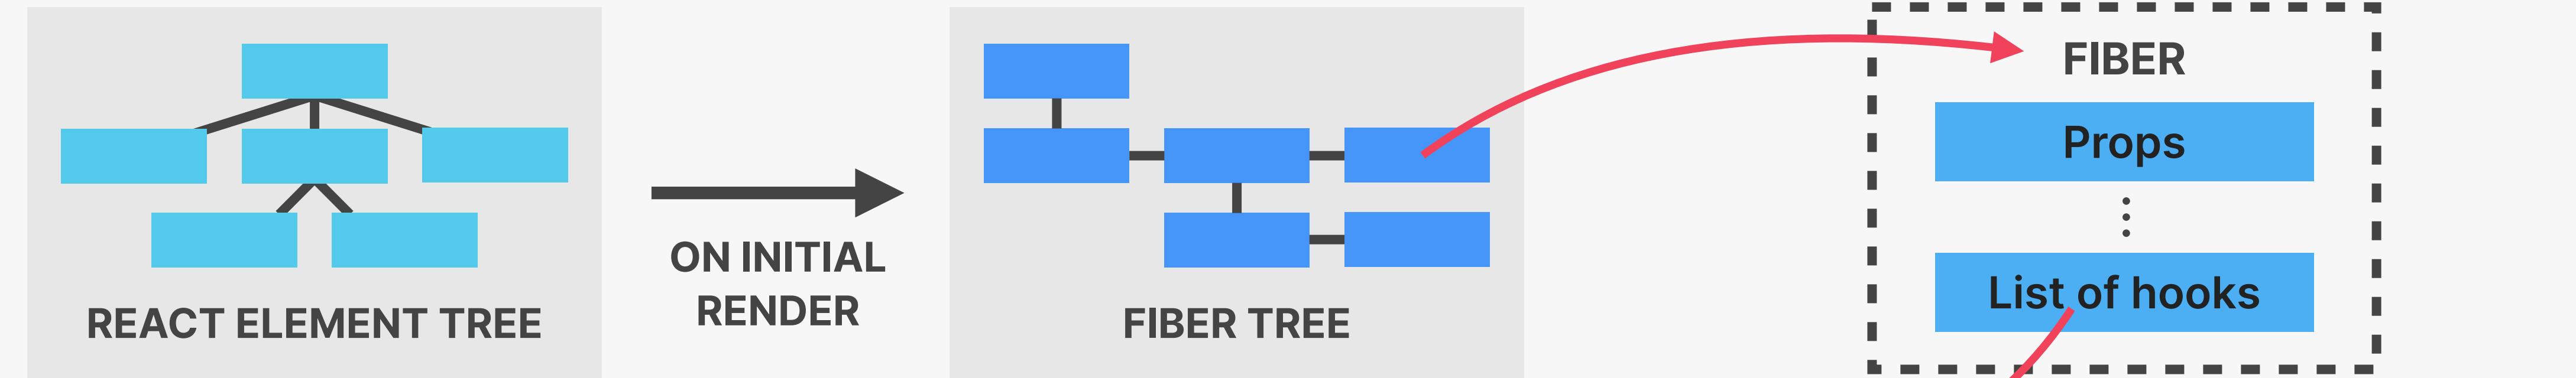


👉 Hypothetical example! This code does **NOT** work

```
const [A, setA] = useState(23) 1  
if (A === 23) false  
const [B, setB] = useState('') 2  
useEffect(fnZ, []) 3
```


Violates Rule #1

List built based on hooks call order

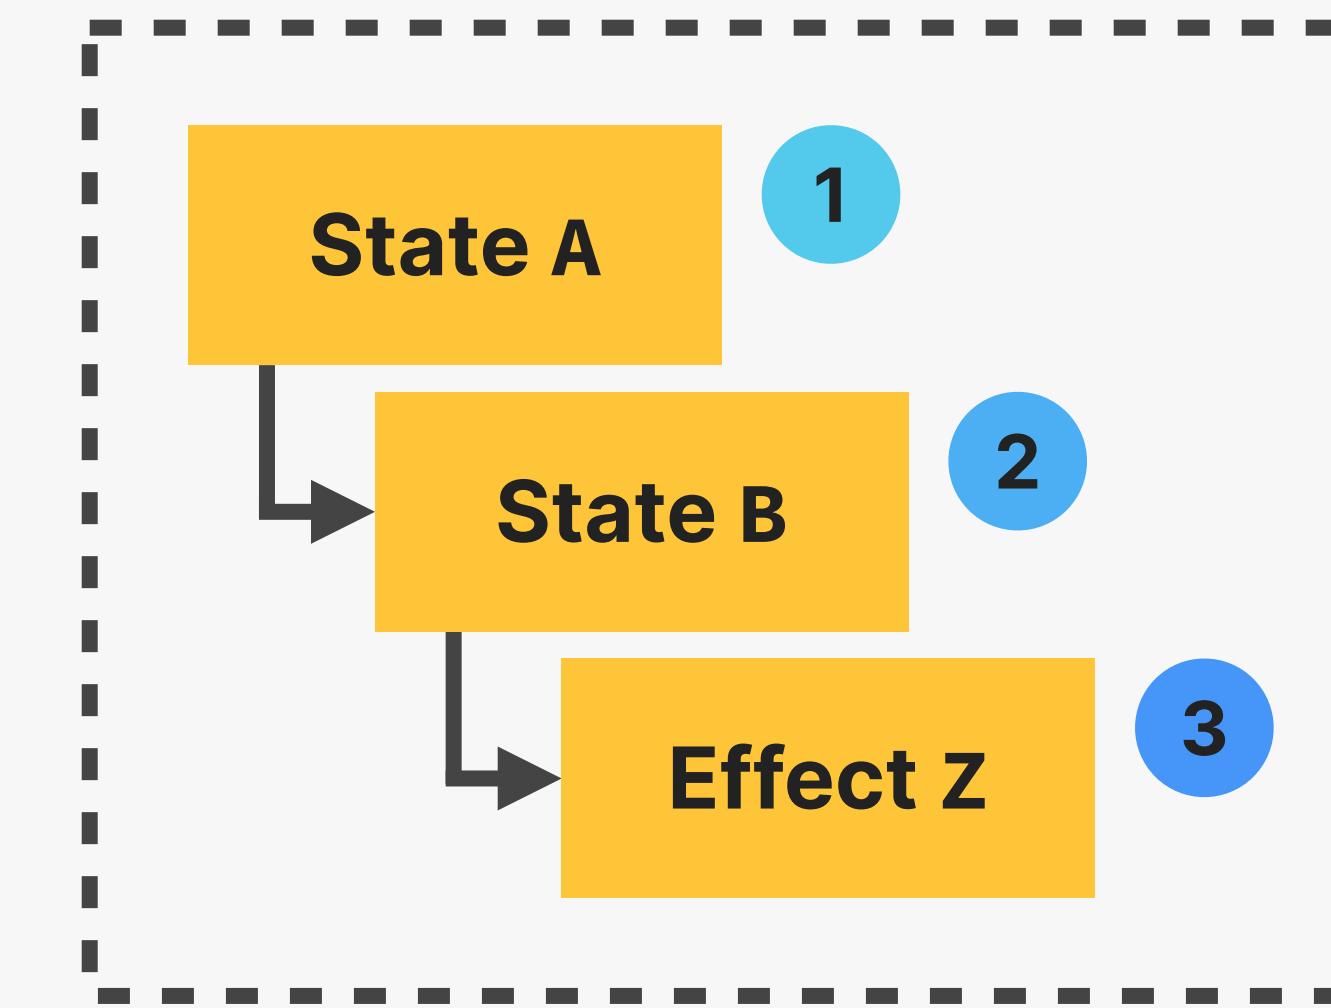

LINKED LIST OF USED HOOKS

👉 Hooks need to called in the same order on every render

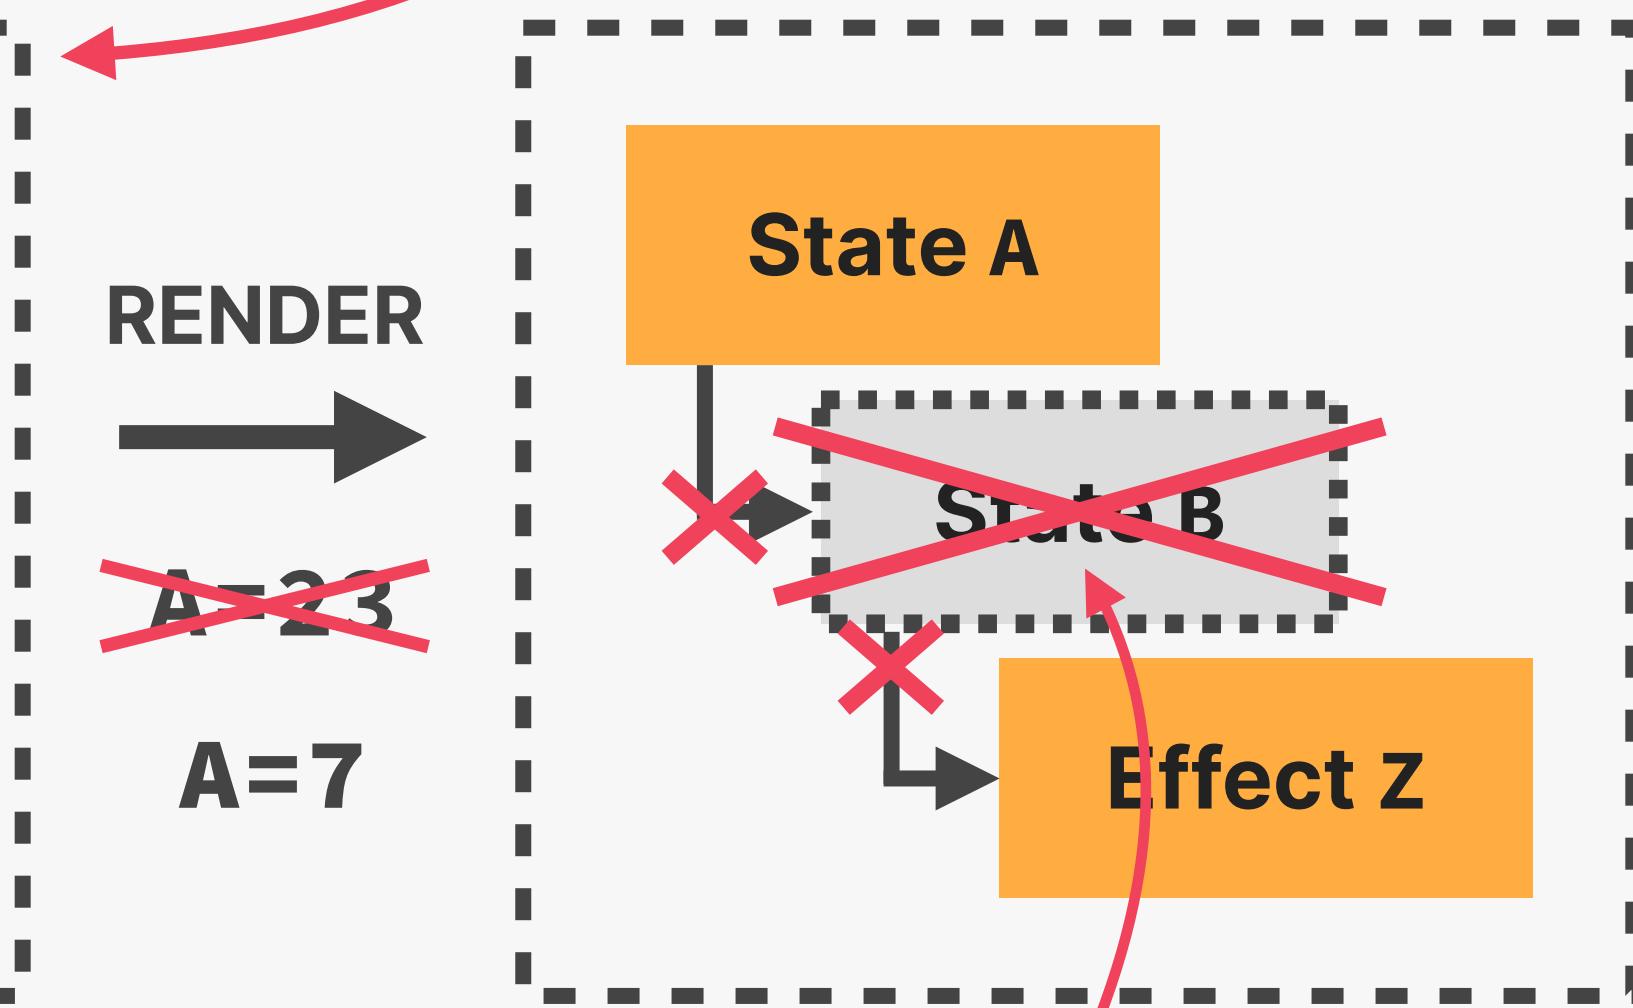

A==23 is now false, so after re-render, this hook would no longer exist, destroying the linked list 😢

HOOKS RELY ON CALL ORDER





JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

CUSTOM HOOKS, REFS, AND
MORE STATE

LECTURE

USESTATE SUMMARY

SUMMARY OF DEFINING AND UPDATING STATE

1

CREATING STATE

Simple

Based on function
(lazy evaluation)

Make sure to **NOT** mutate objects
or arrays, but to **replace** them

2

UPDATING STATE

Simple

Based on current state

```
const [count, setCount] = useState(23);
```

```
const [count, setCount] = useState(  
  () => localStorage.getItem('count')  
)
```

- 👉 Function must be **pure** and accept **no arguments**. Called only on **initial render**

```
setCount(1000);
```

```
setCount((c) => c + 1)
```

- 👉 Function must be **pure** and return **next state**



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

CUSTOM HOOKS, REFS, AND
MORE STATE

LECTURE


INTRODUCING ANOTHER HOOK:
USEREF

WHAT ARE REFS?

REF WITH `useRef`

- 👉 “Box” (object) with a **mutable** `.current` property that is **persisted across renders** (“normal” variables are always reset)
- 👉 Two big use cases:
 - 1 Creating a variable that stays the same between renders (e.g. previous state, setTimeout id, etc.)
 - 2 Selecting and storing DOM elements
- 👉 Refs are for **data that is NOT rendered**: usually only appear in event handlers or effects, not in JSX (otherwise use state)
- 👉 Do **NOT** read write or read `.current` in render logic (like state)

```
const myRef = useRef(23);
```

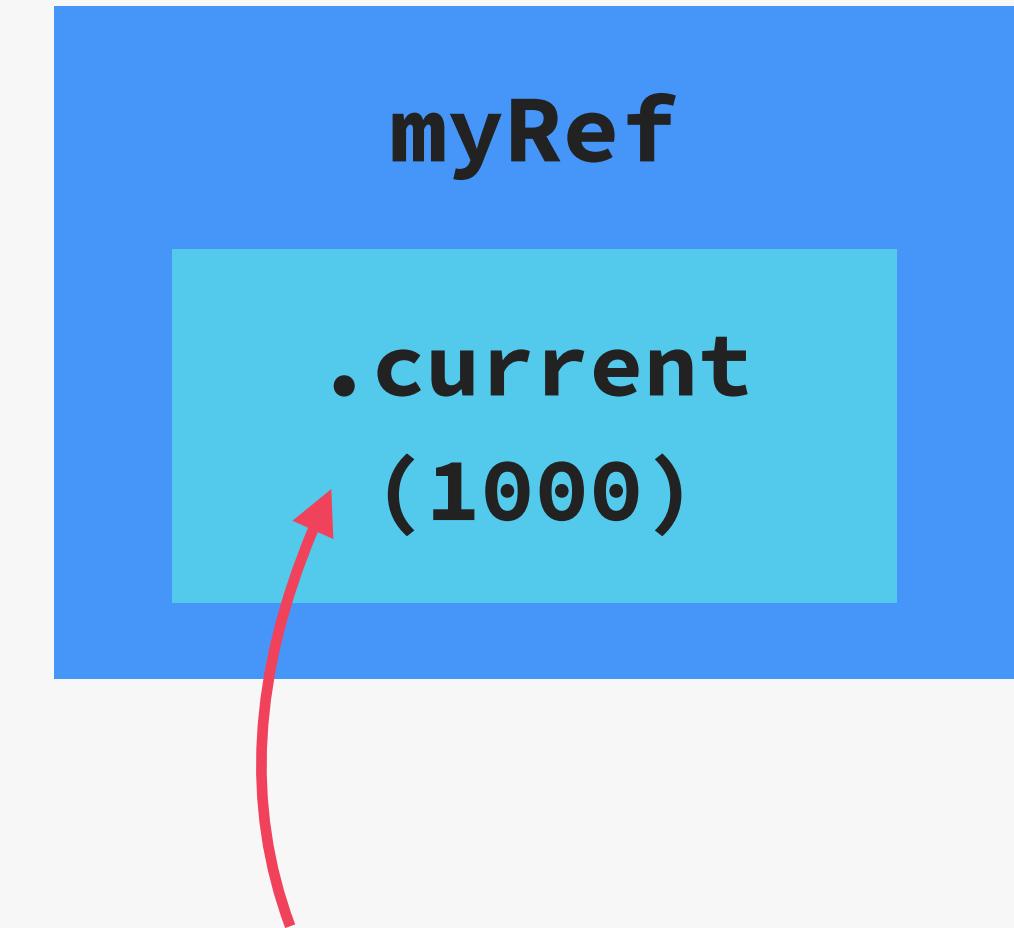


We can write to and
read from the ref
using `.current`

```
myRef.current = 1000;
```

STATE VS. REFS

	PERSISTS ACROSS RENDERS	UPDATING CAUSES RE-RENDER	IMMUTABLE	ASYNCHRONOUS UPDATES
STATE	✓	✓	✓	✓
REFS	✓	✗	✗	✗

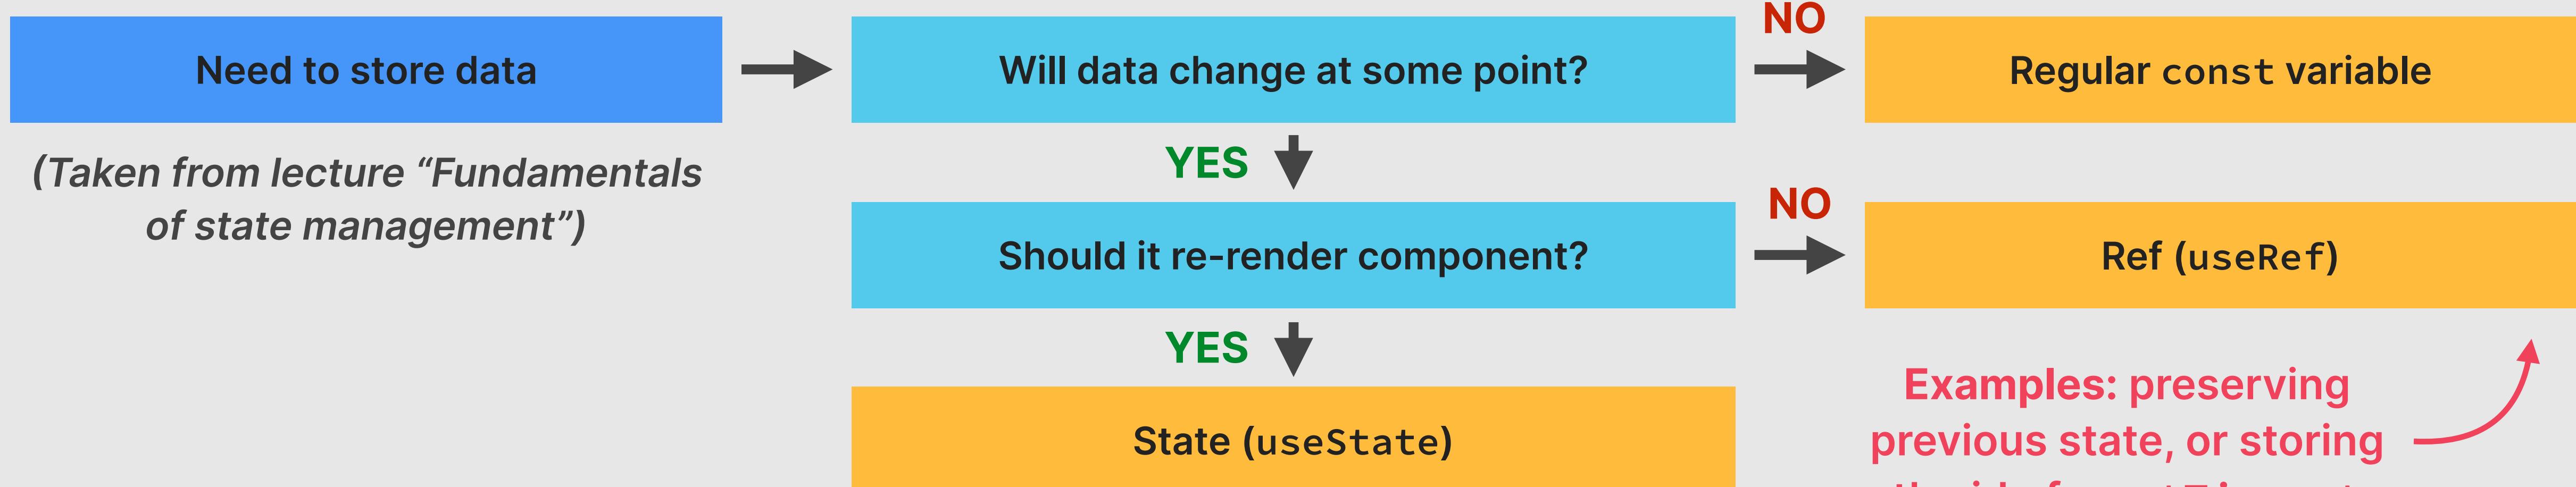



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

CUSTOM HOOKS, REFS, AND
MORE STATE

LECTURE

WHAT ARE CUSTOM HOOKS?
WHEN TO CREATE ONE?

REUSING LOGIC WITH CUSTOM HOOKS



- 👉 Allow us to reuse **non-visual logic** in multiple components
- 👉 One custom hook should have **one purpose**, to make it **reusable** and **portable** (even across multiple projects)
- 👉 Rules of hooks apply to custom hooks too

```
function useFetch(url) {  
  const [data, setData] = useState([]);  
  const [isLoading, setIsLoading] = useState(false);  
  
  useEffect(function () {  
    fetch(url)  
      .then(res => res.json())  
      .then(res => setData(res));  
  }, []);  
  
  return [data, isLoading]  
}
```

The code shows a custom hook named `useFetch`. It uses the `useState` hook to manage state. It also uses the `useEffect` hook to fetch data from a URL. The returned value is an array containing the fetched data and the loading status.

Needs to use **one or more hooks**

Function name needs to start with **use**

Unlike components, can receive and return **any relevant data** (usually `[]` or `{}`)

**REACT BEFORE
HOOKS: CLASS-
BASED REACT**



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

REACT BEFORE HOOKS: CLASS-BASED REACT

LECTURE

CLASS COMPONENTS VS. FUNCTION COMPONENTS

FUNCTION COMPONENTS VS. CLASS COMPONENTS

Existed since beginning,
but without hooks

FUNCTION COMPONENTS

CLASS COMPONENTS

JUL 17	Introduced in	v16.8 (2019, with hooks)	v0.13 (2015)
💎	How to create	JavaScript function (any type)	ES6 class, extending React.Component
👀	Reading props	Destructuring or props.X	this.props.X
🚀	Local state	useState hook	this.setState()
✨	Side effects/lifecycle	useEffect hook	Lifecycle methods
☎️	Event handlers	Functions	Class methods
🎨	Returning JSX	Return JSX from function	Return JSX from render method
🏆	Advantages	<ul style="list-style-type: none">👍 Easier to build (less boilerplate code)👍 Cleaner code: useEffect combines all lifecycle-related code in a single place👍 Easier to share stateful logic👍 We don't need this keyword anymore	<ul style="list-style-type: none">👍 Lifecycle might be easier to understand for beginners

PART 03

ADVANCED REACT + REDUX

THE ADVANCED USERREDUCER HOOK



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

THE ADVANCED USERREDUCER
HOOK

LECTURE

MANAGING STATE WITH
USERREDUCER

WHY USEREDUCER?

👉 STATE MANAGEMENT WITH useState IS NOT ENOUGH IN CERTAIN SITUATIONS:

1

When components have **a lot of state variables and state updates**, spread across many event handlers **all over the component**

2

When **multiple state updates** need to happen **at the same time** (as a reaction to the same event, like “starting a game”)

3

When updating one piece of state **depends on one or multiple other pieces of state**

👉 IN ALL THESE SITUATIONS, useReducer CAN BE OF GREAT HELP

MANAGING STATE WITH USERREDUCER

STATE WITH useReducer

- 👉 An alternative way of setting state, ideal for **complex state and related pieces of state**
- 👉 Stores related pieces of state in a **state** object Like `setState()` with superpowers
- 👉 `useReducer` needs **reducer:** function containing **all logic to update state**. Decouples state logic from component
- 👉 **reducer:** pure function (*no side effects!*) that takes current state and action, and returns the next state
- 👉 **action:** object that describes **how to update state**
- 👉 **dispatch:** function to trigger state updates, by “**sending**” actions from event handlers to the reducer

Instead of `setState()`

```
const [state, dispatch] =  
  useReducer(reducer, initialState);
```


```
function reducer(state, action) {  
  switch (action.type) {  
    case 'dec':  
      return state - 1;  
    case 'inc':  
      return state + 1;  
    case 'setCount':  
      return action.payload;  
    default:  
      throw new Error('Unknown');  
  }  
}
```

HOW REDUCERS UPDATE STATE

```
const [state, dispatch] = useReducer(reducer, initialState);
```

useReducer

👉 Updating state
in a component

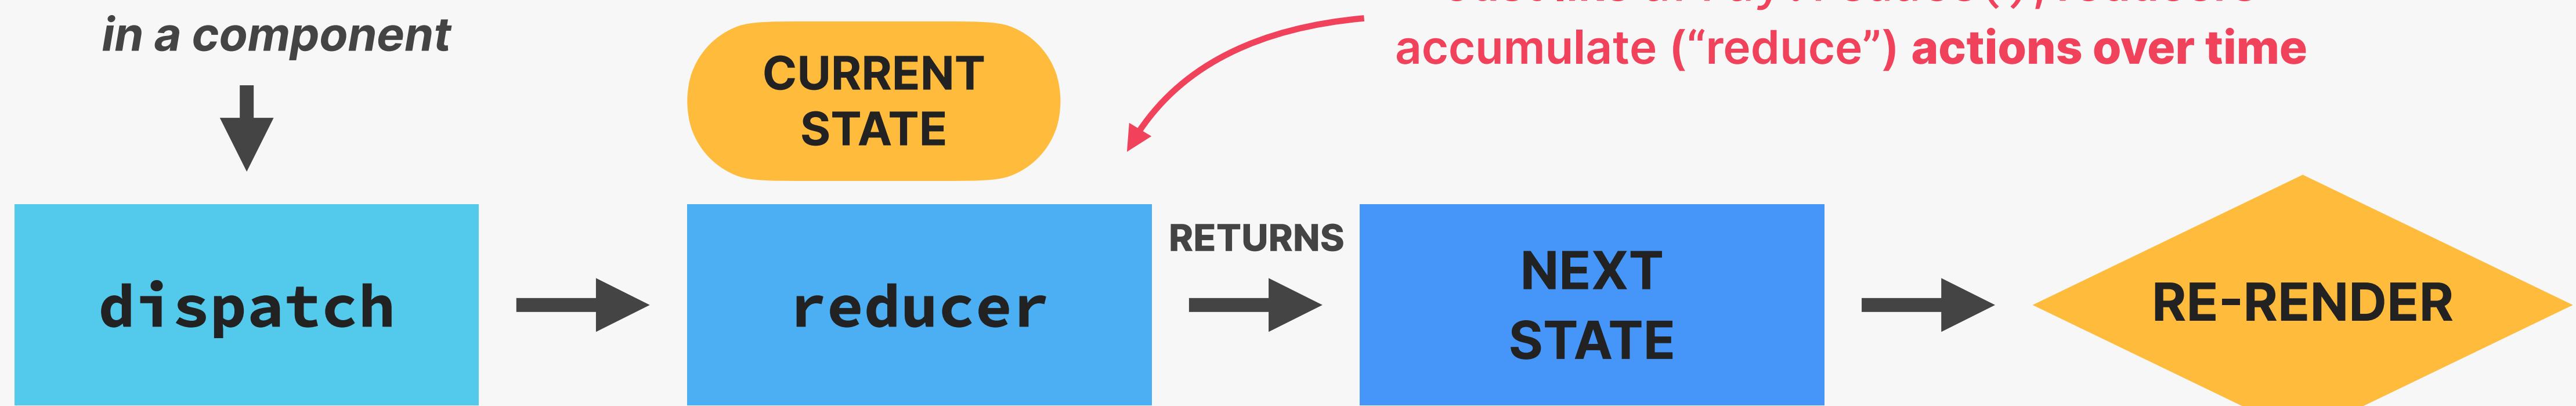

action
`type = 'updateDay'`
`payload = 23`

Object that contains information on
how the reducer should update state

useState

UPDATED STATE

UPDATE

NEXT (UPDATED)
STATE

useState

RE-RENDER

A MENTAL MODEL FOR REDUCERS

👉 REAL-WORLD TASK: WITHDRAWING \$5,000 FROM YOUR BANK ACCOUNT



A MENTAL MODEL FOR REDUCERS



REAL-WORLD TASK: WITHDRAWING \$5,000 FROM YOUR BANK ACCOUNT



DISPATCHER

(Who **requests** the update)

I would like to withdraw
\$5,000 from account 923577



REDUCER

(Who **makes** the update)

(How to make the update)

ACTION

```
type: 'withdraw',
payload: {
  amount: 5000,
  account: 923577,
},
```



STATE

(What needs to be updated)



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

THE ADVANCED USERREDUCER
HOOK

LECTURE

SECTION SUMMARY: USESTATE
VS. USERREDUCER

USESTATE VS. USEREDUCER

useState

- 👉 Ideal for **single, independent pieces of state** (numbers, strings, single arrays, etc.)
- 👉 Logic to update state is placed directly in event handlers or effects, **spread all over one or multiple components**
- 👉 State is updated by **calling setState** (setter returned from useState)
- 👉 **Imperative** state updates
 - `setScore(0);
setPlaying(true);
setTimerSec(0);`
- 👉 Easy to understand and to use

useReducer

- 👉 Ideal for multiple **related pieces of state** and **complex state** (e.g. object with many values and nested objects or arrays)
- 👉 Logic to update state lives in **one central place, decoupled from components**: the reducer
- 👉 State is updated by **dispatching an action** to a reducer
- 👉 **Declarative** state updates: complex state transitions are **mapped to actions**
 - `dispatch({ type: 'startGame' })`
- 👉 More **difficult** to understand and implement

WHEN TO USE USEREDUCER?



REACT ROUTER: BUILDING SINGLE- PAGE APPLICATIONS (SPA)



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

REACT ROUTER: BUILDING SINGLE
PAGE APPLICATIONS (SPA)

LECTURE


ROUTING AND SINGLE-PAGE
APPLICATIONS (SPAs)

WHAT IS ROUTING?

ROUTING

“Client-side routing”




- With routing, we match **different URLs** to **different UI views** (React components): **routes**
 - This enables users to **navigate between different applications screens**, using the browser URL
 - Keeps the UI in sync with the current browser URL
 - Allows us to build **Single-Page Applications**

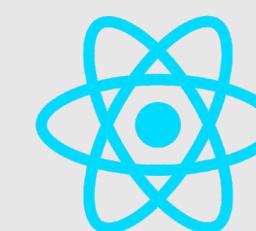



www.example.com/

www.example.com/login

www.example.com/app

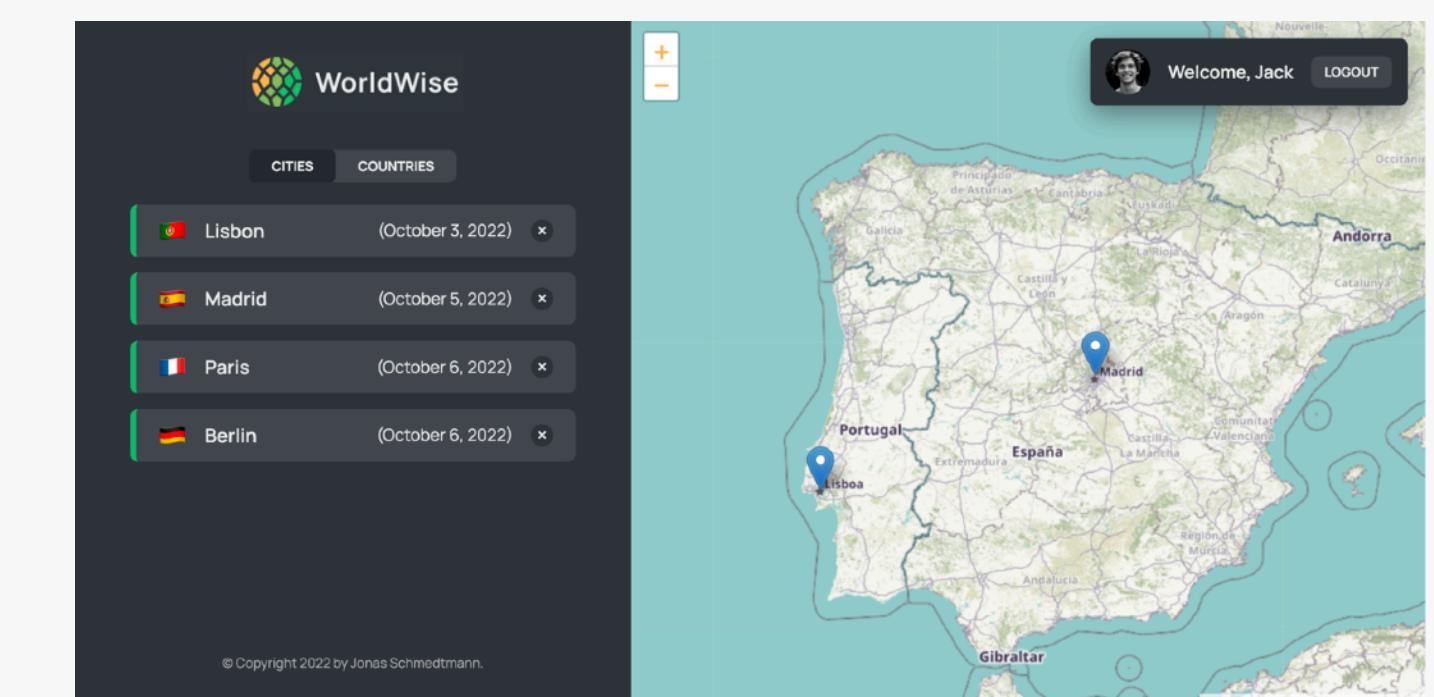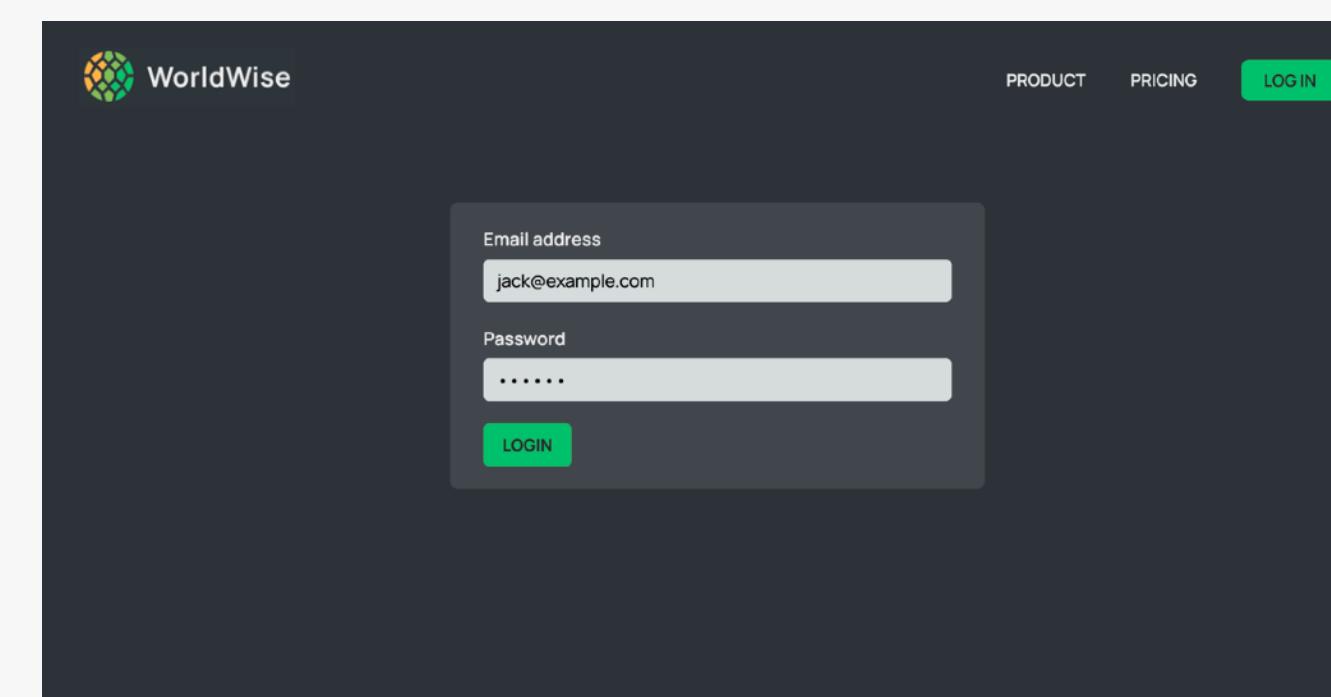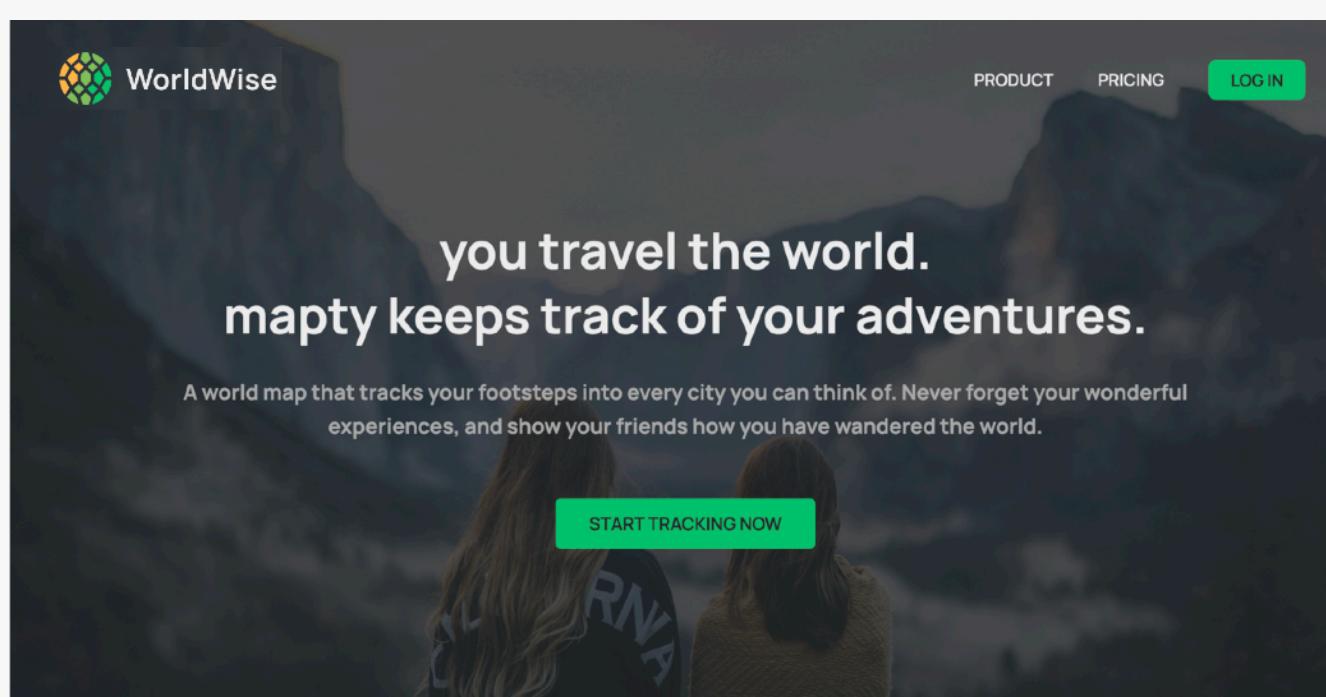

SINGLE-PAGE APPLICATIONS (SPA)

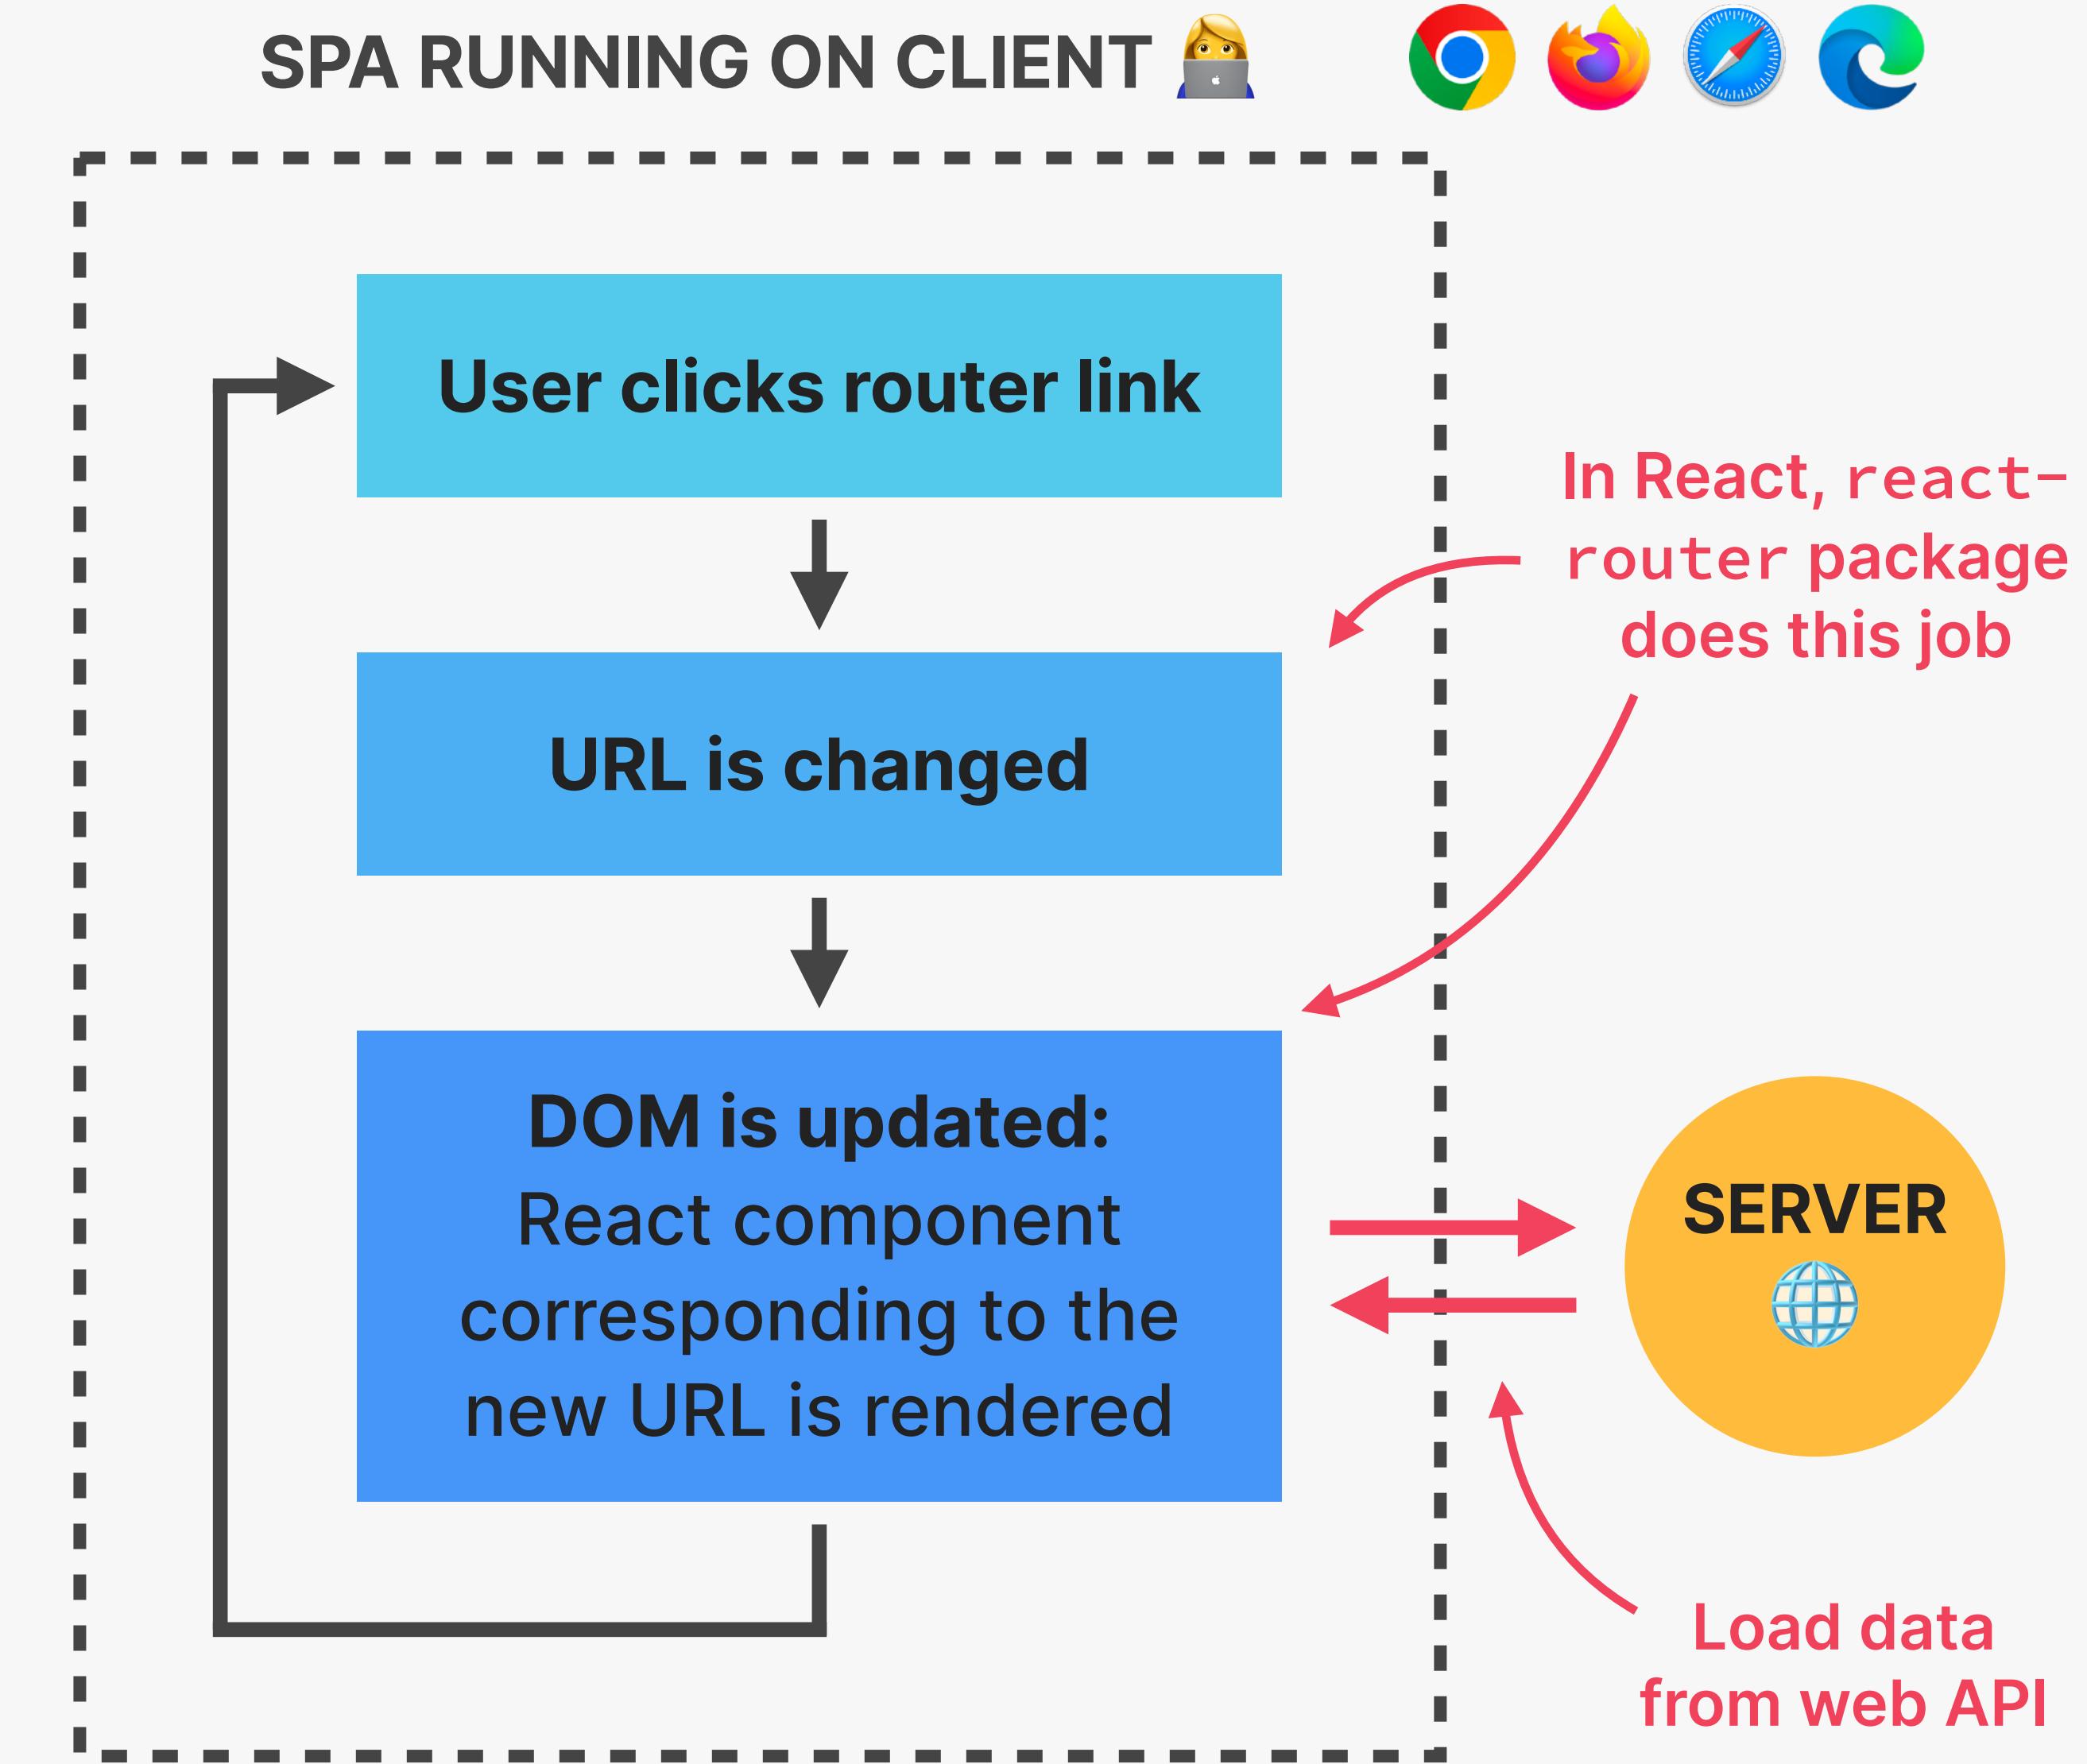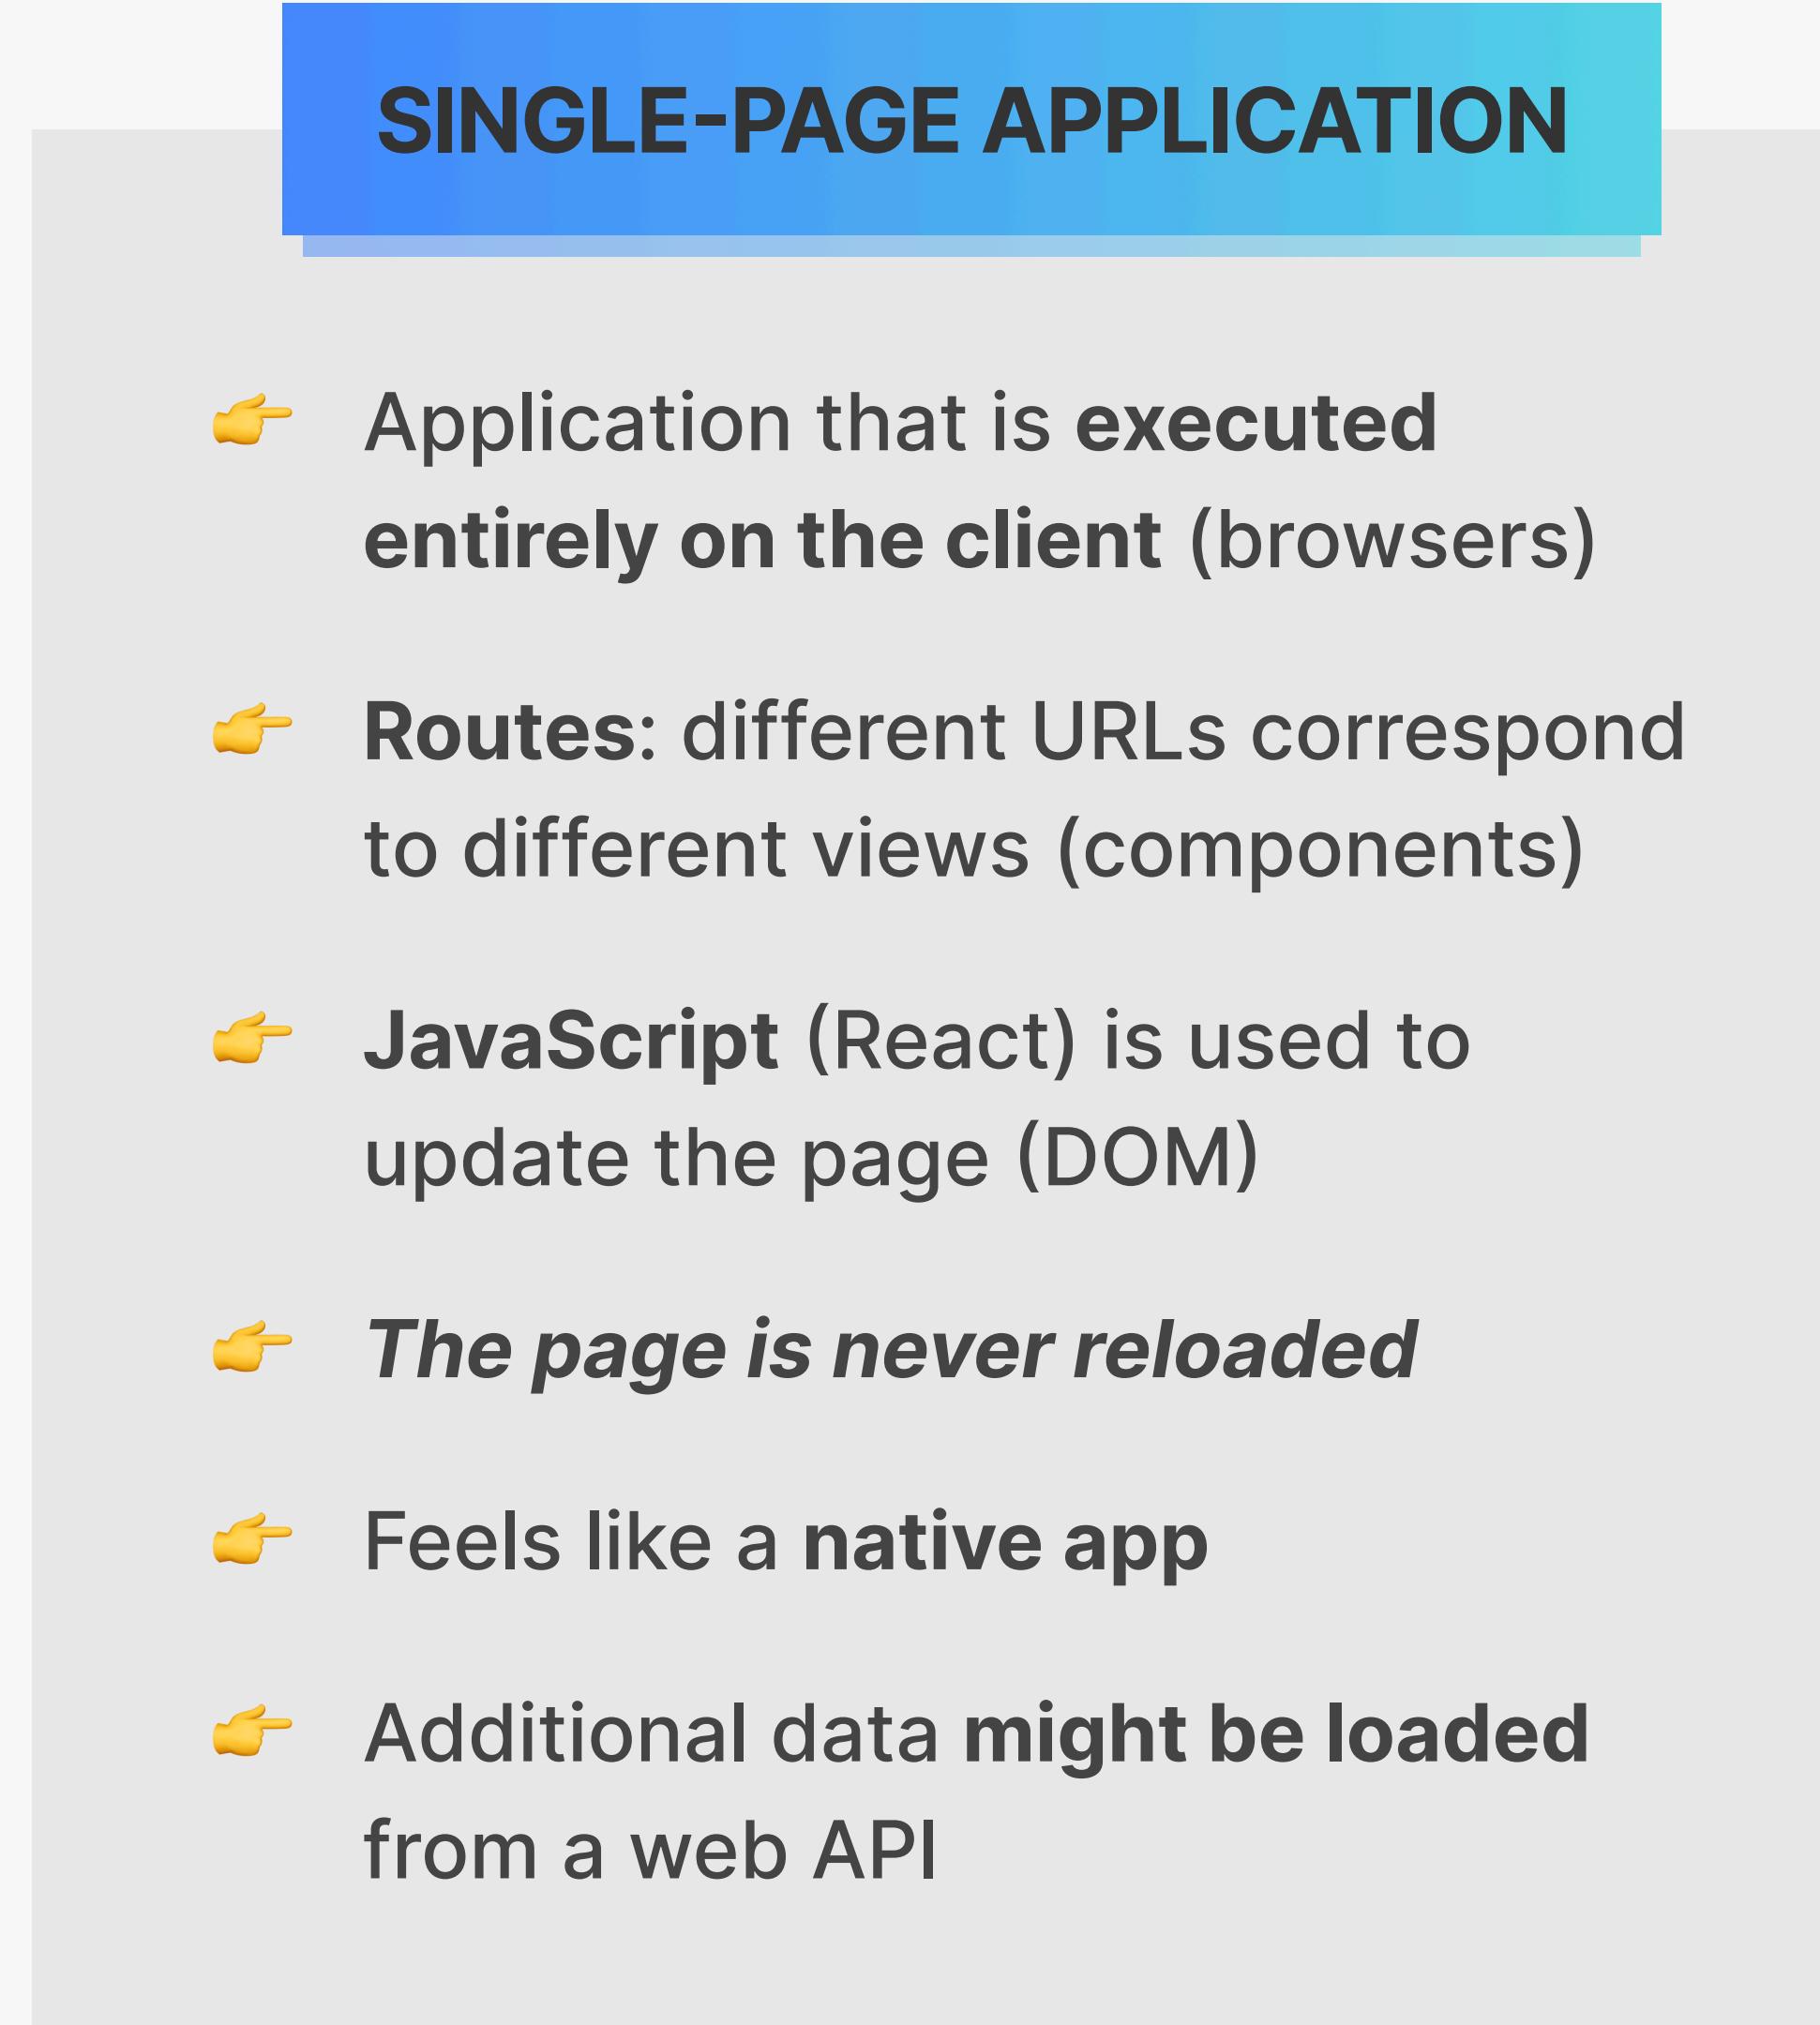



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION


REACT ROUTER: BUILDING SINGLE
PAGE APPLICATIONS (SPA)

LECTURE

STYLING OPTIONS FOR REACT
APPLICATIONS

STYLING OPTIONS IN REACT

React doesn't care about styling

STYLING OPTION	WHERE?	HOW?	SCOPE	BASED ON
👉 Inline CSS 	JSX elements	style prop	JSX element	CSS
👉 CSS or Sass file  	External file	className prop	Entire app	CSS
👉 CSS Modules 	One external file per component	className prop	Component	CSS
👉 CSS-in-JS 	External file or component file	Creates new component	Component	JavaScript
👉 Utility-first CSS 	JSX elements	className prop	JSX element	CSS

👉 Alternative to styling with CSS: UI libraries like MUI, Chakra UI, Mantine, etc.   



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

REACT ROUTER: BUILDING SINGLE
PAGE APPLICATIONS (SPA)

LECTURE

STORING STATE IN THE URL

THE URL FOR STATE MANAGEMENT

- 👉 The URL is an excellent place to store UI state and an alternative to useState in some situations!
Examples: open/closed panels, currently selected list item, list sorting order, applied list filters

- 1 Easy way to store state in a **global place**, accessible to **all components** in the app
- 2 Good way to “pass” data from one page into the next page
- 3 Makes it possible to **bookmark and share** the page with the exact UI state it had at the time

www.example.com /app/cities/lisbon?lat=38.728&lng=-9.141

• React Router tools:



↑
path

↑
params

↑
query string

EXAMPLE: PARAMS AND QUERY STRING

www.example.com/app/cities/lisbon?lat=38.728&lng=-9.141

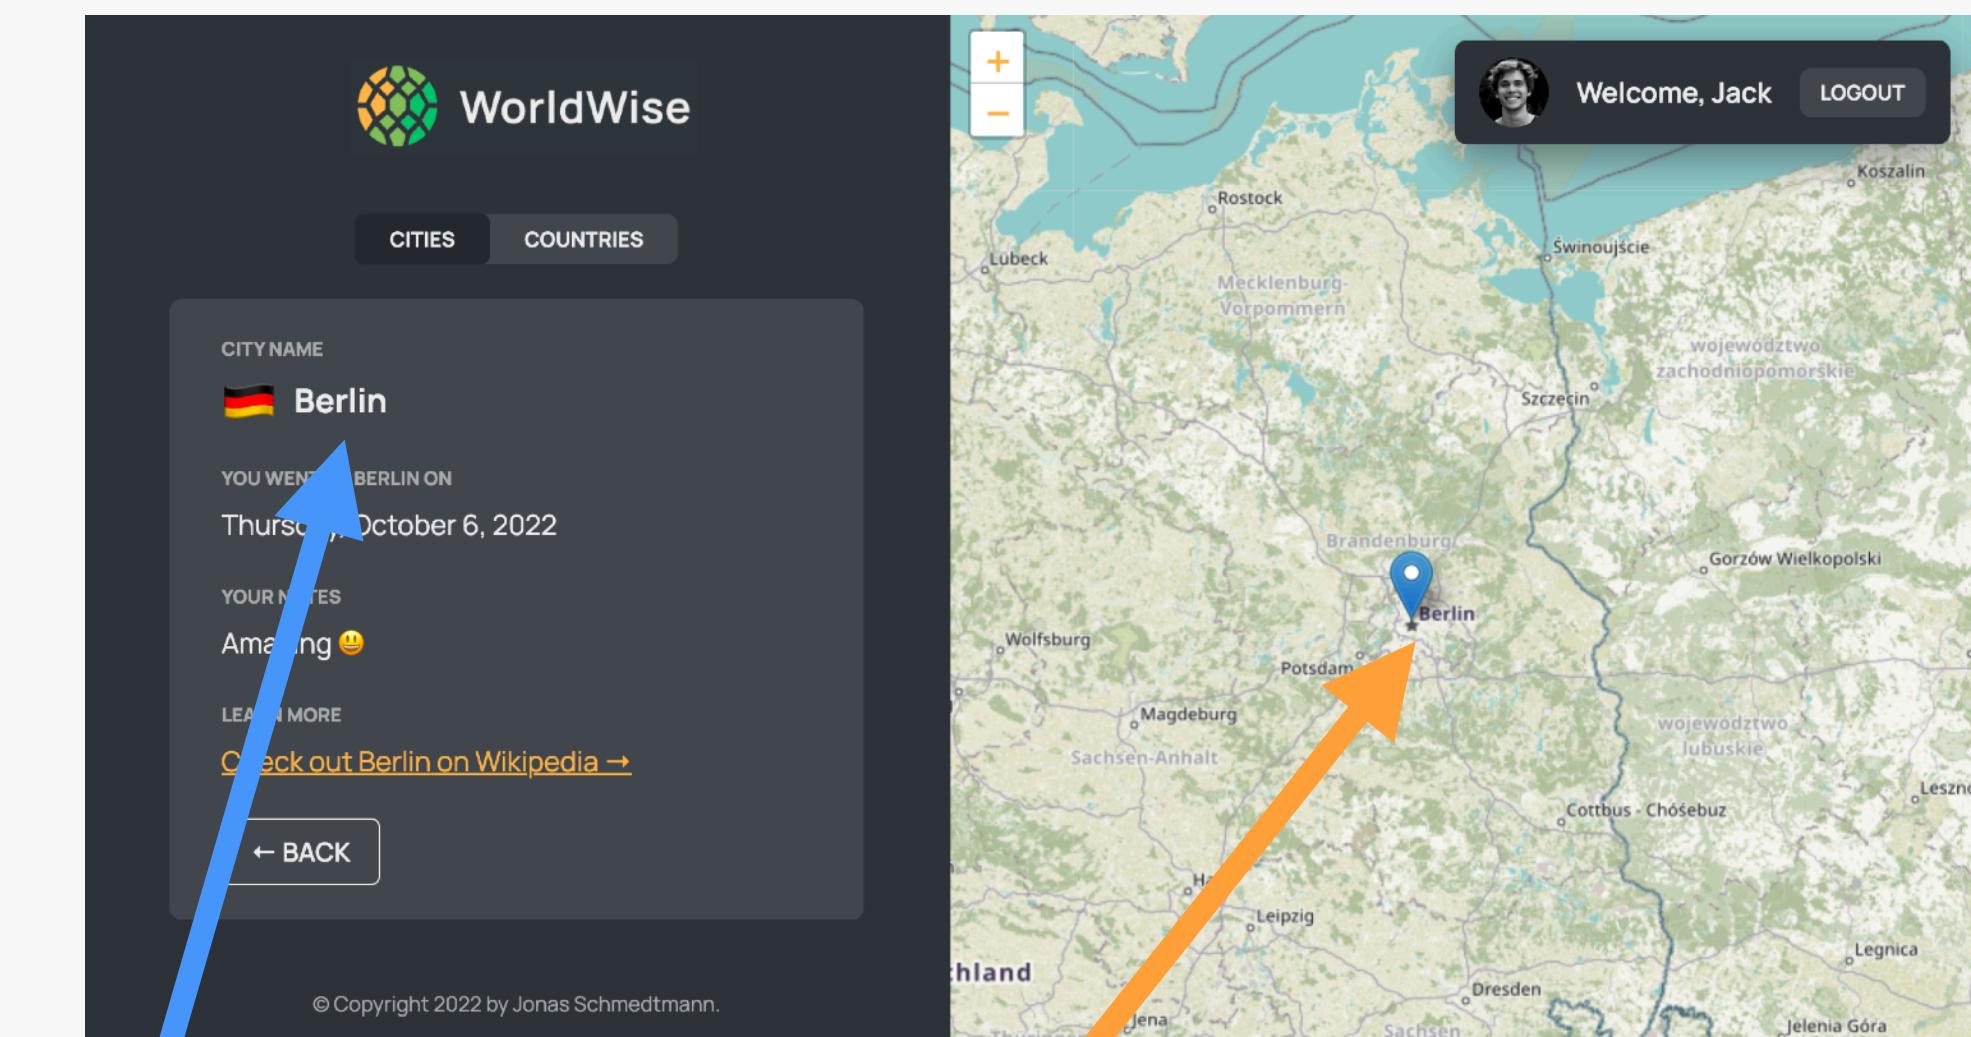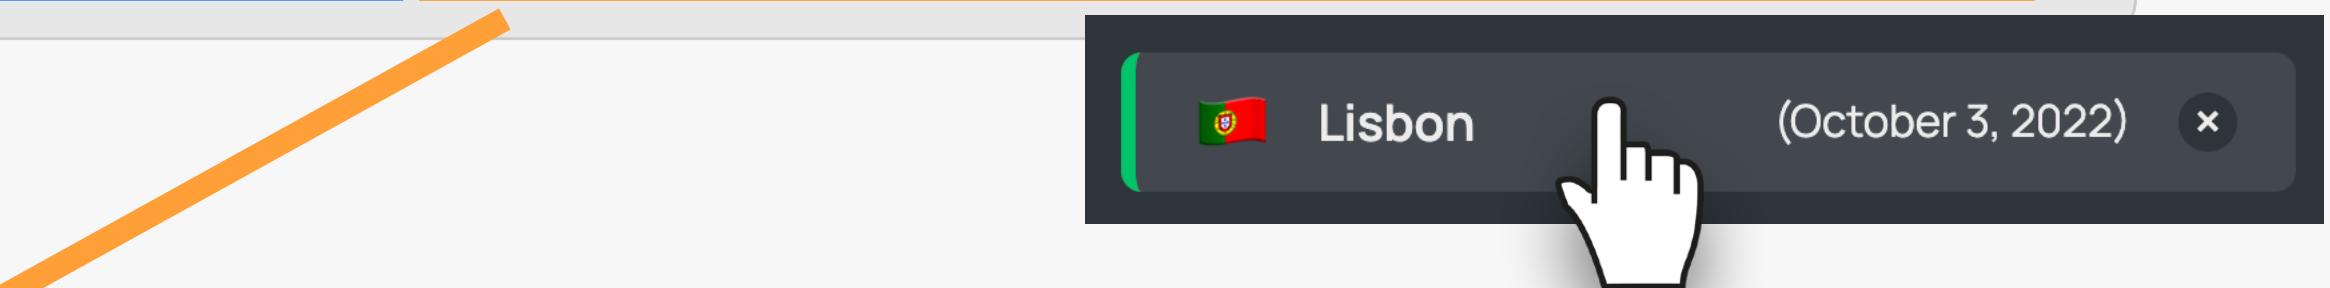

- 👉 City name and GPS location were retrieved from the URL instead of application state!

www.example.com/app/cities/berlin?lat=52.536&lng=13.377

ADVANCED STATE MANAGEMENT: THE CONTEXT API



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

ADVANCED STATE MANAGEMENT:
THE CONTEXT API

LECTURE


WHAT IS THE CONTEXT API?

A SOLUTION TO PROP DRILLING


👉 TASK: Passing state into multiple deeply nested child components

SOLUTION 1: PASSING PROPS

Components
that need
count state

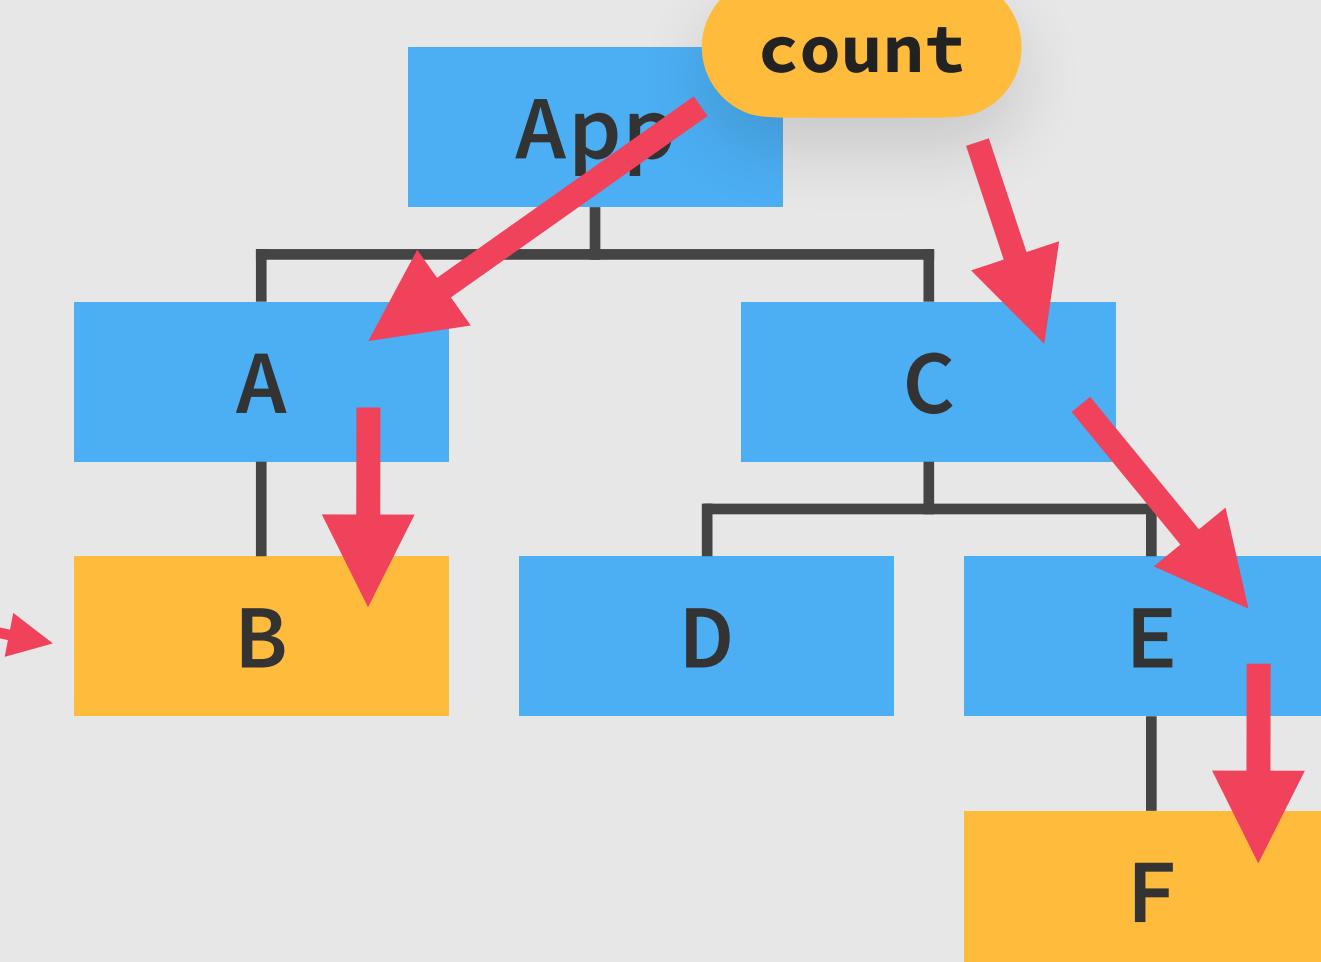

SOLUTION 2: CONTEXT API

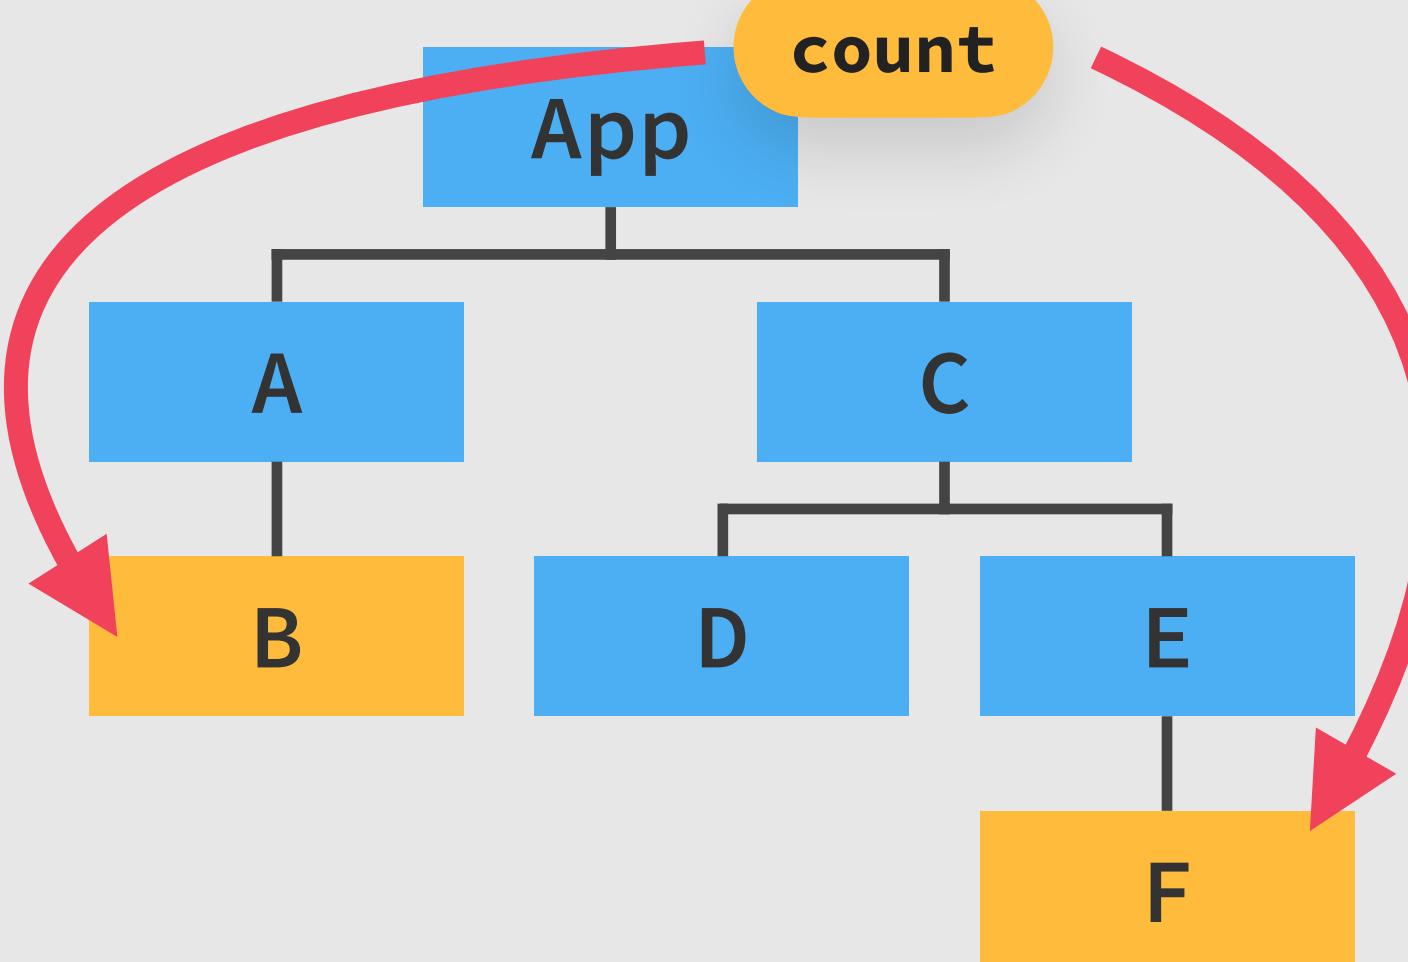

🚫 PROBLEM: “PROP DRILLING”

👍 READ STATE FROM EVERYWHERE




Remember that a good solution to “prop drilling” is better component composition (see “Thinking in React” section)

WHAT IS THE CONTEXT API?

CONTEXT API

- 👉 System to pass data throughout the app **without manually passing props down the tree**
 - 👉 Allows us to “broadcast” global state to the entire app
- 1 **Provider:** gives all child components access to value
- 2 **value:** data that we want to make available (usually state and functions)
- 3 **Consumers:** all components that read the provided context value

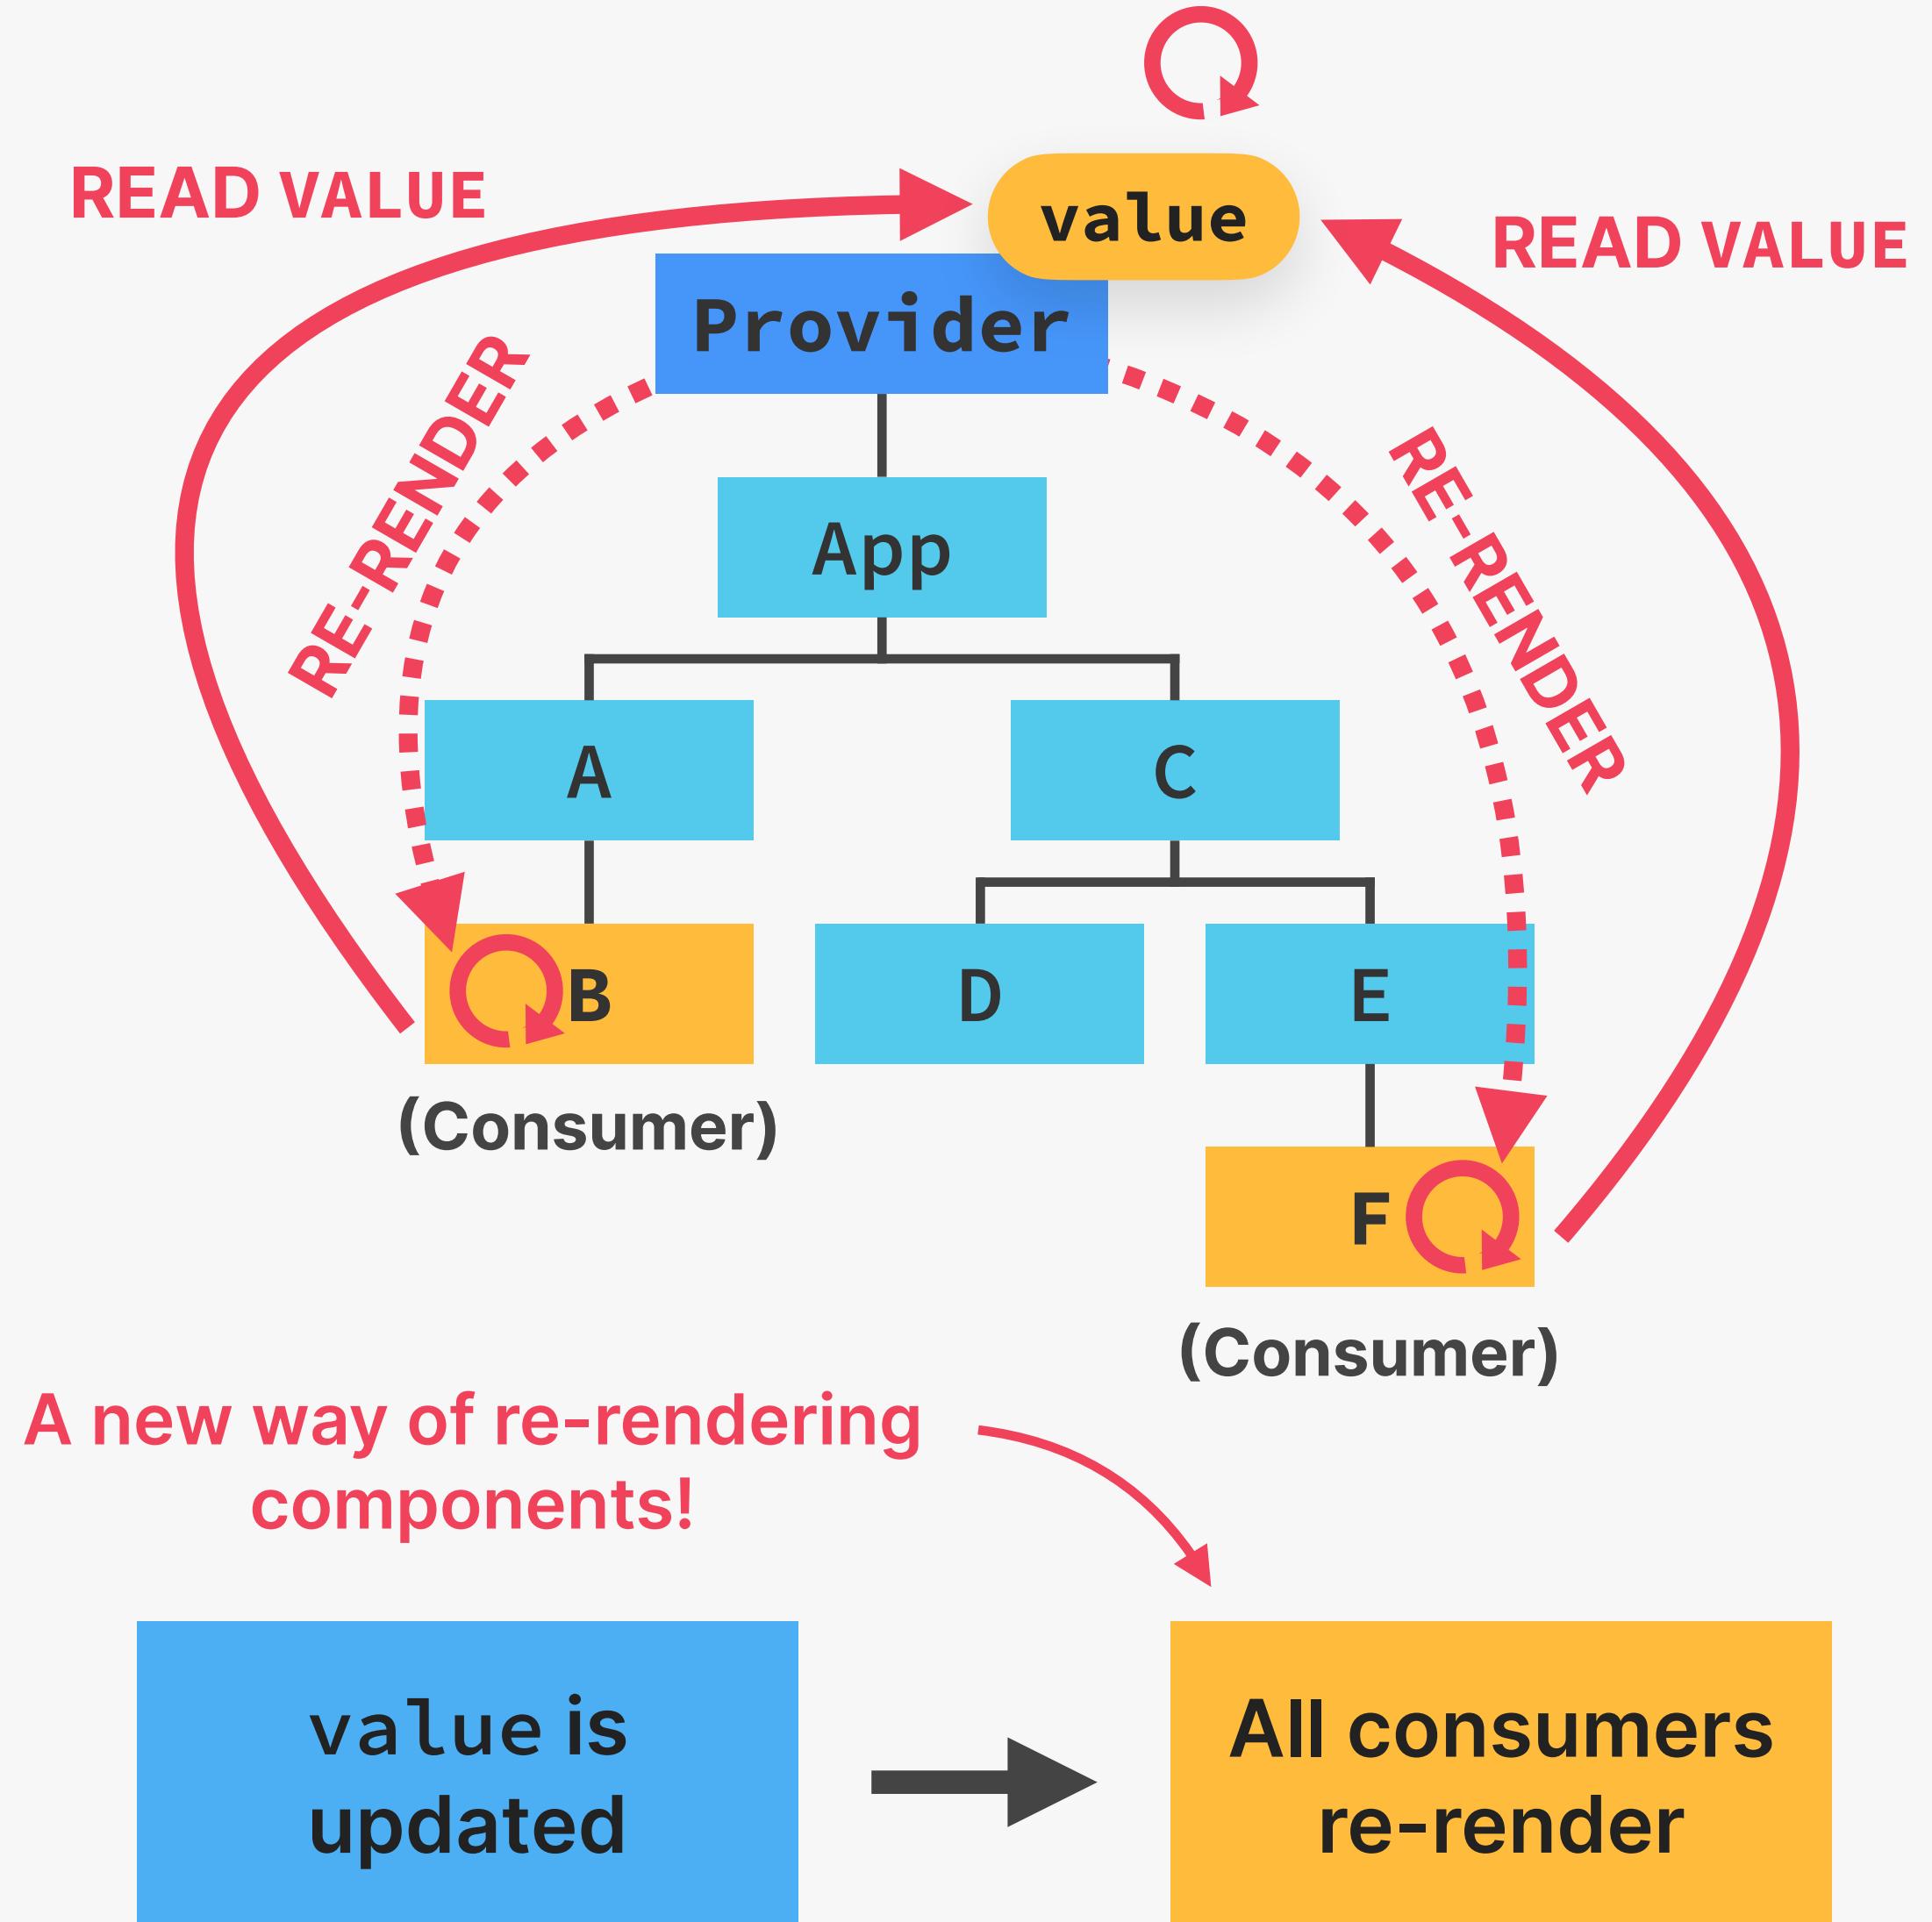



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

ADVANCED STATE MANAGEMENT:
THE CONTEXT API

LECTURE

THINKING IN REACT: ADVANCED
STATE MANAGEMENT

REVIEW: WHAT IS STATE MANAGEMENT?



State management: Giving each piece of state the right **home**

✓ When to use state



✓ Types of state (**accessibility**): local vs. global

👉 Types of state (**domain**): UI vs. remote

👉 Where to place each piece of state

👉 Tools to manage all types of state

This lecture!

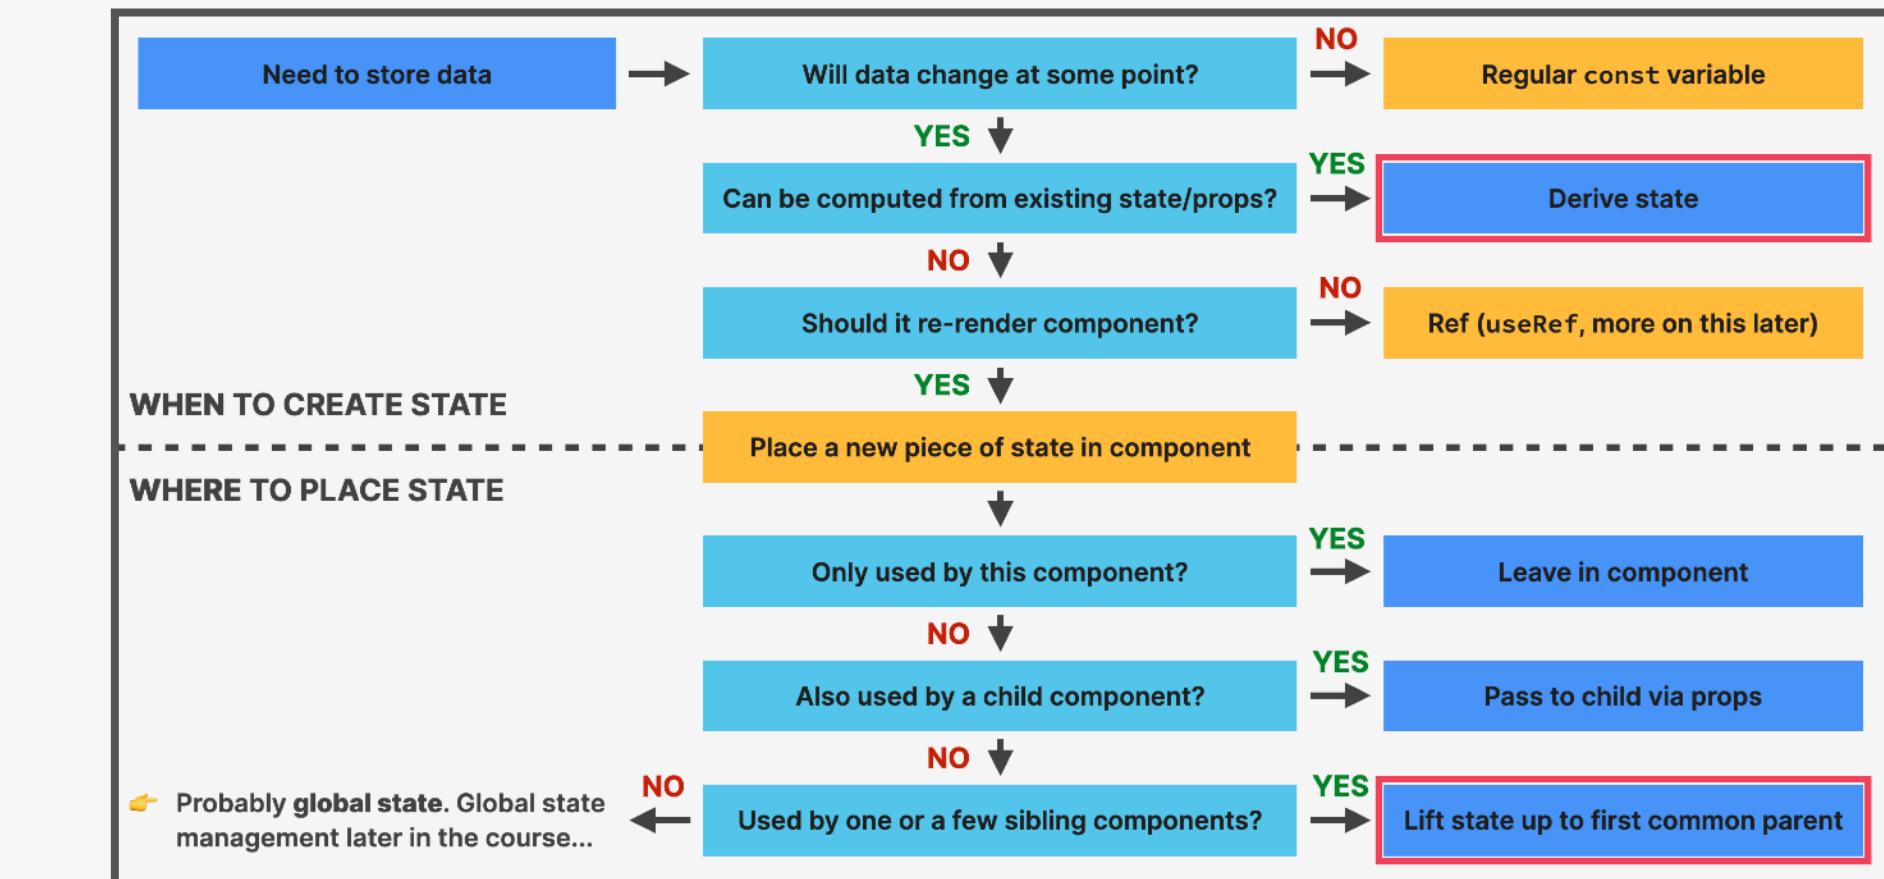

From Lecture “Fundamentals of State Management”. You can keep using this 😊

TYPES OF STATE

1

STATE ACCESSIBILITY

"If this component was rendered twice, should a state update in one of them reflect in the other one?"



LOCAL STATE

VS.



GLOBAL STATE

- 👉 Needed only by **one or few components**
- 👉 Only accessible in **component and child components**

- 👉 Might be needed by **many components**
- 👉 Accessible to **every component** in the application

2

STATE DOMAIN



REMOTE STATE

VS.



UI STATE

- 👉 All application data **loaded from a remote server (API)**
- 👉 Usually **asynchronous**
- 👉 Needs re-fetching + updating

- 👉 **Everything else 😅**
- 👉 Theme, list filters, form data, etc.
- 👉 Usually **synchronous** and stored in the application

STATE PLACEMENT OPTIONS

Where to place state?	TOOLS	WHEN TO USE?
 Local component	useState, useReducer, or useRef	 Local state
 Parent component	useState, useReducer, or useRef	Lifting up state
 Context	Context API + useState or useReducer	Global state (preferably UI state)
 3rd-party library	Redux, React Query, SWR, Zustand, etc.	Global state (remote or UI)
 URL	React Router	Global state, passing between pages
 Browser	Local storage, session storage, etc.	Storing data in user's browser

STATE MANAGEMENT TOOL OPTIONS



How to manage different types of state in practice?

1 STATE DOMAIN

UI STATE

2

REMOTE STATE

Mostly in small applications

1

STATE ACCESSIBILITY



LOCAL STATE



GLOBAL STATE

- 👉 useState
- 👉 useReducer
- 👉 useRef

- 👉 fetch + useEffect + useState/useReducer

- 👉 Context API + useState/useReducer
- 👉 Redux, Zustand, Recoil, etc.
- 👉 React Router

- 👉 Context API + useState/useReducer
- 👉 Redux, Zustand, Recoil, etc.

- 👉 React Query
- 👉 SWR
- 👉 RTK Query

Tools highly specialized in handling remote state

**PERFORMANCE
OPTIMIZATION AND
ADVANCED
USEFFECT**



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

PERFORMANCE OPTIMIZATION
AND ADVANCED USEEFFECT

LECTURE

PERFORMANCE OPTIMIZATION
AND WASTED RENDERS

PERFORMANCE OPTIMIZATION TOOLS

1

PREVENT WASTED RENDERS

- 👉 memo
- 👉 useMemo
- 👉 useCallback
- 👉 Passing elements as children or regular prop

2

IMPROVE APP SPEED/ RESPONSIVENESS

- 👉 useMemo
- 👉 useCallback
- 👉 useTransition

3

REDUCE BUNDLE SIZE



- 👉 Using fewer 3rd-party packages
- 👉 Code splitting and lazy loading



This list of tools and techniques is, by no means, exhaustive. You're already doing many optimizations by following the best practices I have been showing you 🤘

WHEN DOES A COMPONENTS INSTANCE RE-RENDER?

👉 A component instance only gets re-rendered in 3 different situations:

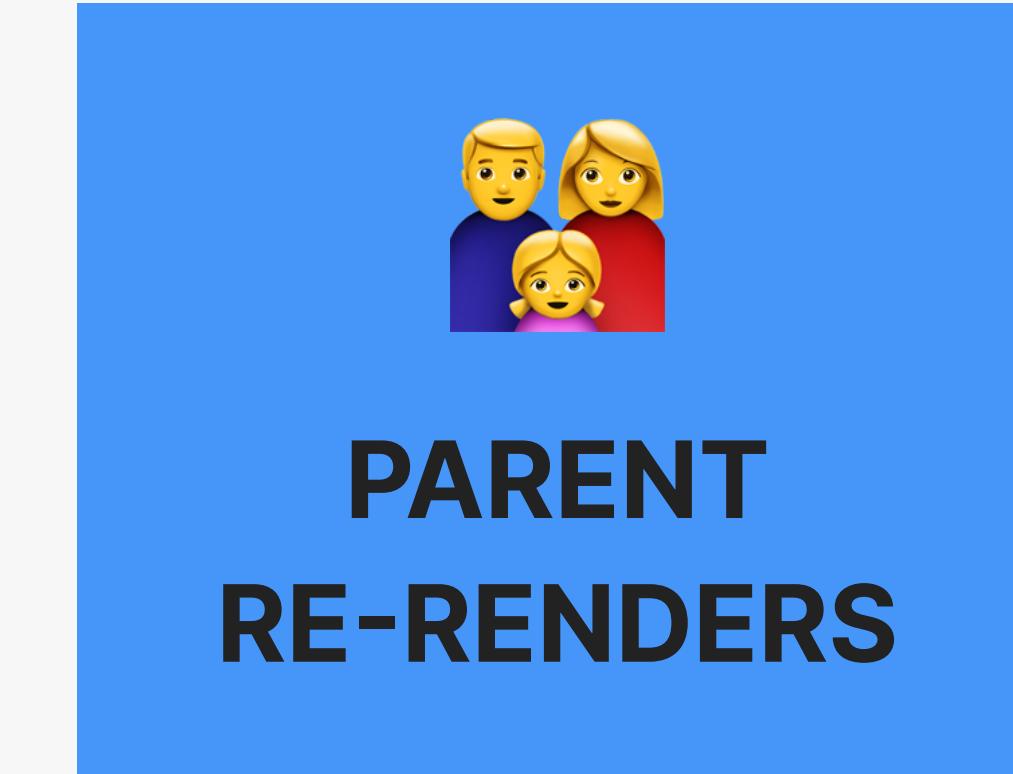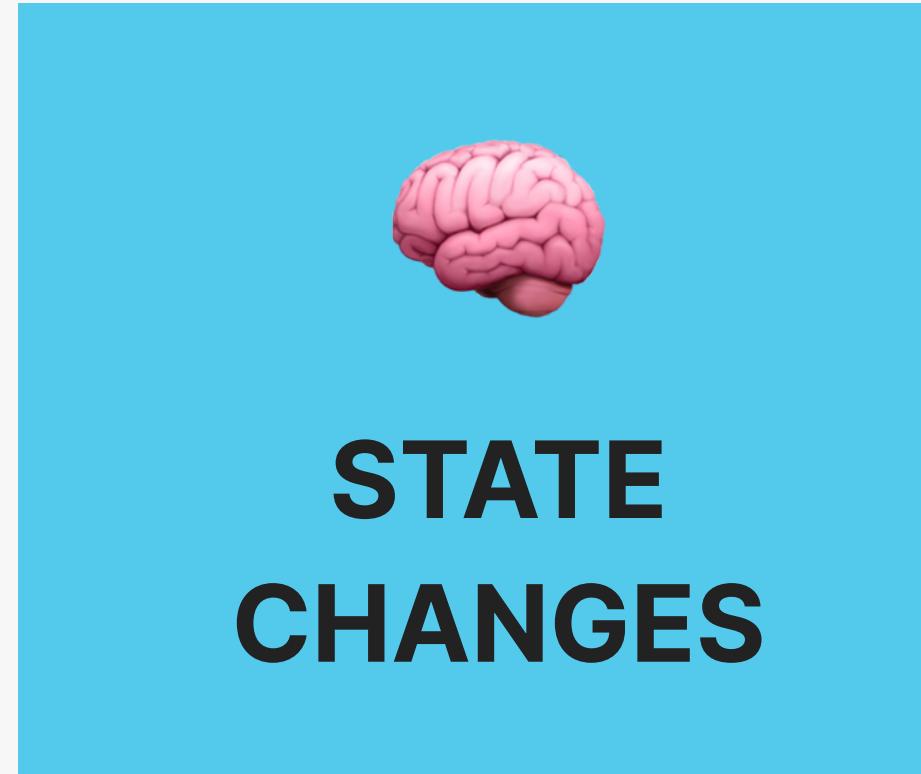

Creates the false impression that changing props re-renders a component. This is NOT true.



👉 Remember: a render does *not* mean that the DOM actually gets updated, it just means the component function gets called. But this can be an expensive operation.



Usually no problem, as React is very fast!

👉 Wasted render: a render that didn't produce any change in the DOM



👉 Only a problem when they happen too frequently or when the component is very slow



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION


PERFORMANCE OPTIMIZATION
AND ADVANCED USEEFFECT

LECTURE

UNDERSTANDING MEMO

WHAT IS MEMOIZATION?


👉 **Memoization:** Optimization technique that executes a pure function once, and saves the result in memory. If we try to execute the function again with the **same arguments as before**, the previously saved result will be returned, **without executing the function again**.

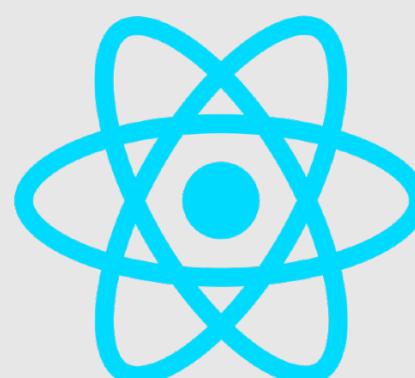

- 👉 Memoize **components** with `memo`
- 👉 Memoize **objects** with `useMemo`
- 👉 Memoize **functions** with `useCallback`

- 1 Prevent wasted renders
- 2 Improve app speed/responsiveness

THE MEMO FUNCTION

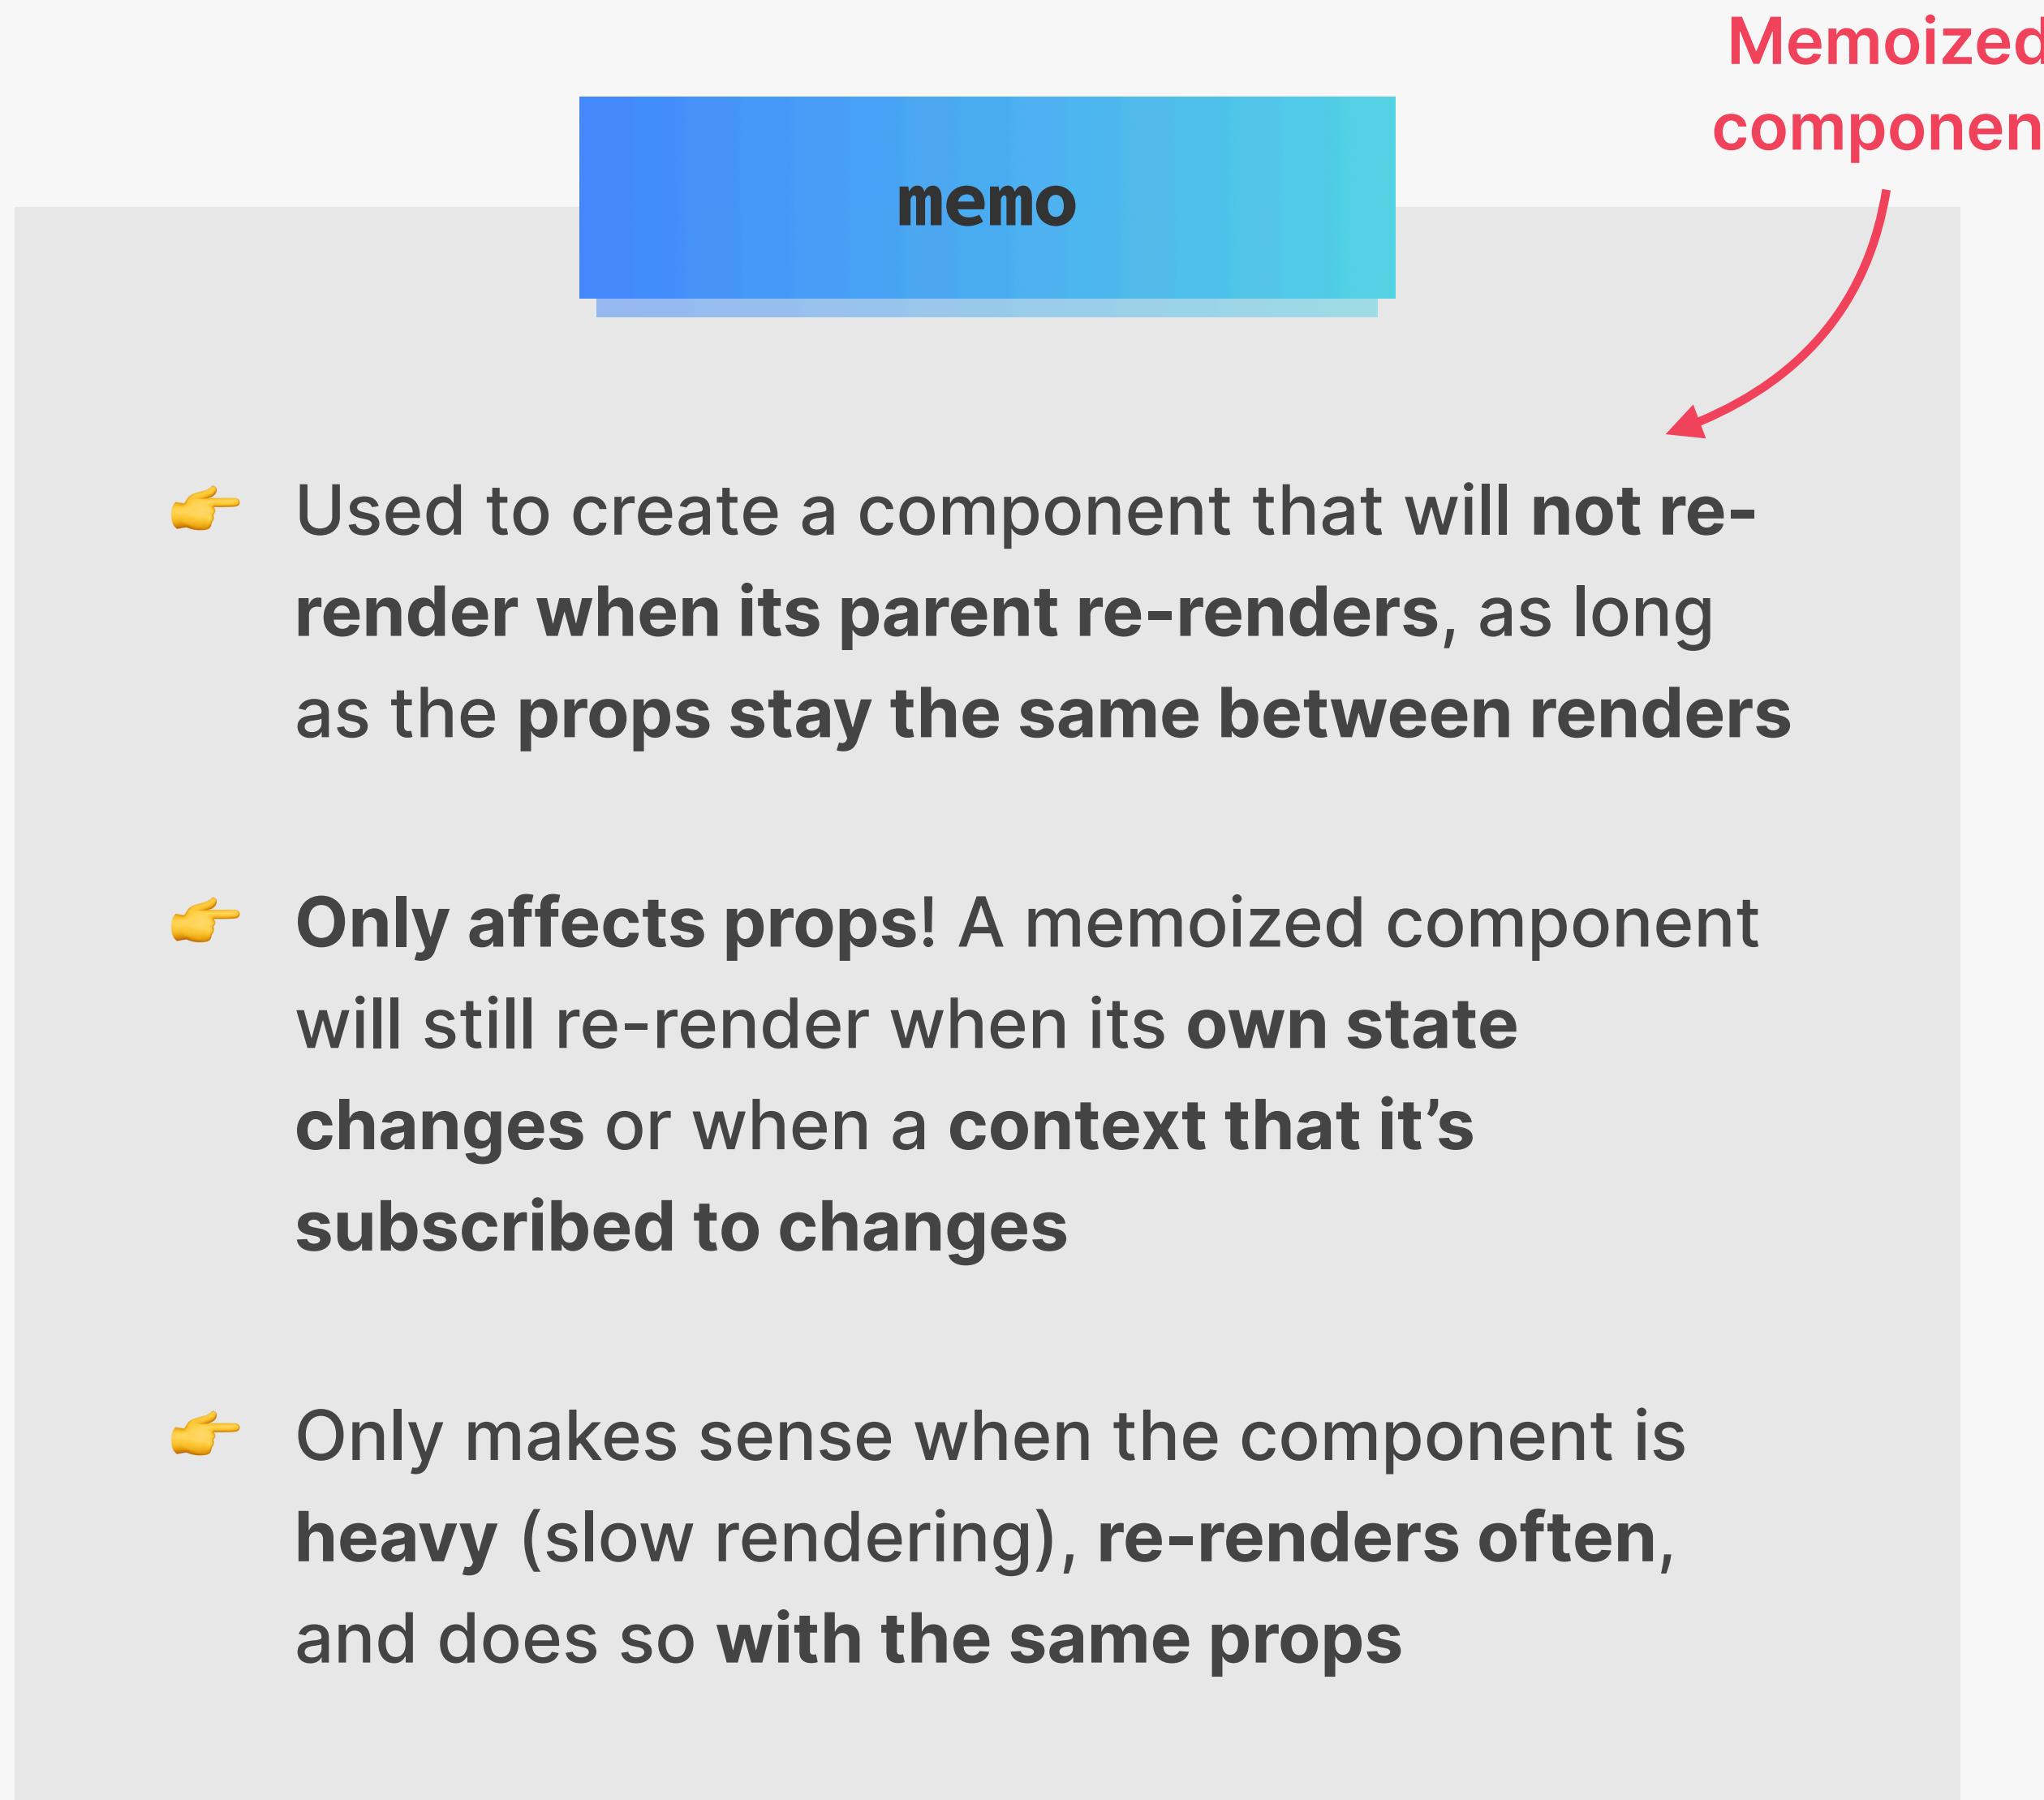

REGULAR BEHAVIOR (NO MEMO)

Components
re-renders



Child
re-renders

MEMOIZED CHILD WITH MEMO

Components
re-renders

SAME
PROPS

Memoized child
does **NOT**
re-render

NEW
PROPS

Memoized child
re-renders



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

PERFORMANCE OPTIMIZATION
AND ADVANCED USEEFFECT

LECTURE

UNDERSTANDING USEMEMO AND
USECALLBACK

AN ISSUE WITH MEMO

In React, everything is **re-created on every render** (including objects and functions)



In JavaScript, two objects or functions that look the same, are **actually different** (`{ } != { }`)

THEREFORE A dark gray downward-pointing arrow.

If objects or functions are passed as props, the child component will always see them as **new props on each re-render**



If props are different between re-renders, *memo* will not work

SOLUTION A dark gray downward-pointing arrow.

We need to **memoize objects and functions, to make them stable (preserve) between re-renders** (`memoized {} == memoized {}`)


TWO NEW HOOKS: USEMEMO AND USECALLBACK

useMemo AND useCallback


- 👉 Used to memoize values (`useMemo`) and functions (`useCallback`) between renders
- 👉 Values passed into `useMemo` and `useCallback` will be stored in memory ("cached") and **returned in subsequent re-renders, as long as dependencies ("inputs") stay the same**
- 👉 `useMemo` and `useCallback` have a **dependency array** (like `useEffect`): whenever one **dependency changes**, the value will be re-created



REGULAR BEHAVIOR (NO USEMEMO)

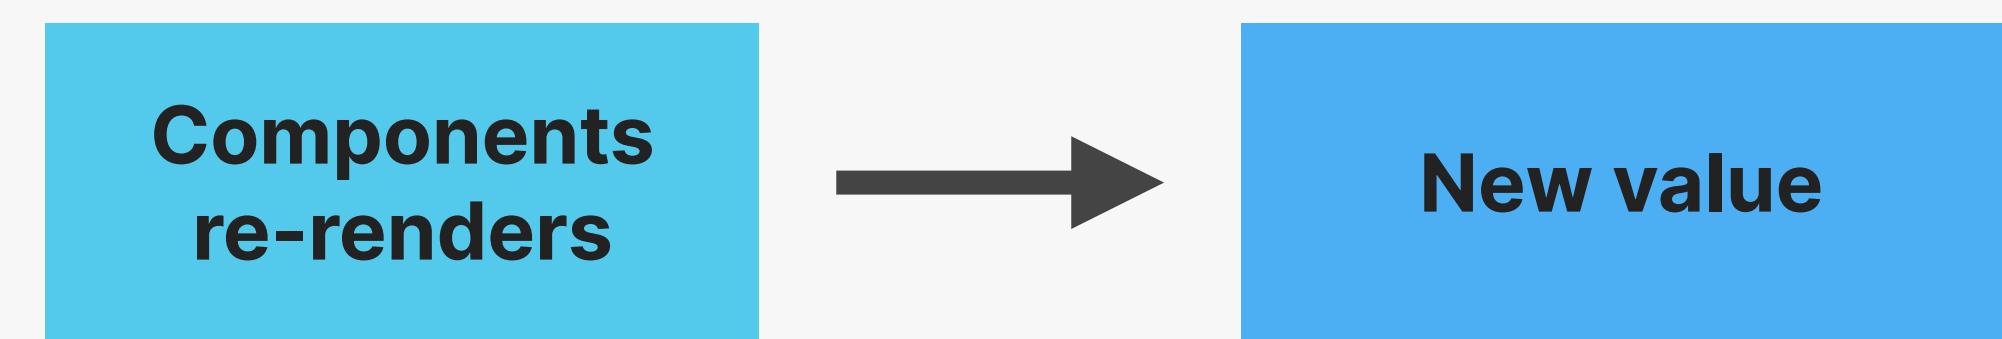

MEMOIZING A VALUE WITH USEMEMO

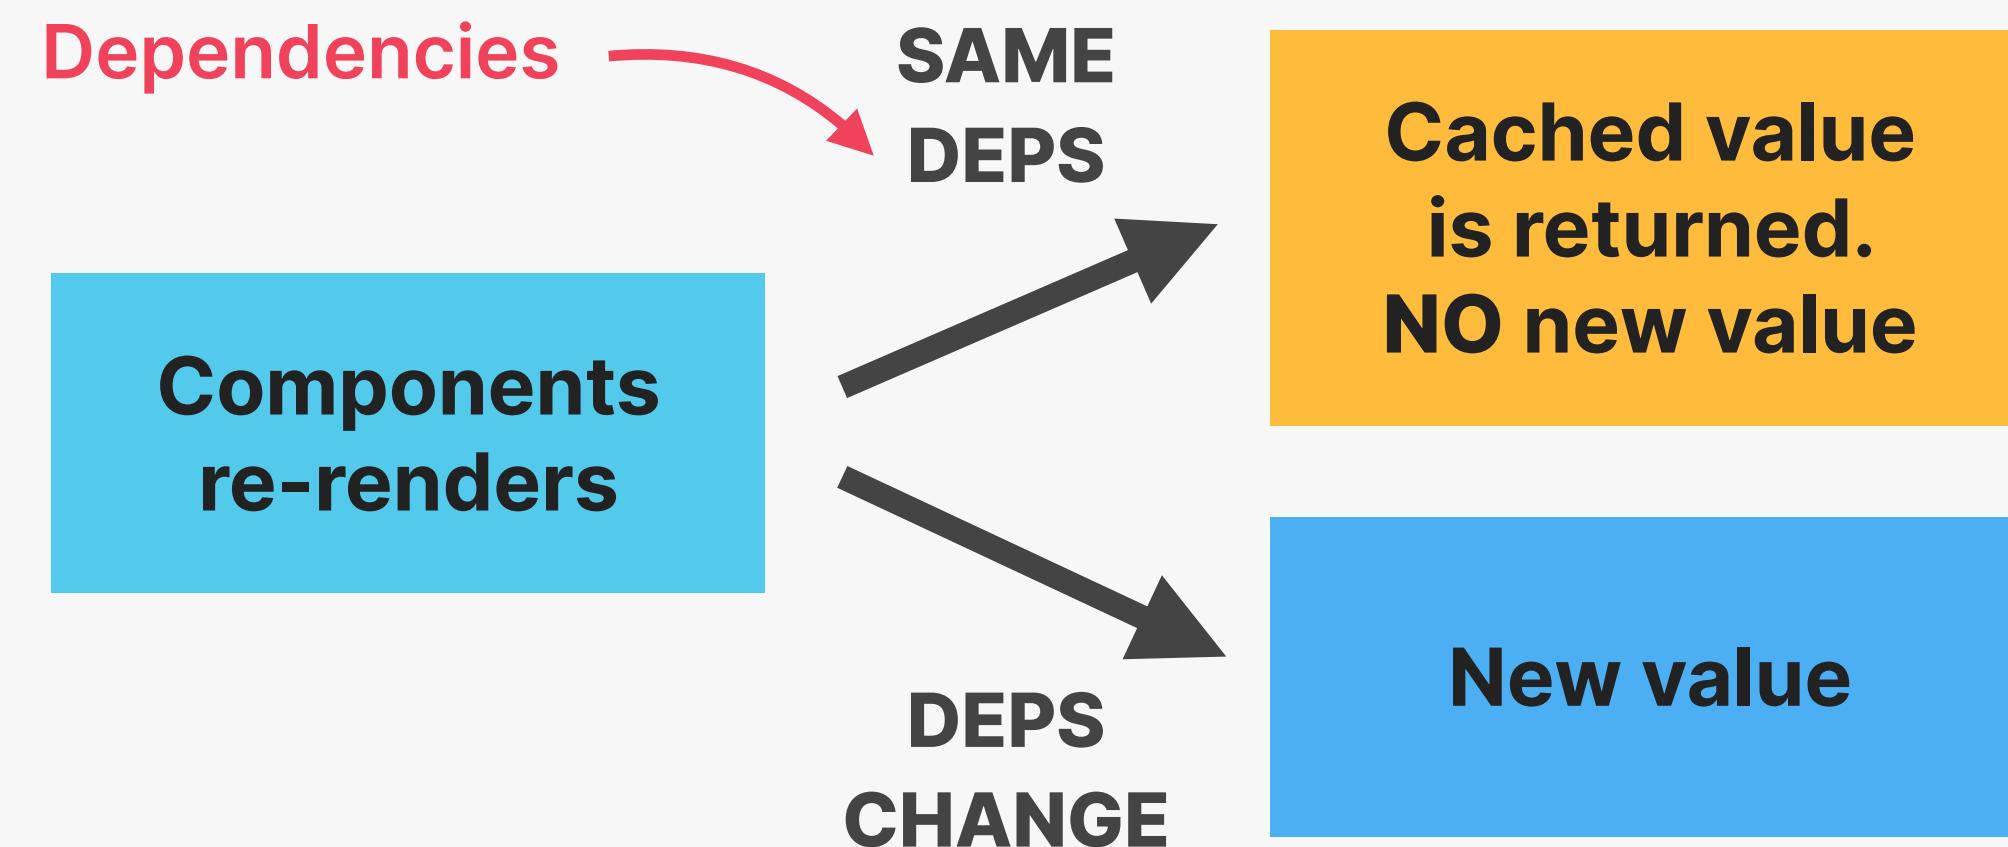

TWO NEW HOOKS: USEMEMO AND USECALLBACK

useMemo AND useCallback

- 👉 Used to memoize values (`useMemo`) and functions (`useCallback`) between renders
- 👉 Values passed into `useMemo` and `useCallback` will be stored in memory ("cached") and **returned in subsequent re-renders, as long as dependencies ("inputs") stay the same**
- 👉 `useMemo` and `useCallback` have a **dependency array** (like `useEffect`): whenever one **dependency changes**, the value will be **re-created**
- 👉 Only use them for one of the three **use cases**!

THREE BIG USES CASES:

- 1 Memoizing props to prevent wasted renders (together with `memo`)
- 2 Memoizing values to avoid expensive re-calculations on every render
- 3 Memoizing values that are used in dependency array of another hook

For example to
avoid infinite
`useEffect` loops



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

PERFORMANCE OPTIMIZATION
AND ADVANCED USEEFFECT

LECTURE

OPTIMIZING BUNDLE SIZE WITH
CODE SPLITTING

THE BUNDLE AND CODE SPLITTING

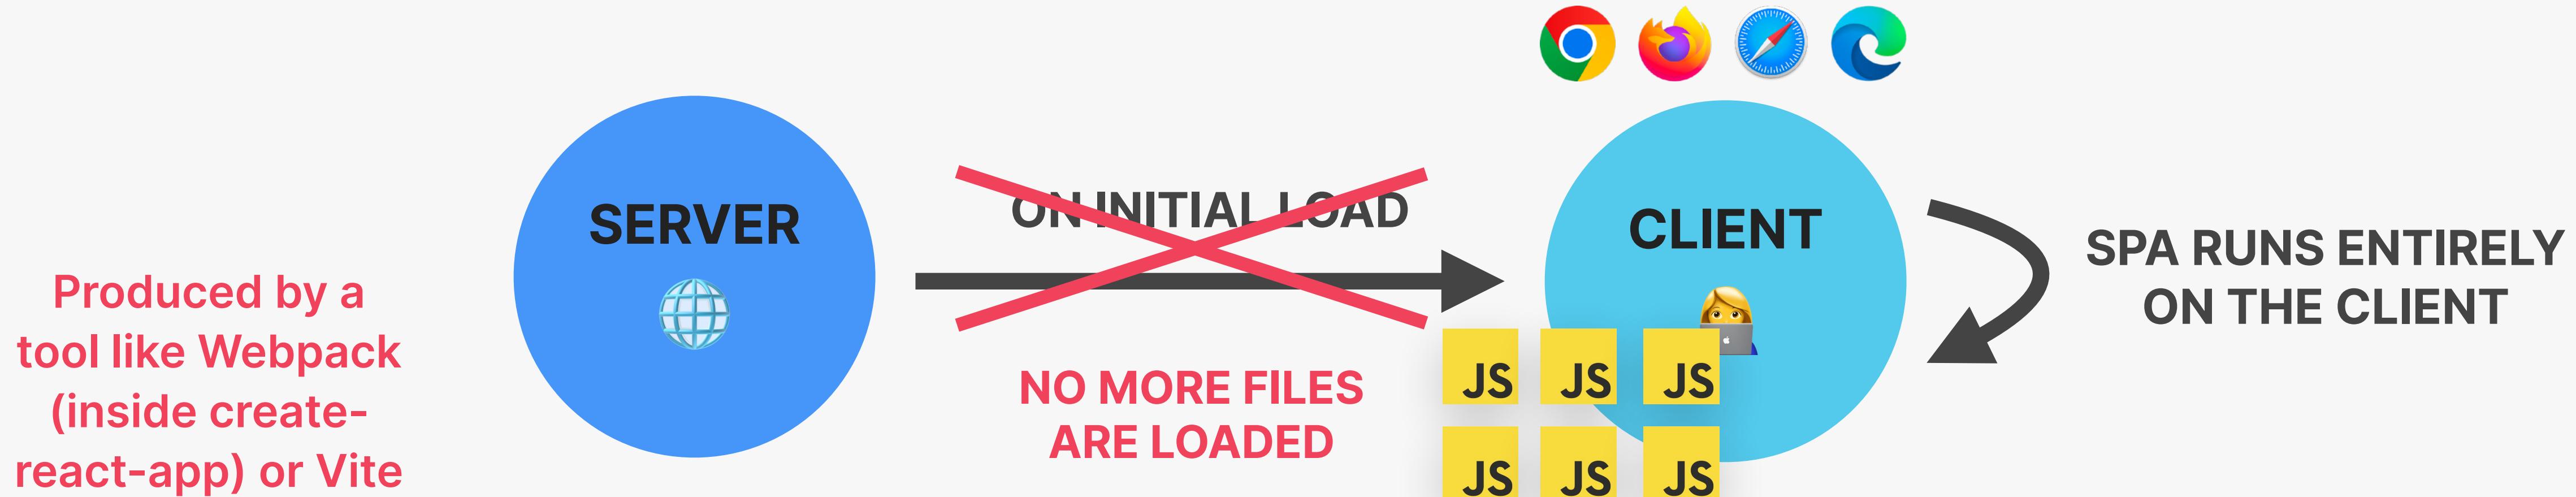

- 👉 **Bundle:** JavaScript file containing the **entire application code**. Downloading the bundle will load **the entire app at once**, turning it into a SPA
- 👉 **Bundle size:** Amount of JavaScript users have to download to start using the app. One of the most important things to be optimized, so that the bundle takes **less time to download**
- 👉 **Code splitting:** Splitting bundle into multiple parts that can be **downloaded over time** ("lazy loading")



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

PERFORMANCE OPTIMIZATION
AND ADVANCED USEEFFECT

LECTURE

DON'T OPTIMIZE PREMATURELY!

DON'T OPTIMIZE PREMATURELY!

DO

- ✓ Find performance bottlenecks using the Profiler and visual inspection (laggy UI)
- ✓ Fix those real performance issues
- ✓ Memoize expensive re-renders
- ✓ Memoize expensive calculations
- ✓ Optimize context if it has many consumers and changes often
- ✓ Memoize context value + child components
- ✓ Implement code splitting + lazy loading for SPA routes

DON'T!

- 🚫 Don't optimize prematurely!
- 🚫 Don't optimize anything if there is nothing to optimize...
- 🚫 Don't wrap all components in memo()
- 🚫 Don't wrap all values in useMemo()
- 🚫 Don't wrap all functions in useCallback()
- 🚫 Don't optimize context if it's not slow and doesn't have many consumers



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

PERFORMANCE OPTIMIZATION
AND ADVANCED USEEFFECT

LECTURE

USEEFFECT RULES AND BEST
PRACTICES

USEEFFECT DEPENDENCY ARRAY RULES

DEPENDENCY ARRAY RULES

- 👉 Every state variable, prop used inside the effect **MUST** be included in the dependency array
- 👉 All “reactive values” must be included! That means any function or variable that reference any other reactive value
- 👉 Dependencies choose themselves: **NEVER** ignore the exhaustive-deps ESLint rule!
- 👉 Do NOT use objects or arrays as dependencies (objects are recreated on each render, and React sees new objects as different, `{}` `!==` `{}`)

Reactive value: state, prop, or context value, or any other value that *references* a reactive value

```
const [number, setNumber] = useState(5);
const [duration, setDuration] = useState(0);
const mins = Math.floor(duration);
const secs = (duration - mins) * 60;

const formatDur = function () {
  return `${mins}:${secs < 10 ? '0' : ''}${secs}`;
};

useEffect(
  function () {
    document.title =
      `${number}-exercise workout ${formatDur()}`;
  },
  [number, formatDur]
);
```

All reactive values used in effect

- 👉 The same rules apply to the dependency arrays of other hooks: useMemo and useCallback

REMOVING UNNECESSARY DEPENDENCIES



MOVING FUNCTION DEPENDENCIES

- 👉 Move function **into the effect**
- 👉 If you need the function in multiple places, **memoize it** (`useCallback`)
- 👉 If the function doesn't reference any reactive values, move it **out of the component**



MOVING OBJECT DEPENDENCIES

- 👉 Instead of including the entire object, include **only the properties you need** (primitive values)
- 👉 If that doesn't work, use the same strategies as for functions (**moving** or **memoizing** object)



OTHER STRATEGIES

- 👉 If you have **multiple related reactive values** as dependencies, try using a **reducer** (`useReducer`)
- 👉 You don't need to include `setState` (from `useState`) and `dispatch` (from `useReducer`) in the dependencies, as **React guarantees them to be stable** across renders

WHEN NOT TO USE AN EFFECT



Effects should be used as a **last resort**, when no other solution makes sense. React calls them an “escape hatch” to step outside of React

THREE CASES WHERE EFFECTS ARE OVERUSED:

1

Responding to a user event. An event handler function should be used instead

2

Fetching data on component mount. This is fine in small apps, but in real-world app, a library like React Query should be used

3

Synchronizing state changes with one another (setting state based on another state variable). Try to use derived state and event handlers

Avoid these as a beginner

We actually do this in the current project, but for a good reason 😊

REDUX AND MODERN REDUX TOOLKIT (WITH THUNKS)



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

REDUX AND MODERN REDUX
TOOLKIT (WITH THUNKS)

LECTURE

INTRODUCTION TO REDUX

WHAT IS REDUX?

REDUX

- 👉 3rd-party library to manage **global state**
- 👉 **Standalone** library, but easy to integrate with React apps using `react-redux` library
- 👉 All global state is stored in one **globally accessible store**, which is easy to update using “actions” (like `useReducer`)
- 👉 It’s conceptually similar to using the Context API + `useReducer`
- 👉 Two “versions”: (1) Classic Redux, (2) Modern Redux Toolkit

We will learn both 😎



Redux

Global store is updated



All consuming components re-render



You need to have a really good understanding of the `useReducer` hook in order to understand Redux!

DO YOU NEED TO LEARN REDUX?

👉 Historically, Redux was used in most React apps for all global state. Today, that has changed, because there are many alternatives. **Many apps don't need Redux anymore**, unless they need a lot of global UI state.

You might not need to learn Redux...

🤔 WHY LEARN REDUX IN THIS COURSE?

1

Redux can be hard to learn, and this course teaches it well 😅

2

You will encounter Redux code in your job, so you should understand it


3

Some apps do require Redux (or a similar library)


REDUX USE CASES




Historically, Redux was used in most React apps for all global state. Today, that has changed, because there are many alternatives. Many apps don't need Redux anymore, unless they need a lot of global UI state.

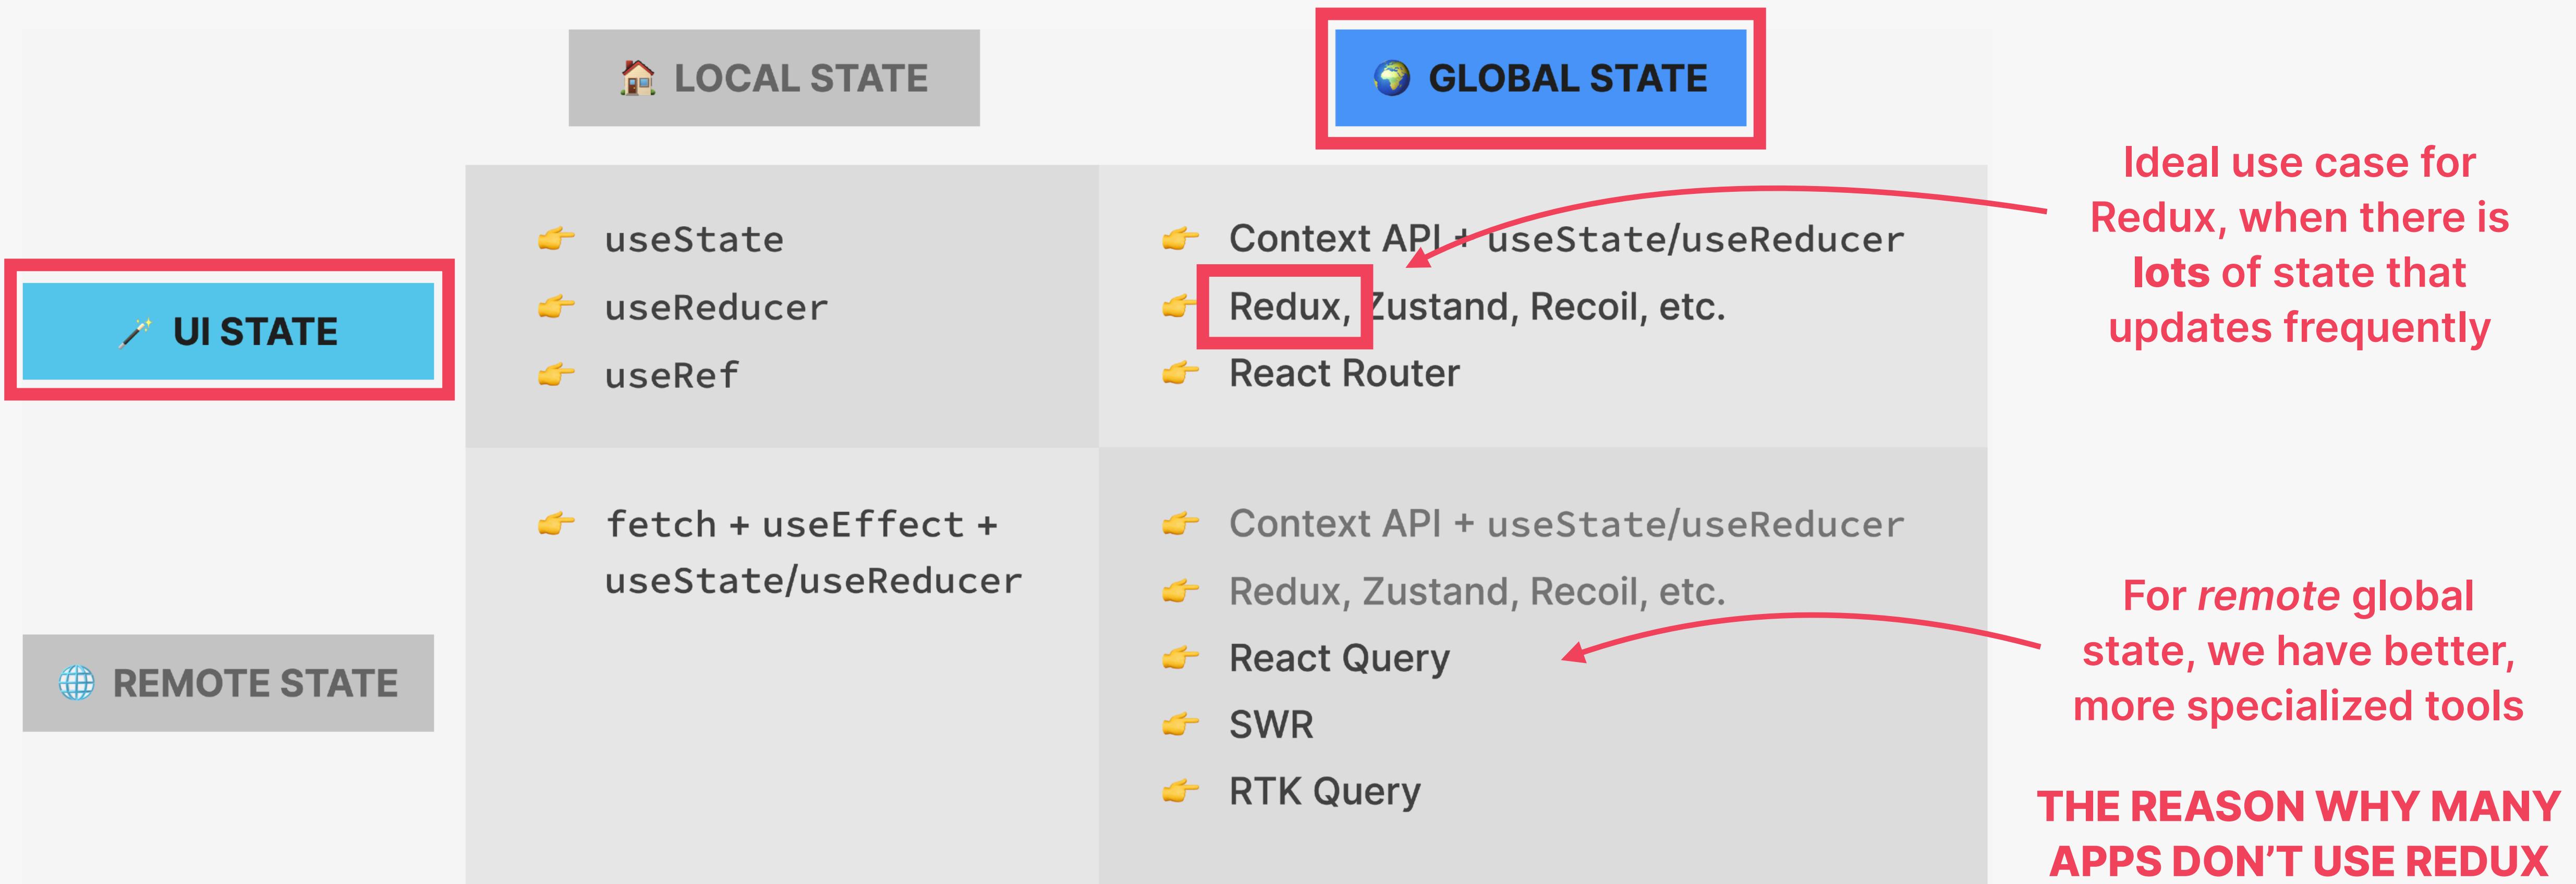


THE MECHANISM OF THE USERREDUCER HOOK

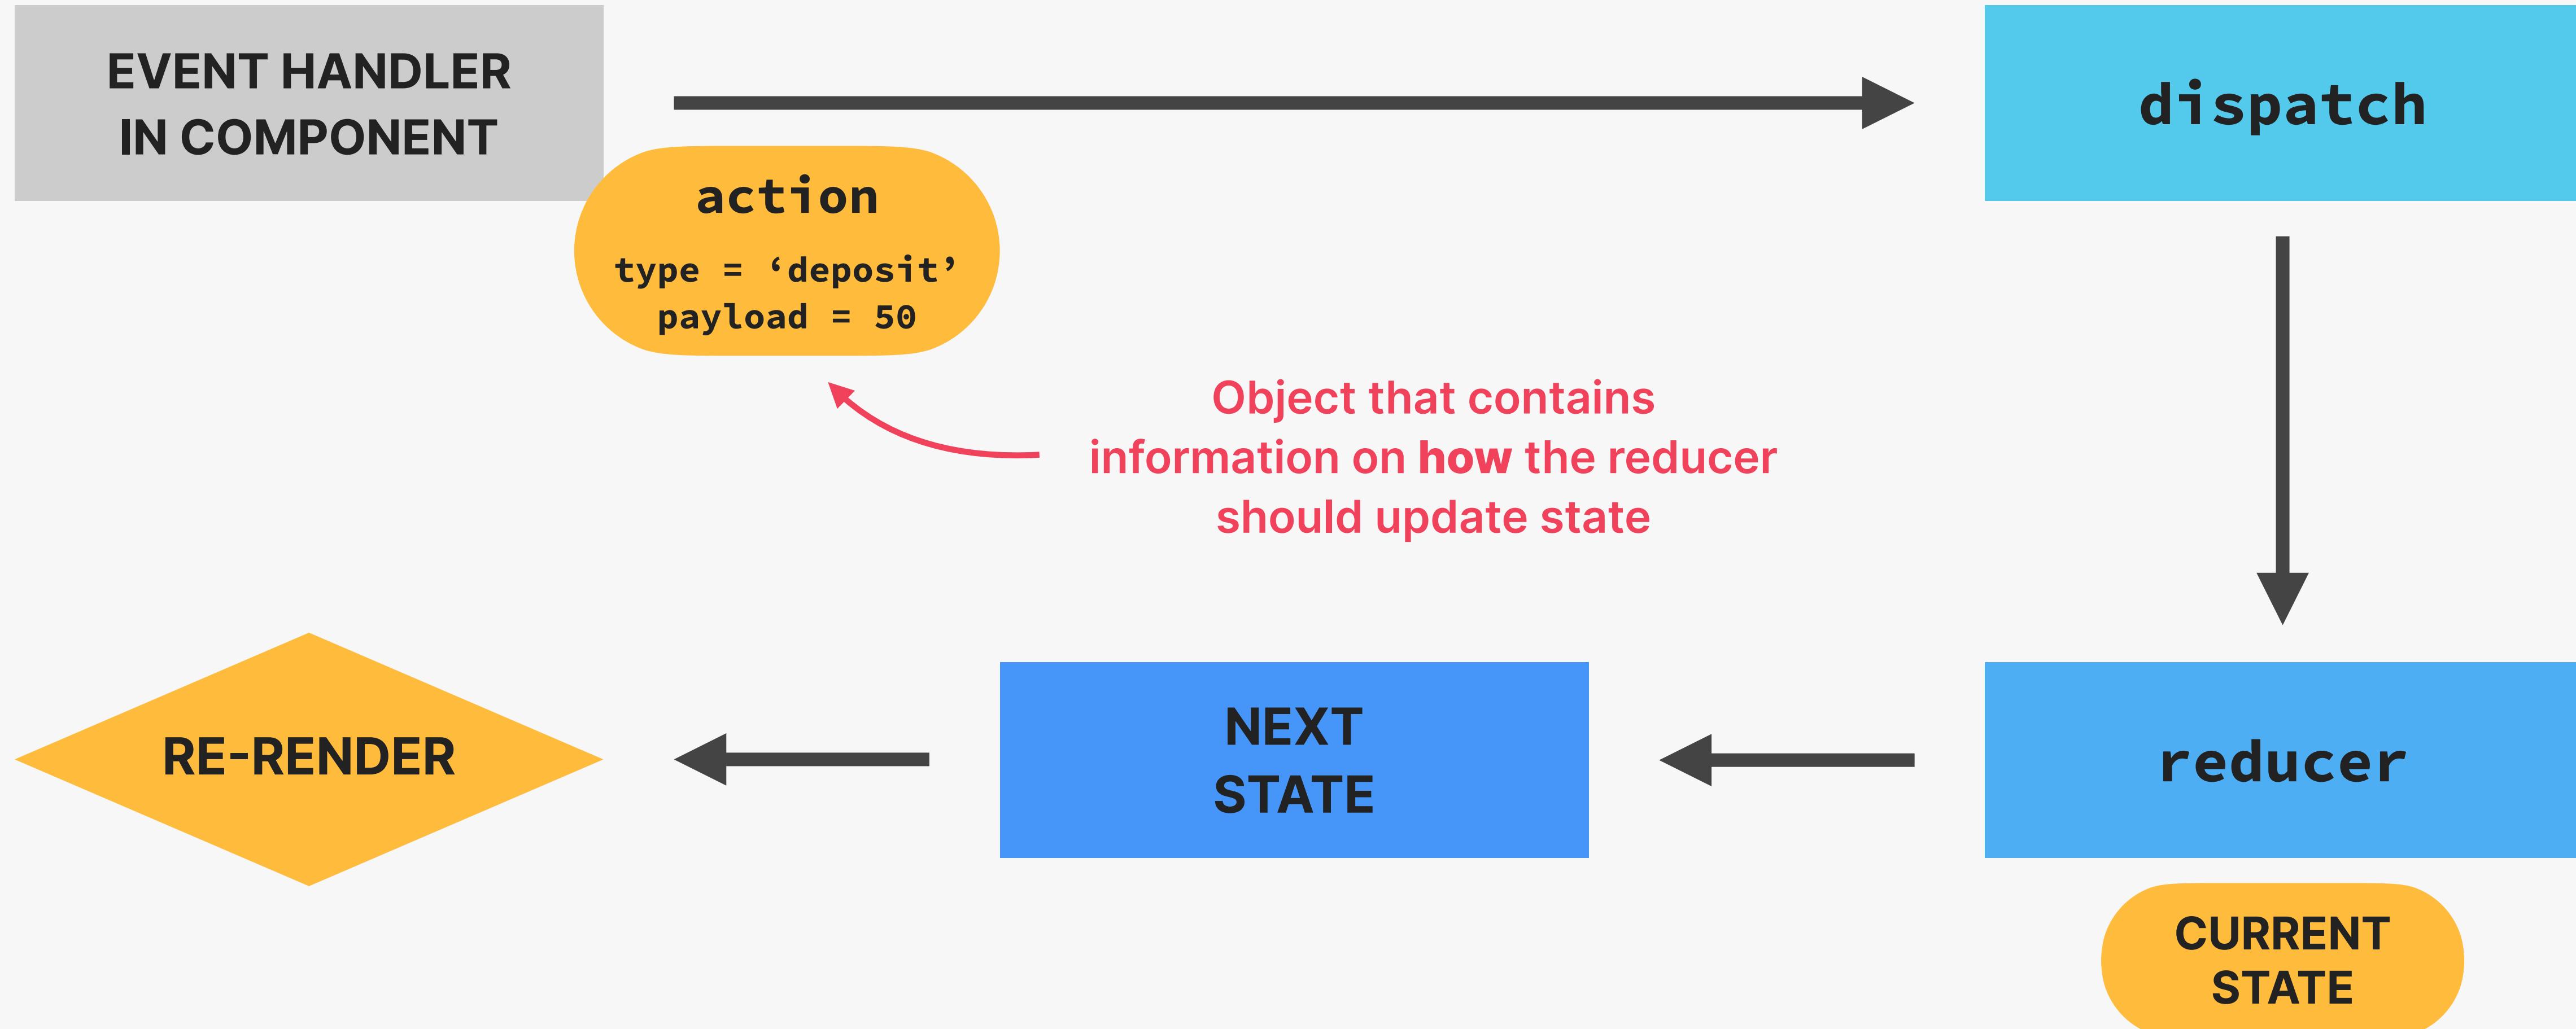


THE MECHANISM OF REDUX

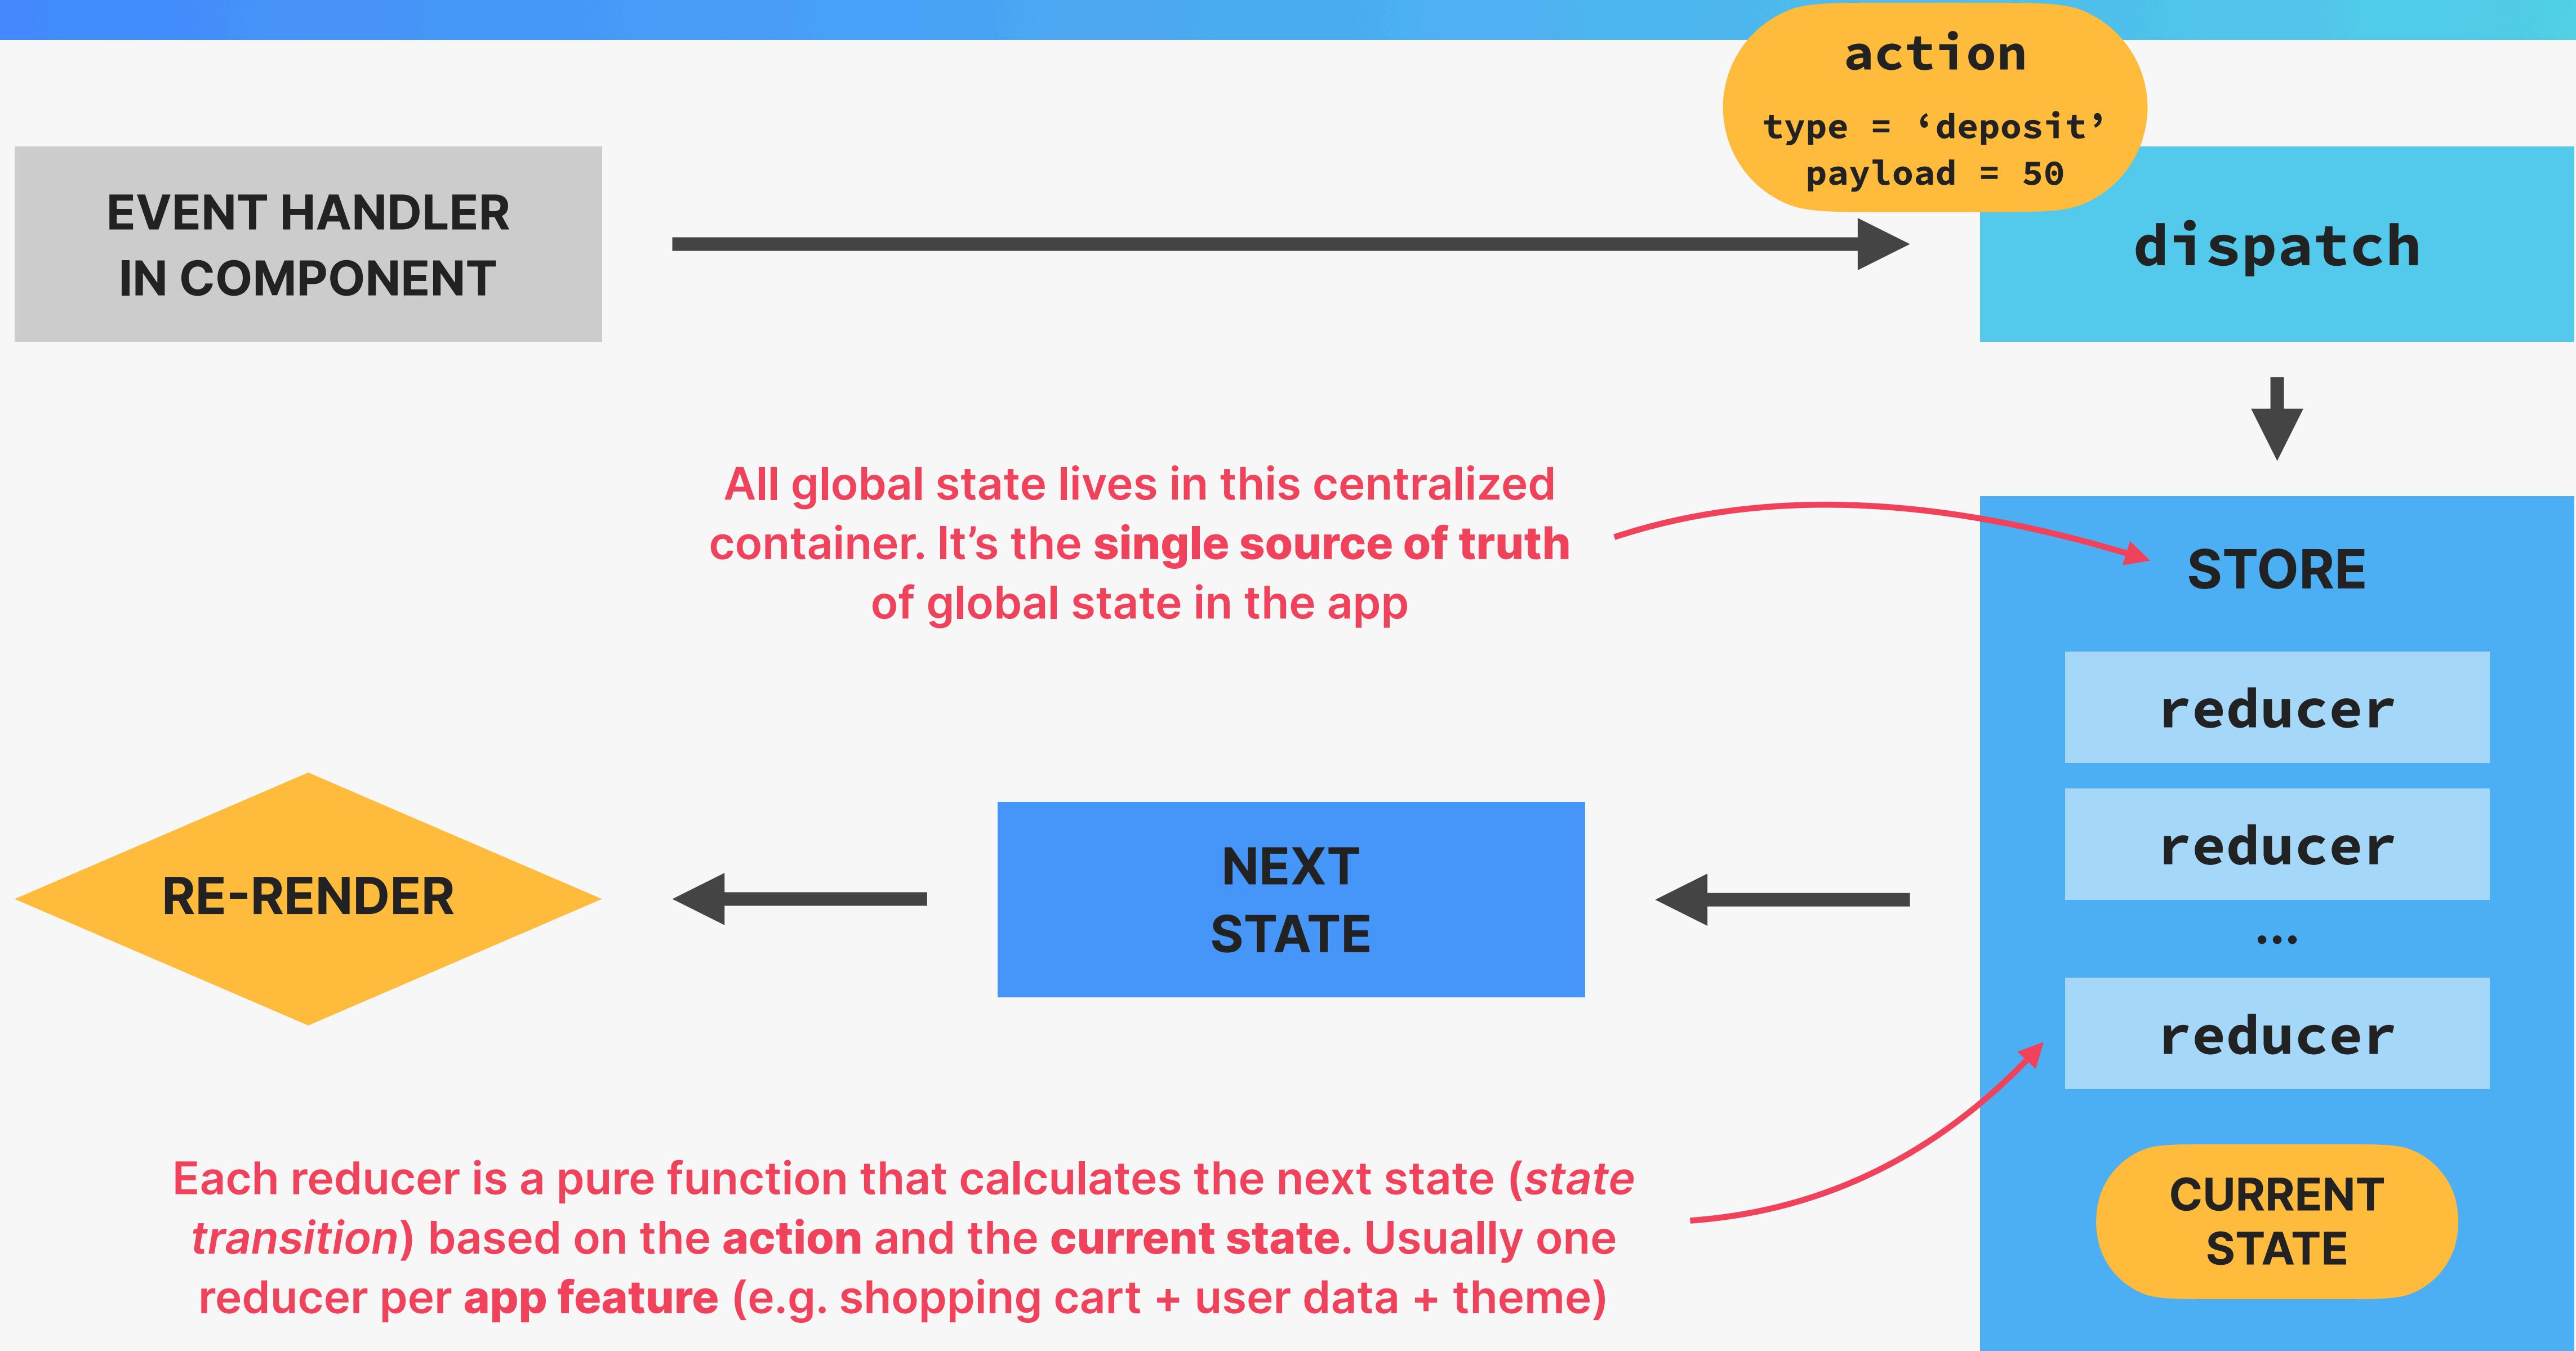

THE MECHANISM OF REDUX

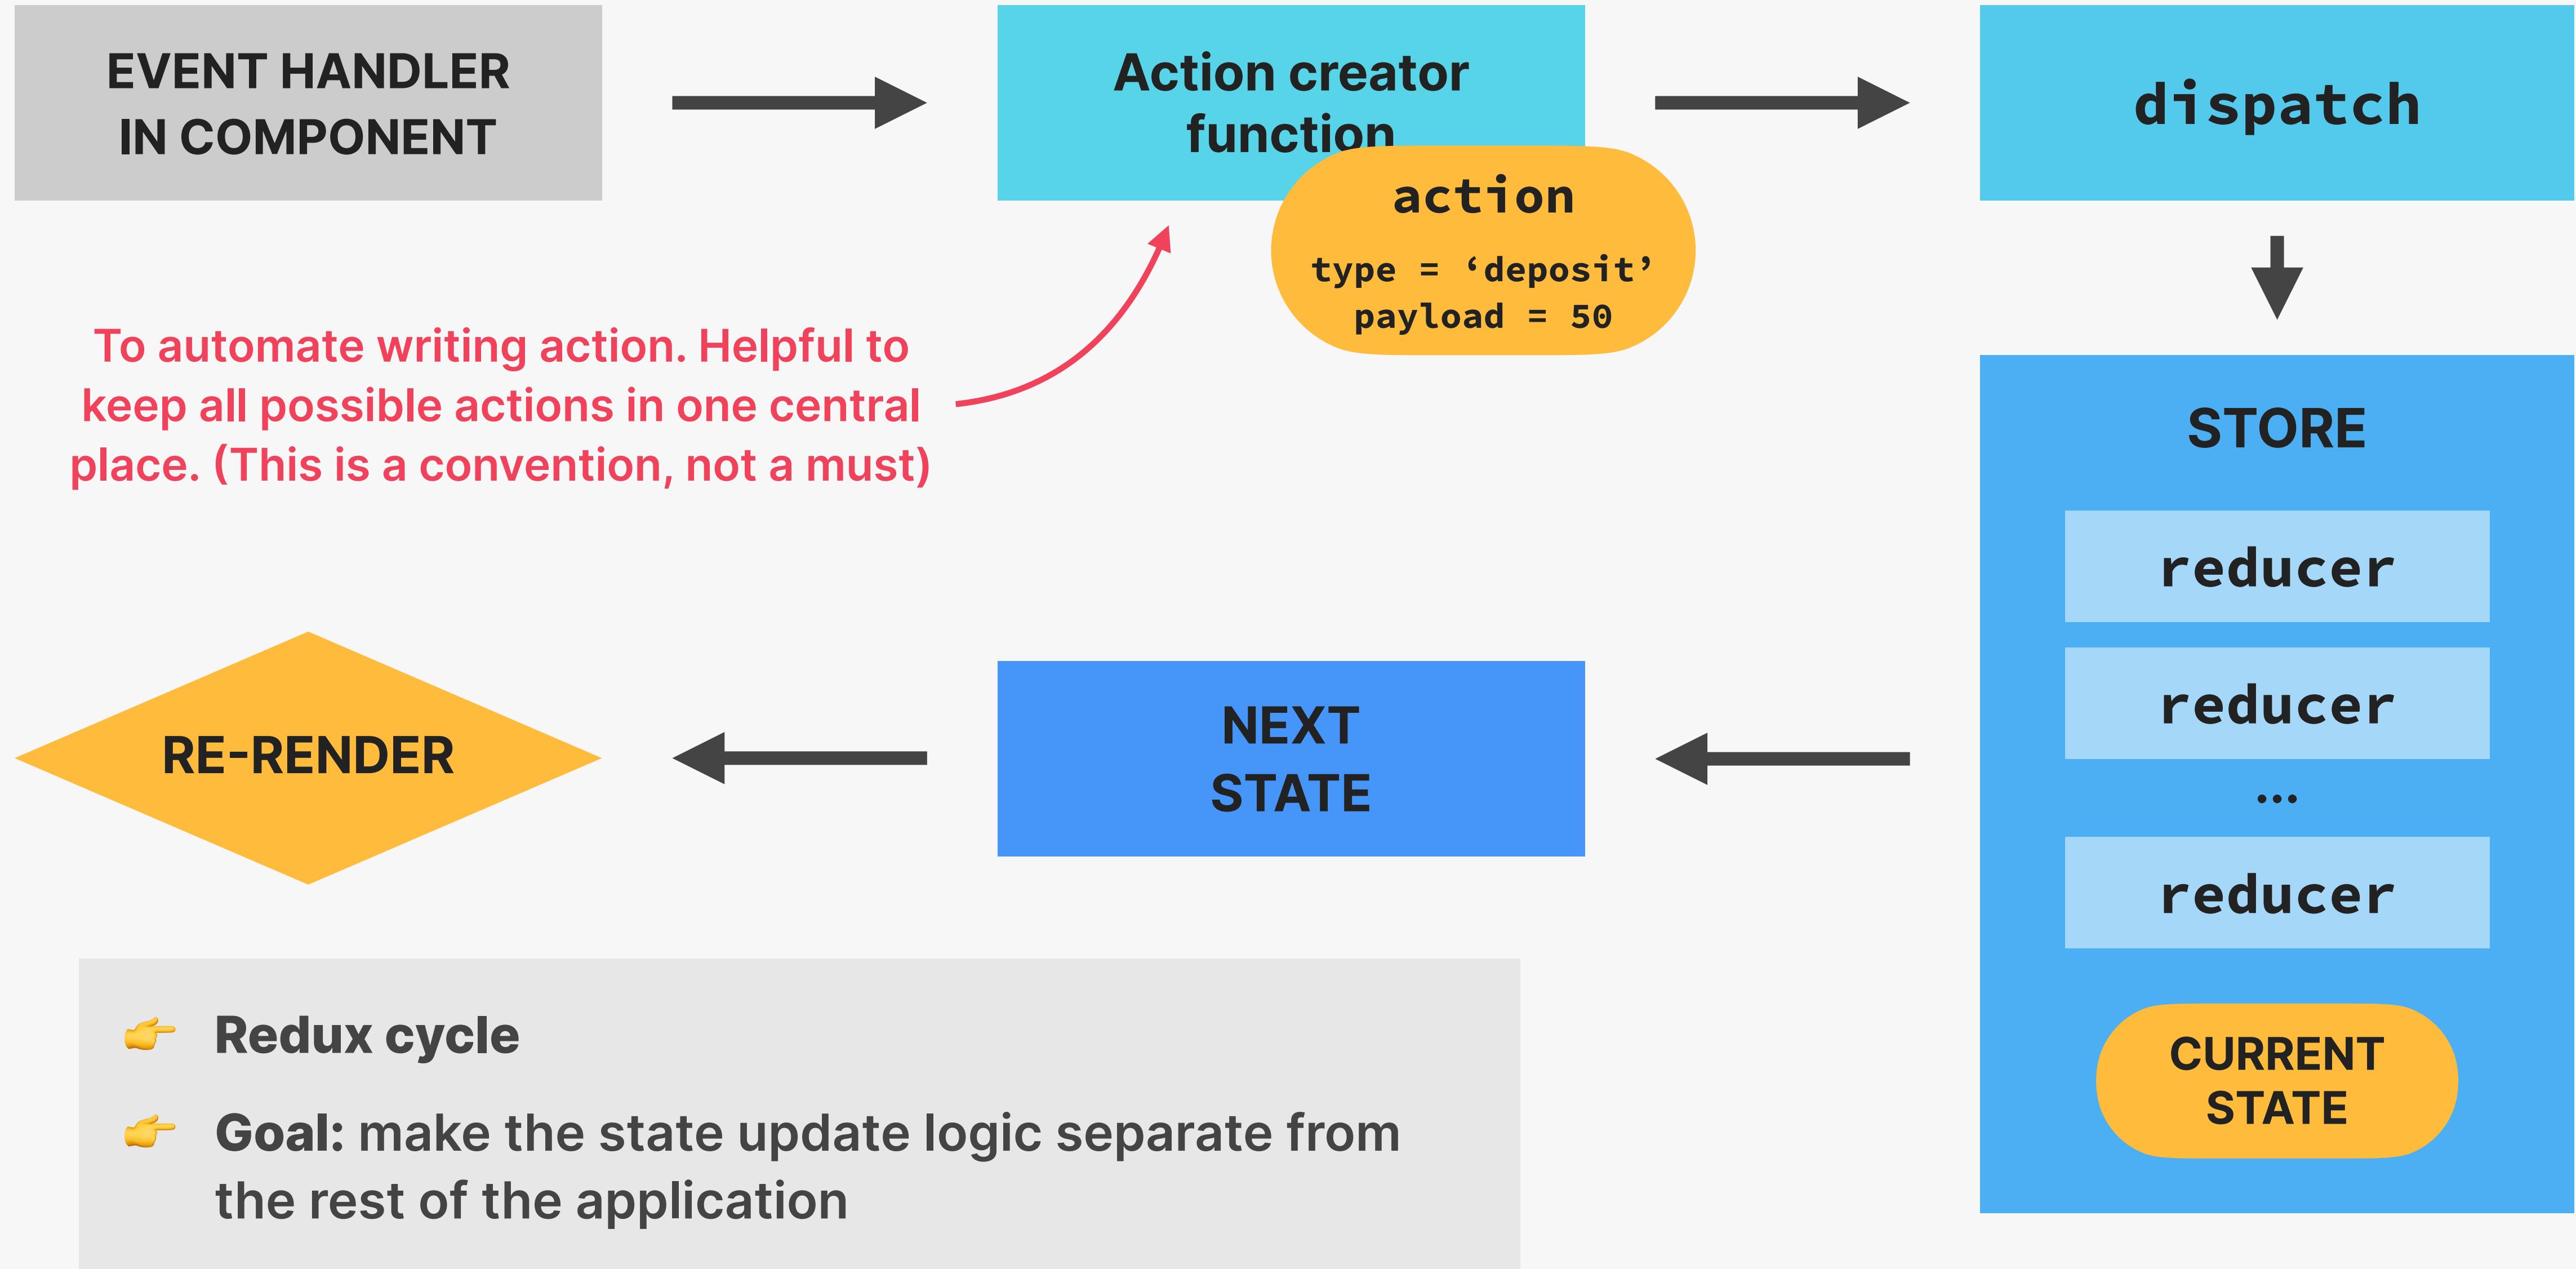

THE MECHANISM OF REDUX

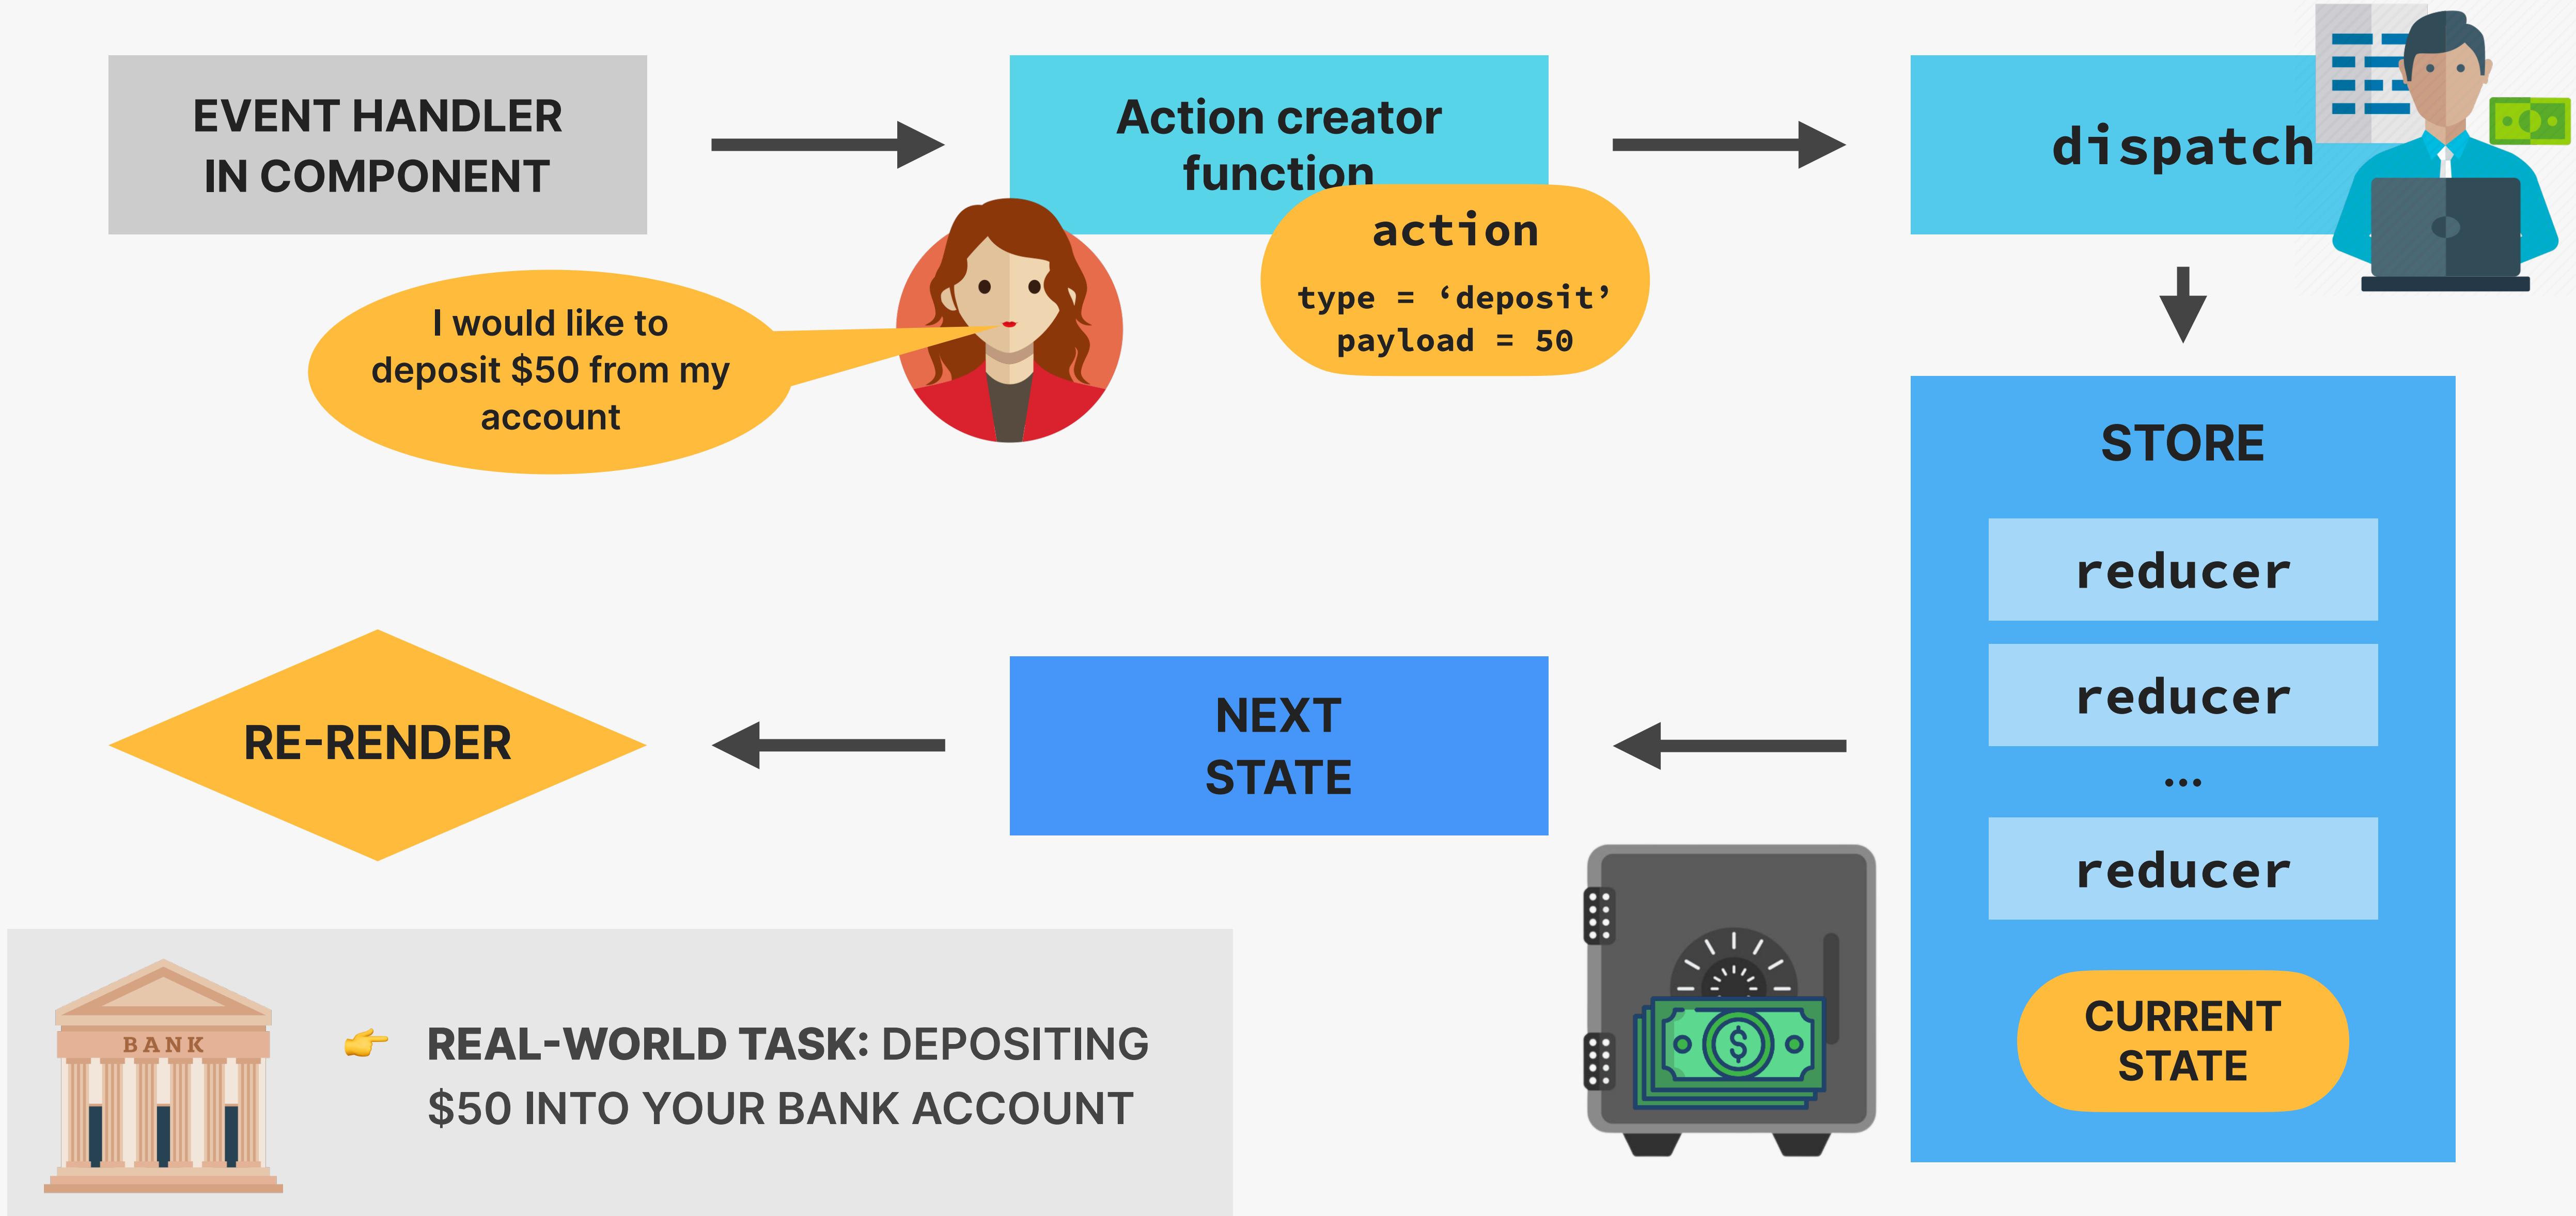



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

REDUX AND MODERN REDUX
TOOLKIT (WITH THUNKS)

LECTURE


REDUX MIDDLEWARE AND
THUNKS

WHAT IS REDUX MIDDLEWARE?



Where to make an **asynchronous API call** (or any other async operation) in Redux?

A function that sits between dispatching the action and the store. Allows us to run code **after** dispatching, but **before** reaching the reducer in the store.

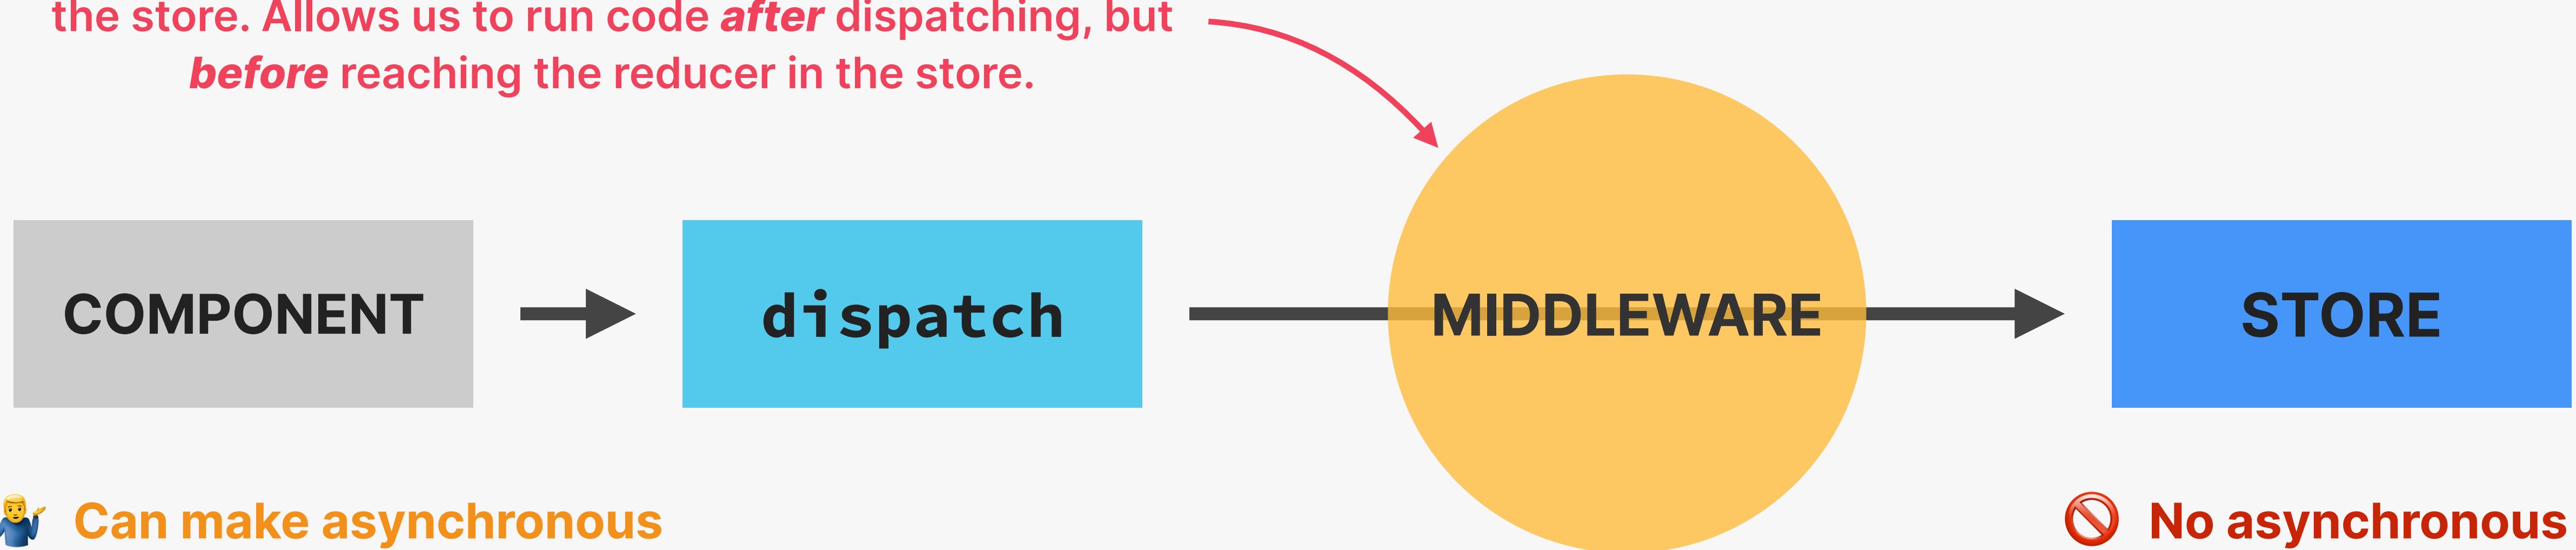

💡 Can make asynchronous operations and then dispatch

💡 Fetching data in components is not ideal

👍 Perfect for asynchronous code

👍 API calls, timers, logging, etc.

👍 The place for side effects

🚫 No asynchronous operations

🚫 Reducers need to be pure functions

REDUX THUNKS



Where to make an **asynchronous API call** (or any other async operation) in Redux?



💡 **Can make asynchronous operations and then dispatch**

💡 **Fetching data in components is not ideal**

👍 **Perfect for asynchronous code**

👍 **API calls, timers, logging, etc.**

👍 **The place for side effects**

🚫 **No asynchronous operations**

🚫 **Reducers need to be pure functions**



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

REDUX AND MODERN REDUX
TOOLKIT (WITH THUNKS)

LECTURE

WHAT IS REDUX TOOLKIT (RTK)?

WHAT IS REDUX TOOLKIT?

REDUX TOOLKIT

- 👉 The **modern and preferred** way of writing Redux code
- 👉 An **opinionated** approach, forcing us to use Redux best practices
- 👉 100% compatible with “classic” Redux, allowing us to **use them together**
- 👉 Allows us to **write a lot less code** to achieve the same result (less “boilerplate”)
- 👉 Gives us 3 big things (but there are many more...):
 - 1 We can write code that “**mutates**” state inside reducers (will be converted to **immutable** logic behind the scenes by “Immer” library)
 - 2 Action creators are **automatically** created
 - 3 **Automatic** setup of thunk middleware and DevTools



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

REDUX AND MODERN REDUX
TOOLKIT (WITH THUNKS)

LECTURE

REDUX VS. CONTEXT API

CONTEXT API VS. REDUX

CONTEXT API + useReducer

- 👍 Built into React
- 👍 Easy to set up a **single context**
- 👎 Additional state “slide” requires new context **set up from scratch** (“provider hell” in App.js)
- 👎 No mechanism for async operations
- 👎 Performance optimization is a **pain**
- 👎 Only React DevTools

REDUX

- 👎 Requires additional package (larger bundle size)
- 👎 More work to set up **initially**
- 👍 Once set up, it’s easy to create **additional state “slices”**
- 👍 Supports **middleware** for async operations
- 👍 Performance is optimized **out of the box**
- 👍 Excellent DevTools

Keep in mind that we should **not** use
these solutions for **remote state**

WHEN TO USE CONTEXT API OR REDUX?

CONTEXT API + useReducer

“Use the Context API for global state management in small apps”

- 👉 When you just need to share a value that **doesn't change often** [Color theme, preferred language, authenticated user, ...]
- 👉 When you need to solve a simple **prop drilling** problem
- 👉 When you need to manage state in a **local sub-tree** of the app

These are not super common in UI state

- 👉 When you have lots of global UI state that needs to be **updated frequently** (because *Redux is optimized for this*) [Shopping cart, current tabs, complex filters or search, ...]
- 👉 When you have **complex state** with nested objects and arrays (*because you can mutate state with Redux Toolkit*)

For example in the compound component pattern



There is no right answer that fits every project. It all depends on the project needs!

PART 04

PROFESSIONAL REACT DEVELOPMENT

REACT ROUTER WITH DATA LOADING (v6.4+)



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

REACT ROUTER WITH DATA
LOADING (V6.4+)

LECTURE

APPLICATION PLANNING

THE PROJECT: 🍕 FAST REACT PIZZA CO.

REMEMBER OUR VERY FIRST PROJECT?

— FAST REACT PIZZA CO. —

OUR MENU

Authentic Italian cuisine. 6 creative dishes to choose from. All from our stone oven, all organic, all delicious.

 Focaccia <small>Bread with italian olive oil and rosemary</small> 6	 Pizza Margherita <small>Tomato and mozzarella</small> 10
 Pizza Spinaci <small>Tomato, mozzarella, spinach, and ricotta cheese</small> 12	 Pizza Funghi <small>Tomato, mozzarella, mushrooms, and onion</small> 12
 Pizza Salamino <small>Tomato, mozzarella, and pepperoni</small> SOLD OUT	 Pizza Prosciutto <small>Tomato, mozzarella, ham, arugula, and burrata cheese</small> 18

We're open until 22:00. Come visit us or order online.

[Order now](#)



🍕 FAST REACT PIZZA CO.

- 👉 Now the same restaurant (business) needs a simple way of allowing customers to **order pizzas and get them delivered to their home**
- 👉 We were hired to build the application front-end 



HOW TO PLAN AND BUILD A REACT APPLICATION

FROM THE EARLIER “THINKING IN REACT” LECTURE:

- 1 Break the desired UI into **components**
- 2 Build a **static** version (no state yet)
- 3 Think about **state management + data flow**



- 👉 This works well for small apps with **one page and a few features**
- 👉 In **real-world apps**, we need to adapt this process



HOW TO PLAN AND BUILD A REACT APPLICATION

1

Gather application **requirements and features**

2

Divide the application into **pages**

👉 Think about the **overall** and **page-level UI**

👉 Break the desired UI into **components** ← From earlier

👉 Design and build a **static** version (no state yet) ← From earlier

3

Divide the application into **feature categories**

👉 Think about **state management + data flow** ← From earlier

4

Decide on what **libraries** to use (technology decisions)

This is just a rough overview. In the real-world, things are never this linear



PROJECT REQUIREMENTS FROM THE BUSINESS

STEP 1

- 👉 Very simple application, where users can order **one or more pizzas from a menu**
- 👉 Requires **no user accounts** and no login: users just input their names before using the app
- 👉 The pizza menu can change, so it should be **loaded from an API** ✓ DONE
- 👉 Users can add multiple pizzas to a **cart** before ordering
- 👉 Ordering requires just the **user's name, phone number, and address**
- 👉 If possible, **GPS location** should also be provided, to make delivery easier
- 👉 User's can mark their order as “**priority**” for an additional 20% of the cart price
- 👉 Orders are made by **sending a POST request** with the order data (user data + selected pizzas) to the API
- 👉 Payments are made on delivery, so **no payment processing** is necessary in the app
- 👉 Each order will get a **unique ID** that should be displayed, so the **user can later look up their order** based on the ID
- 👉 Users should be able to mark their order as “**priority**” order **even after it has been placed**

From these requirements, we can understand the features we need to implement

FEATURES + PAGES

STEP 2 + 3

FEATURE CATEGORIES

1 User

2 Menu

3 Cart

4 Order

NECESSARY PAGES

1 Homepage

2 Pizza menu

3 Cart

4 Placing a new order

5 Looking up an order


/

/menu

/cart

/order/new

/order/:orderId

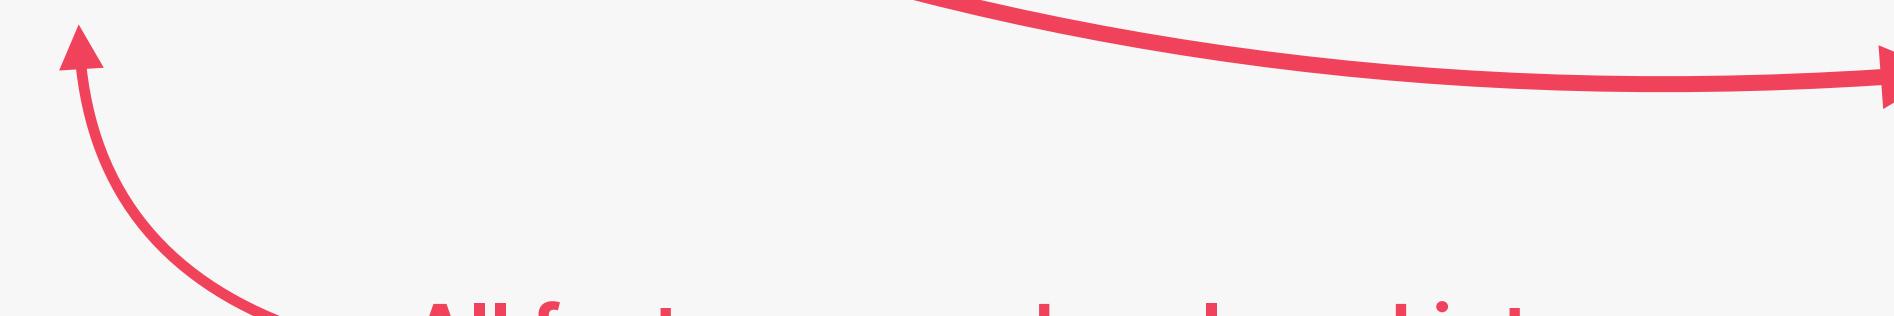

All features can be placed into one of these. So this is what the app will essentially be about

STATE MANAGEMENT + TECHNOLOGY DECISIONS

STEP 3 + 4

STATE
“DOMAINS” /
“SLICES”

These usually map
quite nicely to the
app features

👉 Routing

👉 Styling

👉 Remote state
management

👉 UI State
management

- 1 User → Global UI state (*no accounts, so stays in app*)
- 2 Menu → Global remote state (*menu is fetched from API*)
- 3 Cart → Global UI state (*no need for API, just stored in app*)
- 4 Order → Global remote state (*fetched and submitted to API*)

TYPES OF
STATE

This is just one of many tech
stacks we could have chosen

• React Router

The standard for React SPAs

tailwindcss

Trendy way of styling applications that we want to learn

• React Router

New way of fetching data right inside React Router (v6.4+) that is worth exploring (“render-as-you-fetch” instead of “fetch-on-render”). Not really state management, as it doesn’t persist state.

Redux

State is fairly complex. Redux has many advantages for UI state. Also, we want to practice Redux a bit more

TAILWIND CSS CRASH COURSE: STYLING THE APP



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

TAILWIND CSS CRASH COURSE:
STYLING THE APP

LECTURE

WHAT IS TAILWIND CSS?

WHAT IS TAILWIND CSS?

TAILWIND CSS

- 👉 “A *utility-first CSS framework packed with utility classes like flex, text-center and rotate-90 that can be composed to build any design, directly in your markup (HTML or JSX)*”
- 👉 **Utility-first CSS approach:** writing tiny classes with one single purpose, and then combining them to build entire layouts
- 👉 In tailwind, **these classes are already written for us.** So we’re not gonna write any new CSS, but instead use some of tailwind’s hundreds of classes



THE GOOD AND BAD ABOUT TAILWIND

THE GOOD

- 👍 You don't need to think about class names
- 👍 No jumping between files to write markup and styles
- 👍 Immediately understand styling in any project that uses tailwind
- 👍 Tailwind is a design system: many design decisions have been taken for you, which makes UIs look better and more consistent
- 👍 Saves a lot of time, e.g. on responsive design
- 👍 Docs and VS Code integration are great

These two are enough to give tailwind a try!



THE BAD

- 👎 Markup (HTML or JSX) looks very unreadable, with lots of class names (*you get used to it*)
 - 👎 You have to learn a lot of class names (*but after a day of usage you know fundamentals*)
 - 👎 You need to install and set up tailwind on each new project
 - 👎 You're giving up on "vanilla CSS" 😢
- 👏 Many people love to hate on tailwind for no reason. Please don't be that person! Try it before judging 🙏

**SETTING UP OUR
BIGGEST PROJECT +
STYLED
COMPONENTS**



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

SETTING UP OUR BIGGEST
PROJECT + STYLED COMPONENTS

LECTURE

APPLICATION PLANNING

THE PROJECT: THE WILD OASIS



- 👉 “The Wild Oasis” is a small boutique **hotel** with 8 luxurious wooden cabins
- 👉 They need a custom-built application to manage everything about the hotel: **bookings, cabins and guests**
- 👉 This is the **internal application** used inside the hotel to **check in guests as they arrive**
- 👉 They have nothing right now, so they **also need the API**
- 👉 Later they will probably want a **customer-facing website** as well, where customers will be able to **book stays**, using the same API

REVIEW: HOW TO PLAN A REACT APPLICATION

- 1 Gather application **requirements and features**
- 2 Divide the application into **pages**
- 3 Divide the application into **feature categories**
- 4 Decide on what **libraries** to use (technology decisions)



PROJECT REQUIREMENTS FROM THE BUSINESS

- 👉 Users of the app are hotel employees. They need to be logged into the application to perform tasks
- 👉 New users can only be signed up inside the applications (to guarantee that only actual hotel employees can get accounts)
- 👉 Users should be able to upload an avatar, and change their name and password
- 👉 App needs a table view with all cabins, showing the cabin photo, name, capacity, price, and current discount
- 👉 Users should be able to update or delete a cabin, and to create new cabins (including uploading a photo)
- 👉 App needs a table view with all bookings, showing arrival and departure dates, status, and paid amount, as well as cabin and guest data
- 👉 The booking status can be “unconfirmed” (booked but not yet checked in), “checked in”, or “checked out”. The table should be filterable by this important status
- 👉 Other booking data includes: number of guests, number of nights, guest observations, whether they booked breakfast, breakfast price
- 👉 Users should be able to delete, check in, or check out a booking as the guest arrives (no editing necessary for now)
- 👉 Bookings may not have been paid yet on guest arrival. Therefore, on check in, users need to accept payment (outside the app), and then confirm that payment has been received (inside the app)
- 👉 On check in, the guest should have the ability to add breakfast for the entire stay, if they hadn't already
- 👉 Guest data should contain: full name, email, national ID, nationality, and a country flag for easy identification
- 👉 The initial app screen should be a dashboard, to display important information for the last 7, 30, or 90 days:
 - 👉 A list of guests checking in and out on the current day. Users should be able to perform these tasks from here
 - 👉 Statistics on recent bookings, sales, check ins, and occupancy rate
 - 👉 A chart showing all daily hotel sales, showing both “total” sales and “extras” sales (only breakfast at the moment)
 - 👉 A chart showing statistics on stay durations, as this is an important metric for the hotel
- 👉 Users should be able to define a few application-wide settings: breakfast price, min and max nights/booking, max guests/booking
- 👉 App needs a dark mode

STEP 1



PROJECT REQUIREMENTS FROM THE BUSINESS

- 👉 Users of the app are hotel employees. They need to be logged into the application to perform tasks
 - 👉 New users can only be signed up inside the applications (to guarantee that only actual hotel employees can get in)
 - 👉 Users should be able to upload an avatar, and change their name and password
- AUTHENTICATION**
- 👉 App needs a table view with all cabins, showing the cabin photo, name, capacity, price, and current discount
 - 👉 Users should be able to update or delete a cabin, and to create new cabins (including uploading a photo)
- CABINS**
- 👉 App needs a table view with all bookings, showing arrival and departure dates, status, and paid amount, as well as cabin and guest data
 - 👉 The booking status can be “unconfirmed” (booked but not yet checked in), “checked in”, or “checked out”. The table needs to be sorted by this important status
 - 👉 Other booking data includes: number of guests, number of nights, guest observations, whether they booked breakfast, breakfast price
- BOOKINGS**
- 👉 Users should be able to delete, check in, or check out a booking as the guest arrives (no editing necessary for now)
 - 👉 Bookings may not have been paid yet on guest arrival. Therefore, on check in, users need to accept payment (on behalf of the guest) and then confirm that payment has been received (inside the app)
 - 👉 On check in, the guest should have the ability to add breakfast for the entire stay, if they hadn't already
- CHECK IN / OUT**
- 👉 Guest data should contain: full name, email, national ID, nationality, and a country flag for easy identification
- GUESTS**
- 👉 The initial app screen should be a dashboard, to display important information for the last 7, 30, or 90 days:
 - 👉 A list of guests checking in and out on the current day. Users should be able to perform these tasks from here
 - 👉 Statistics on recent bookings, sales, check ins, and occupancy rate
 - 👉 A chart showing all daily hotel sales, showing both “total” sales and “extras” sales (only breakfast at the moment)
 - 👉 A chart showing statistics on stay durations, as this is an important metric for the hotel
- DASHBOARD**
- 👉 Users should be able to define a few application-wide settings: breakfast price, min and max nights/booking, maximum guests per cabin
 - 👉 App needs a dark mode
- SETTINGS**

FEATURES + PAGES

STEP 2 + 3

FEATURE CATEGORIES

1 Bookings

2 Cabins

3 Guests

4 Dashboard

5 Check in and out

6 App settings

7 Authentication

NECESSARY PAGES

1 Dashboard

2 Bookings

3 Cabins

4 Booking check in

5 App settings

6 User sign up

7 Login

8 Account settings

/dashboard

/bookings

/cabins

/checkin/:bookingID

/settings

/users

/login

/account



We will discuss state later.
Most of it will be global

CLIENT-SIDE RENDERING (CSR) OR SERVER-SIDE RENDERING (SSR)?

CSR WITH PLAIN REACT

- 👉 Used to build **Single-Page Applications (SPAs)**
- 👉 All HTML is rendered on the **client**
- 👉 All JavaScript needs to be downloaded before apps start running: **bad for performance**
- 👉 **One perfect use case:** apps that are used “internally” as tools inside companies, that are entirely hidden behind a login



This is exactly what
we want to build in
this project

SSR WITH FRAMEWORK

- 👉 Used to build **Multi-Page Applications (MPAs)**
- 👉 Some HTML is rendered in the **server**
- 👉 **More performant**, as less JavaScript needs to be downloaded
- 👉 The **React team** is moving more and more in this direction

NEXT.JS

Remix

TECHNOLOGY DECISIONS

👉 Routing

 **React Router**

STEP 4


👉 Styling

<  > styled components

👉 Remote state management

 **React Query**

👉 UI State management

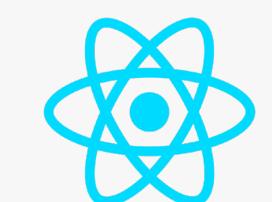 **Context API**

👉 Form management

 **React Hook Form**

👉 Other tools

React icons / React hot toast / Recharts / date-fns / Supabase

The standard for React SPAs

Very popular way of writing component-scoped CSS, right inside JavaScript. A technology worth learning

The best way of managing remote state, with features like caching, automatic re-fetching, pre-fetching, offline support, etc. Alternatives are SWR and RTK Query, but this is the most popular

There is almost no UI state needed in this app, so one simple context with useState will be enough. No need for Redux

Handling bigger forms can be a lot of work, such as manual state creation and error handling. A library can simplify all this

**SUPABASE CRASH
COURSE: BUILDING A
BACK-END!**



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

SUPABASE CRASH COURSE:
BUILDING A BACK-END!

LECTURE

WHAT IS SUPABASE?

WHAT IS SUPABASE?

SUPABASE

- 👉 Service that allows developers to easily **create a back-end with a Postgres database**
- 👉 Automatically creates a **database** and **API** so we can easily request and receive data from the server
- 👉 No back-end development needed 😊
- 👉 Perfect to get up and running **quickly!**
- 👉 Not just an API: Supabase also comes with easy-to-use **user authentication** and **file storage**



**WITH SUPABASE, WE DON'T NEED
TO DO ANY OF THIS MANUALLY!
IT'S ALL INCLUDED**





JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

SUPABASE CRASH COURSE:
BUILDING A BACK-END!

LECTURE

MODELING APPLICATION STATE

MODELING STATE




- 👉 All this state will be **global remote state**, stored within Supabase
- 👉 There will be one **table** for each state “slice” in the database



THE BOOKINGS TABLE

- 👉 Bookings are about a **guest** renting a **cabin**
- 👉 So a booking needs information about what **guest** is booking which **cabin**: we need to **connect** them
- 👉 Supabase uses a Postgres DB, which is SQL (relational DB). So we **join** tables using **foreign keys**

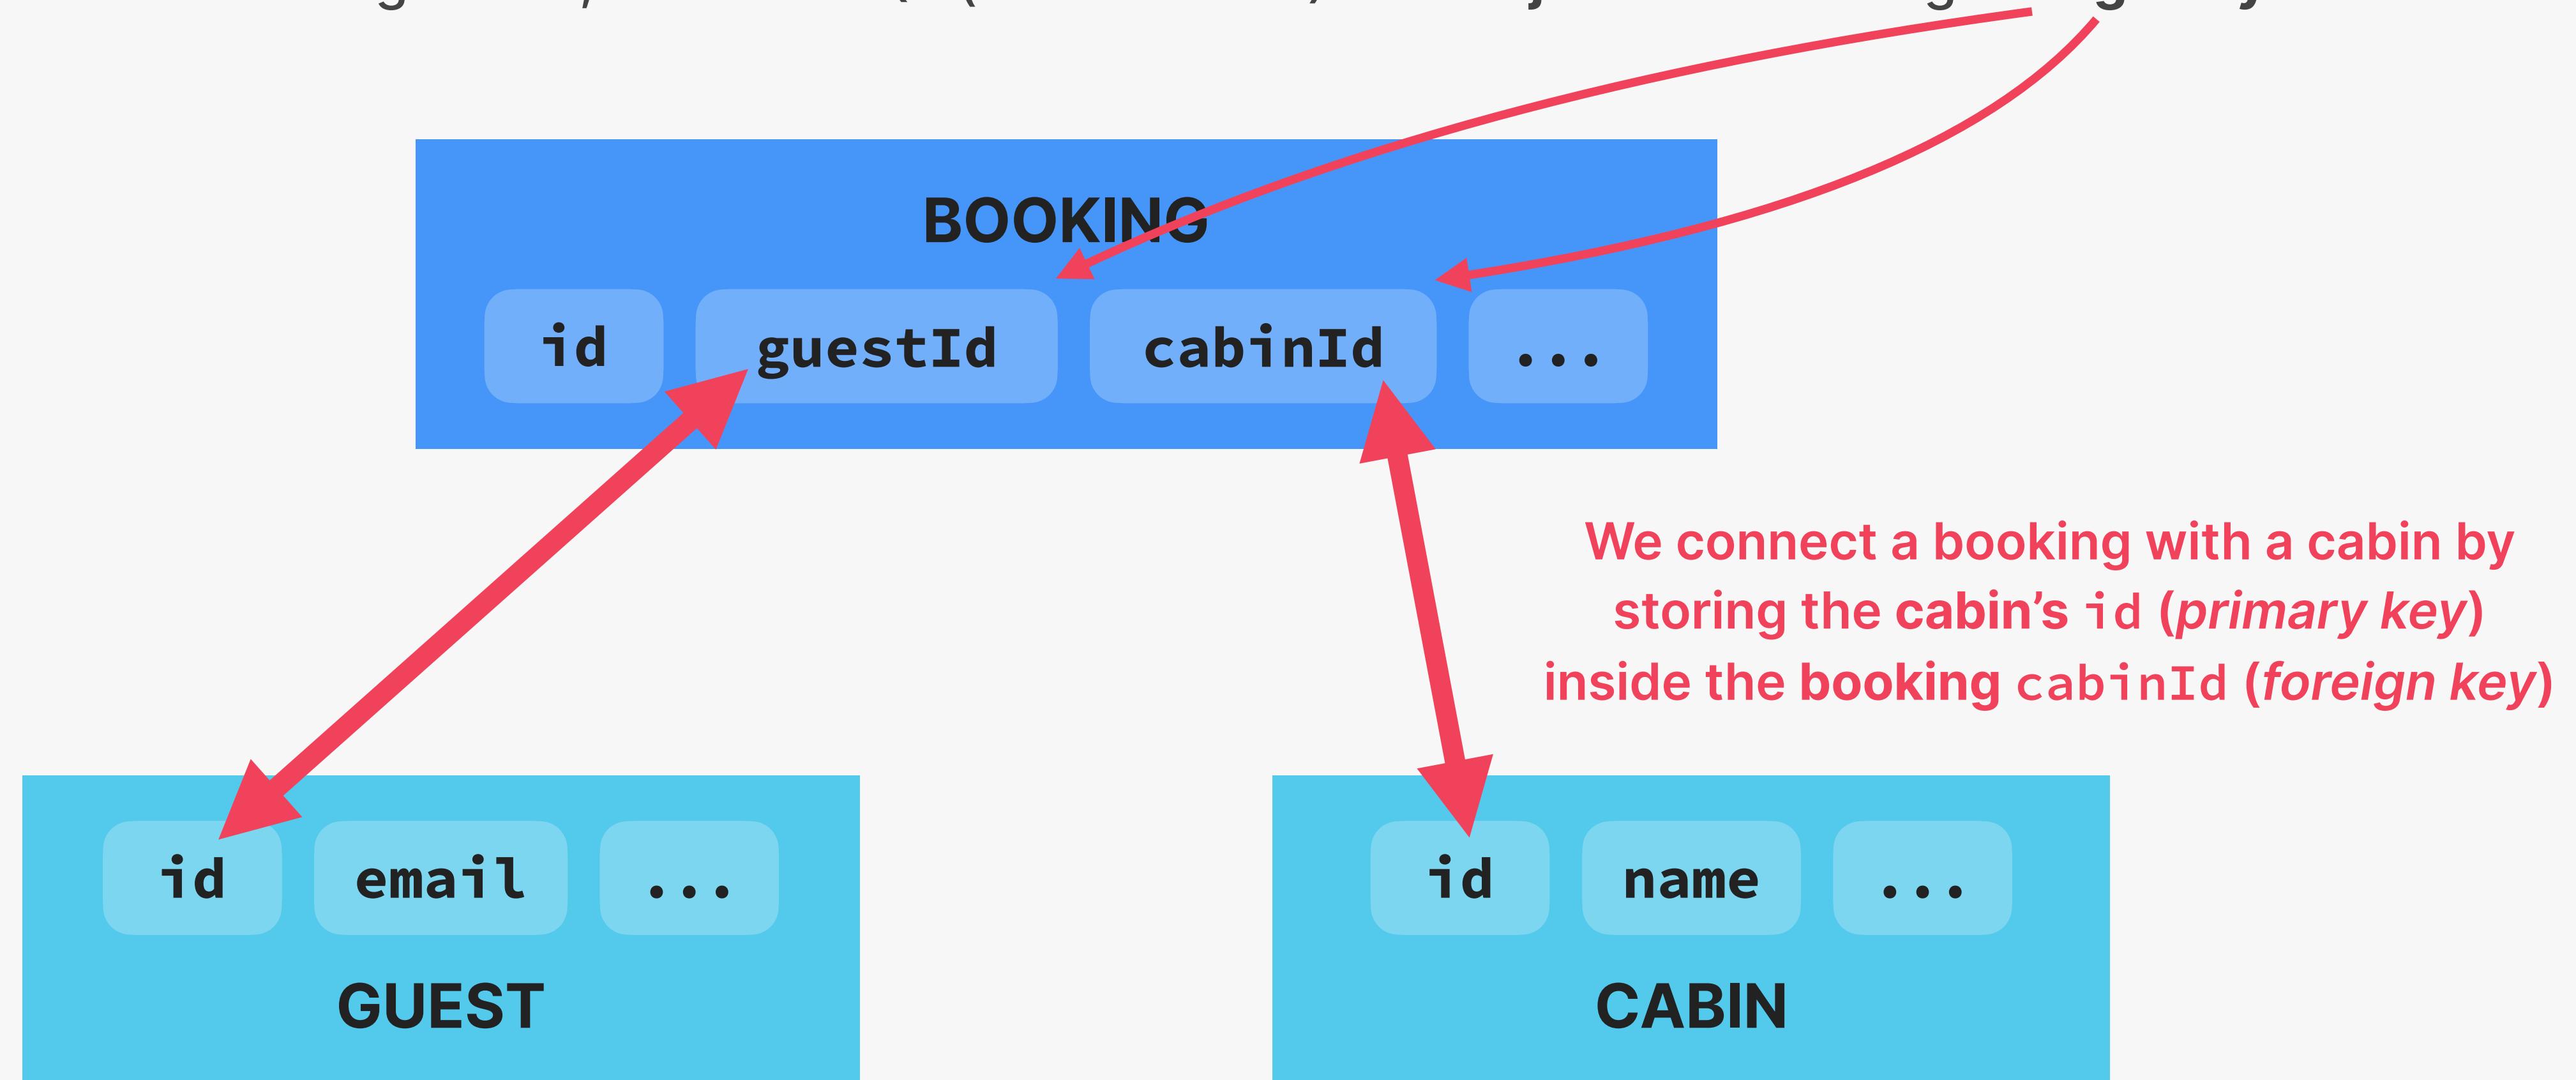

REACT QUERY: MANAGING REMOTE STATE



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

REACT QUERY: MANAGING
REMOTE STATE


LECTURE

WHAT IS REACT QUERY?

WHAT IS REACT QUERY?

REACT QUERY

- 👉 Powerful library for managing **remote (server) state**
- 👉 Many features that allow us to write a **lot less code**, while also **making the UX a lot better**:
 - 👉 Data is stored in a cache
 - 👉 Automatic loading and error states
 - 👉 Automatic re-fetching to keep state synched
 - 👉 Pre-fetching
 - 👉 Easy remote state mutation (updating)
 - 👉 Offline support
- 👉 Needed because remote state is **fundamentally different** from regular (UI) state

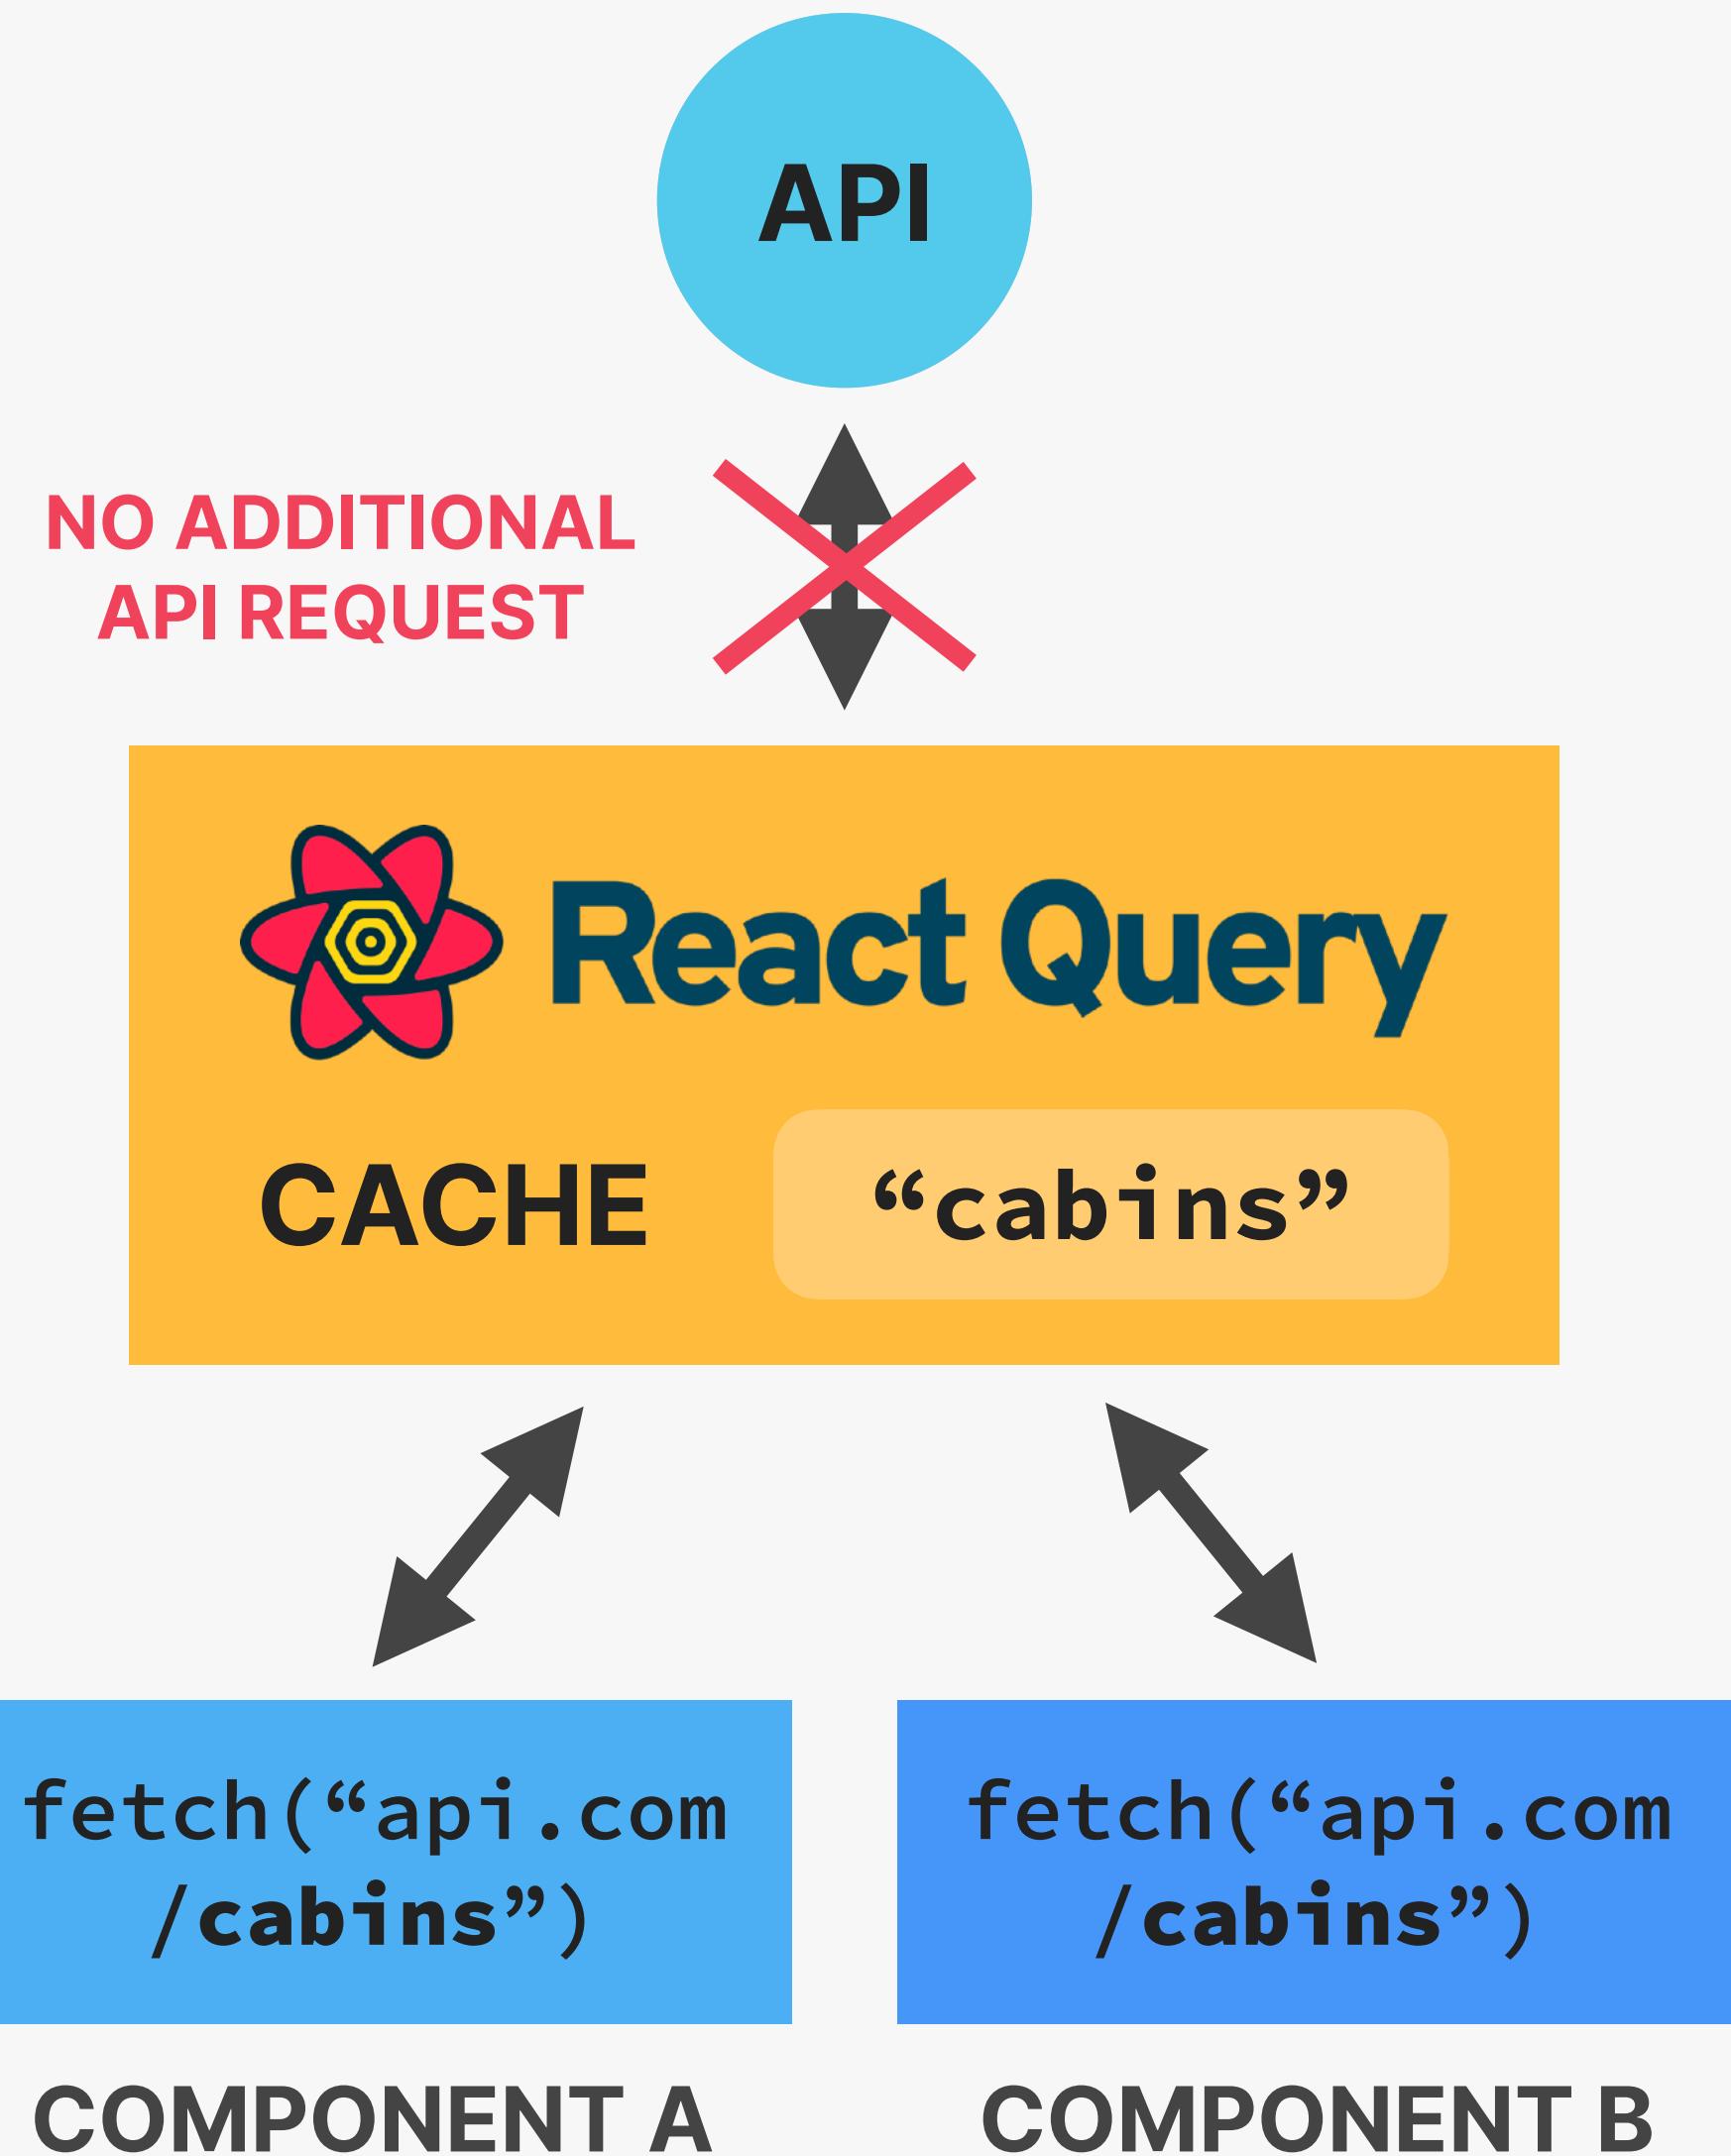

ADVANCED REACT PATTERNS



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

ADVANCED REACT PATTERNS


LECTURE

AN OVERVIEW OF REUSABILITY IN
REACT

HOW TO REUSE CODE IN REACT?

Use props as a component API, to enable custom behavior. Can be stateless, stateful, or structural components

👉 I need to reuse:

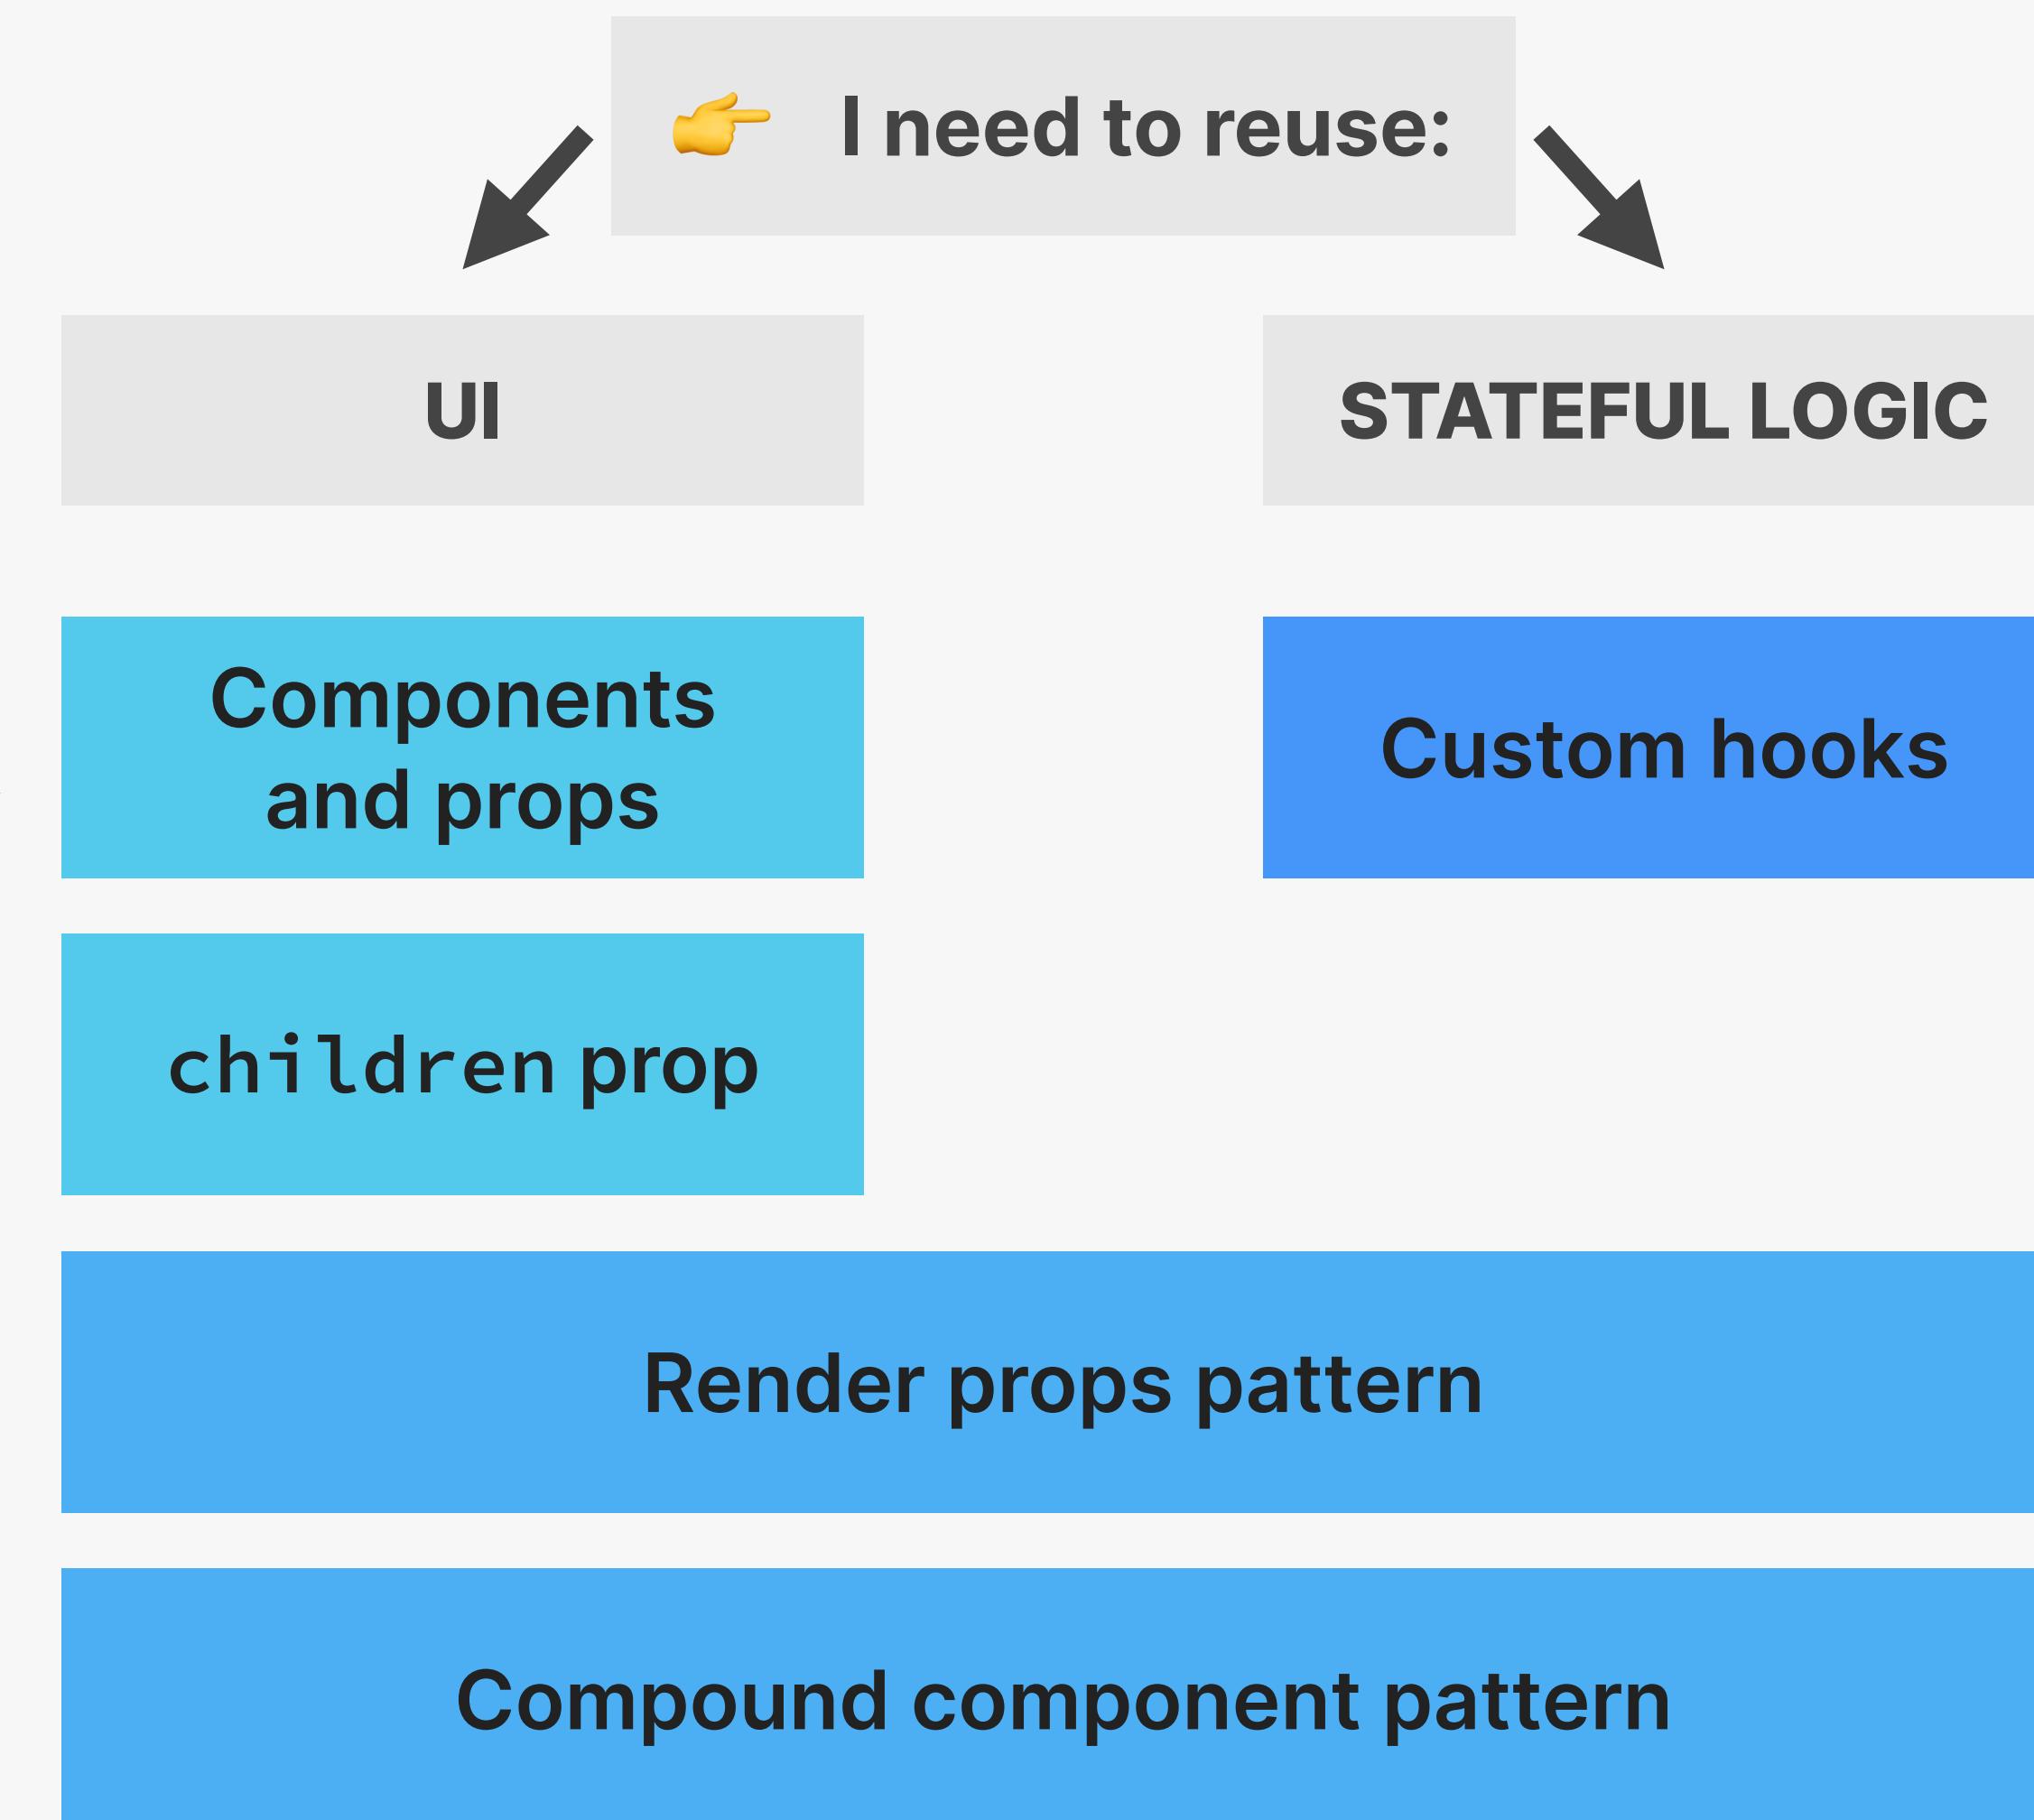

To customize the component's content

Logic with hooks

For complete control over what the component renders, by passing in a function that tells the component what to render. Was more common before hooks, but still useful

👉 There are even more patterns, but these ones matter most

For very self-contained components that need/want to manage their own state. Compound components are like fancy super-components

PART 05

FULL-STACK REACT

OVERVIEW OF NEXT.JS WITH THE "APP" ROUTER



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION


OVERVIEW OF NEXT.JS WITH THE
"APP" ROUTER

LECTURE

AN OVERVIEW OF SERVER-SIDE
RENDERING (SSR)


REVIEW: THE RISE OF SINGLE-PAGE APPLICATIONS

1 THE “OLD” WAY

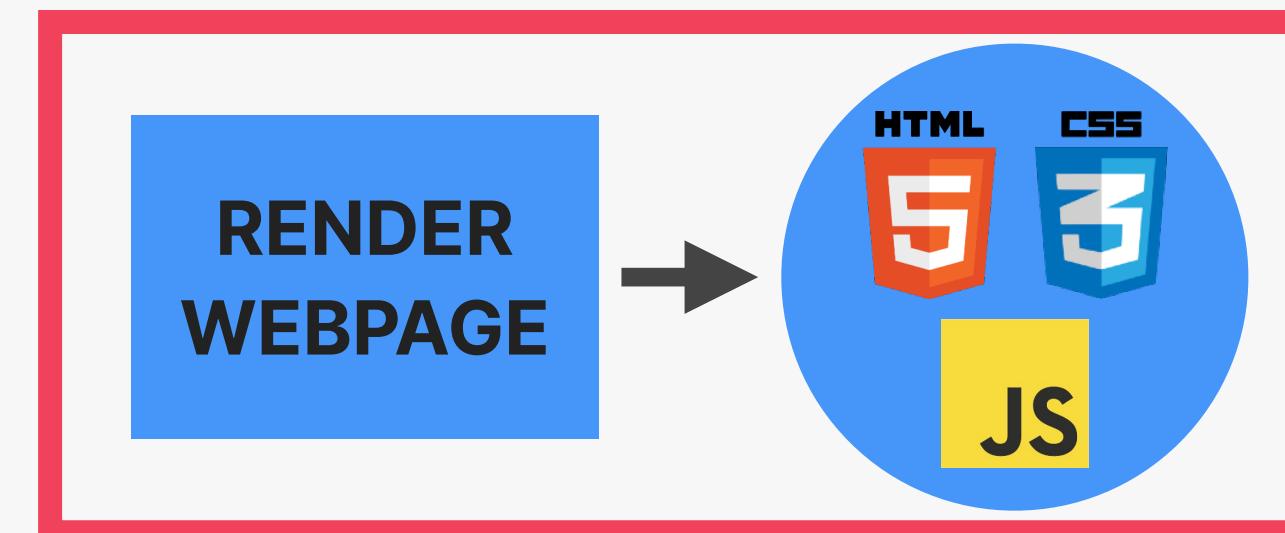



3 GETTING MODERN AGAIN

NEXT.js
Remix

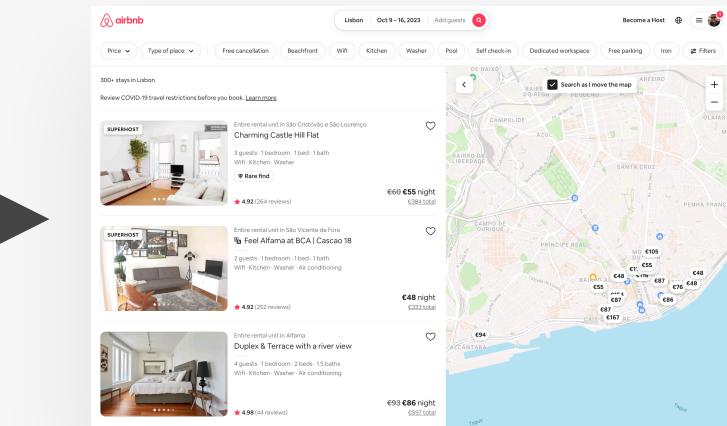


CLIENT / FRONT-END


2 THE “MODERN” WAY

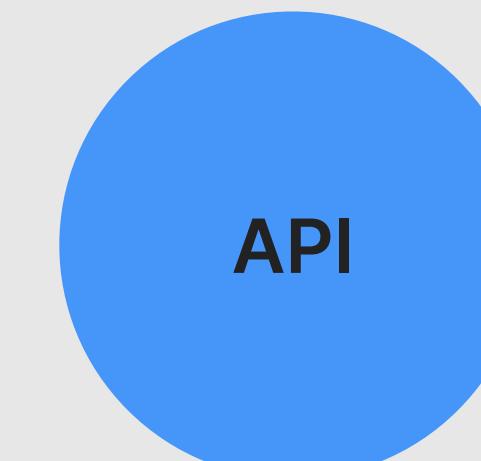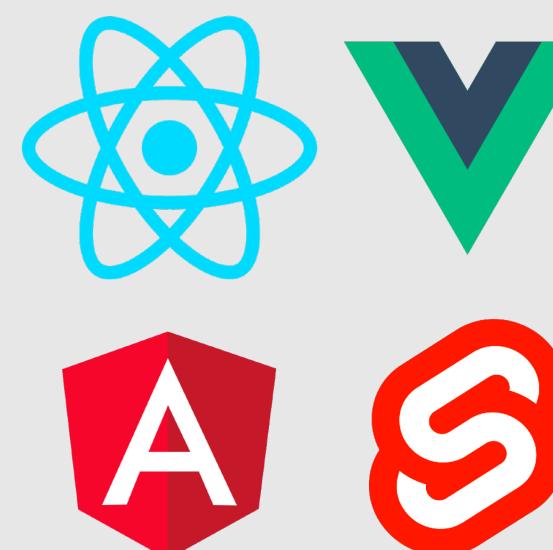


SERVER-SIDE RENDERING

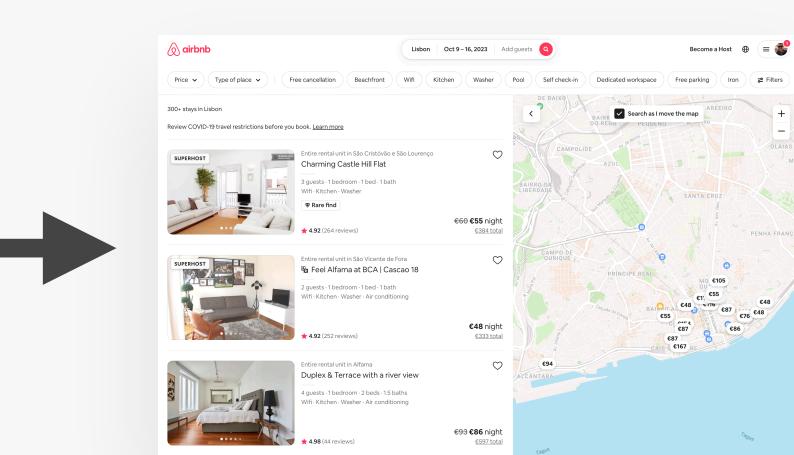

CLIENT-SIDE RENDERING

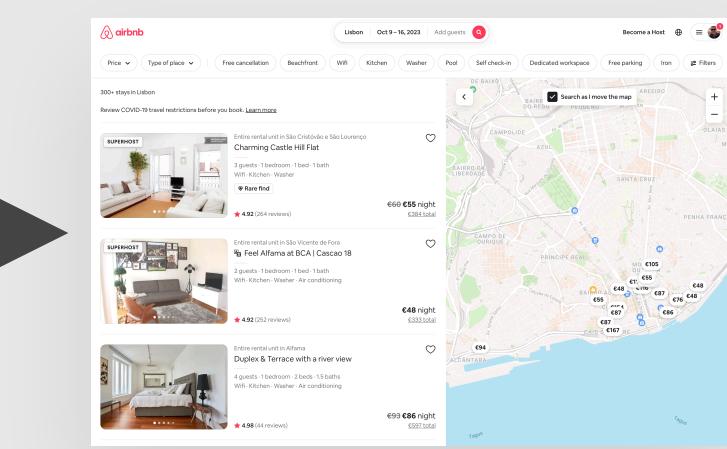

CLIENT-SIDE RENDERING (CSR) VS. SERVER-SIDE RENDERING (SSR)

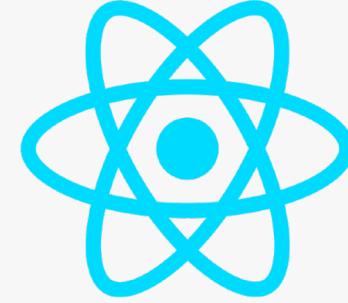

CLIENT-SIDE RENDERING

NEXT.js


- 👉 HTML is rendered on the **client** (the *user's* computer) using JavaScript
- 👎 Slower initial page loads:
 - 👉 Bigger JavaScript bundle needs to be downloaded before app starts running
 - 👉 Data is fetched after components mount
- 👍 Highly interactive: All the code and content has already been loaded (except data)
- 👎 SEO can be problematic

SERVER-SIDE RENDERING

- 👉 HTML is rendered on the **server** (the *developer's* computer)

- 👍 Faster initial page loads:
 - 👉 Less JavaScript needs to be downloaded and executed
 - 👉 Data is fetched before HTML is rendered
- 👎 Less interactive: Pages might be downloaded on demand and require full page reloads
- 👍 SEO-friendly: Content is easier for search engines to index

WHEN TO USE CSR AND SSR?

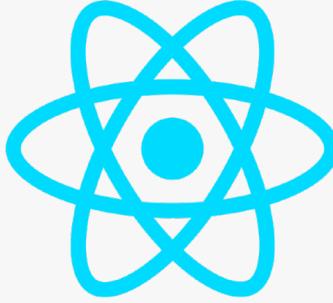

CLIENT-SIDE RENDERING

- 👉 SPAs: Perfect for building highly interactive web apps
- 👉 Apps that don't need SEO:
 - 👉 Apps that are used “internally” as tools inside companies
 - 👉 Apps that are entirely hidden behind a login

This is what we've been doing so far

NEXT.js

SERVER-SIDE RENDERING

- 👉 Content-driven websites or apps where SEO is essential: E-commerce, blogs, news, marketing websites, etc.

More on this later

TWO TYPES OF SSR:


1

Static: HTML generated at build time (often called Static Site Generation, or SSG)

2

Dynamic: HTML generated each time server receives new request (some call only this SSR)

TYPICAL TIMELINE OF CSR VS. SSR WITH DATA FETCHING

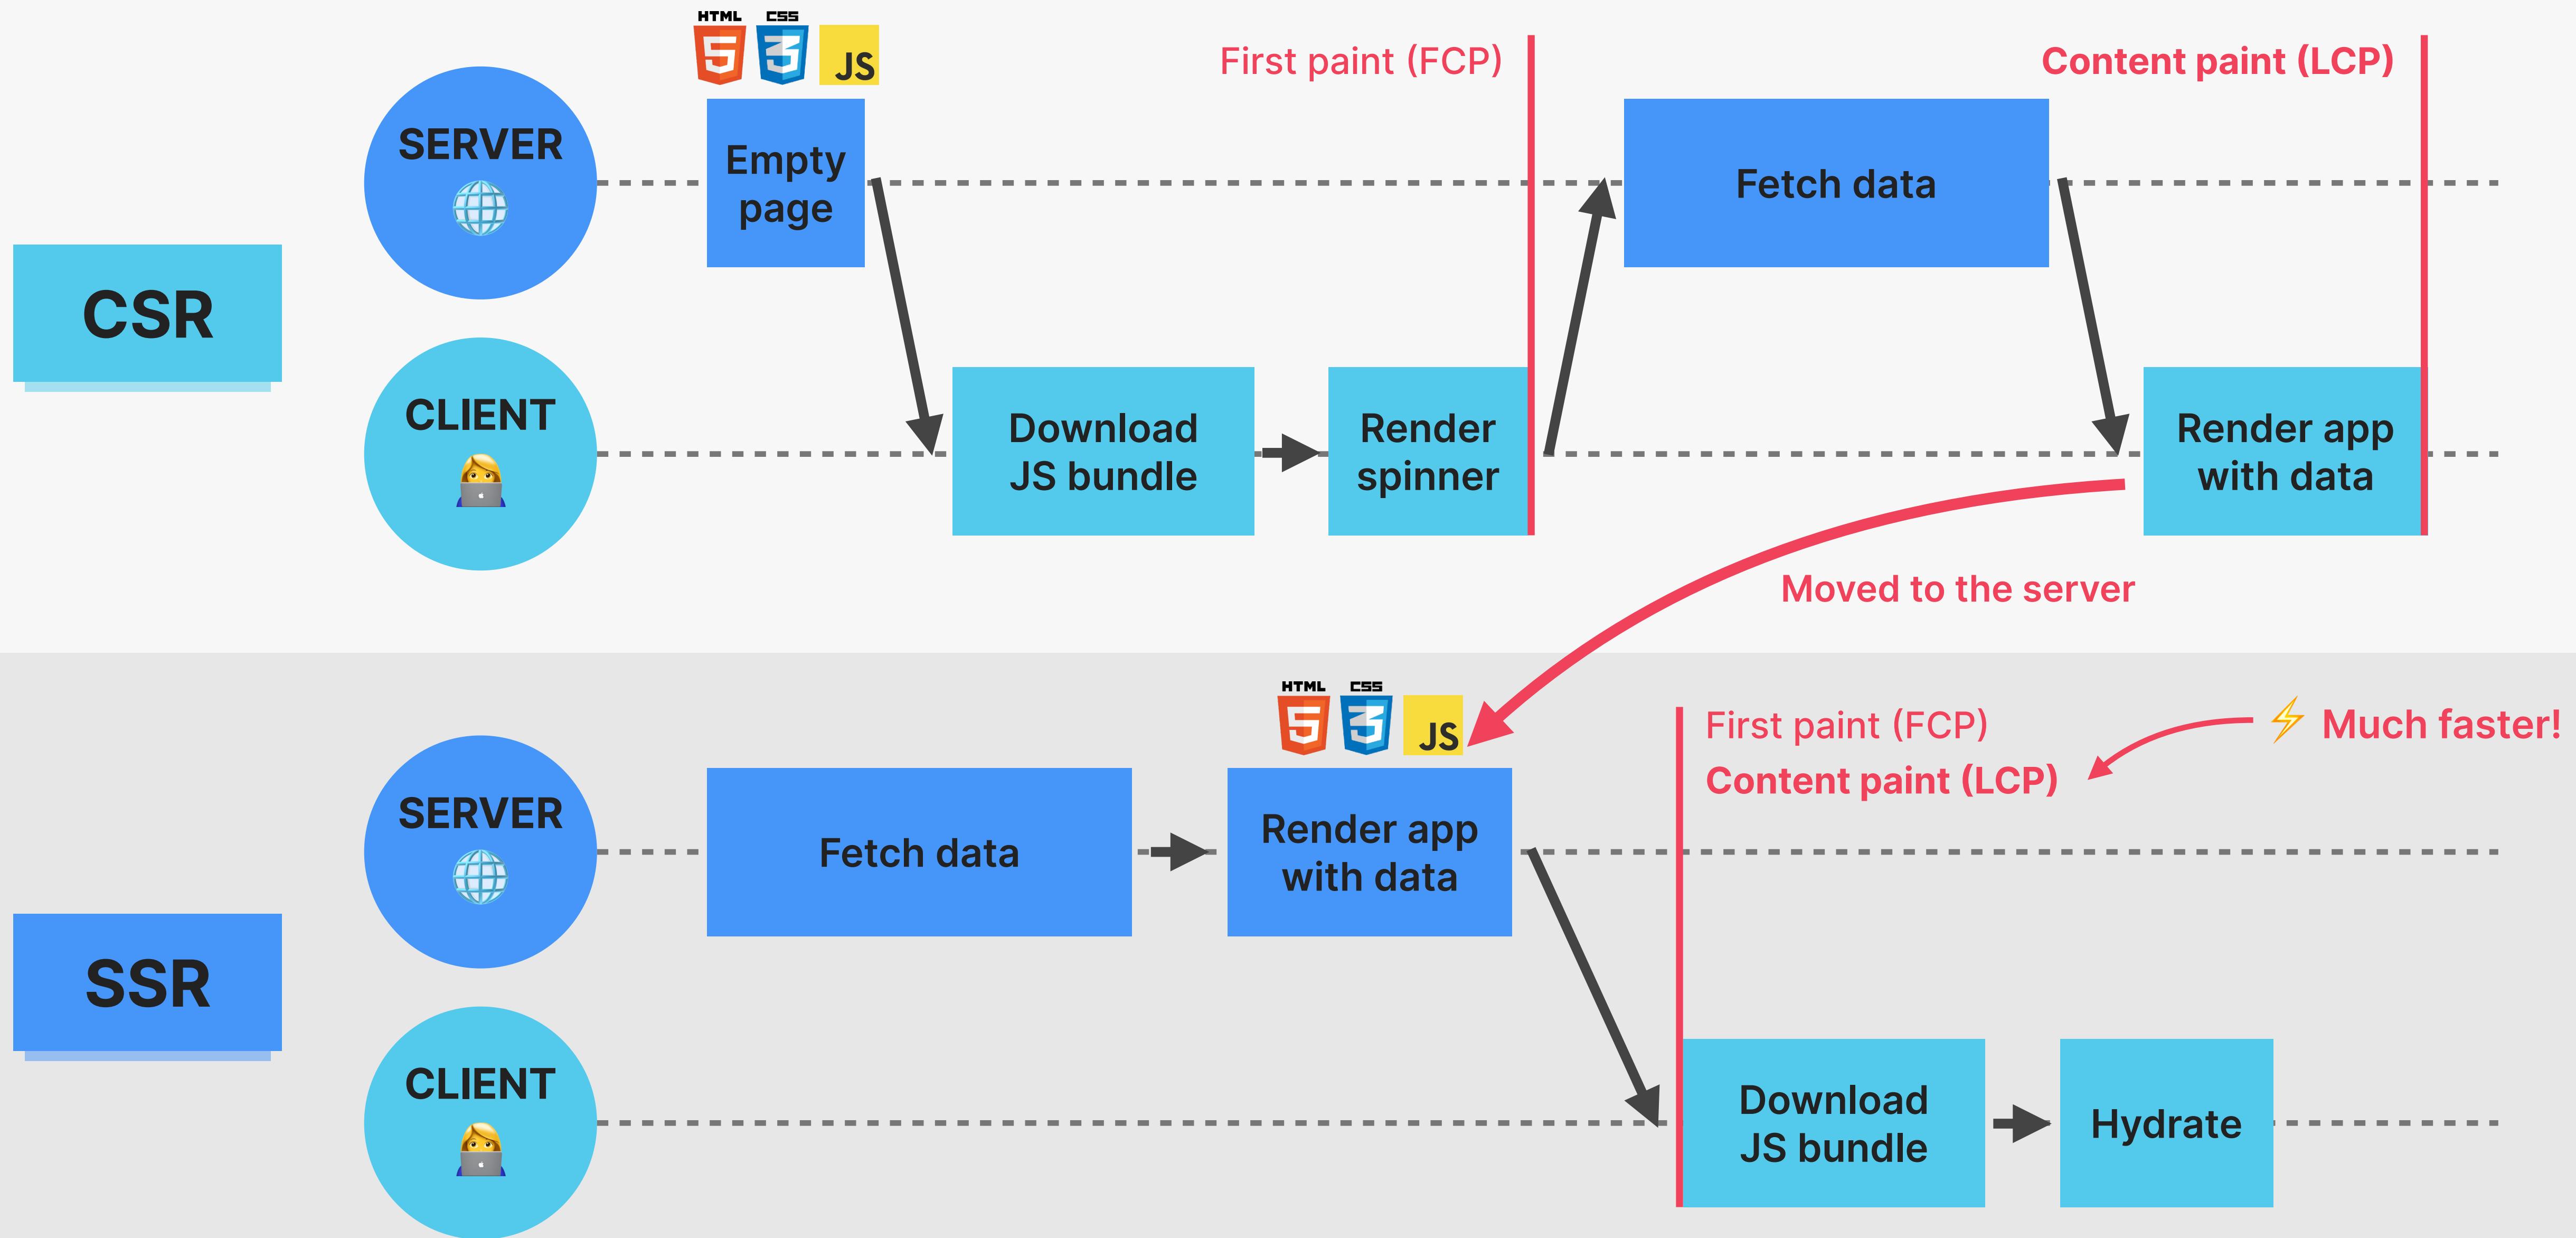



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

OVERVIEW OF NEXT.JS WITH THE
"APP" ROUTER

LECTURE

THE MISSING PIECE: HYDRATION

WHAT IS HYDRATION?

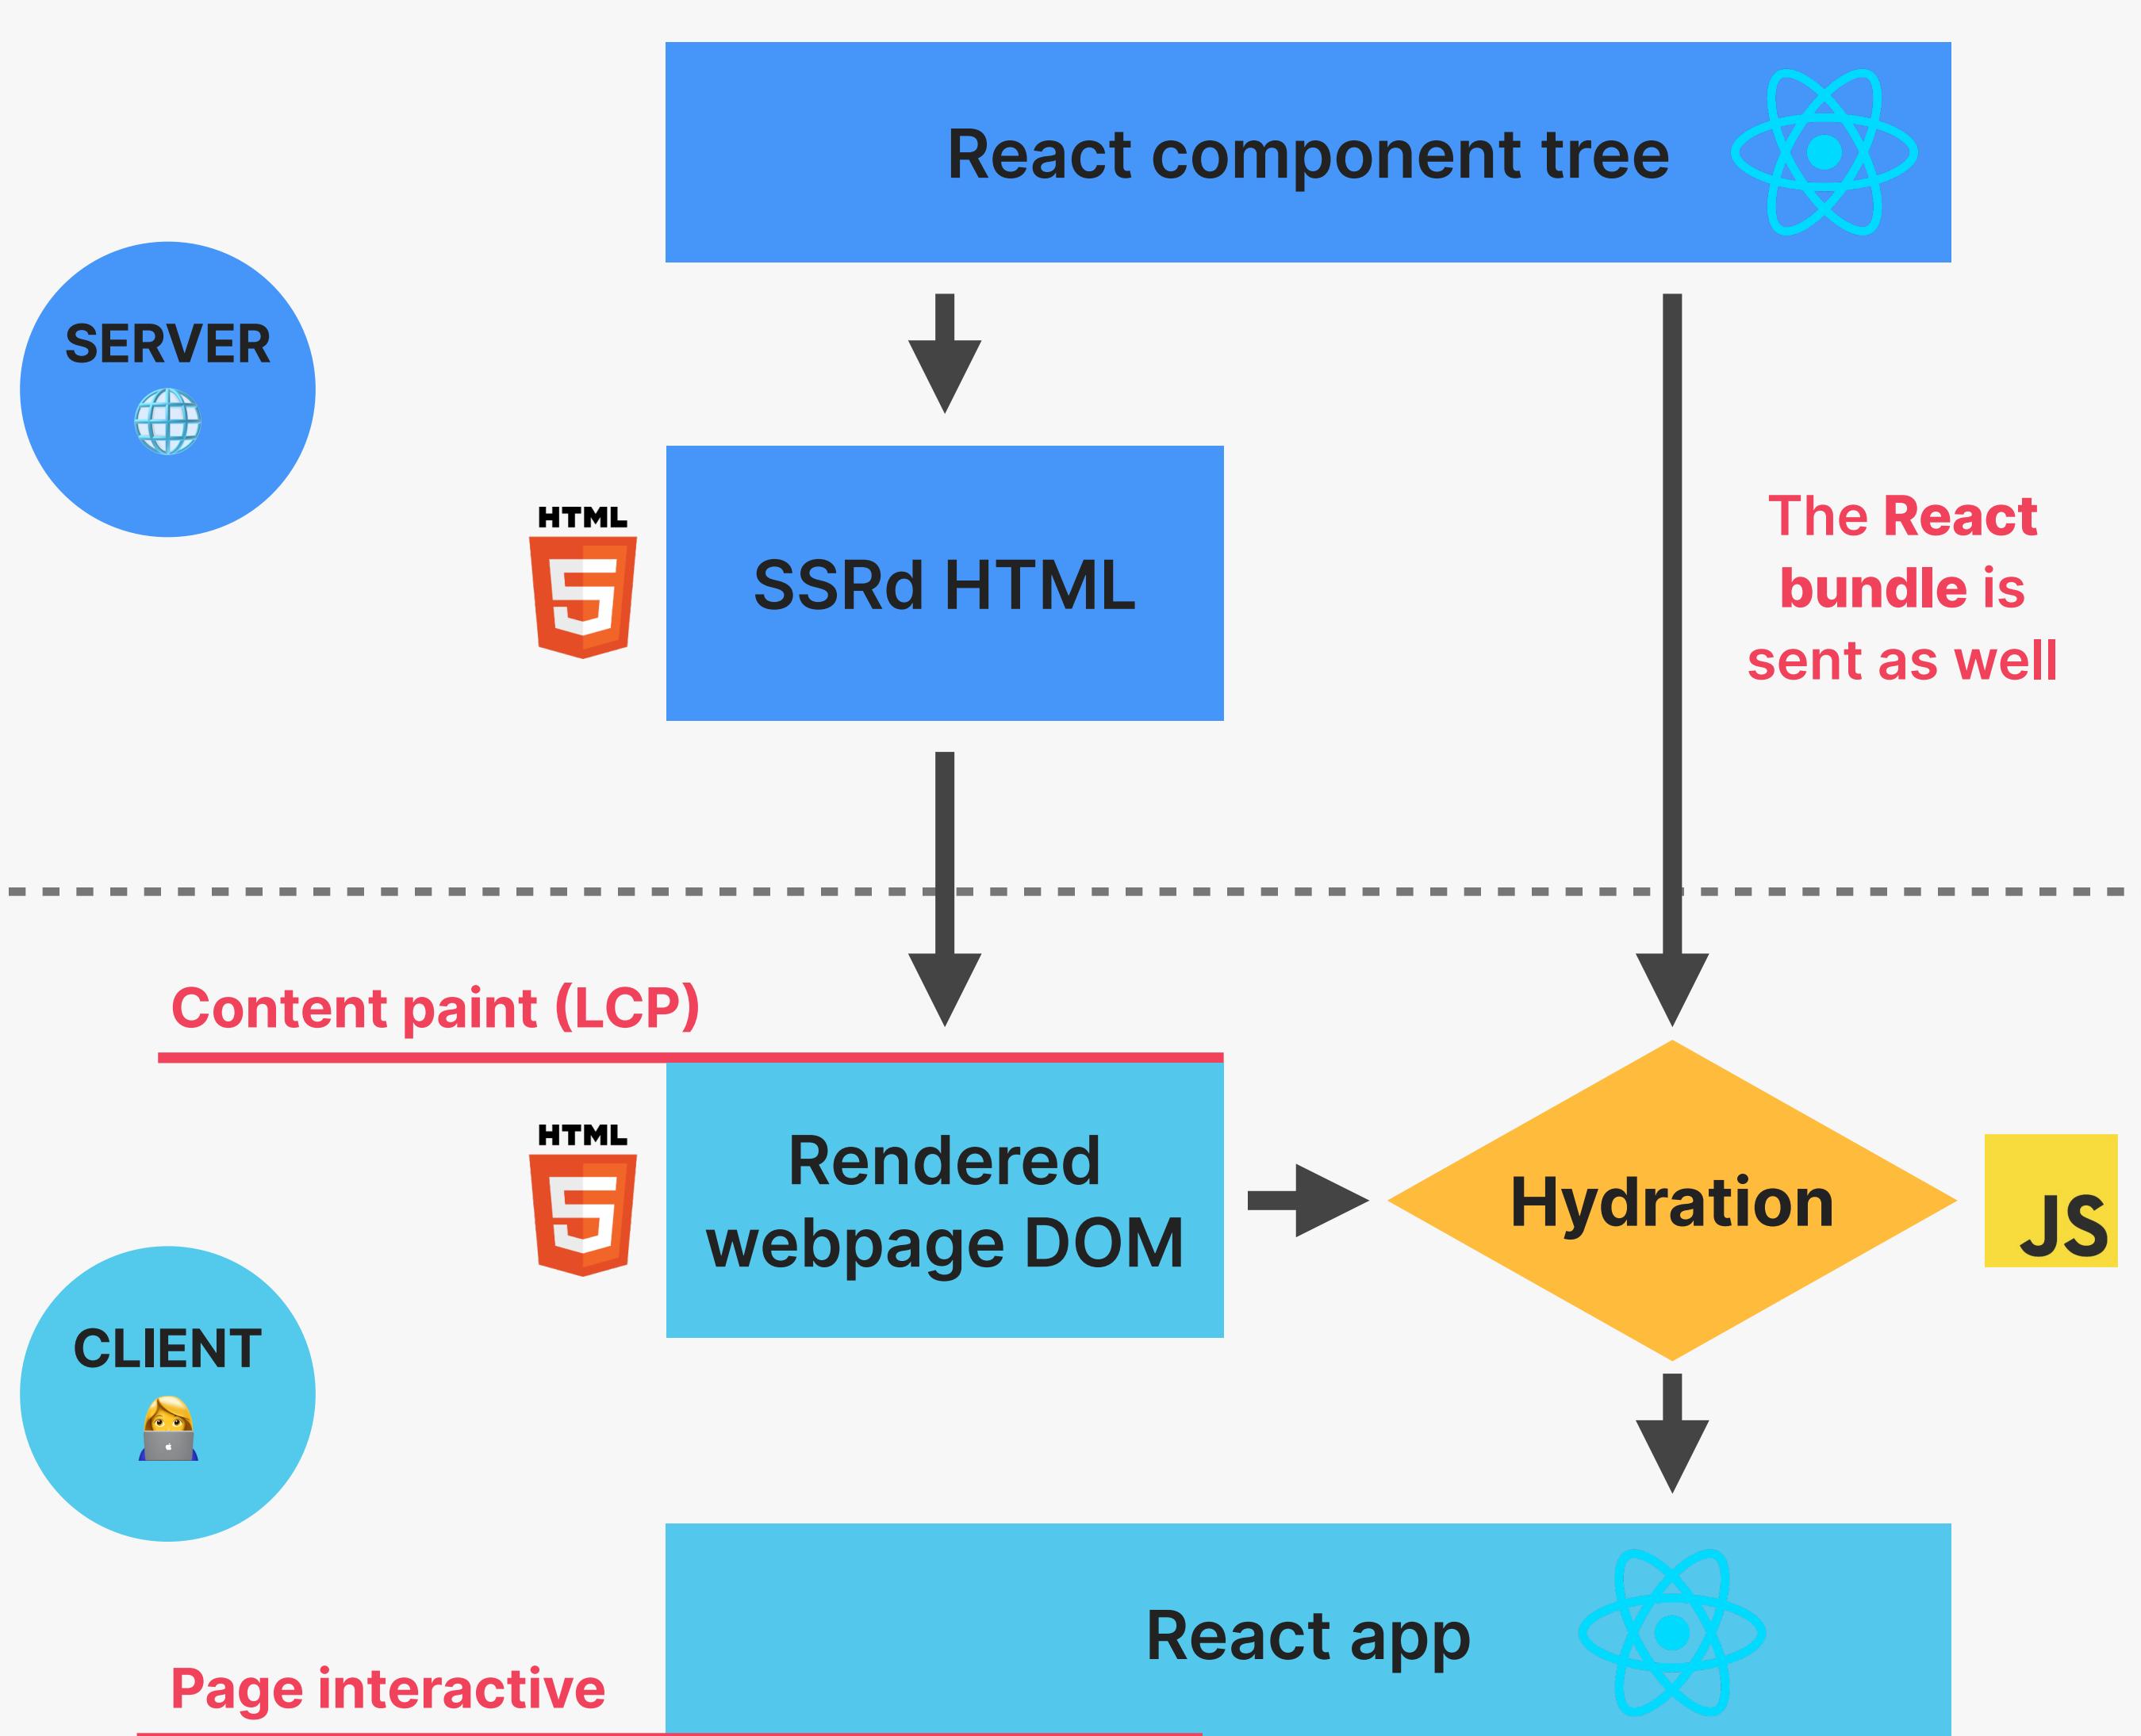

- 👉 Adds back the **interactivity and event handlers** that were lost when HTML was server-side rendered
- 👉 *Watering the “dry” HTML with the “water” of interactivity and event handlers*
- 👉 React builds the component tree on the client and compares it with the actual SSRd DOM: **They must be the same so React can adopt it!**
- 👉 **Common hydration error causes:** incorrect HTML element nesting, different data used for rendering, using browser-only APIs, side effects, etc.



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

OVERVIEW OF NEXT.JS WITH THE
"APP" ROUTER

LECTURE

WHAT IS NEXT.JS?

WHAT IS NEXT.JS?


NEXT.JS

“THE REACT FRAMEWORK FOR THE WEB”


▲Vercel

- 👉 **Meta-framework built on top of React:** we still use components, props, react hooks, etc.
- 👉 **Opinionated way of building React apps:** Set of conventions and best practices regarding routing, data fetching, etc.
- 👉 Allows us to build **complex full-stack** web apps and sites
- 👉 Allows us to use **cutting-edge React features** that need to be integrated into a framework: Suspense, Server Components, Server Actions, streaming, etc.

React's full-stack architecture vision

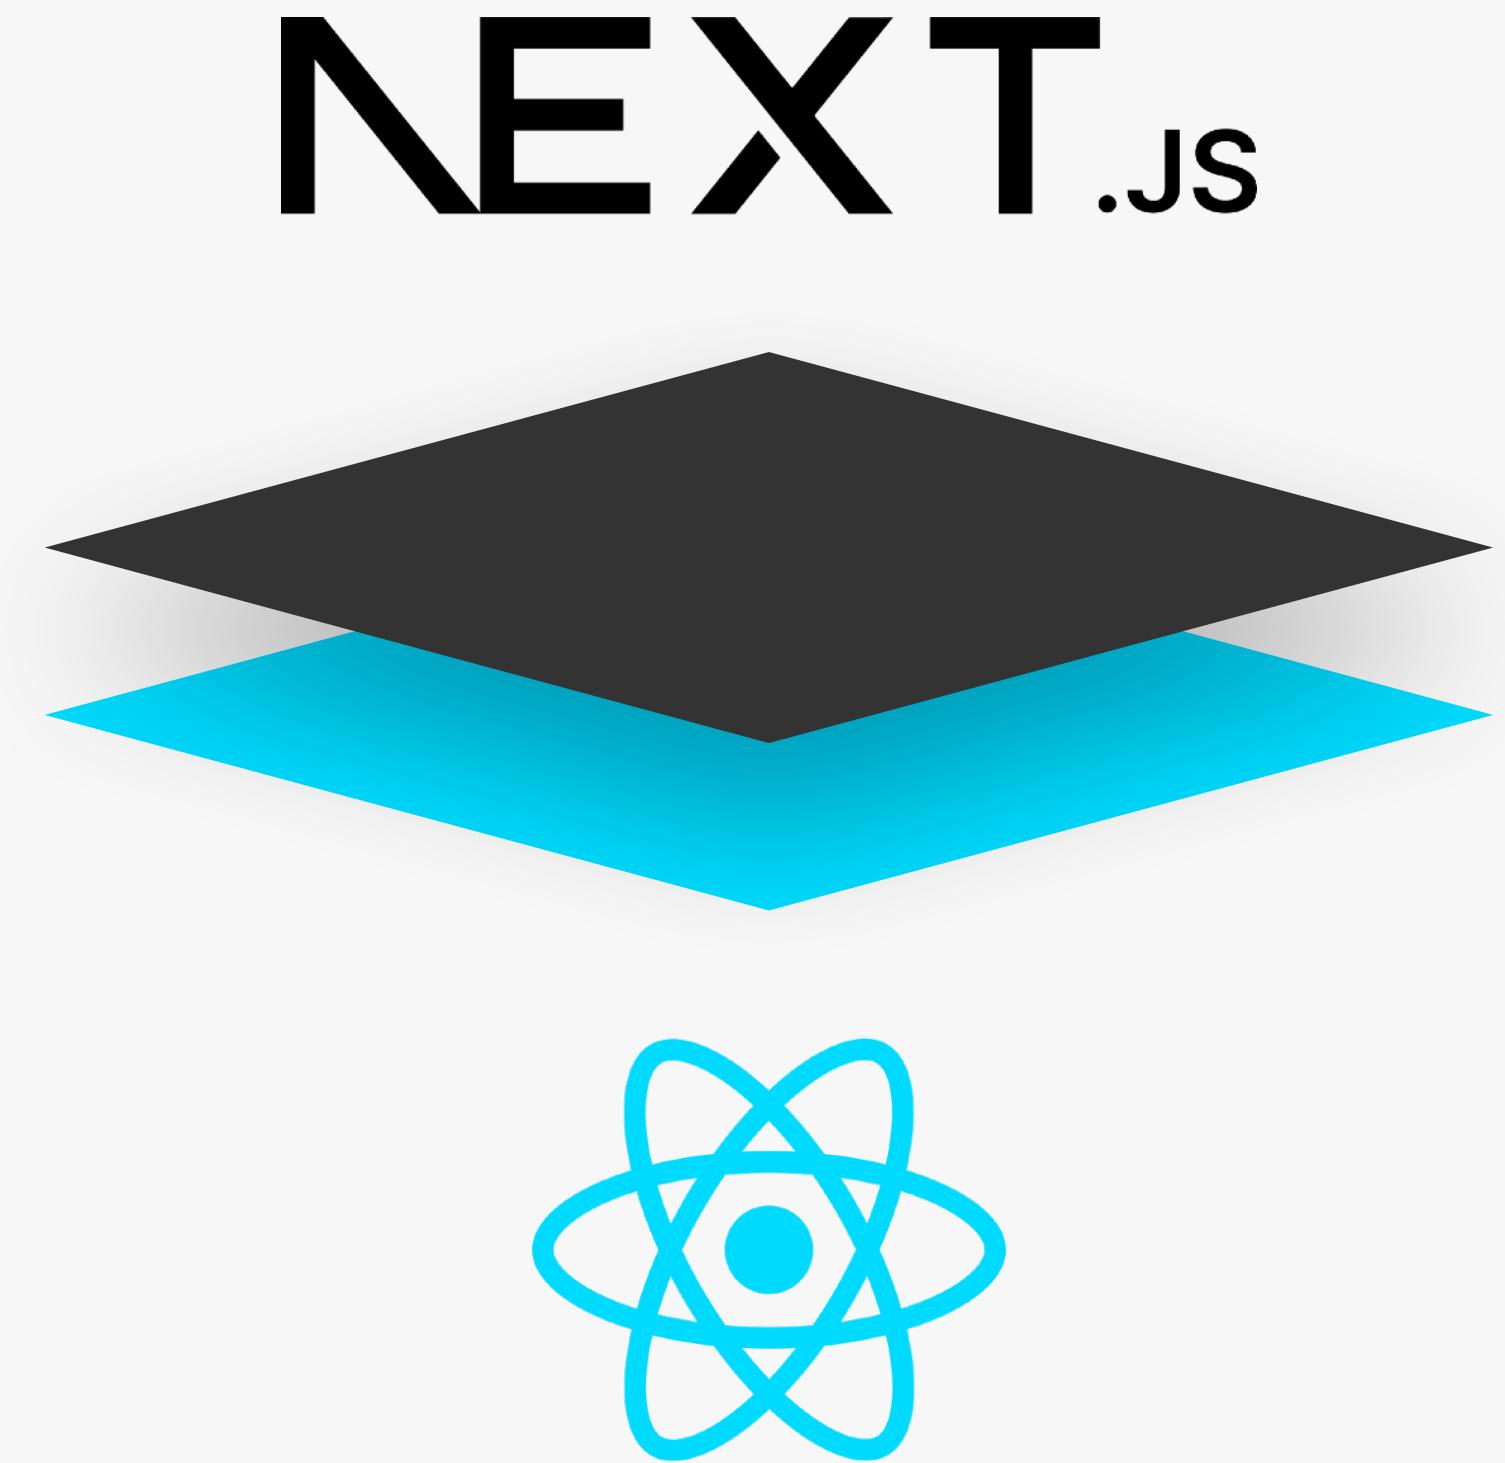

THE NEXT.JS KEY INGREDIENTS

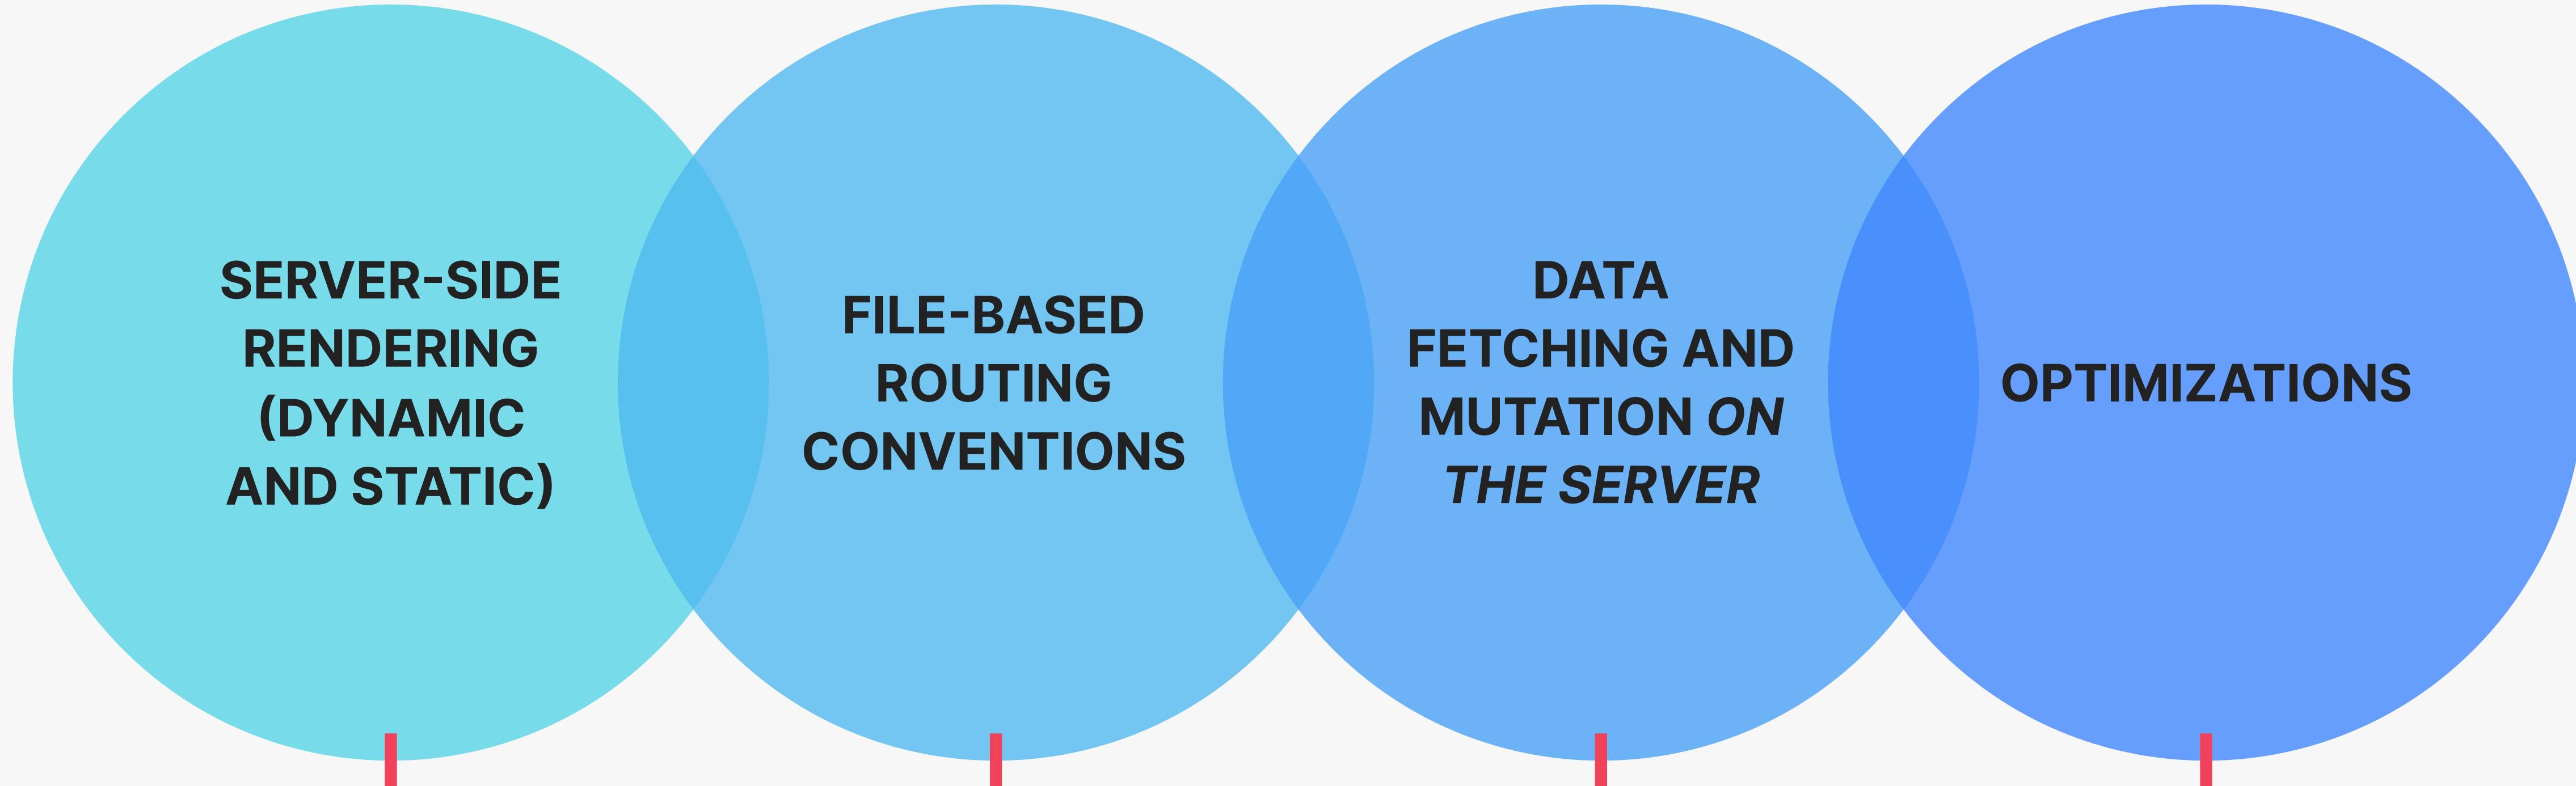

👉 Dynamic or static can be **selected** for each route

👉 **Folders as routes**
👉 Special files for pages, layouts, loaders, etc.

👉 Fetching data directly in **Server Components**
👉 Mutations in **Server Actions**

👉 Images
👉 Fonts
👉 SEO
👉 Preloading

TWO FLAVOURS OF NEXT.JS: "APP" AND "PAGES" ROUTER

MODERN NEXT.JS: "APP" ROUTER

- 👉 Introduced in Next.js 13.4 (2023)
- 👉 Recommend for new projects
- 👉 Implements **React's full-stack architecture**: Server Components, Server Actions, Streaming, etc.
- 👉 Easy fetching with **fetch()** right in components
- 👉 Extremely easy to create **layouts**, loaders, etc.
- 👉 More advanced routing (parallel routing, etc.)
- 👉 Better DX (Developer Experience) and UX
- 👉 Caching is very aggressive and confusing
- 👉 Steep learning curve (but it's React)

LEGACY NEXT.JS: "PAGES" ROUTER

- 👉 The first Next.js router since v1 (2016)
- 👉 Still supported and updated in the future
- 👉 Overall more **simple and easy** to learn
- 👉 Simple things like **layouts** are confusing to implement
- 👉 Data fetching using Next.js-specific APIs such as **getStaticProps** and **getServerSideProps**



We're gonna learn the "app" router from the start. At the end, there is a section on the fundamentals of the "pages" router



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

OVERVIEW OF NEXT.JS WITH THE
"APP" ROUTER

LECTURE

WHAT ARE REACT SERVER
COMPONENTS?

WHY REACT SERVER COMPONENTS?

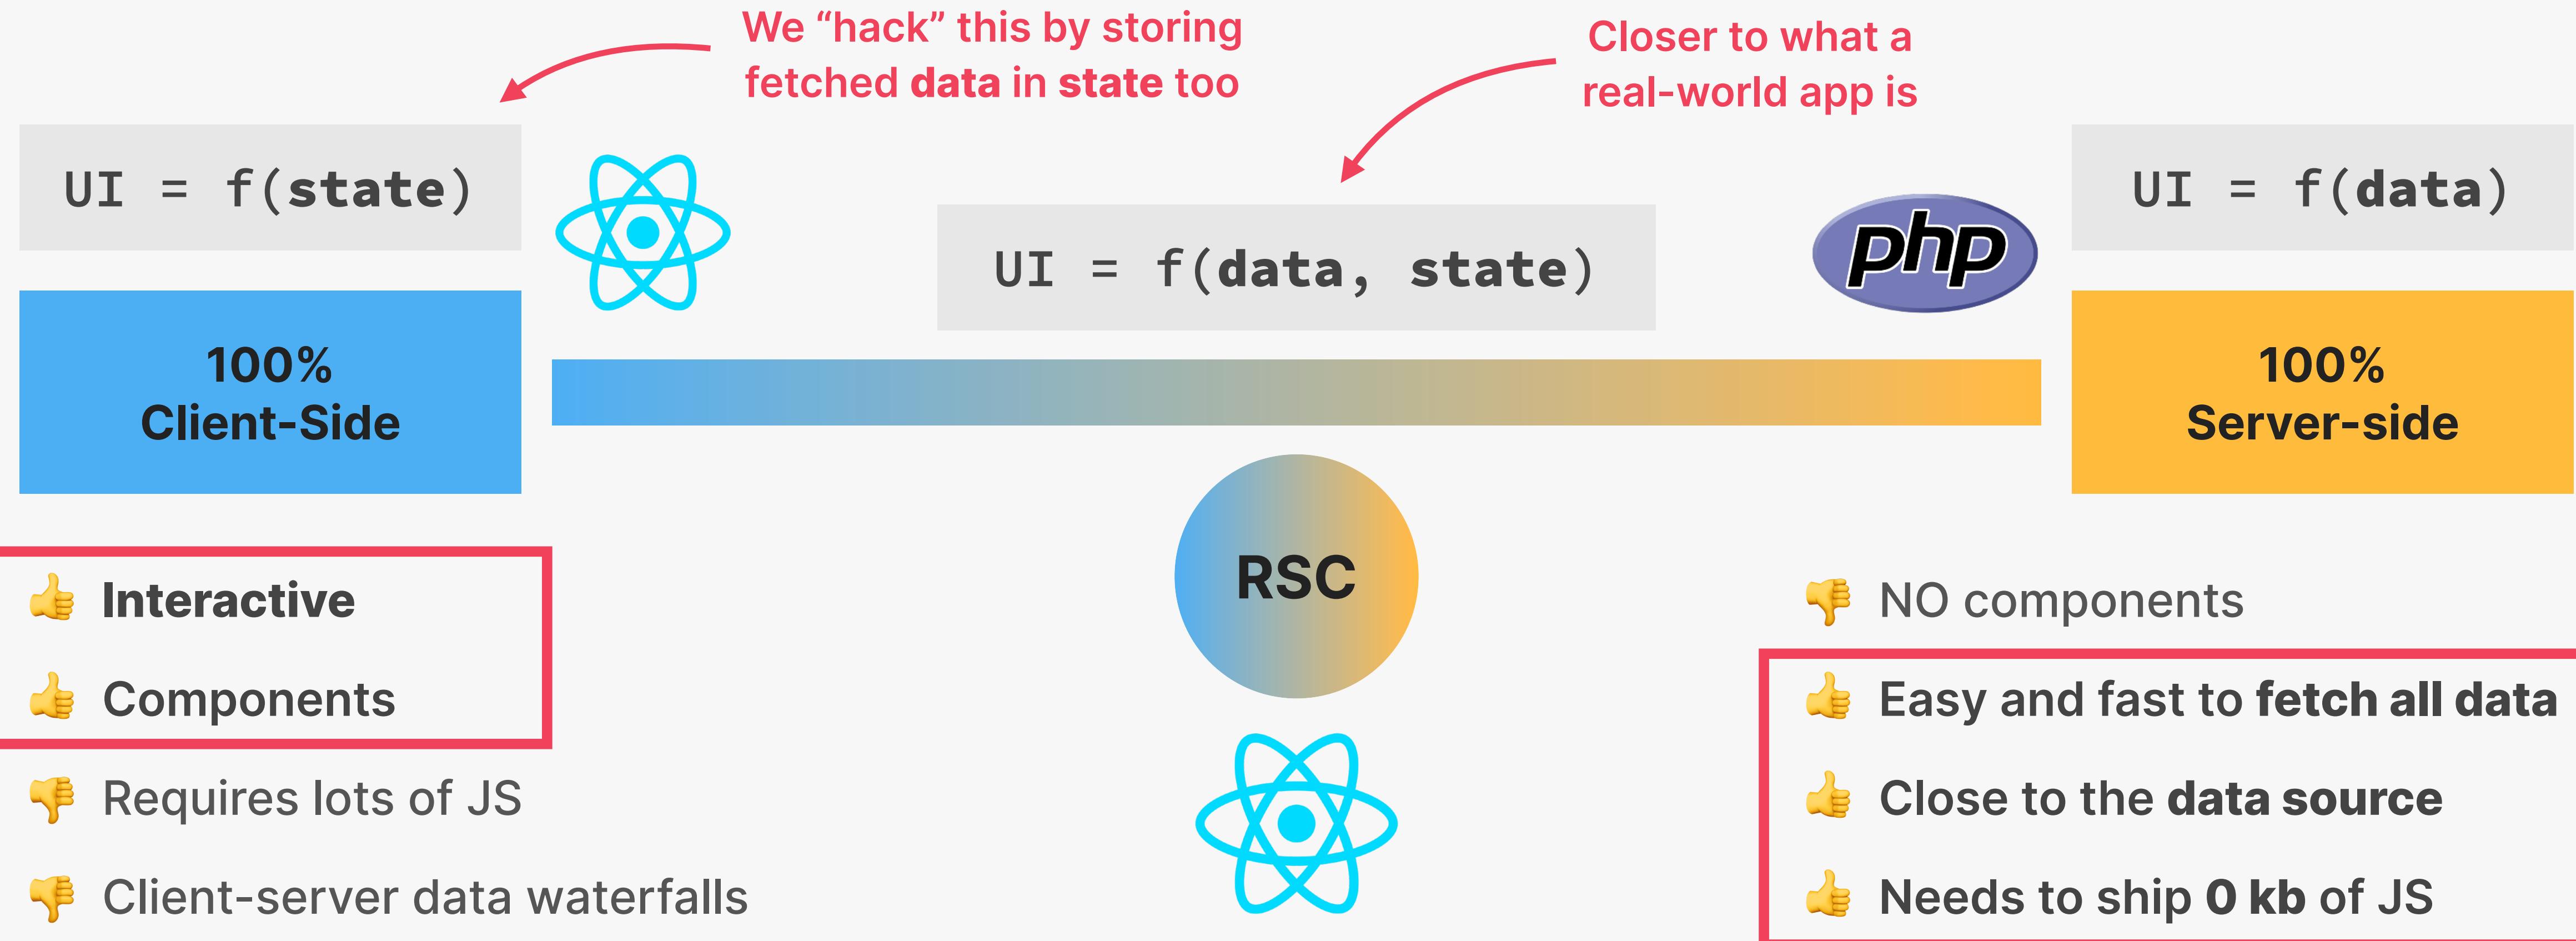

🤔 What if we could take the best of both worlds?

🧩 The answer is a completely new React paradigm: **React Server Components (RSC)**

WHAT ARE REACT SERVER COMPONENTS?

REACT SERVER COMPONENTS (RSC)

- 👉 A new **full-stack architecture** for React apps
- 👉 Introduces the server as an integral part of React component trees: **server components**
- 👉 We write **frontend code** next to **backend code** in a natural way that “feels” like regular React
- 👉 RSC is **NOT** active by default in new React apps (e.g. Vite apps): it needs to be **implemented** by a framework like **Next.js** (“app router”)

Name of the
new **PARADIGM**

Name of the new
COMPONENT TYPE

1

CLIENT COMPONENTS

UI = $f(\mathbf{state})$

- 👉 “Regular” components
- 👉 Created with “`use client`” directive at the top of the module

2

SERVER COMPONENTS

UI = $f(\mathbf{data})$

- 👉 Components that are **only rendered on the server**
- 👉 Don’t make it into the bundle (0 kb)
- 👉 We can build the **back-end with React!**
- 👉 Default in apps that use the RSC architecture (like Next.js)

AN EXAMPLE + THE SERVER-CLIENT BOUNDARY



THE WILD OASIS

- Home
- Bookings
- Cabins**
- Users
- Settings

Client component

All cabins

CABIN	CAPACITY	PRICE	DISCOUNT	⋮
001	Fits up to 2 guests	\$250.00	—	⋮
002	Fits up to 2 guests	\$350.00	—	Duplicate Edit cabin Delete cabin
003	Fits up to 4 guests	\$300.00	—	⋮
004	Fits up to 4 guests	\$500.00	\$50.00	⋮
005	Fits up to 6 guests	\$350.00	—	⋮
006	Fits up to 6 guests	\$800.00	\$100.00	⋮
007	Fits up to 8 guests	\$600.00	\$100.00	⋮
008	Fits up to 10 guests	\$1,400.00	—	⋮

Server component

App

```
graph TD; App --> Sidebar; App --> Header; App --> Main; Sidebar --- Avatar[Avatar]; Header --- DarkMode[DarkMode]; Main --- Table[Table]; Main --- SortBy[SortBy]; Table --- CabinRow[CabinRow]; CabinRow --- Menu[Menu]; Menu --- Duplicate[Duplicate]; Menu --- Edit[Edit]; Menu --- Delete[Delete]
```

Server-client boundary

Split point between server and client code

Client sub-tree. Child modules need no “use client”


Also a sub-tree, but a small one

(Simplified tree)

SERVER COMPONENTS VS. CLIENT COMPONENTS

	CLIENT COMPONENTS	“use client”	SERVER COMPONENTS	Default
 State/hooks	 YES		 NO	
 Lifting state up	 YES		 N.A.	
 Props	 YES		 YES (Must be serializable when passed to client components. No functions or classes)	
 Data fetching	 Also possible, preferably with library		 Preferred. Use <code>async/await</code> in component	
 Can import	Only client components (can't go back in the client-server boundary)		Client and server components	
 Can render	Client components and server components <i>passed as props</i>		Client and server components	
 When re-render?	On state change		On URL change (navigation)	

A SIMPLE NEW MENTAL MODEL

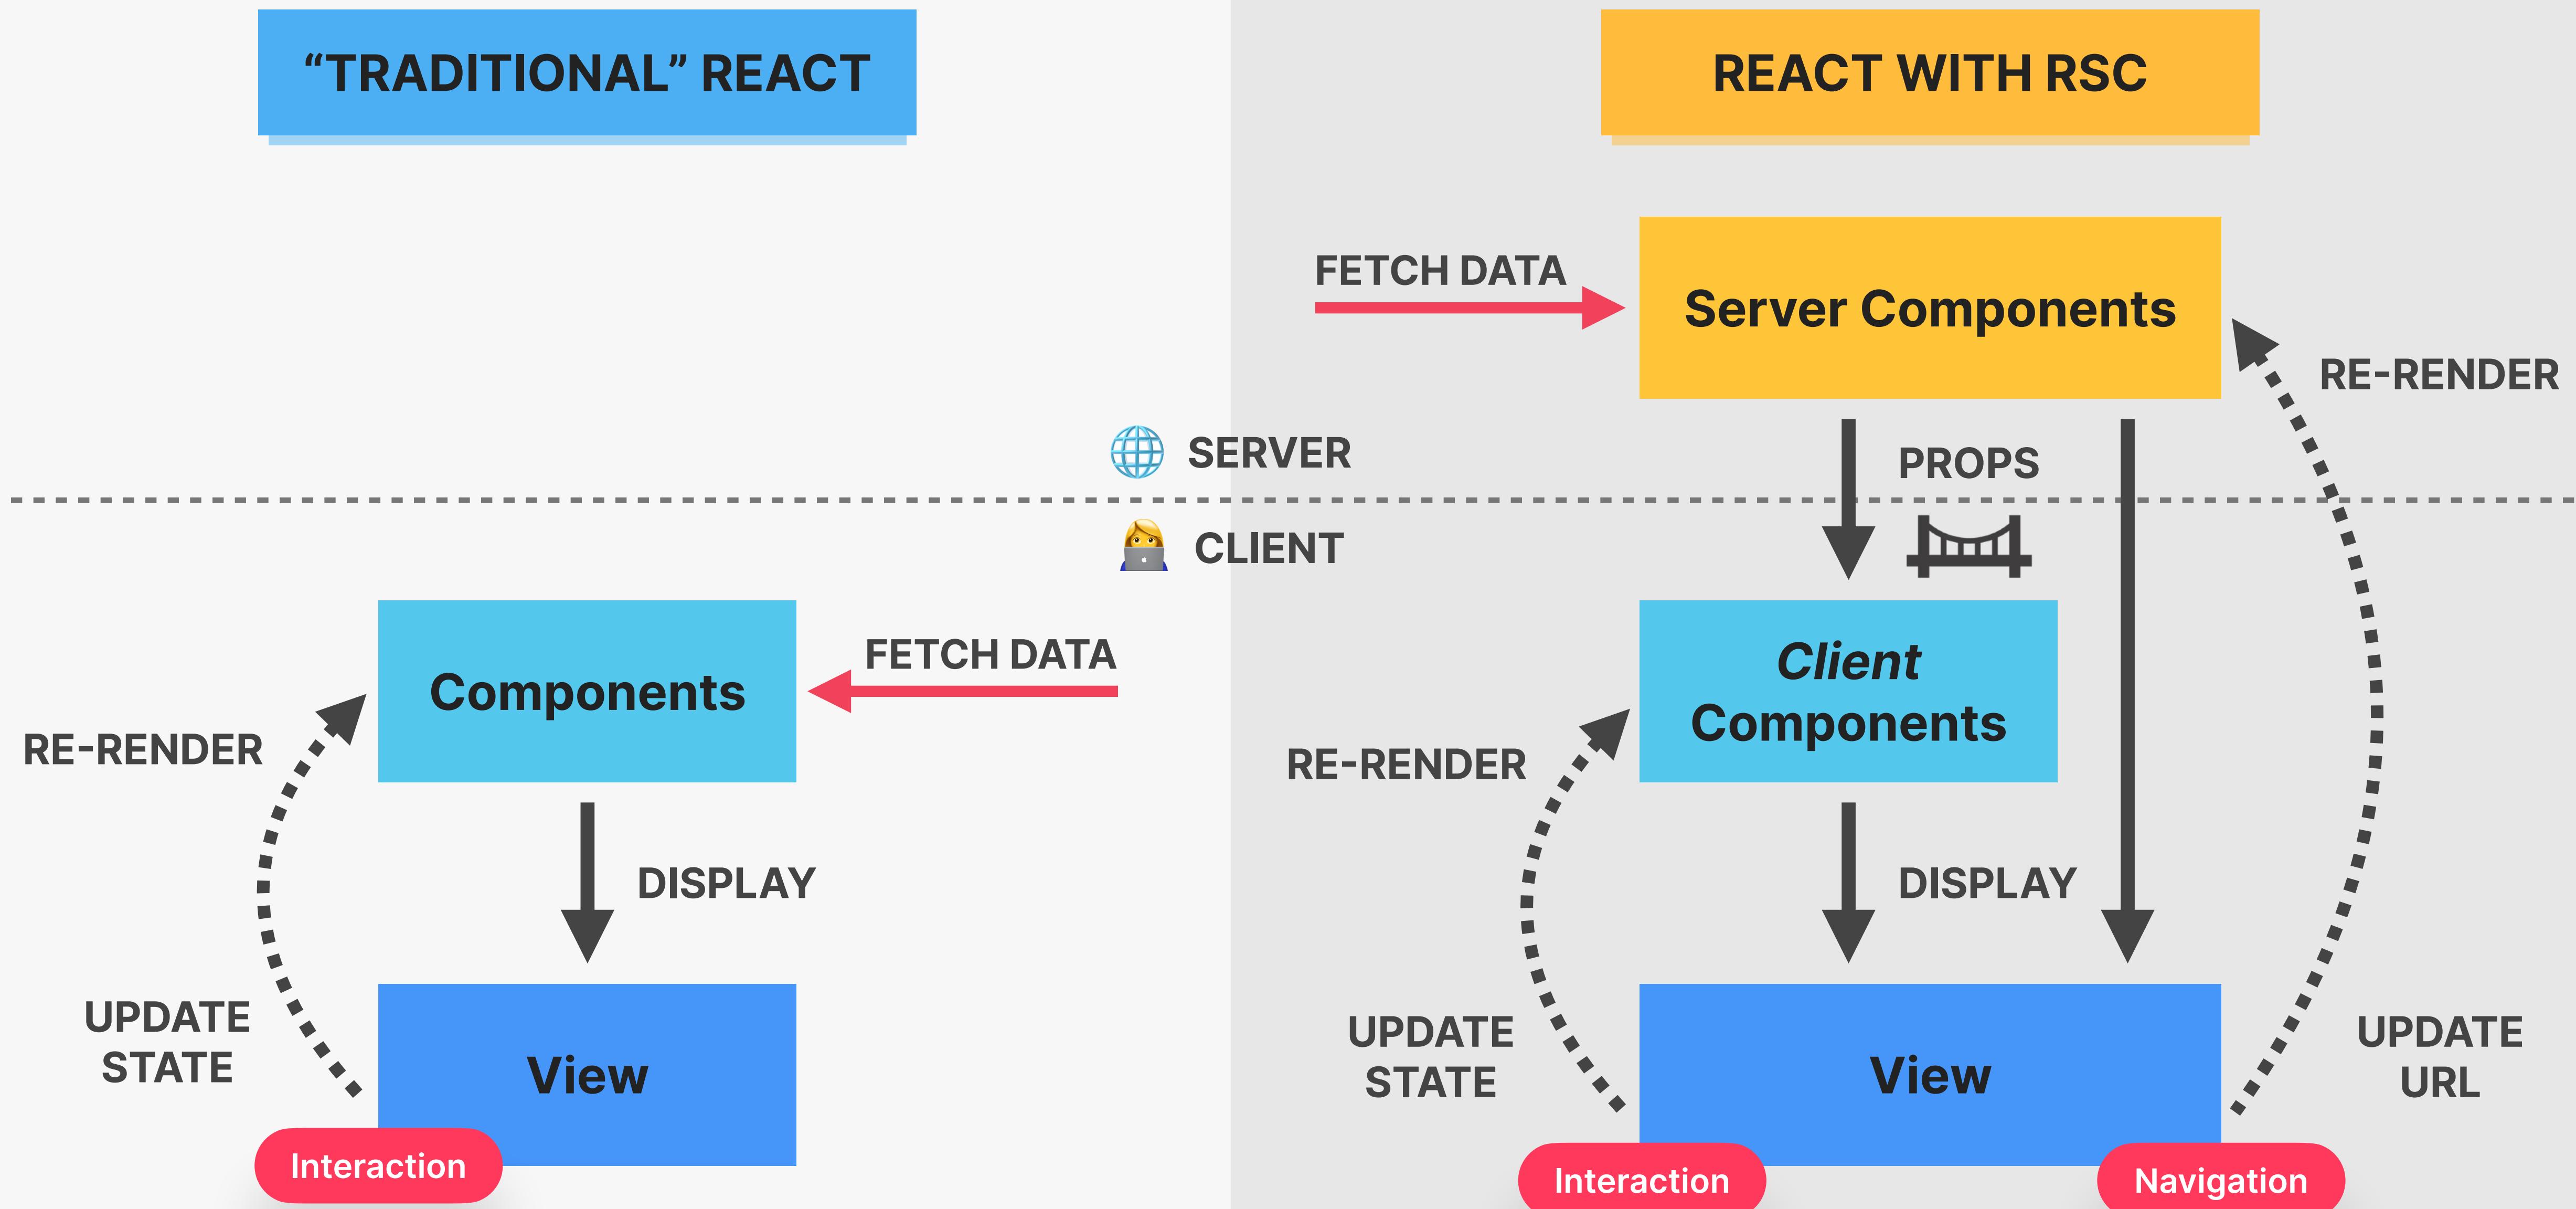

THE GOOD AND BAD OF THE RSC ARCHITECTURE

THE GOOD

- 👍 We can compose entire full-stack apps with **React components alone** (+ server actions 👉)
- 👍 One **single codebase** for front and back-end
- 👍 Server components have **more direct and secure access** to the data source (no API, no exposing API keys, etc.)
- 👍 Eliminate **client-server waterfalls** by fetching all the data needed for a page **at once** before sending it to the client (*not each component*)
- 👍 “**Disappearing code**”: server components ship no JS, so they can import huge libraries “for free”

THE BAD

- 👎 Makes React **more complex**
- 👎 More things to **learn and understand**
- 👎 Things like **Context API** don’t work in server components
- 👎 **More decisions** to make: “Should this be a client or a server component?”, “Should I fetch this data on the server or the client?”, etc.
- 👎 Sometimes you still need to **build an API** (for example if you also have a mobile app)
- 👎 Can only be used within a **framework**



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION



OVERVIEW OF NEXT.JS WITH THE
"APP" ROUTER

LECTURE

HOW RSC WORKS BEHIND THE
SCENES

A QUICK REVIEW OF RENDERING IN REACT

"TRADITIONAL" REACT

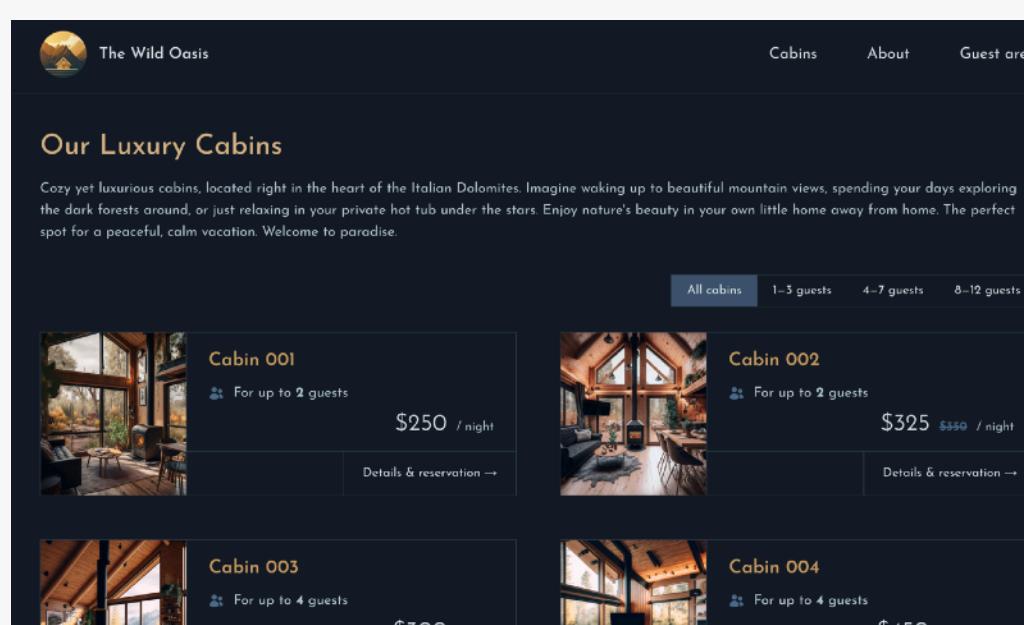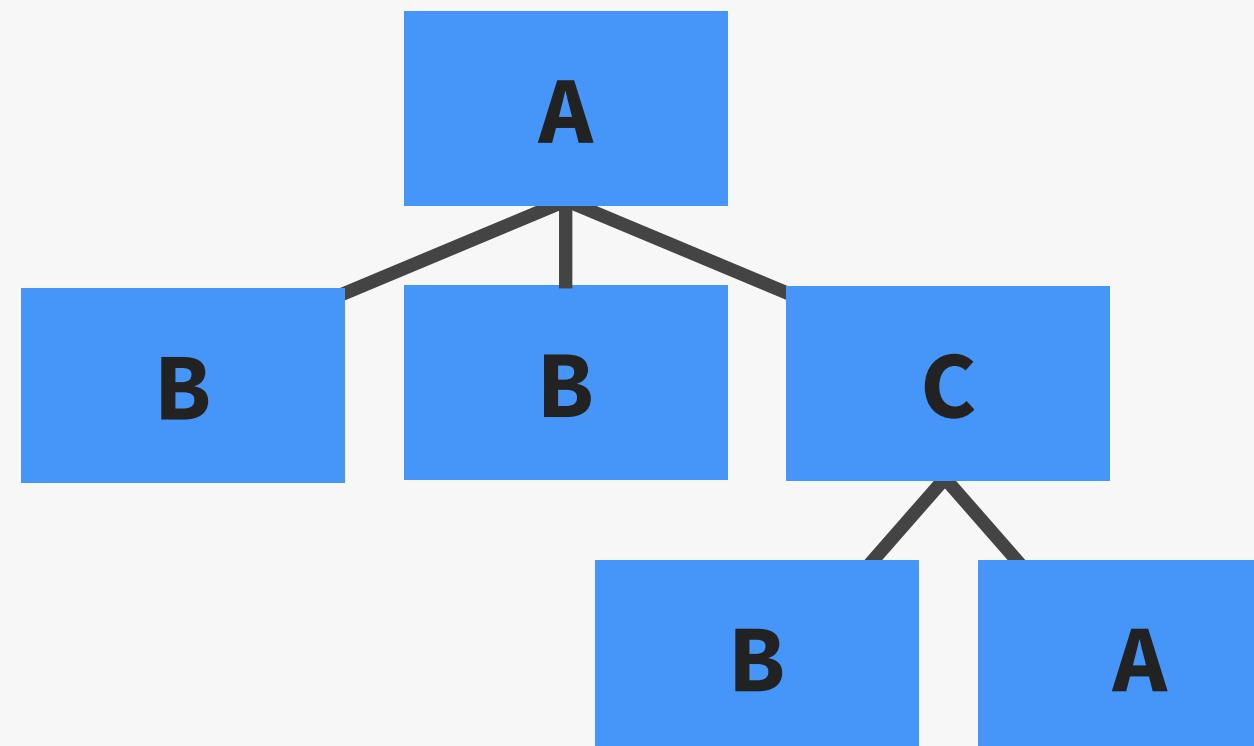

Components

Tree of component instances
(Component tree)

RENDER

React element tree ("Virtual DOM")

COMMIT TO DOM

DOM Elements (HTML)

A

B


C




How does this work in RSC? 🤔👉

```
Object {  
  $$_typeof: Symbol/react.element  
  key: null  
  props:  
    <> children: Array(2)  
      > 0: {$_typeof: Symbol/react.element},  
      > 1: {$_typeof: Symbol/react.element},  
      length: 2  
    > [Prototype]: Array(0)  
    className: "tab-content"  
    > [Prototype]: Object  
    ref: null  
    type: "div"  
  
  <> children: Array(2)  
    > 0: {$_typeof: Symbol/react.element},  
    > 1: {$_typeof: Symbol/react.element},  
    length: 2  
  > [Prototype]: Array(0)  
  className: "tab-content"  
  > [Prototype]: Object  
  ref: null  
  type: "div"  
  
  <> children: Array(2)  
    > 0: {$_typeof: Symbol/react.element},  
    > 1: {$_typeof: Symbol/react.element},  
    length: 2  
  > [Prototype]: Array(0)  
  className: "tab-content"  
  > [Prototype]: Object  
  ref: null  
  type: "div"  
  
  <> children: Array(2)  
    > 0: {$_typeof: Symbol/react.element},  
    > 1: {$_typeof: Symbol/react.element},  
    length: 2  
  > [Prototype]: Array(0)  
  className: "tab-content"  
  > [Prototype]: Object  
  ref: null  
  type: "div"  
}
```

HOW RSC WORKS BEHIND THE SCENES

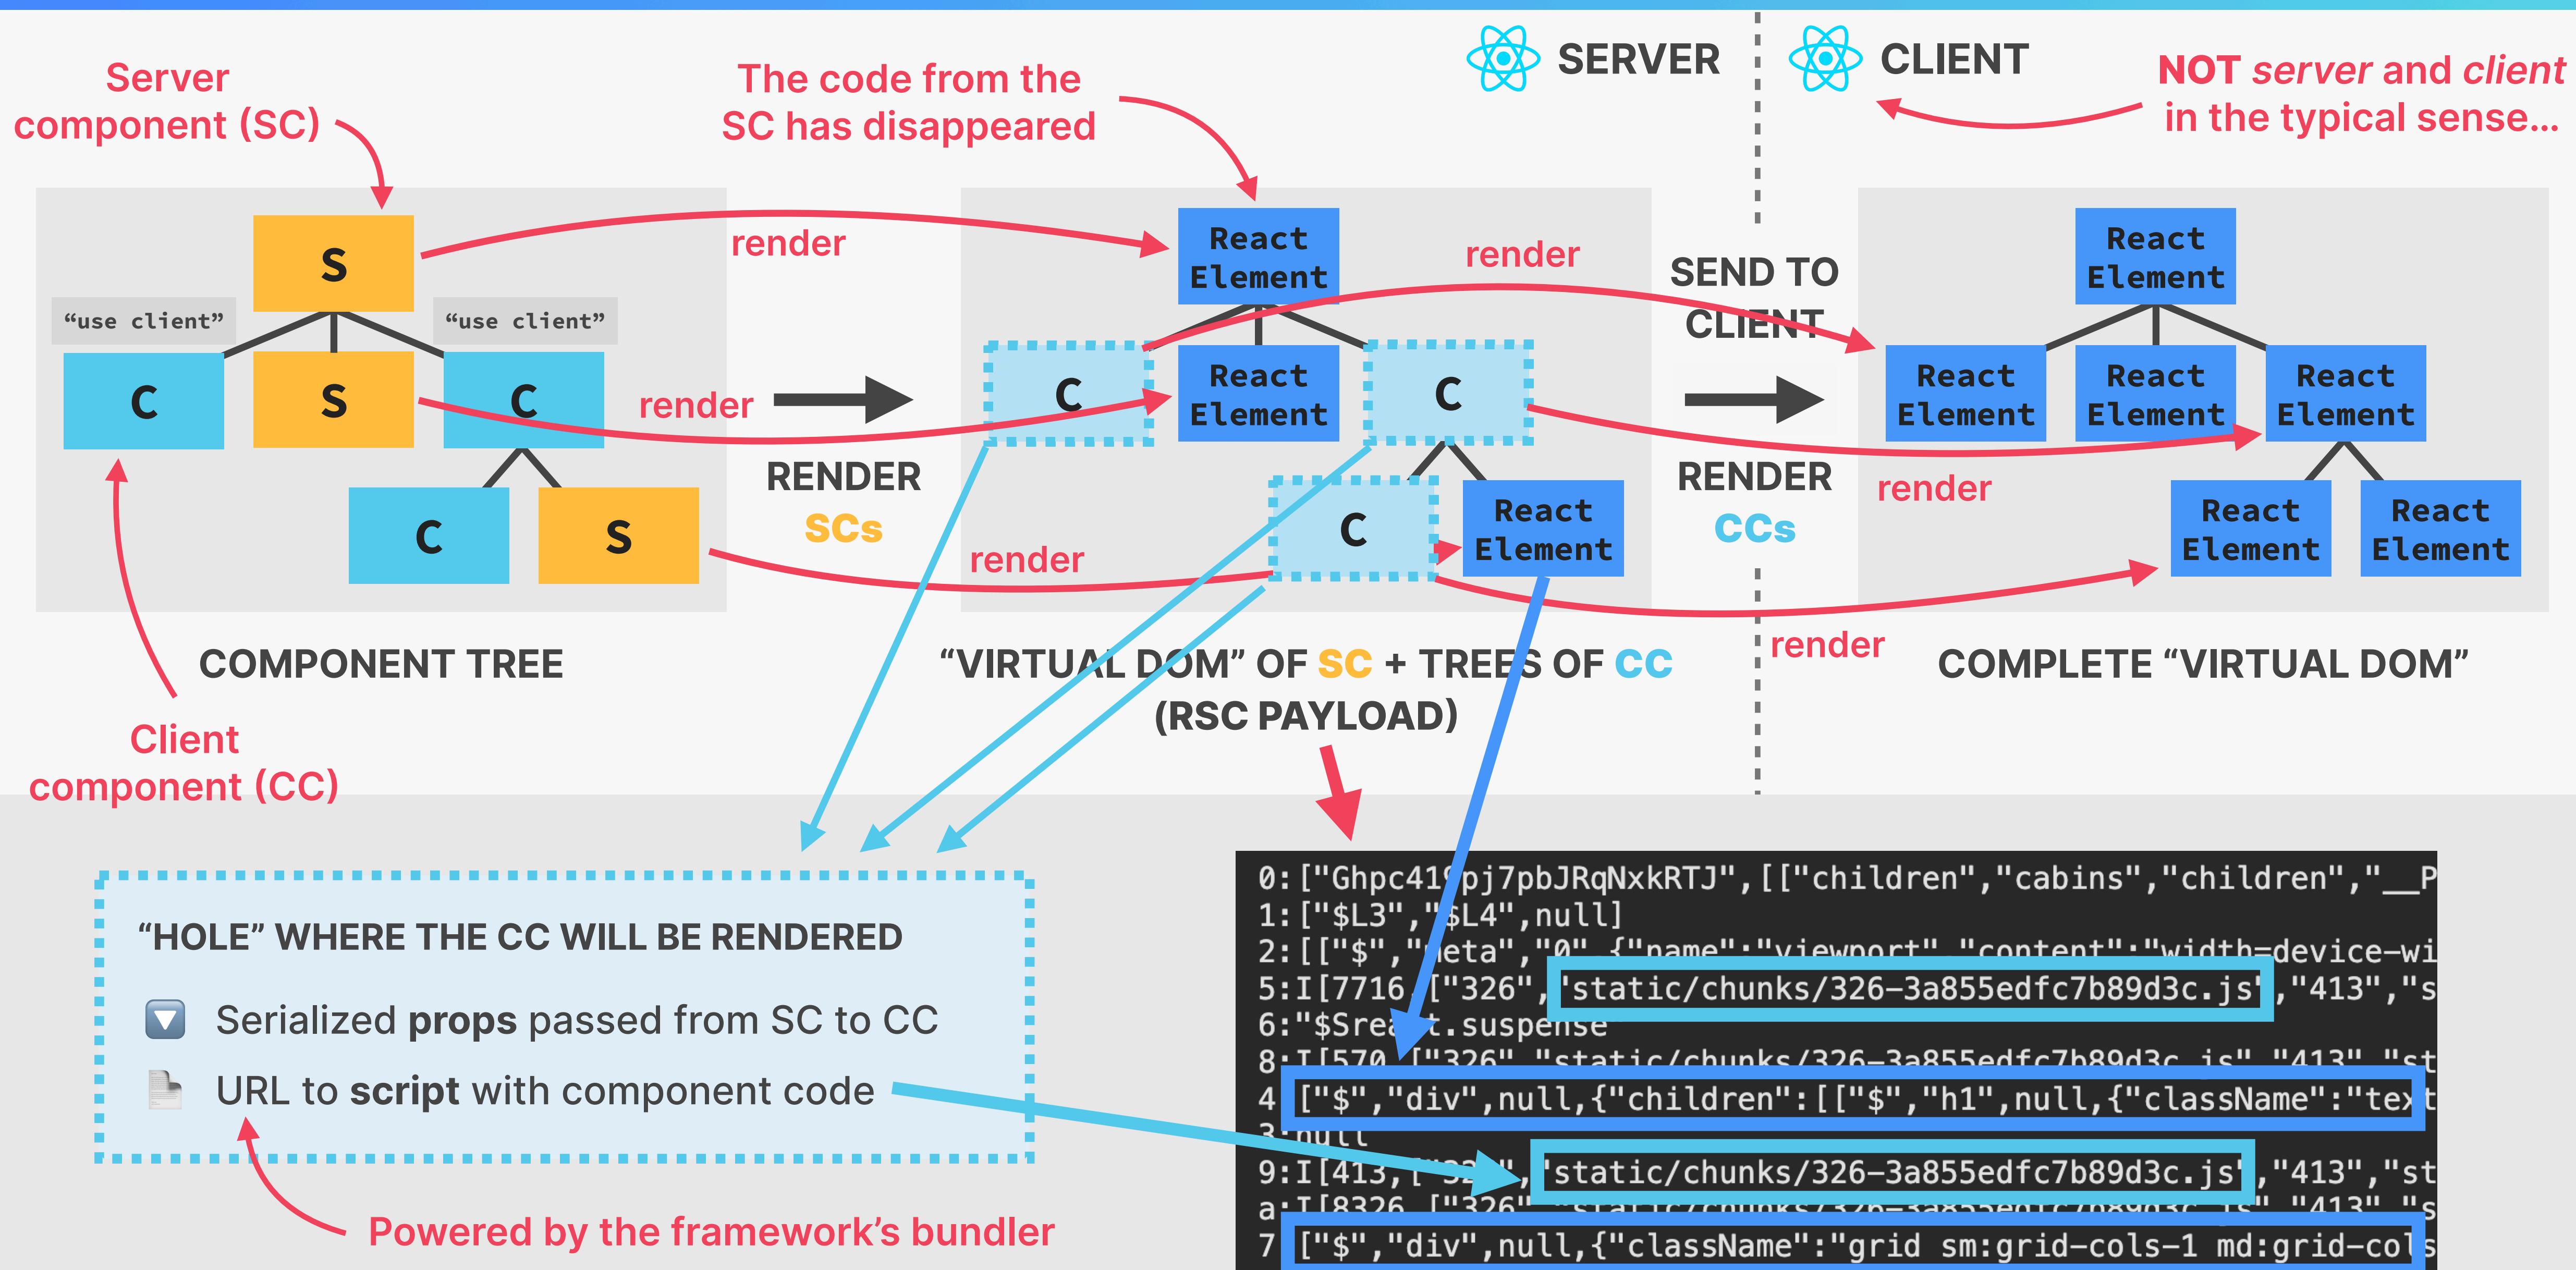

HOW RSC WORKS BEHIND THE SCENES

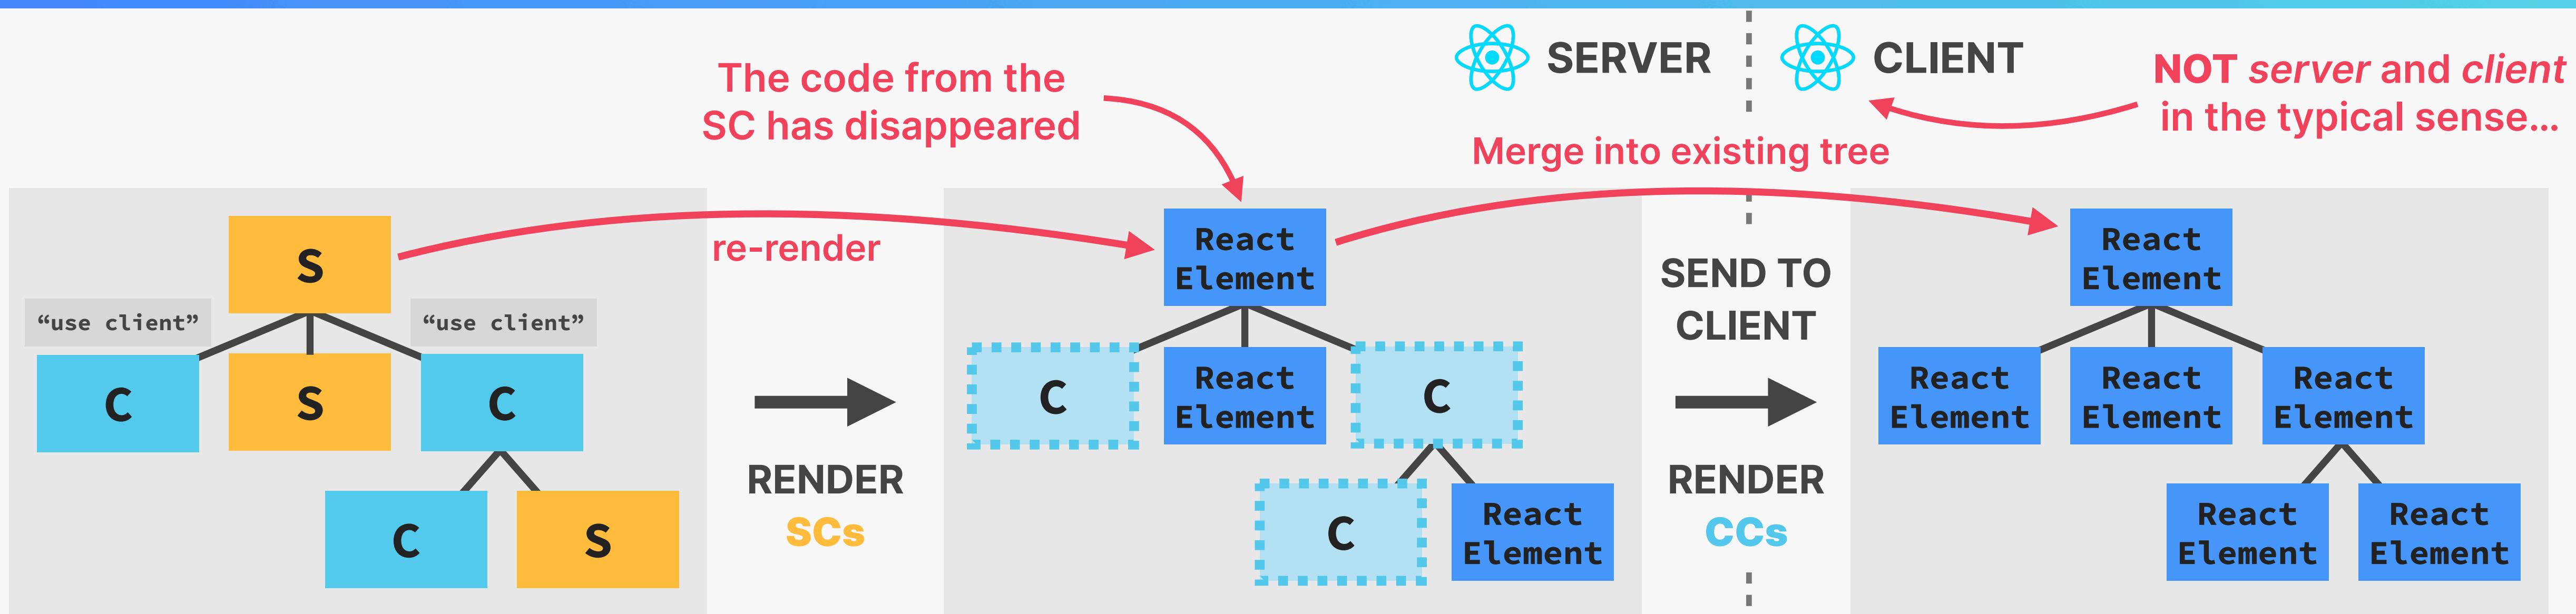

"HOLE" WHERE THE CC WILL BE RENDERED

- ⬇️ Serialized props passed from SC to CC
- ⬇️ URL to script with component code


Powered by the framework's bundler

🤔 Why RSC Payload? Why not render SCs as HTML?

- 👉 Describes the UI as **data**, not as finished **HTML**
- 👉 When a **SC** is **re-rendered**: React is able to **merge** ("reconcile") the current tree on the client with a new tree coming from the server
- 👉 As a result, **UI state can be preserved** when a SC re-renders, instead of completely re-generating the page as **HTML**

A SIMPLIFIED REVIEW

"TRADITIONAL" REACT

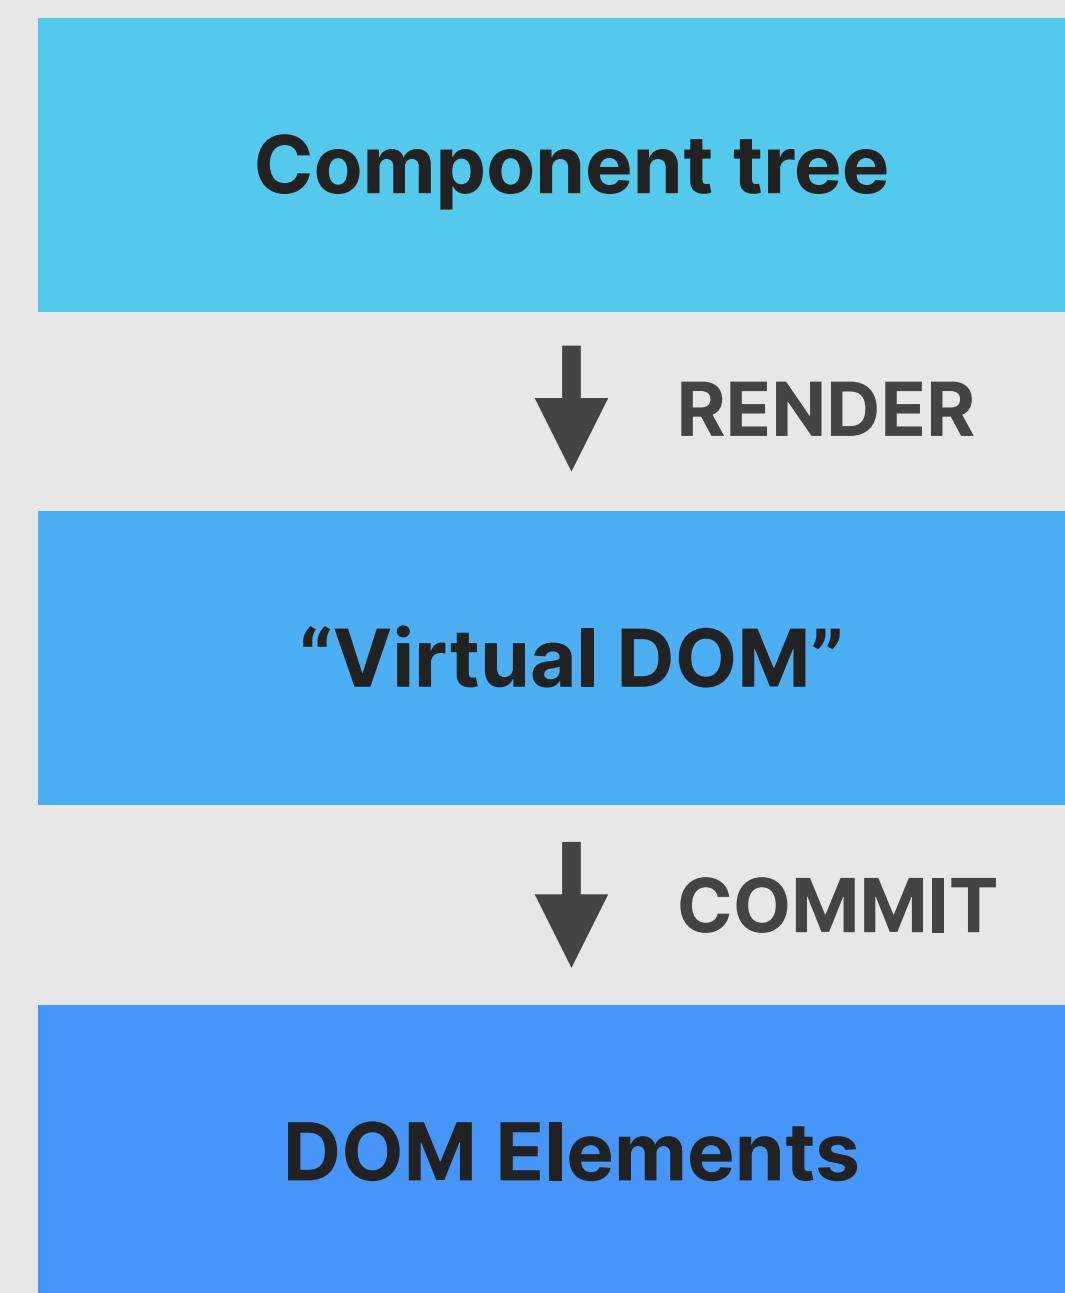

SERVER

CLIENT

1

2

Component tree
of SC and CC

RENDER SC

"Virtual DOM" of SC +
Component trees of CC

SEND "RSC
PAYLOAD"
TO CLIENT
RENDER CC

Complete "Virtual DOM"

COMMIT

DOM Elements

REACT WITH RSC

RSC PAYLOAD –
FOR EACH CC IN TREE:

- 👉 "Hole" where CC will render
- 👉 Serialized props from SC
- 👉 URL to script with code

👉 Steps don't wait for one another. Completed render work is **streamed** to client

~~UI = f(data, state)~~



UI = f(data)(state)

1

2



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

OVERVIEW OF NEXT.JS WITH THE
"APP" ROUTER

LECTURE

RSC VS. SSR: HOW ARE THEY
RELATED?

REVIEW: SERVER-SIDE RENDERING (SSR)

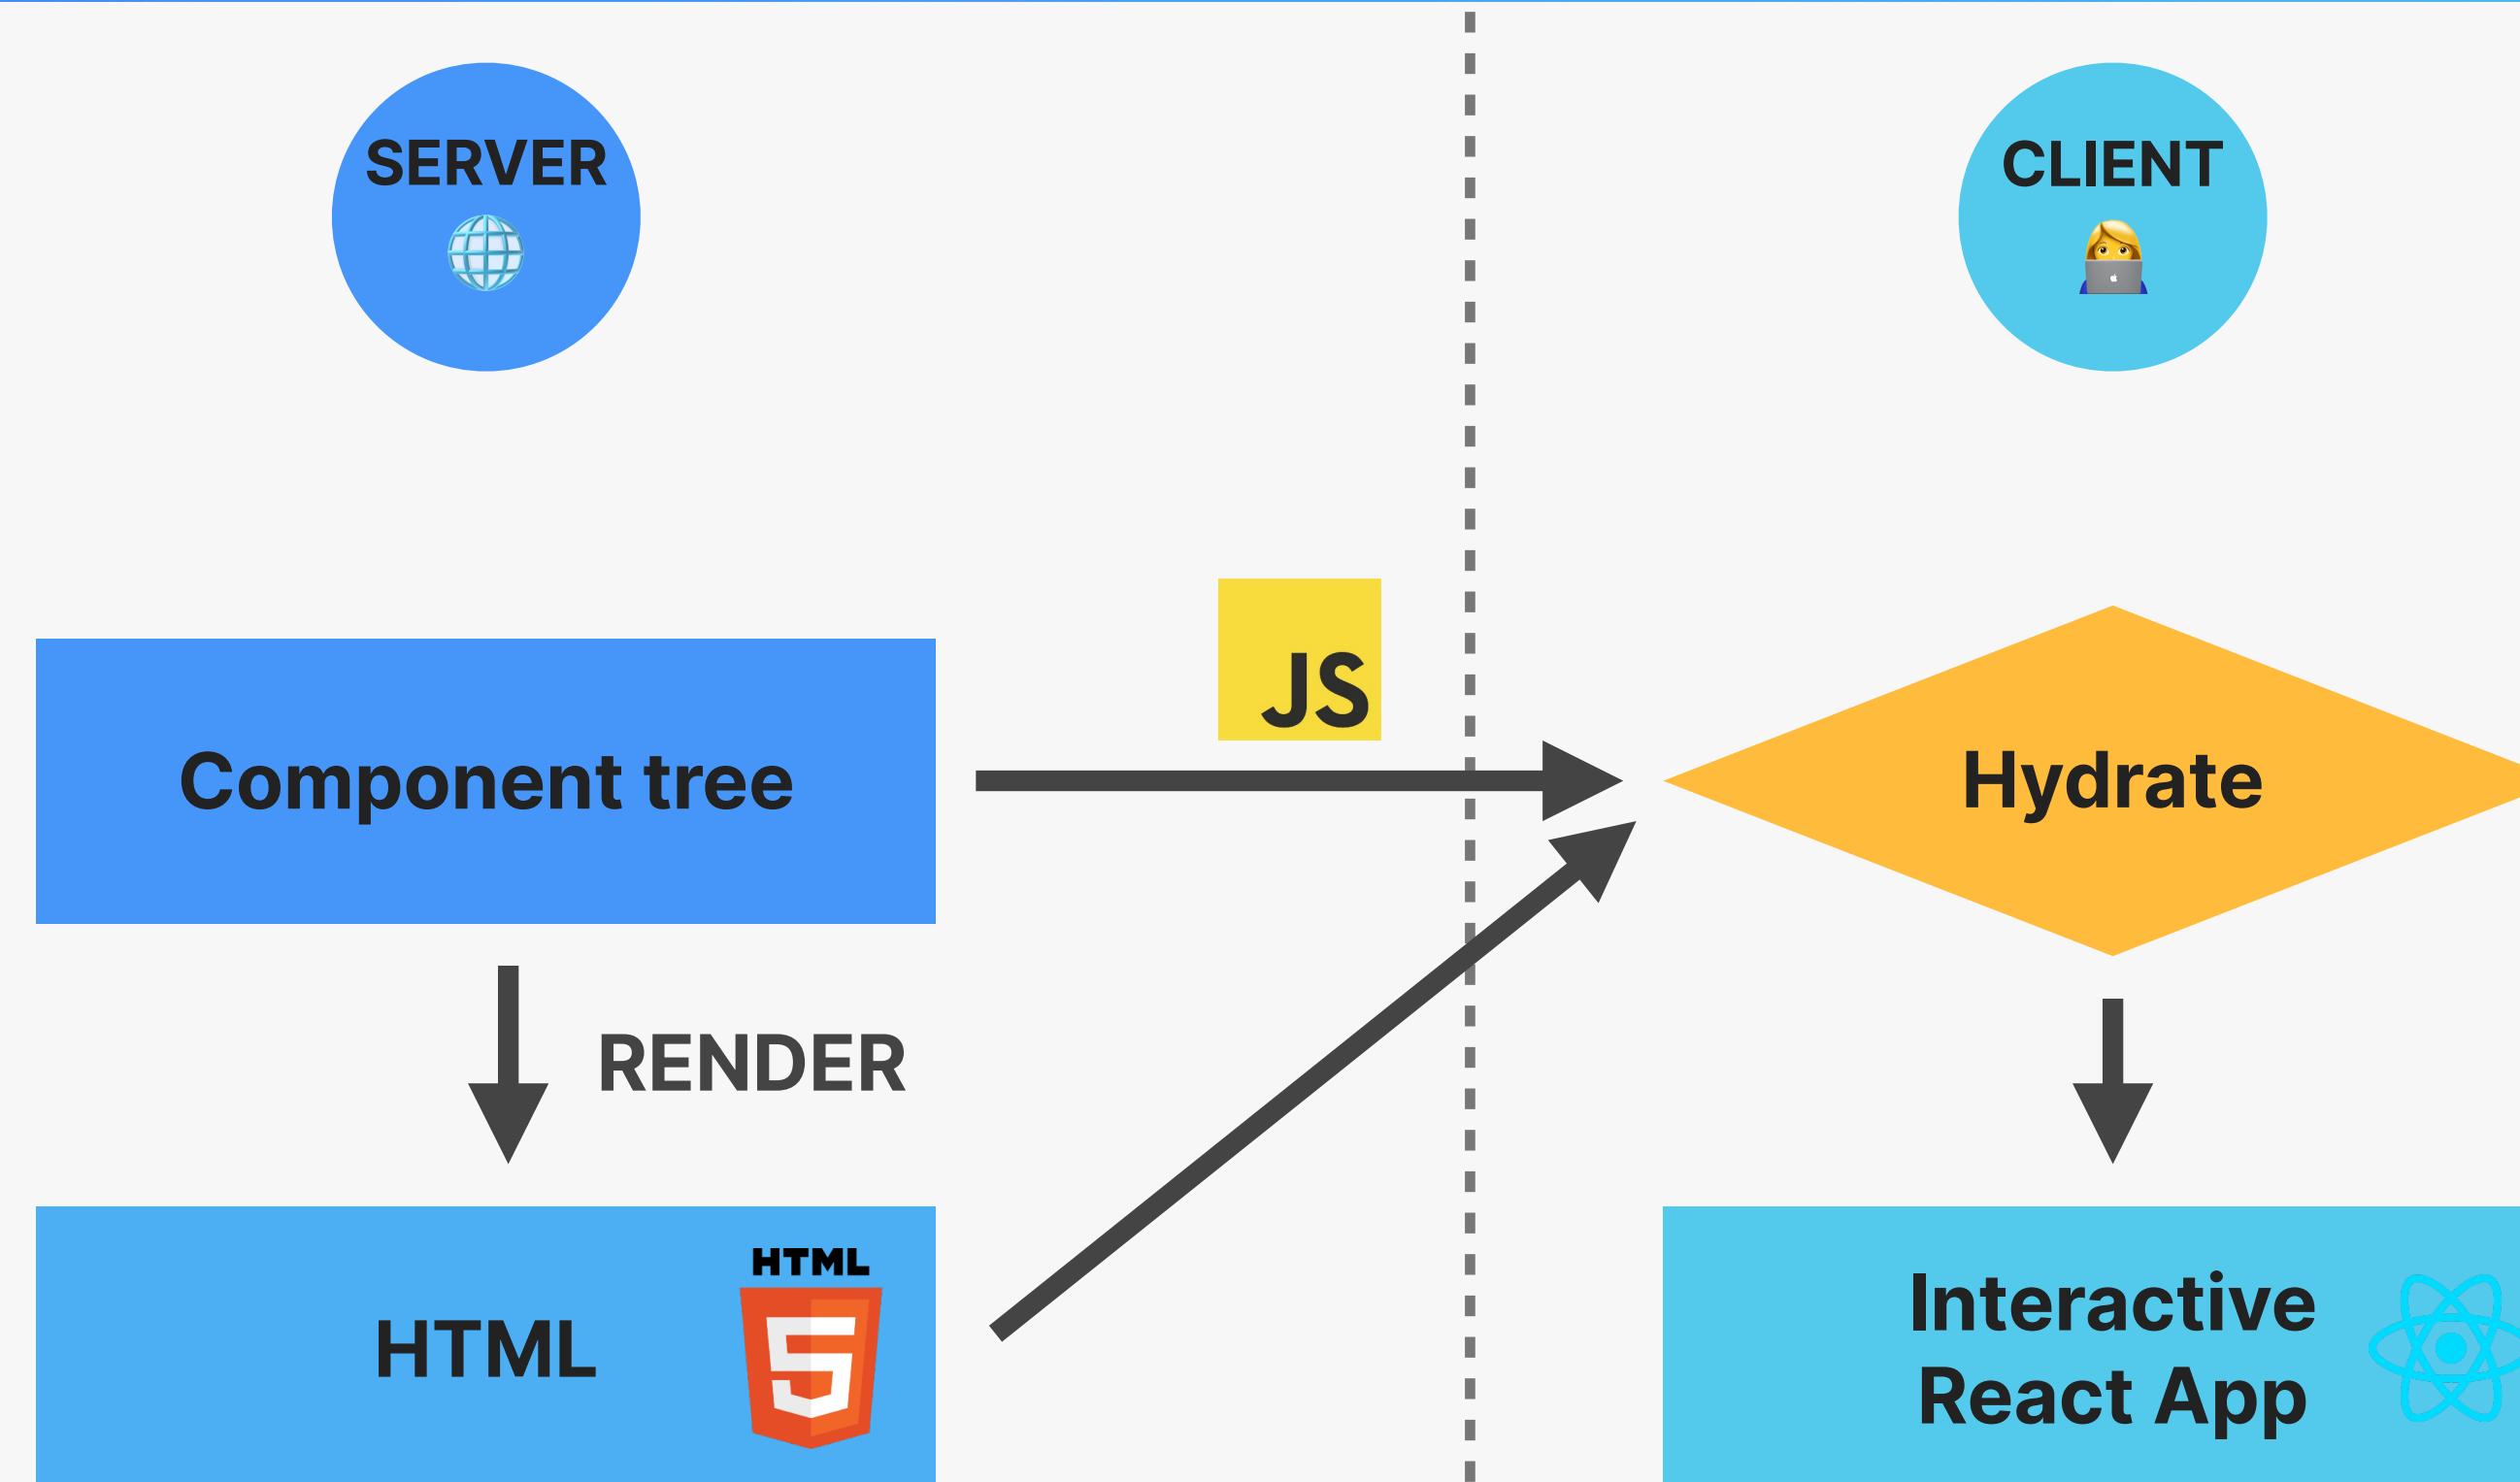


We'll be talking about
dynamic SSR (HTML
generated at runtime)

👉 *SSR: “Just take this component tree, render it as HTML, and send that HTML to the browser”*

👉 *“Also send the React code to make the HTML **interactive**”*


THE RELATIONSHIP BETWEEN RSC AND SSR

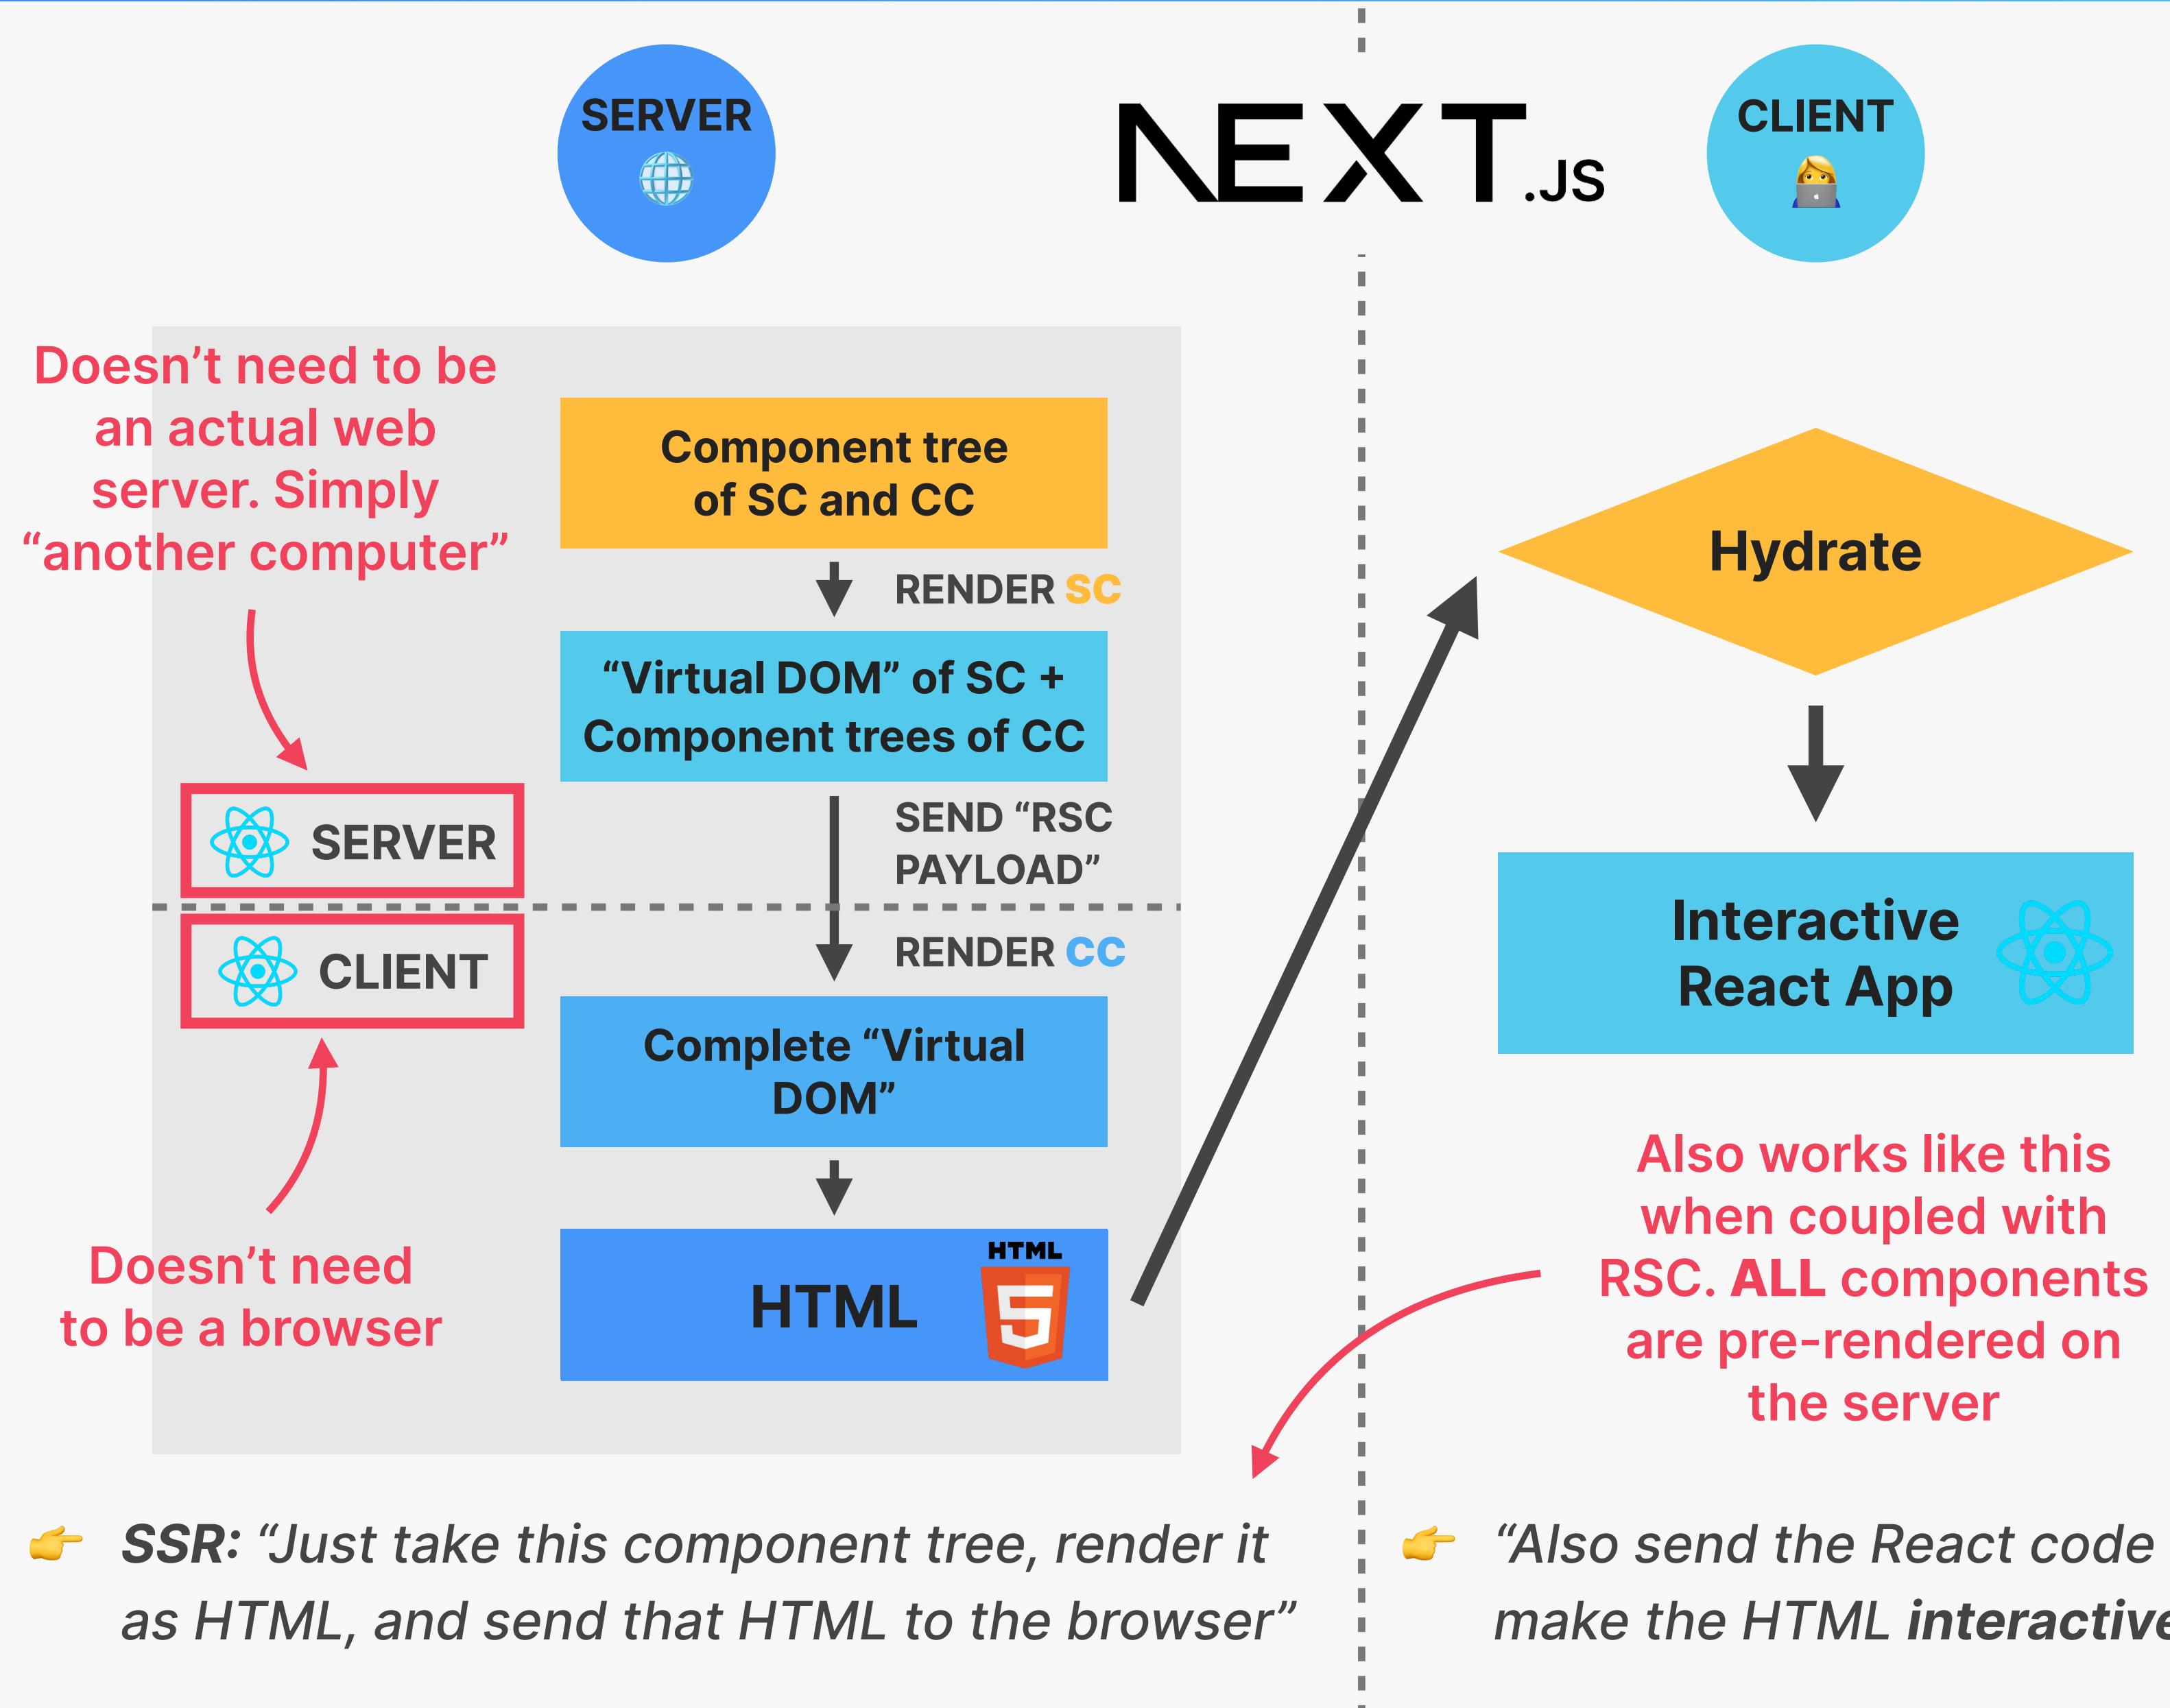

RSC VS. SSR

- 👉 RSC is **NOT** the same as SSR: they are separate technologies
- 👉 RSC does **NOT** replace SSR
- 👉 They usually work together: frameworks can combine them
- 👉 Both **client** and **server** components are **initially rendered on the server** when SSR is used
- 👉 In the RSC model, "server" just means "*the developer's computer*"
- 👉 **Result:** RSC does **NOT** require a running web server! Components could run only **once at built time** (static site generation)

THE RELATIONSHIP BETWEEN RSC AND SSR

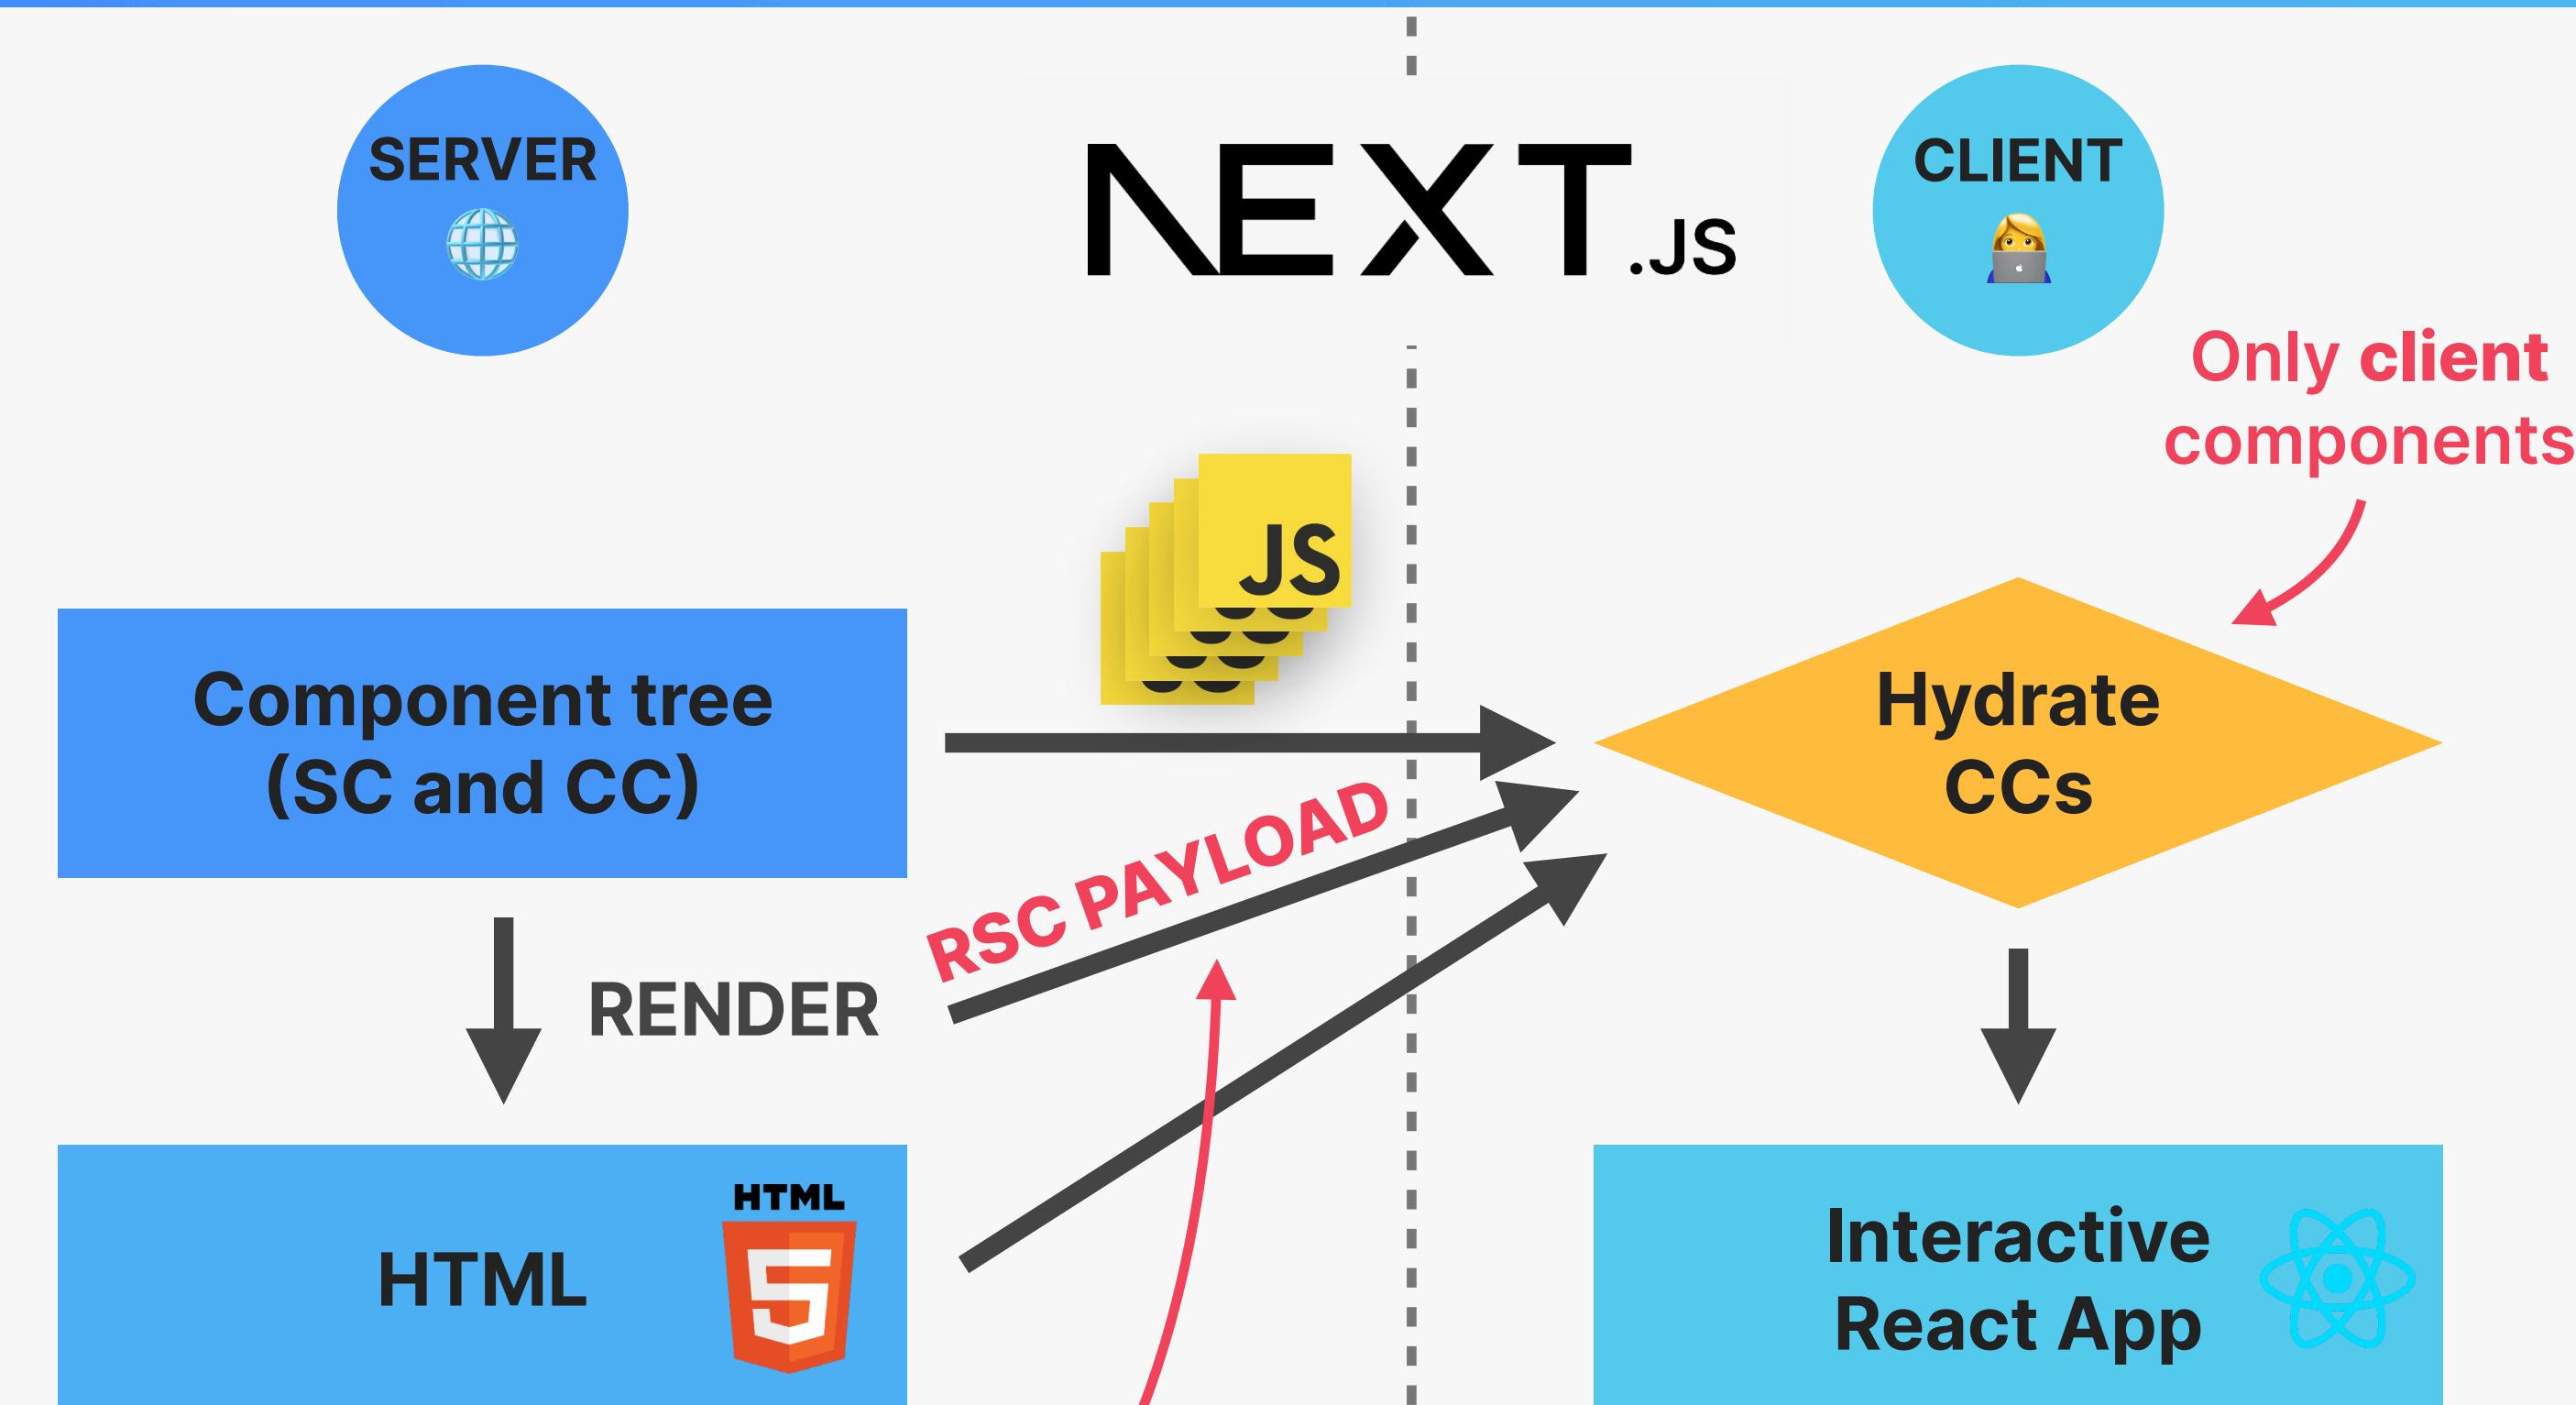

👉 **SSR:** “Just take this component tree, render it as HTML, and send that HTML to the browser”

👉 “Also send the React code to make the HTML *interactive*”

RSC VS. SSR

- 👉 RSC is **NOT** the same as SSR: they are separate technologies
- 👉 RSC does **NOT** replace SSR
- 👉 They usually work together: frameworks can combine them
- 👉 Both **client** and **server** components are **initially rendered on the server** when SSR is used

- 👉 In the RSC model, “server” just means “*the developer’s computer*”
- 👉 **Result:** RSC does **NOT** require a running web server! Components could run only **once at built time** (static site generation)

**STARTING TO BUILD
THE "WILD OASIS"
WEBSITE**



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN


SECTION

STARTING TO BUILD THE "WILD
OASIS" WEBSITE

LECTURE

PROJECT PLANNING: "THE WILD
OASIS" CUSTOMER WEBSITE

THE PROJECT: THE WILD OASIS WEBSITE

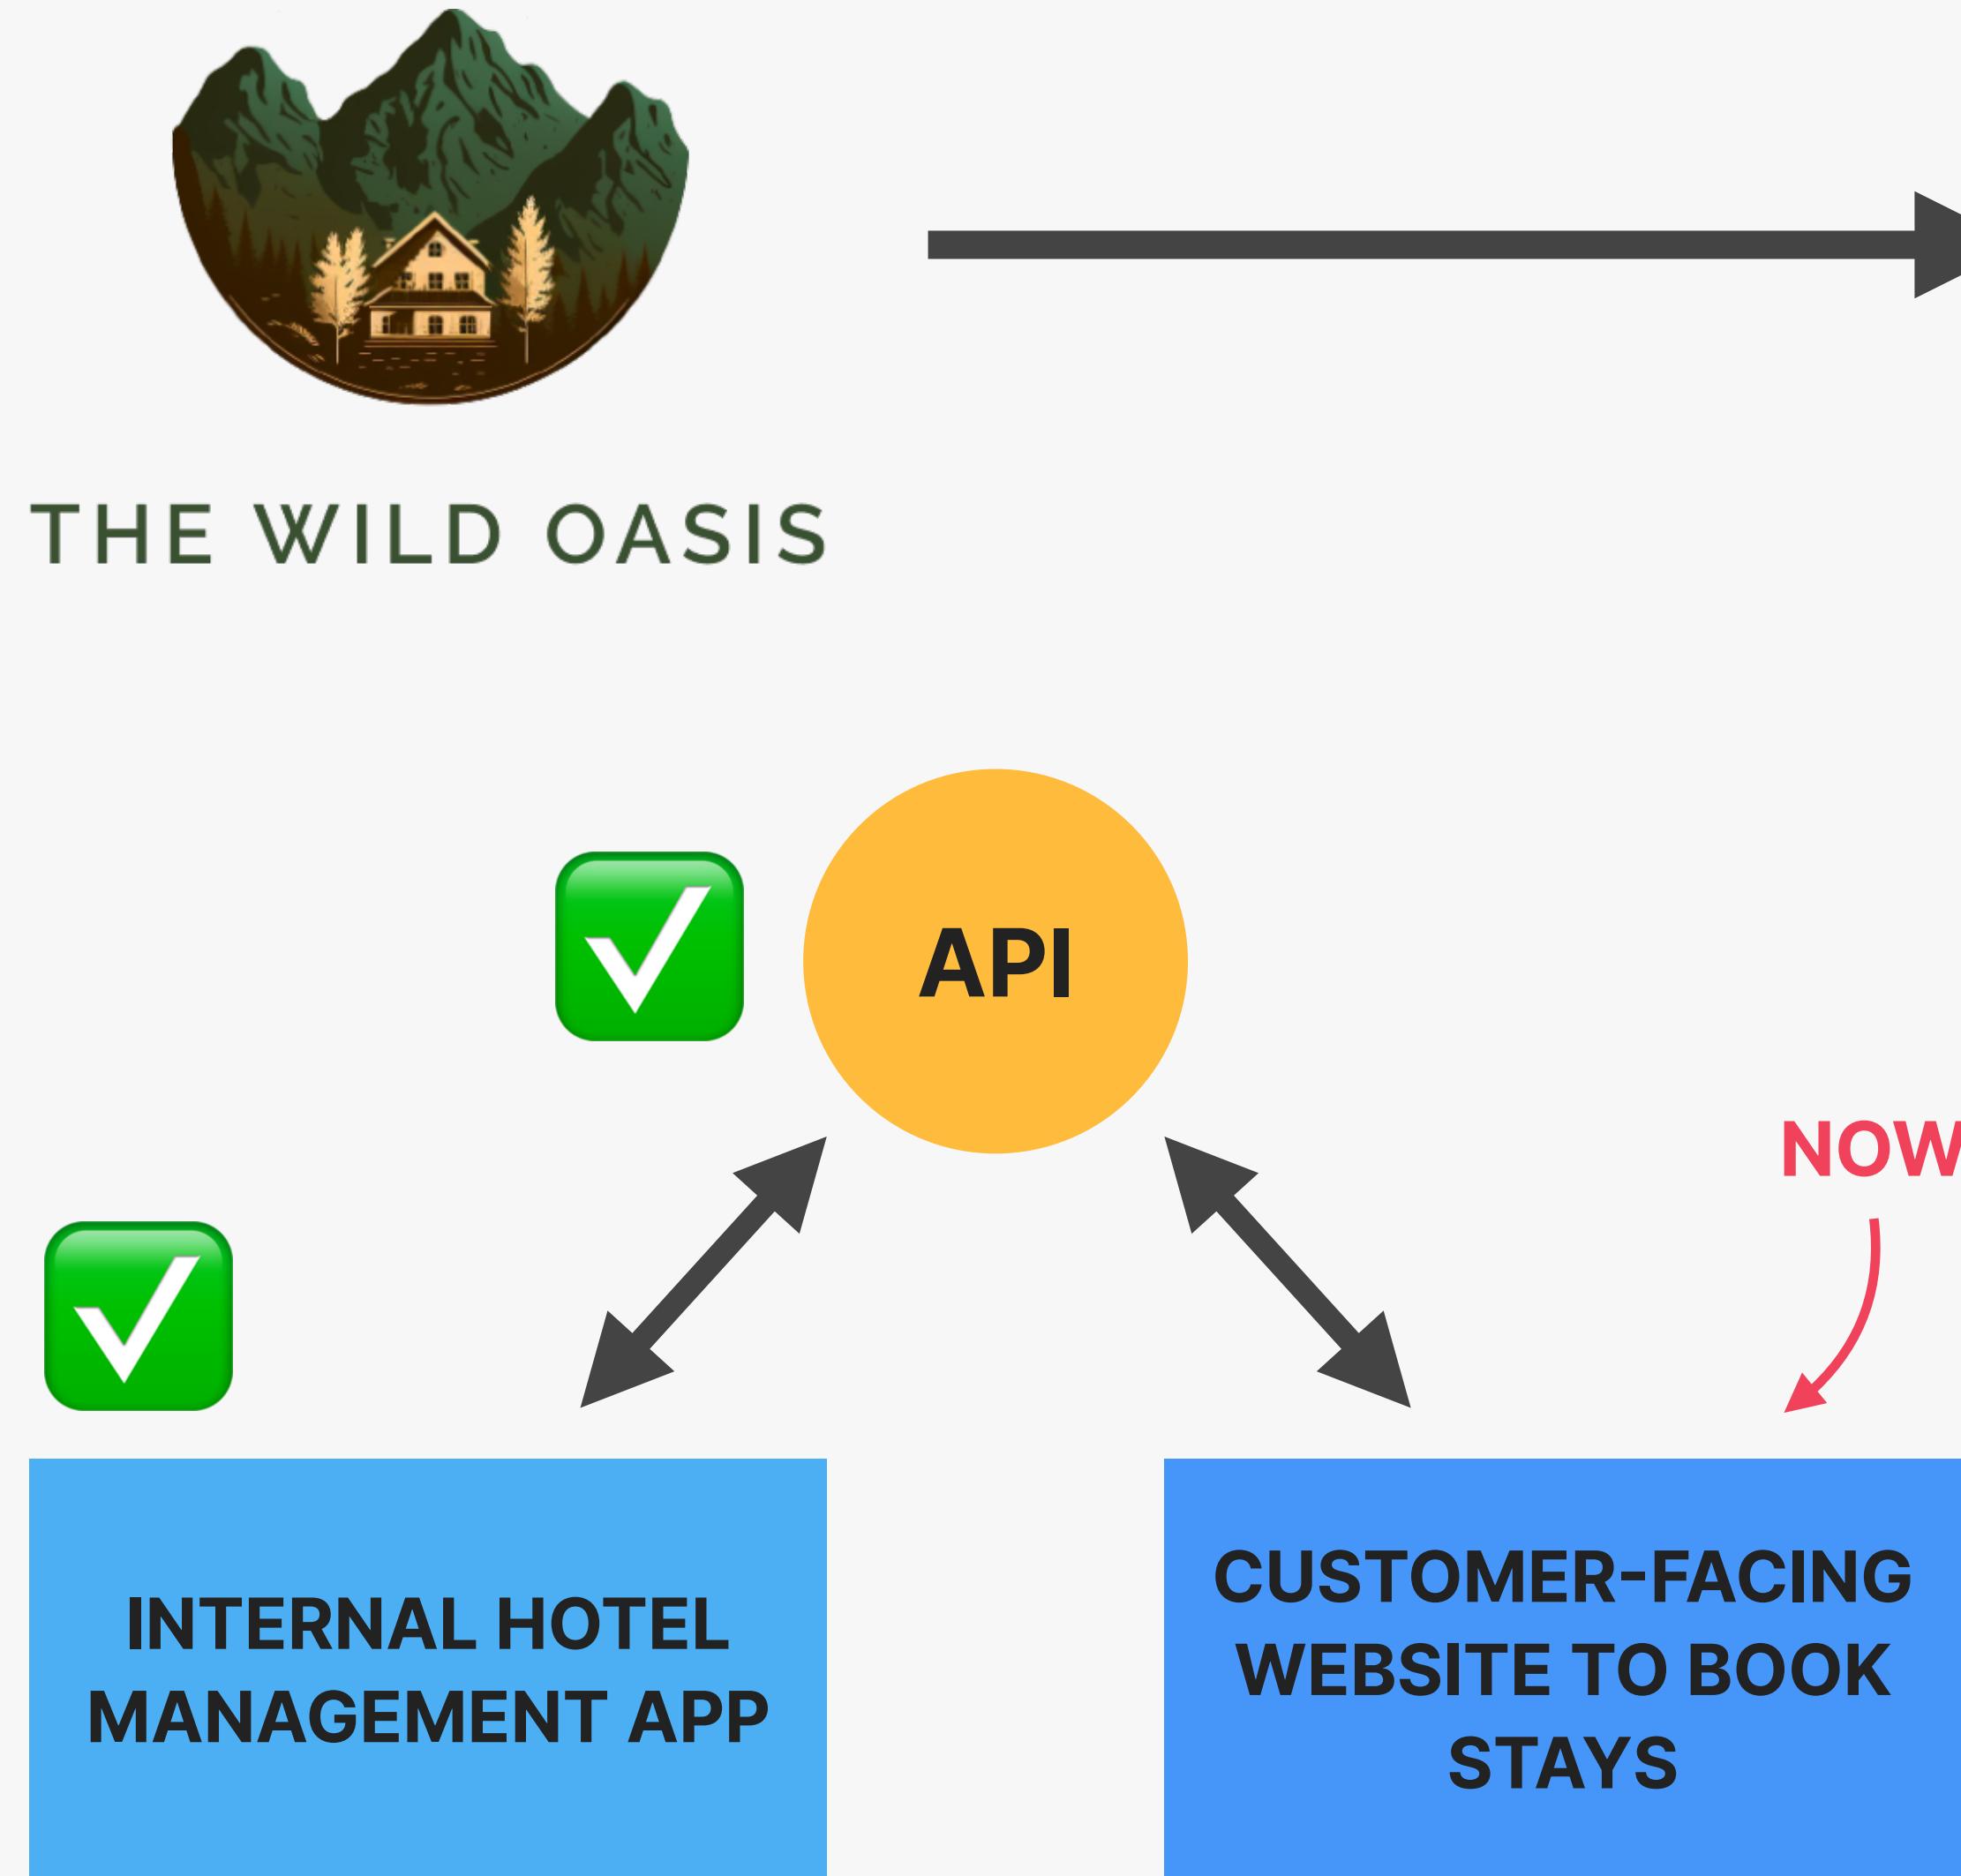

- 👉 Remember: “The Wild Oasis” is a small boutique hotel with 8 luxurious wooden cabins
- ✓ We built their application to manage everything about the hotel: **bookings, cabins and guests**
- ✓ We also build the **API** using Supabase
- 👉 Now they need a **customer-facing website** where guests can learn about the hotel, browse all cabins, reserve a cabin, and create and update their profile
- 👉 Updating data in the internal app should update the website, so we use the same DB and API
- 👉 We are hired again 😎🎉



PROJECT REQUIREMENTS FROM THE BUSINESS

👉 Users of the app are potential guests and actual guests

👉 Guests should be able to learn all about the Wild Oasis Hotel

ABOUT

👉 Guests should be able to get information about each cabin and see booked dates

CABINS

👉 Guests should be able to filter cabins by their maximum guest capacity

👉 Guests should be able to reserve a cabin for a certain date range

👉 Reservations are not paid online. Payments will be made at the property upon arrival. Therefore, new reservations should be set to “unconfirmed” (booked but not yet checked in)

RESERVATIONS

👉 Guests should be able to view all their past and future reservations

👉 Guests should be able to update or delete a reservation

👉 Guests need to sign up and log in before they can reserve a cabin and perform any operation


👉 On sign up, each guest should get a profile in the DB

AUTHENTICATION

👉 Guests should be able to set and update basic data about their profile to make check-in at the hotel faster

PROFILE

FEATURES + PAGES

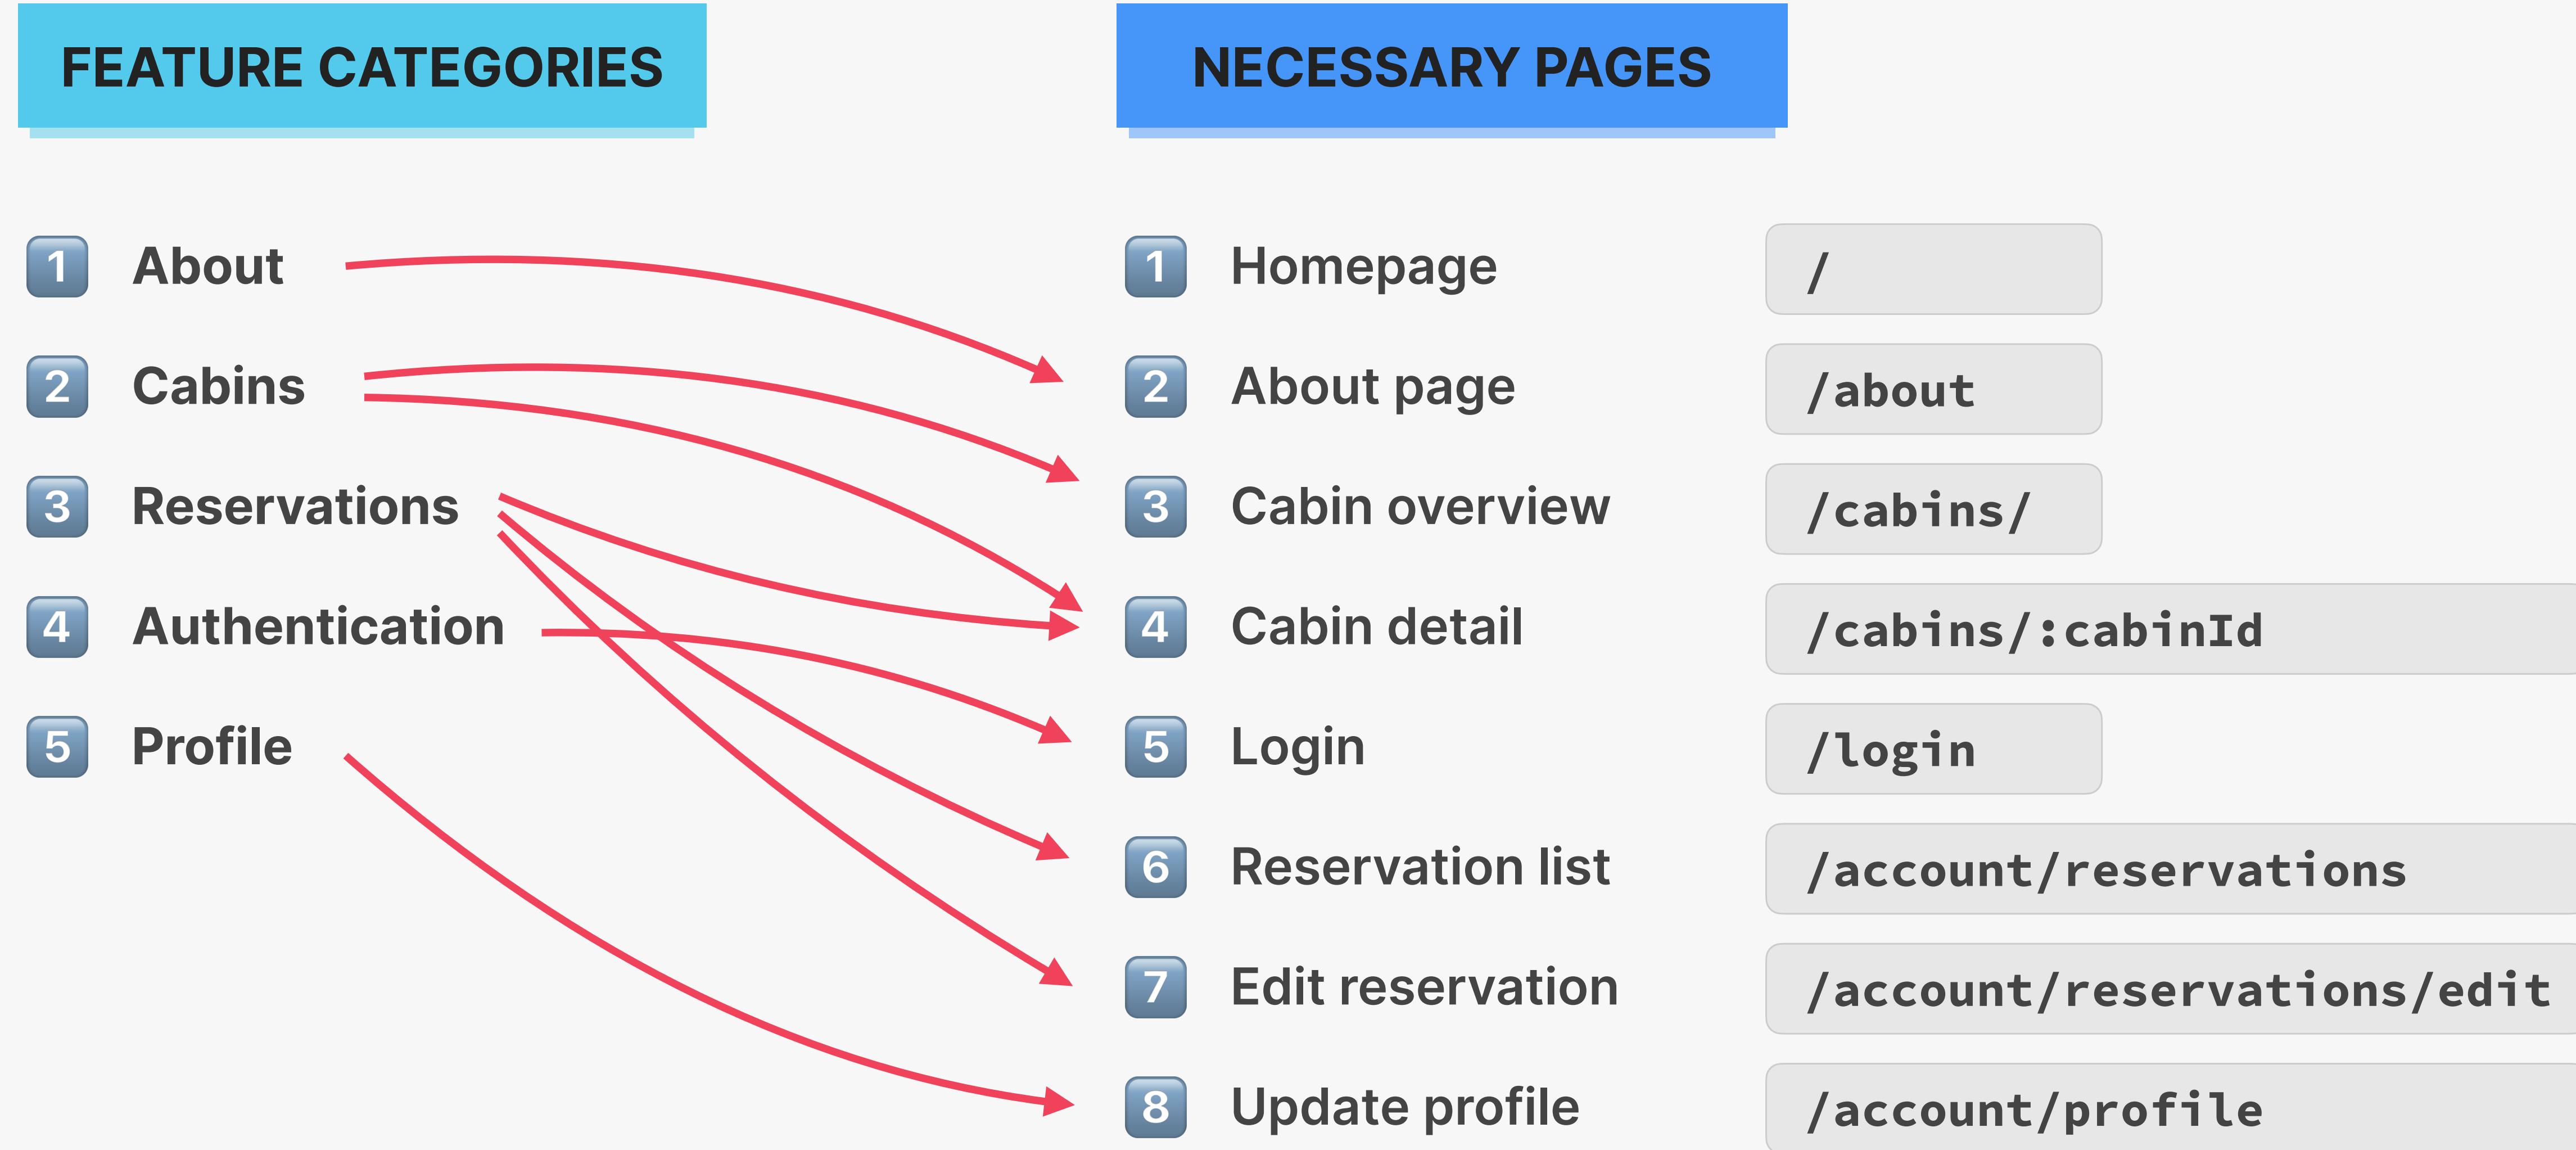


TECHNOLOGY DECISIONS

👉 Framework



The most popular React meta-framework. Handles routing, SSR, data fetching and even remote state management (in a way...), therefore replacing many tools we had to include before

👉 UI State management



Context API

We might still need global UI state in a Next.js app. For that, we can use the Context API, Redux, or any of the other solutions. In this case the Context API will be enough.

👉 DB / API



supabase

We'll use the data and API we already built in the first "Wild Oasis" project. If you skipped that project, please go back to the "Supabase" section to set everything up

👉 Styling



tailwindcss

Modern way of writing CSS. Extremely easy to integrate into Next.js. Most styles and markup will be pre-written anyway in this project.

DATA FETCHING, CACHING, AND RENDERING



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

DATA FETCHING, CACHING, AND
RENDERING


LECTURE

WHAT IS REACT SUSPENSE?

WHAT IS REACT SUSPENSE?

SUSPENSE

- 👉 Built-in React component that we can use to catch/isolate components (or entire subtrees) that are **not ready to be rendered** ("suspending")
- 👉 What causes a component to be **suspending**?
 - 1 **Fetching data** (with a supported library)
 - 2 **Loading code** (with React's lazy loading)
- 👉 Native way to support **asynchronous** operations in a **declarative** way (no more `isLoading` states and render logic 🎉)

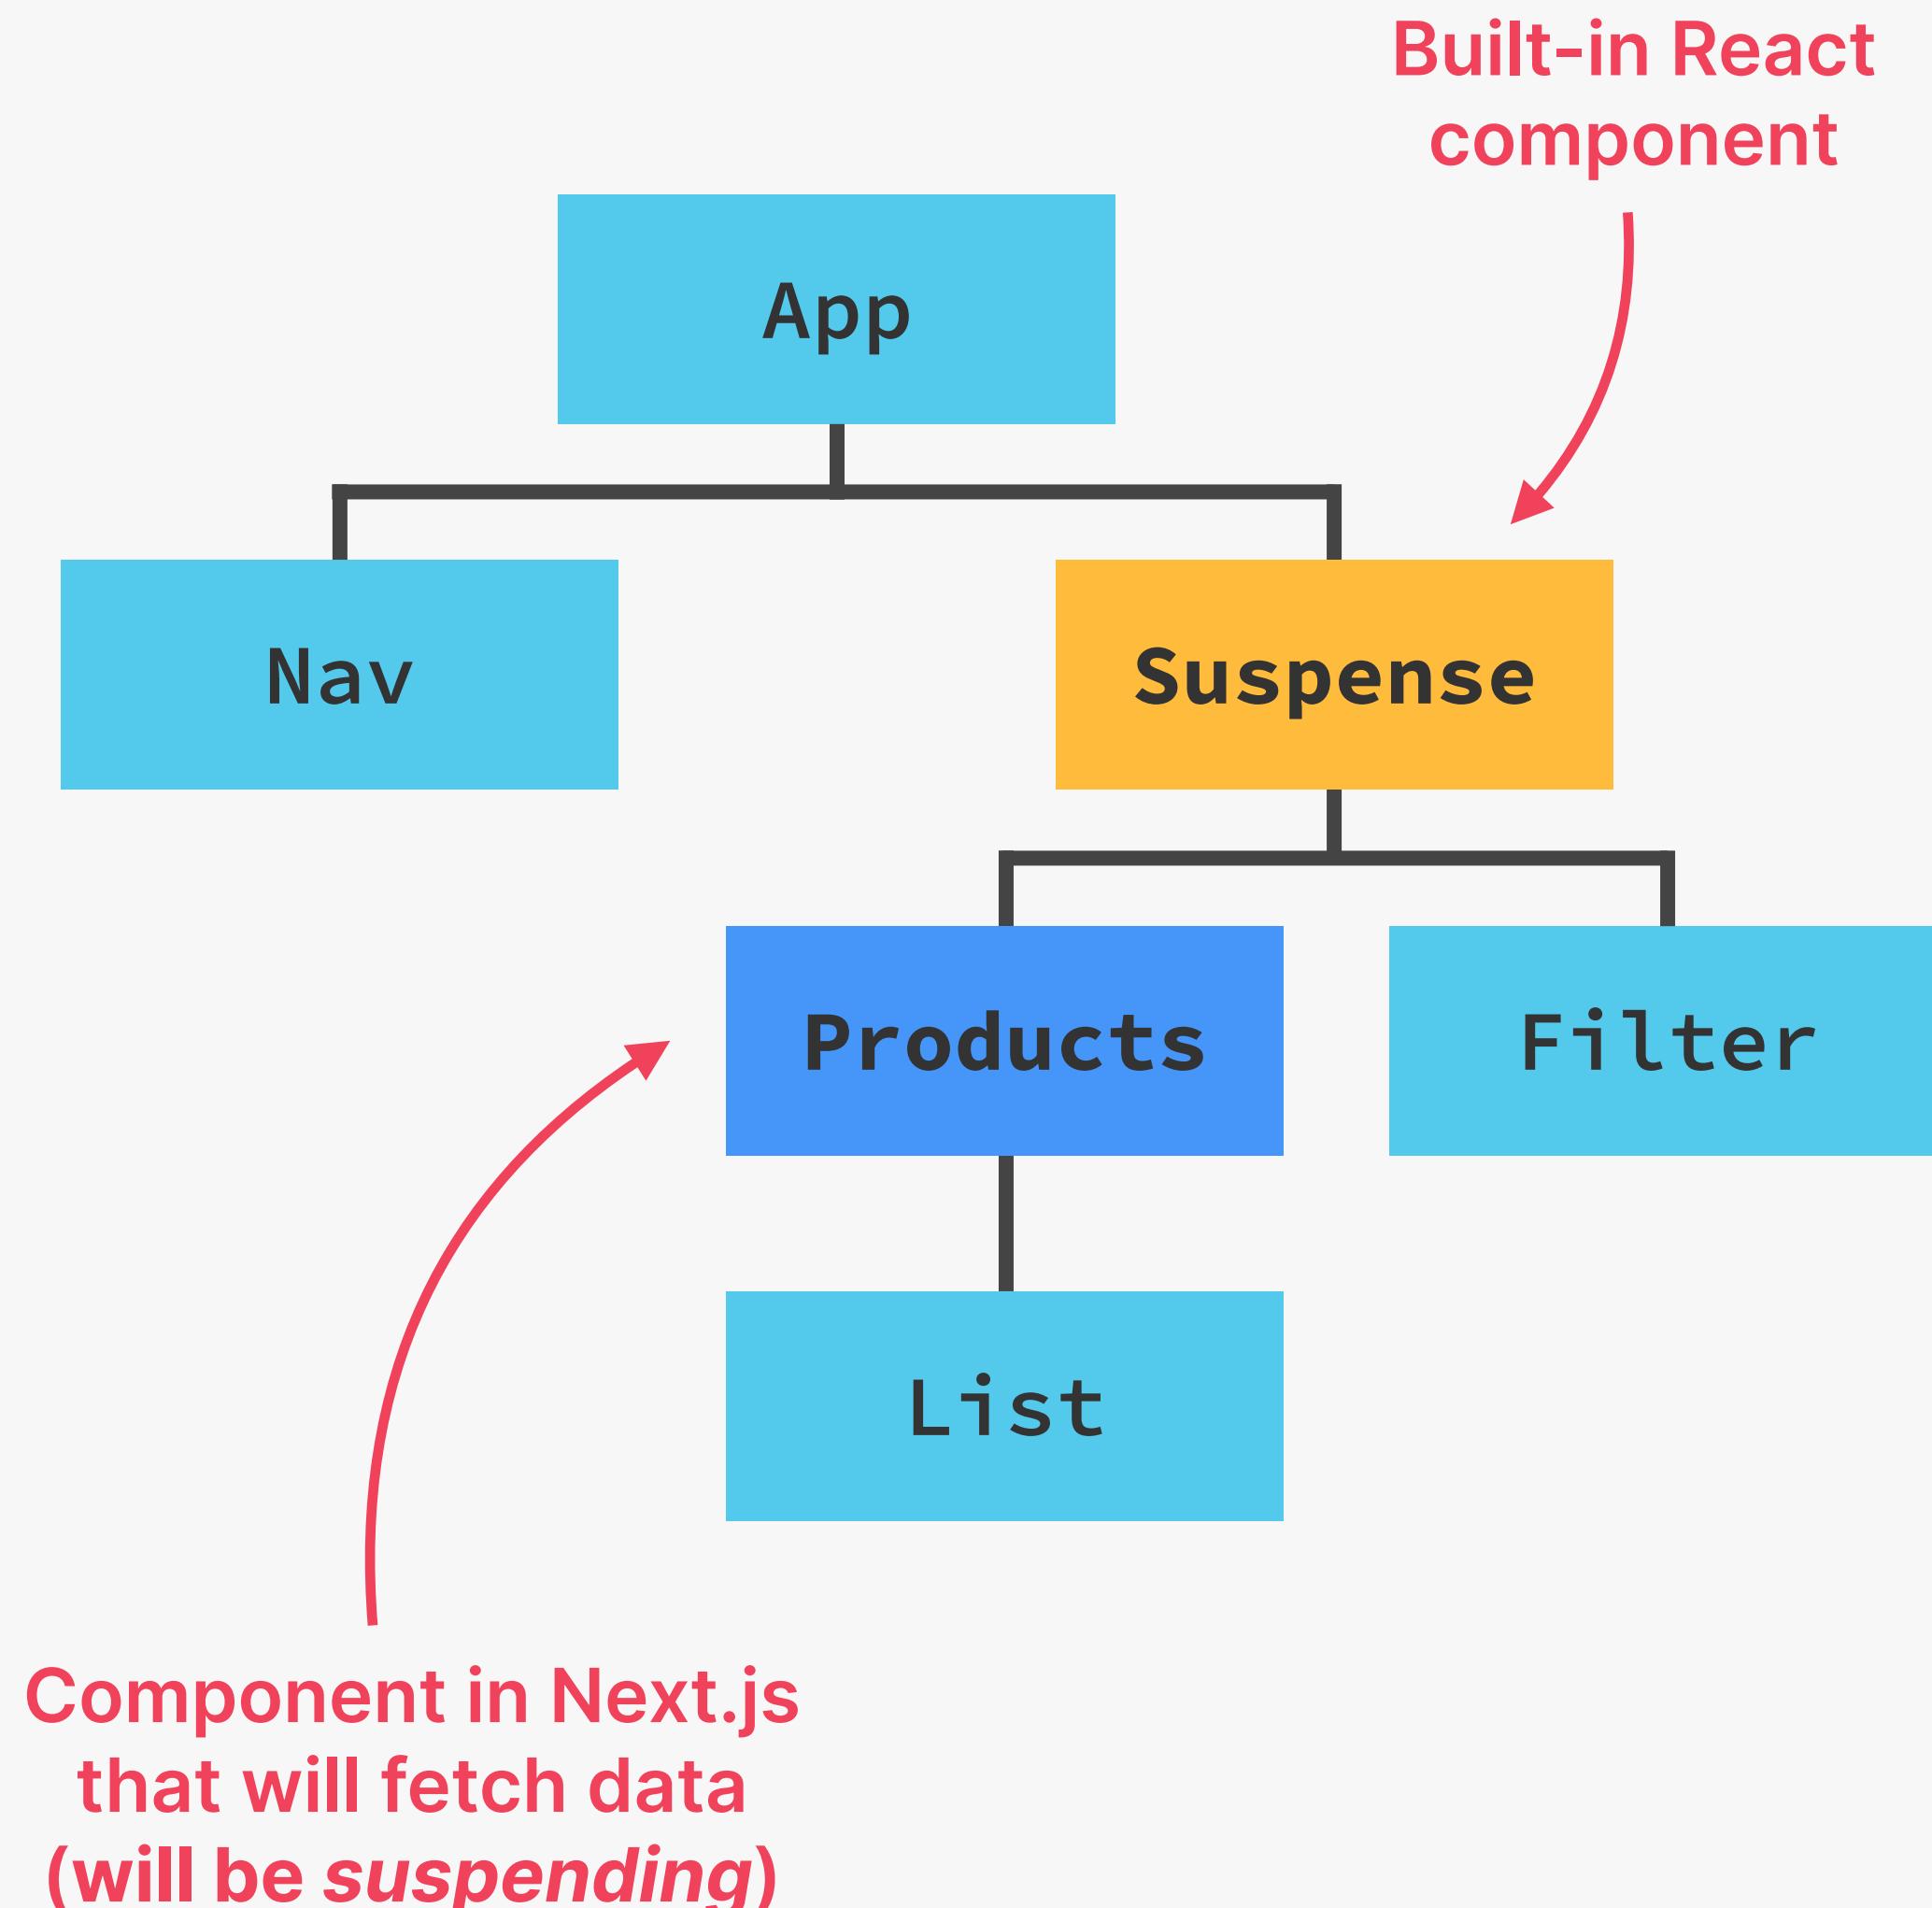

HOW DOES SUSPENSE WORK?


While rendering, **suspending** component is found



Go to **closest Suspense parent** (“boundary”) and
discard already rendered children




Display **fallback component/JSX**




AFTER ASYNC WORK IS DONE

Render subtree under Suspense boundary

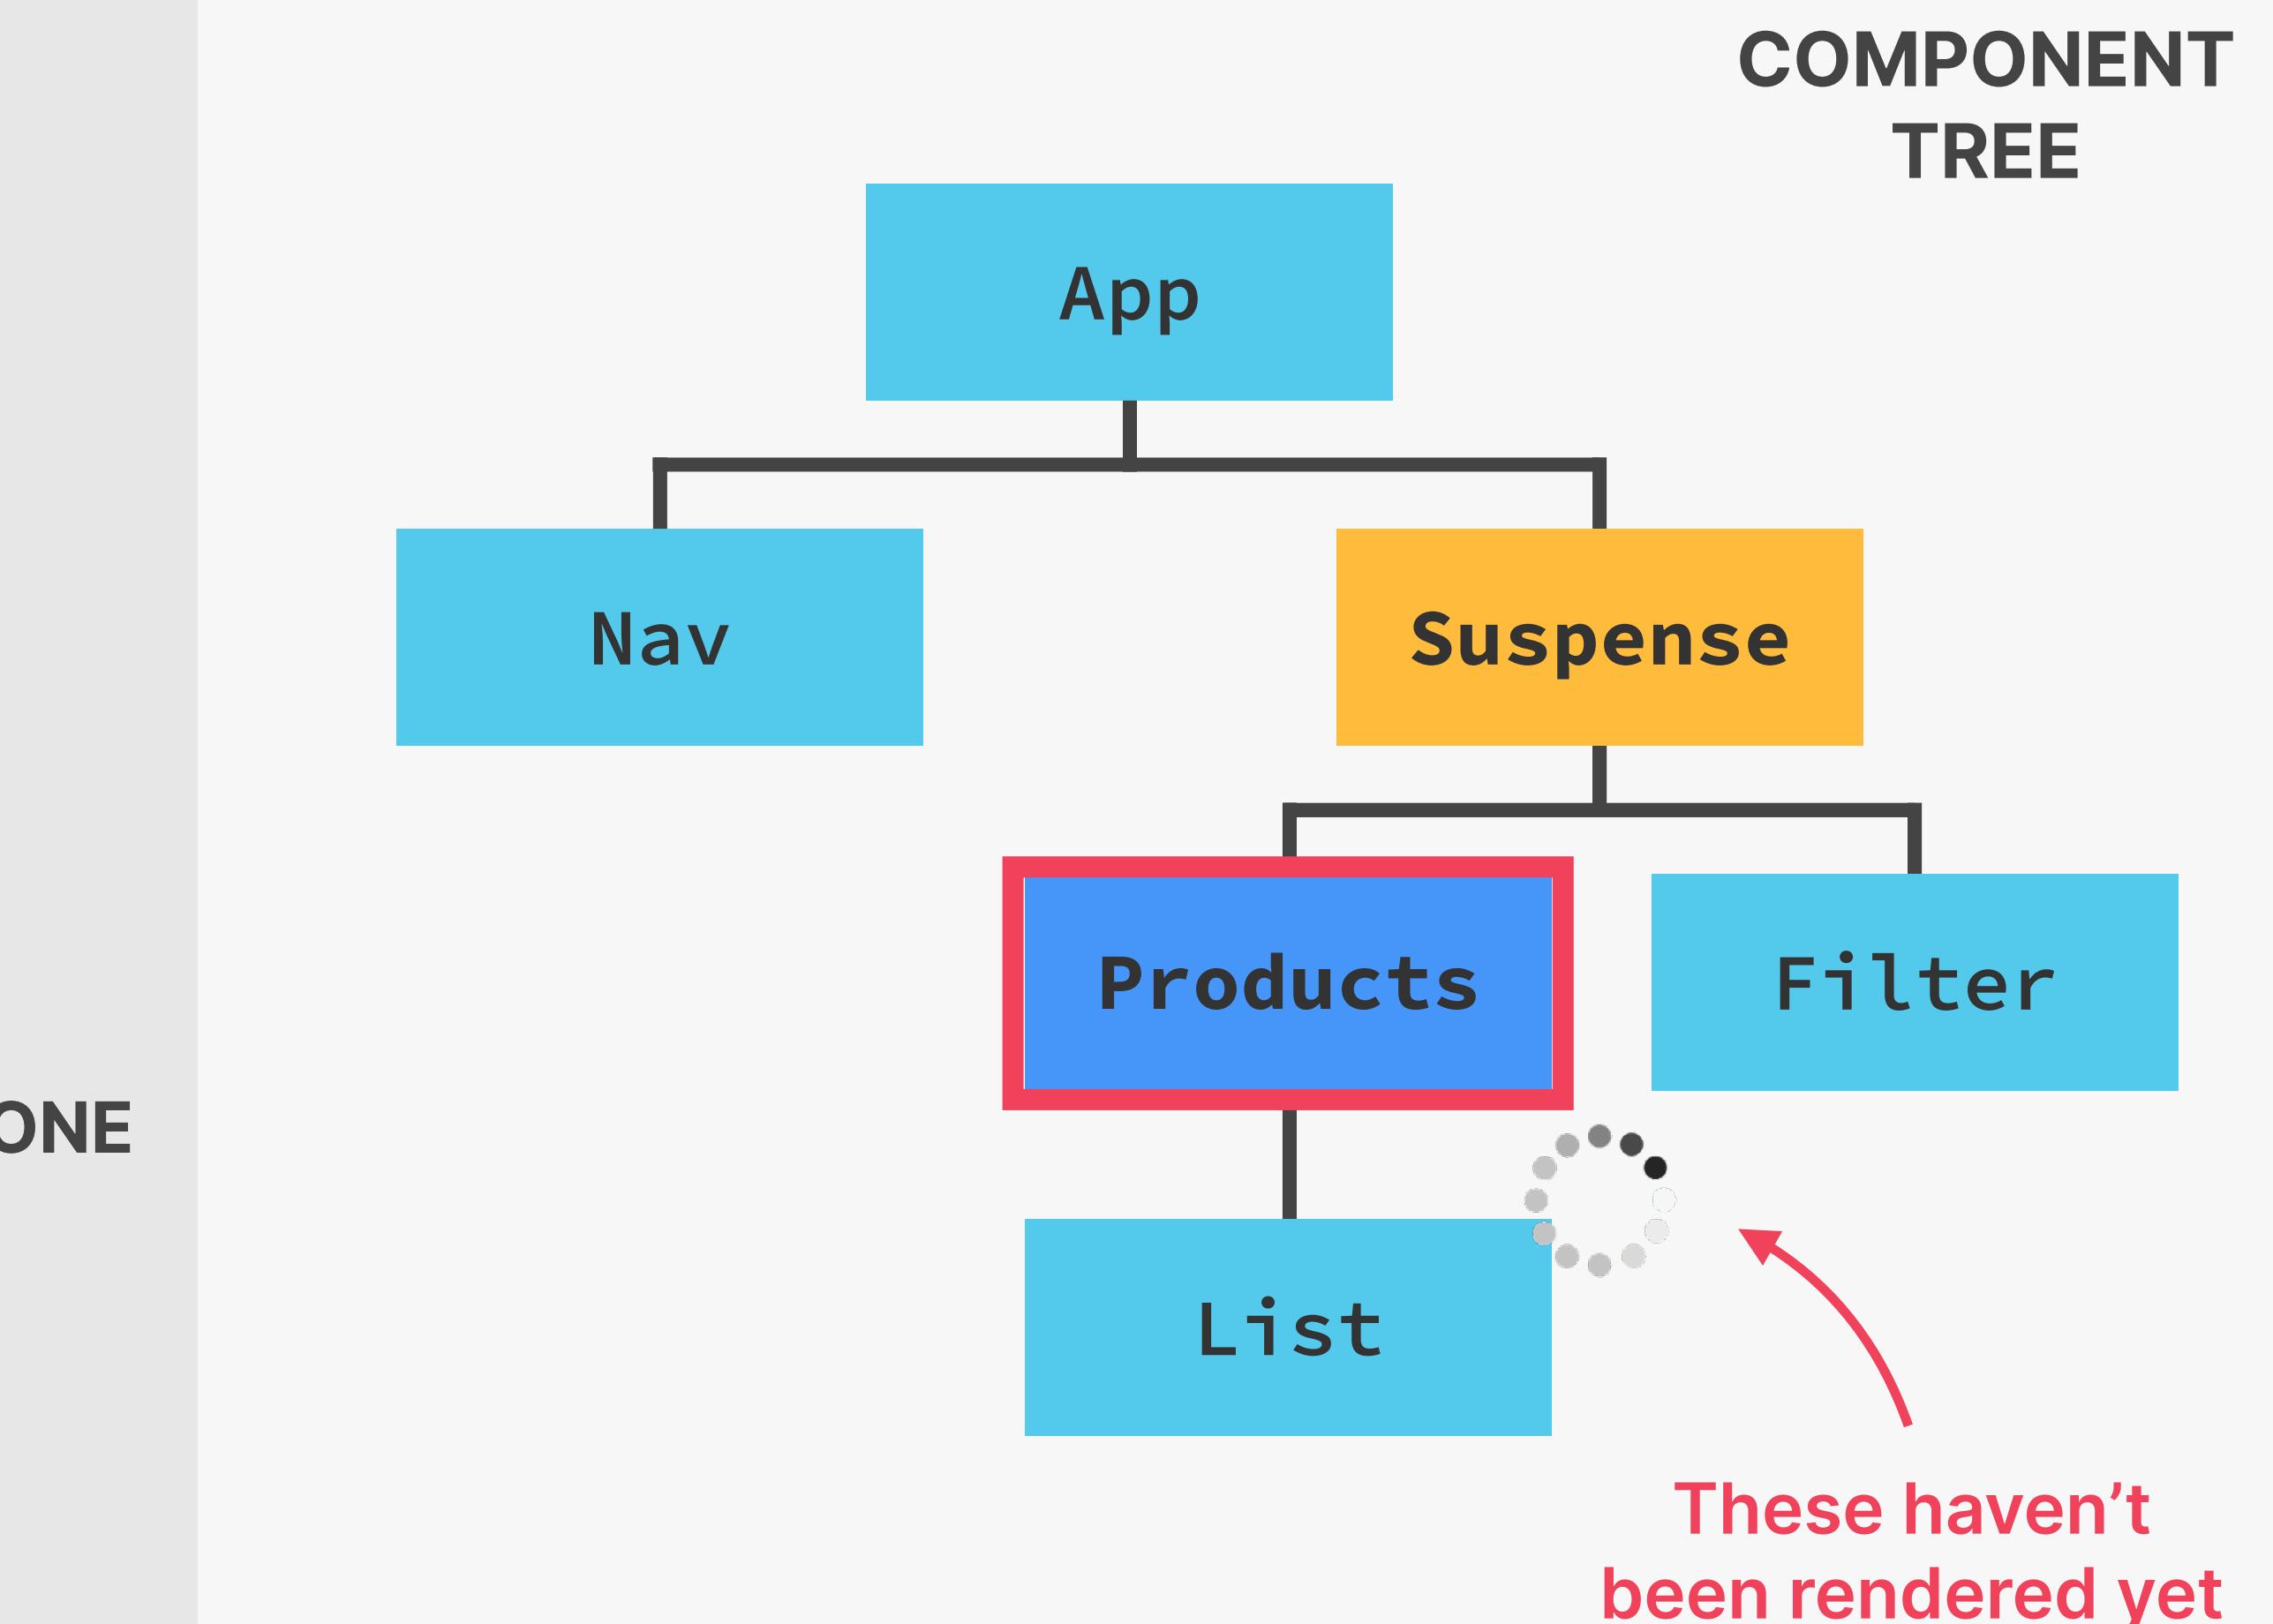

- 👉 Important: Components do **NOT** automatically suspend just because an async operation is happening inside them. Integrating async operations with Suspense is hard, so we use libraries (React Query, Next.js, etc.)

A LOOK BEHIND THE SCENES

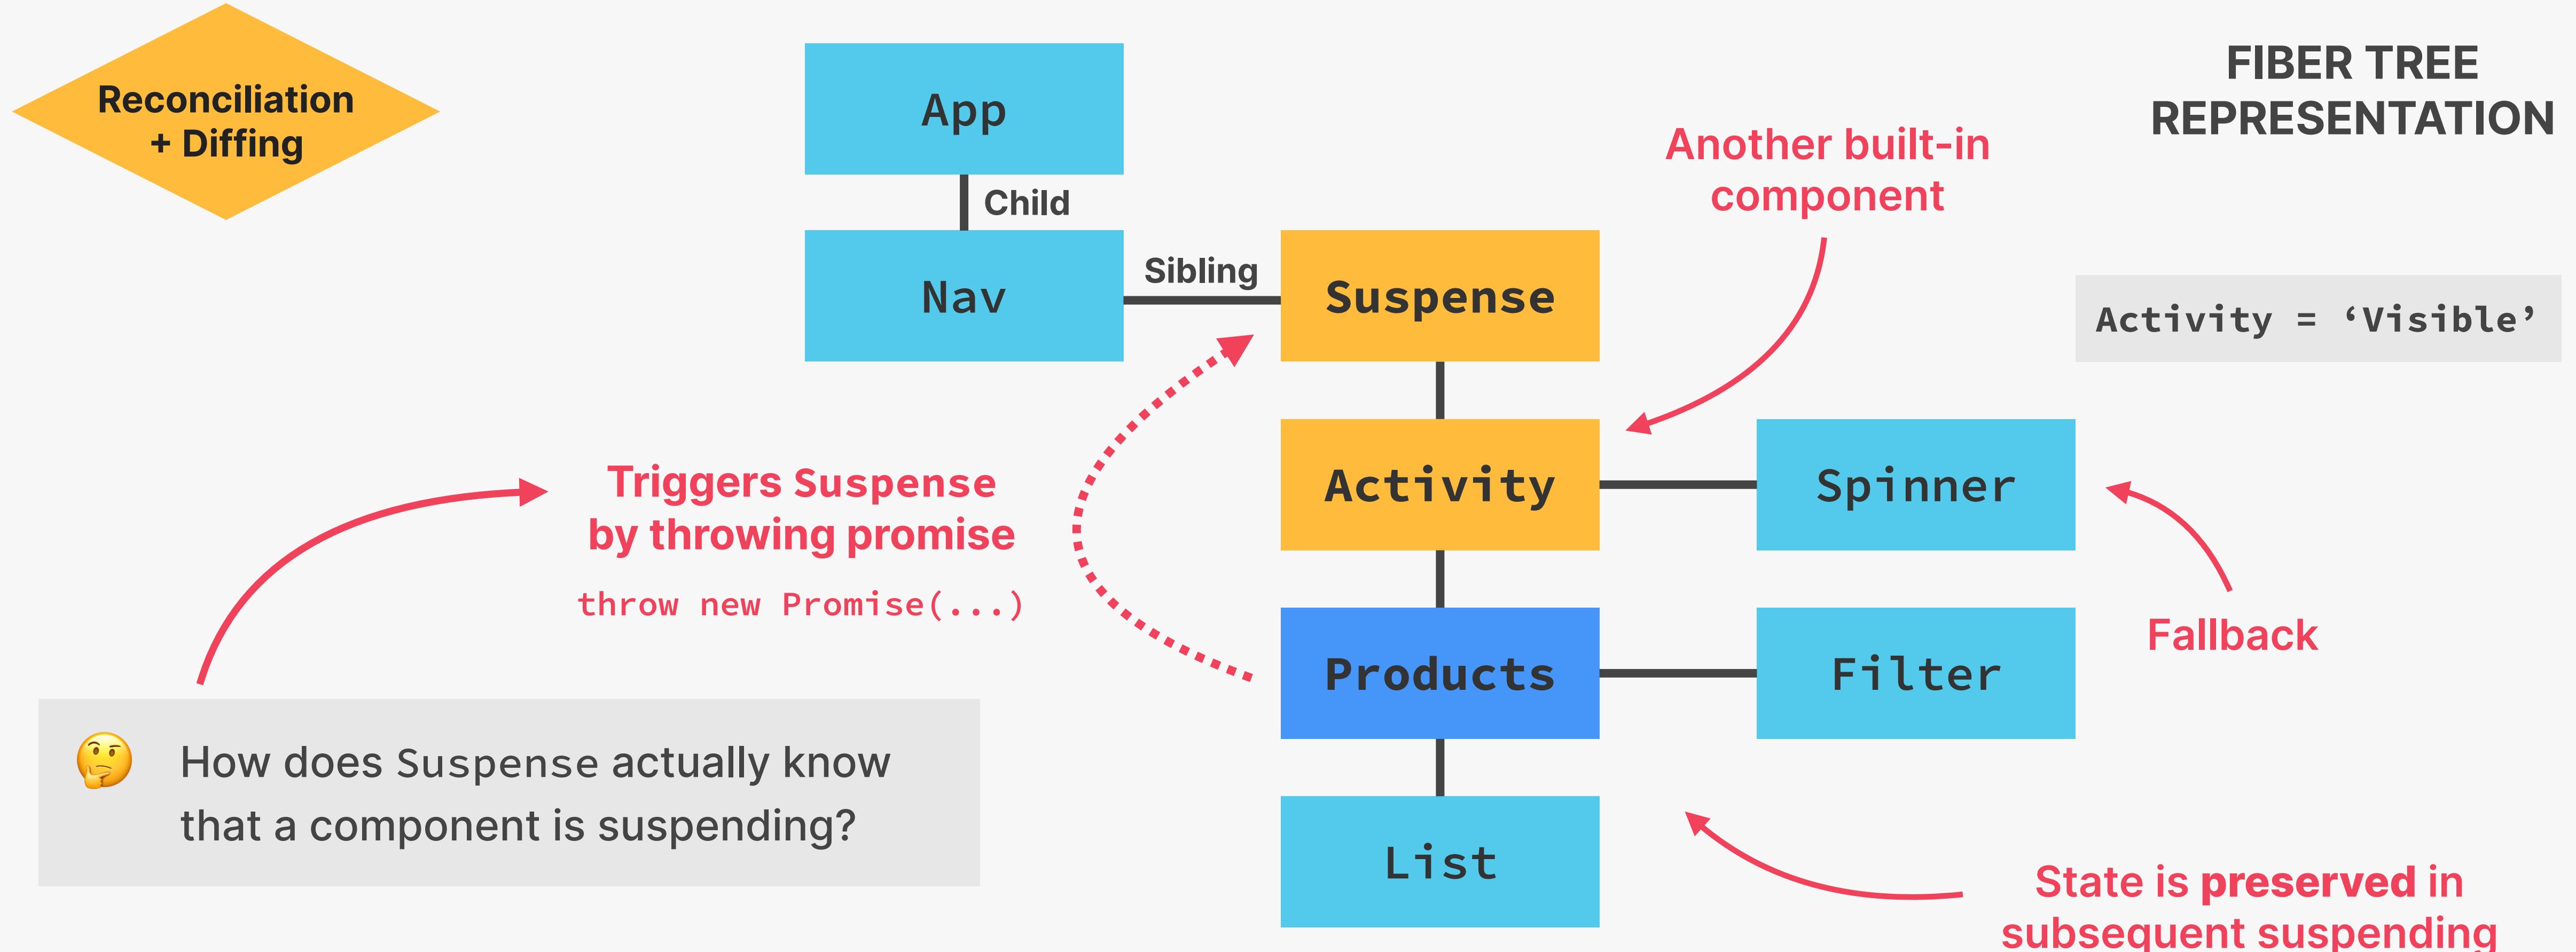

- 👉 Fallback will **NOT** be shown again if the Suspense trigger is wrapped in a **transition** (`startTransition`). In Next.js, that's the case with **page navigations**. We can **reset** the Suspense boundary with a unique **key prop**



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION


DATA FETCHING, CACHING, AND
RENDERING

LECTURE

DIFFERENT TYPES OF SSR: STATIC
VS. DYNAMIC RENDERING

SERVER-SIDE RENDERING IN NEXT.JS

- 👉 Next.js is a **React** framework, so rendering is done by React, following the rules we learned earlier
- 👉 **Remember:** Both **Server** and **Client** components are rendered on the server on the initial render
- 👉 In Next.js, the server-side rendering work is **split by routes**
- 👉 Each route can be either **static** (also called pre-rendered) or **dynamic**
- 👉 There is also **Partial Pre-Rendering (PPR)** which mixes dynamic and static rendering in the same route (*more later* 👉)

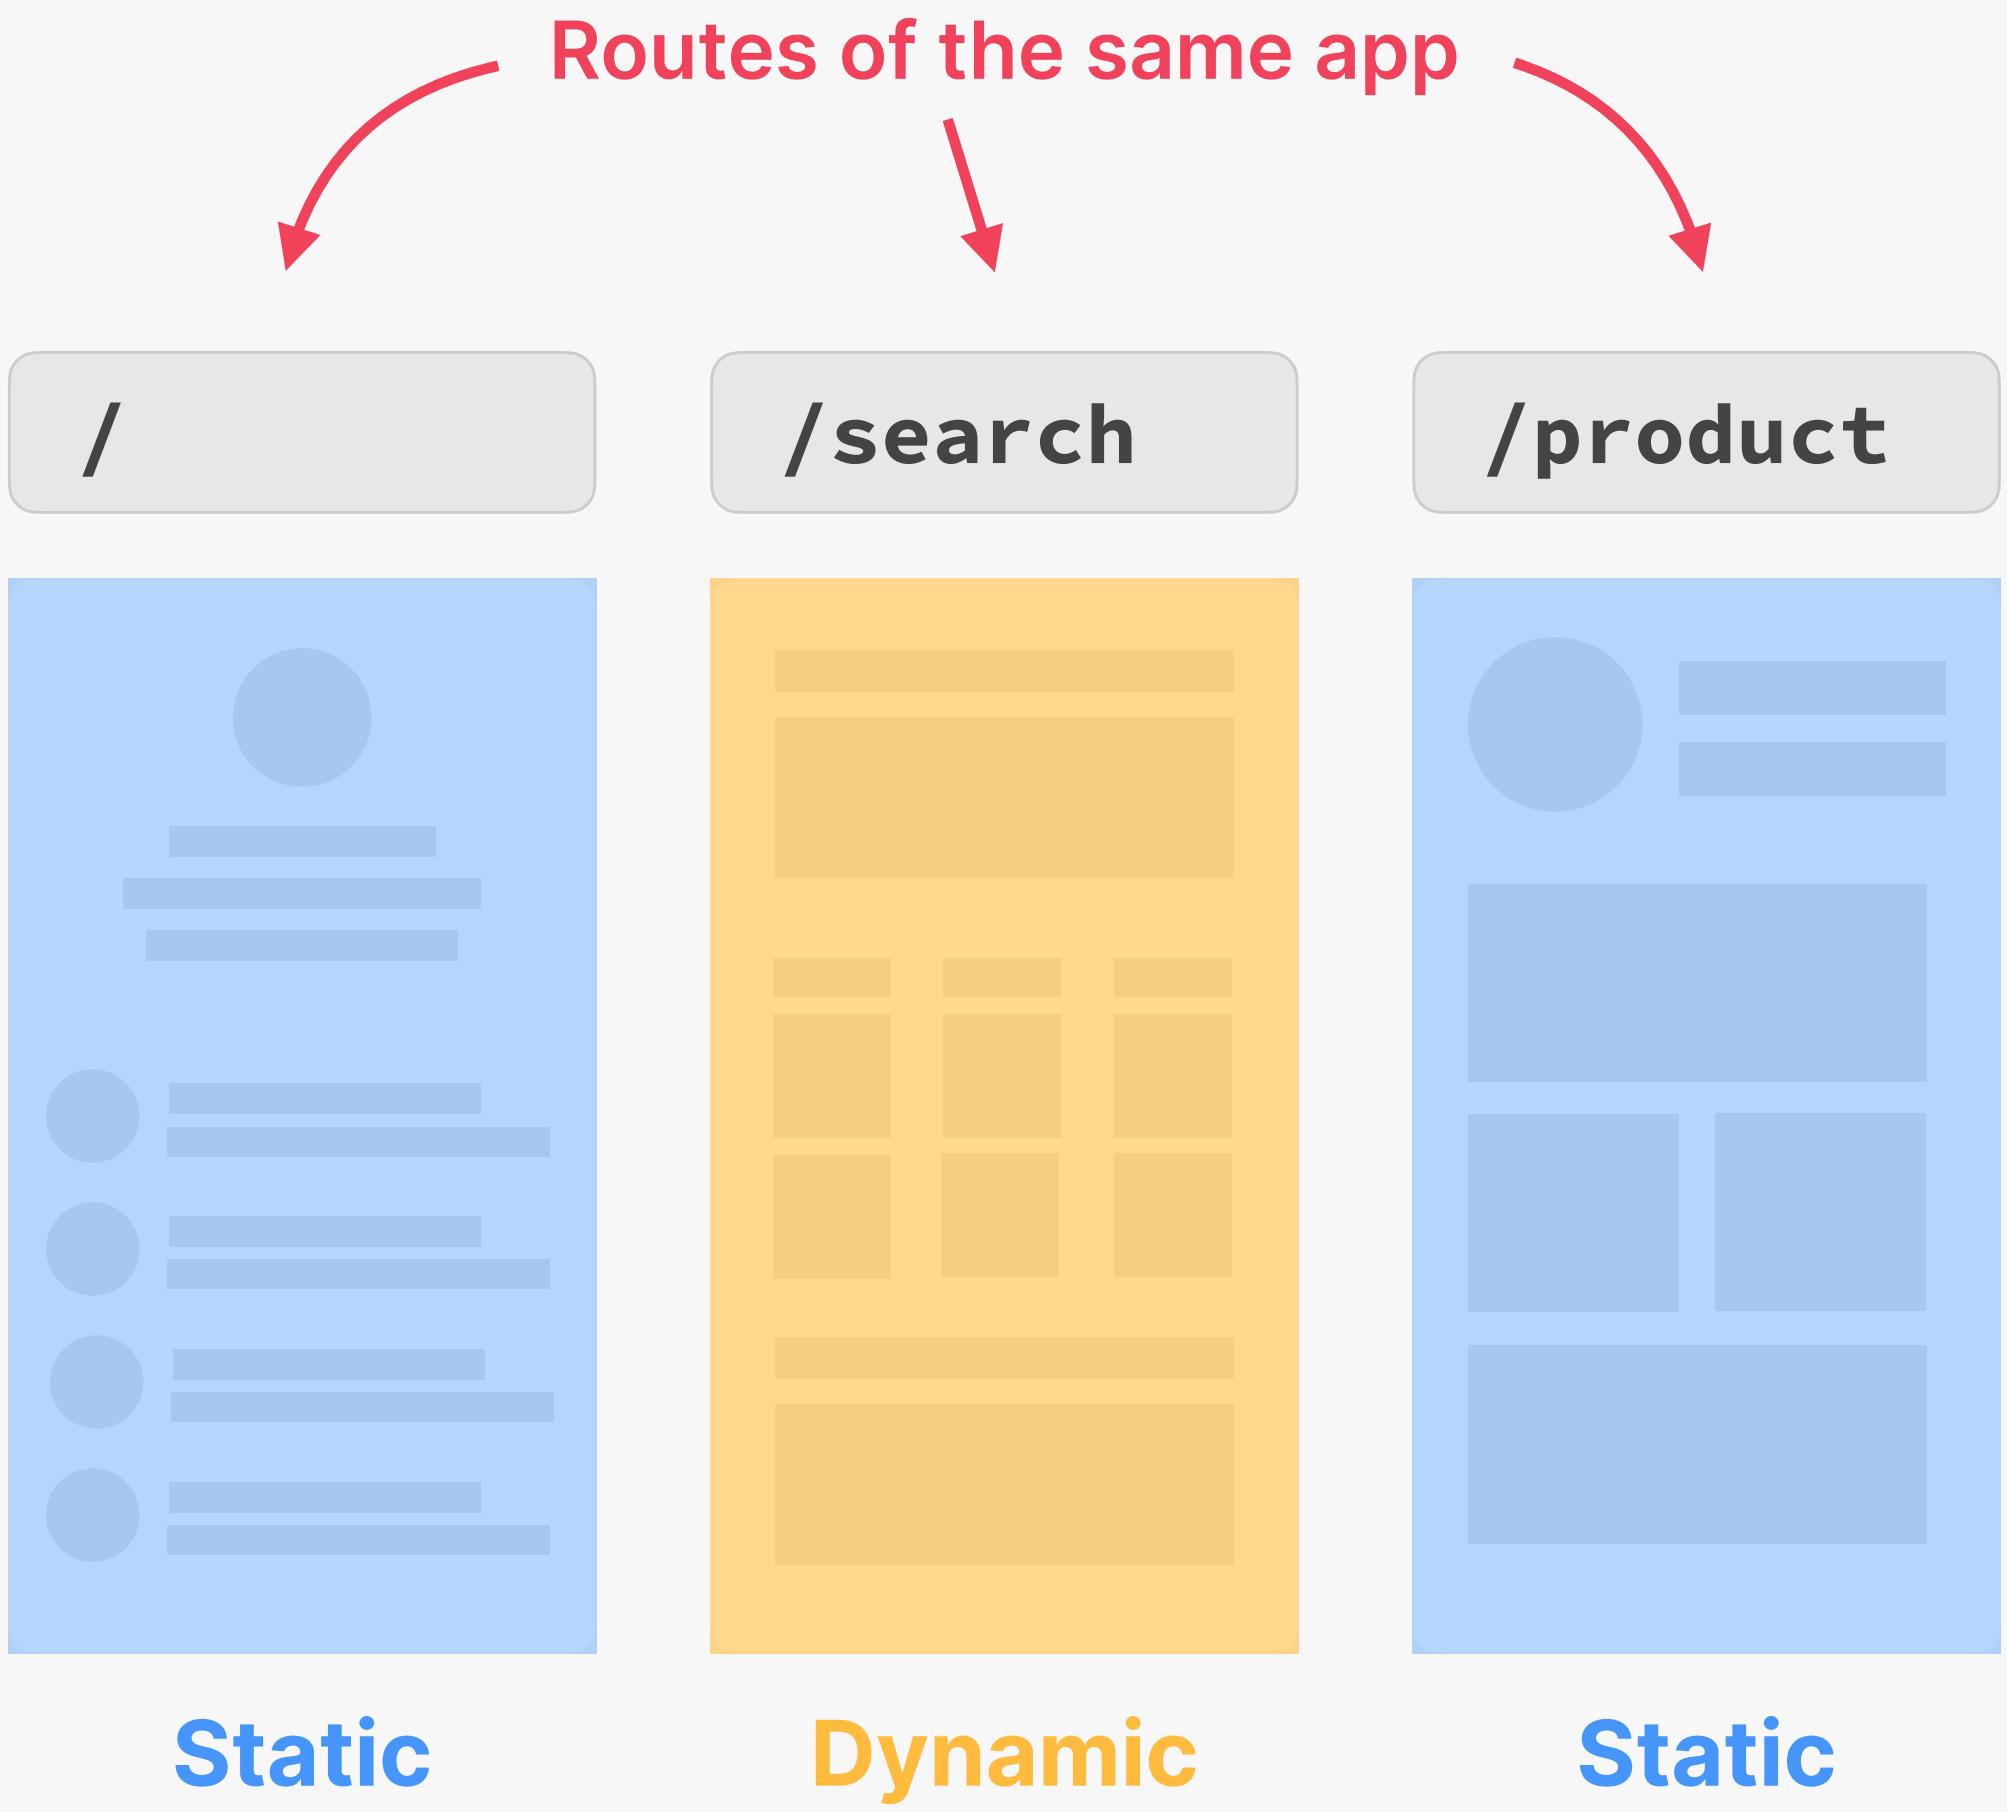

STATIC VS. DYNAMIC RENDERING

STATIC RENDERING

- 👉 HTML is generated at **built time**, or **periodically in the background** by re-fetching data (ISR, *more on this later*👉)
- 👉 Useful when data **doesn't change often** and is **not personalized** to user (e.g. product page)
- 👉 **Default rendering strategy** in Next.js (even when a page or component fetches data)
- 👉 When deployed to **Vercel**, each static route is automatically hosted on a CDN ↗ 
- 👉 If all routes of an app are static, the entire app can be **exported as a static site** (SSG)

DYNAMIC RENDERING

- 👉 HTML is generated at **request time** (for each new request reaches the server)
- 👉 Makes sense if:
 - 1 The data **changes frequently** and is **personalized** to the user (e.g. cart)
 - 2 Rendering a route requires information that **depends on request** (e.g. search params)
- 👉 A route **automatically switches to dynamic** rendering in certain conditions (*next slide*👉)
- 👉 When deployed to **Vercel**, each dynamic route becomes a serverless function

WHEN NEXT.JS SWITCHES TO DYNAMIC RENDERING

- 👉 Usually, developers **don't directly choose** whether a route should be static or dynamic. Next.js will **automatically switch to dynamic rendering** in the following scenarios:

- 1 The route has a **dynamic segment** (page uses **params**)
- 2 **searchParams** are used in the *page component* `/product?quantity=23`
- 3 **headers()** or **cookies()** are used in any of the route's *server components*
- 4 An **uncached data request** is made in any of the route's *server components*

- 👉 This is necessary because any of these values **can not be known** by Next.js at built time

- 👉 We can also **force** Next.js to render a route dynamically:

- 👉 `export const dynamic = 'force-dynamic'; from page.js`
- 👉 `export const revalidate = 0; from page.js`
- 👉 `{ cache: 'no-store' }` added to a **fetch** request in any of the route's *server components*
- 👉 `noStore()` in any of the route's *server components*

These influence caching
More on this later ➡️ 4

SOME TERMINOLOGY YOU MIGHT NEED

- 👉 **Content Delivery Network (CDN):** A network of servers located around the globe that cache and deliver a website's **static content** (HTML, CSS, JS, images) from as close as possible to each user.
- 👉 **Serverless computing:** With the serverless computing model, we can run application code, usually back-end code, without managing the server ourselves. Instead, we can just run single functions on a cloud provider: **serverless functions**. The server is initialized and active only for the duration the serverless function is running, unlike a traditional Node.js app where the server is constantly running. *Remember:* each dynamic route becomes a serverless function.
- 👉 **The “edge”:** “As close as possible to the user”. A CDN is part of an “edge” network, but there is also **serverless “edge” computing**. This is serverless computing that does not happen on a central server, but on a network that's distributed around the globe, as close as possible to the user (like a CDN but for running code). *Important:* we can select certain routes to run on the edge when deployed to Vercel.
- 👉 **Incremental Static Regeneration (ISR):** A Next.js feature that allows developers to update the content of a **static page**, in the background, even after the website has already been built and deployed. This happens by **re-fetching the data** of a component or entire route after a certain interval. *More on this later* 👉



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

DATA FETCHING, CACHING, AND
RENDERING

LECTURE

PARTIAL PRE-RENDERING

PARTIAL PRE-RENDERING (PPR): A WHOLE NEW WAY OF RENDERING

👉 **Idea/problem:** Most pages don't need to be 100% static or 100% dynamic


👉 **Solution:** Partial Pre-Rendering

👉 **New rendering strategy** that combines **static** and **dynamic** rendering in the same route

1 A **static** (*pre-rendered*) shell is served immediately from a CDN, leaving holes for dynamic content

2 The slower **dynamic** content is streamed in as it's rendered on the server

👉 **Result:** Even faster pages that can mostly be delivered from the edge (CDN) even when there are small dynamic parts.

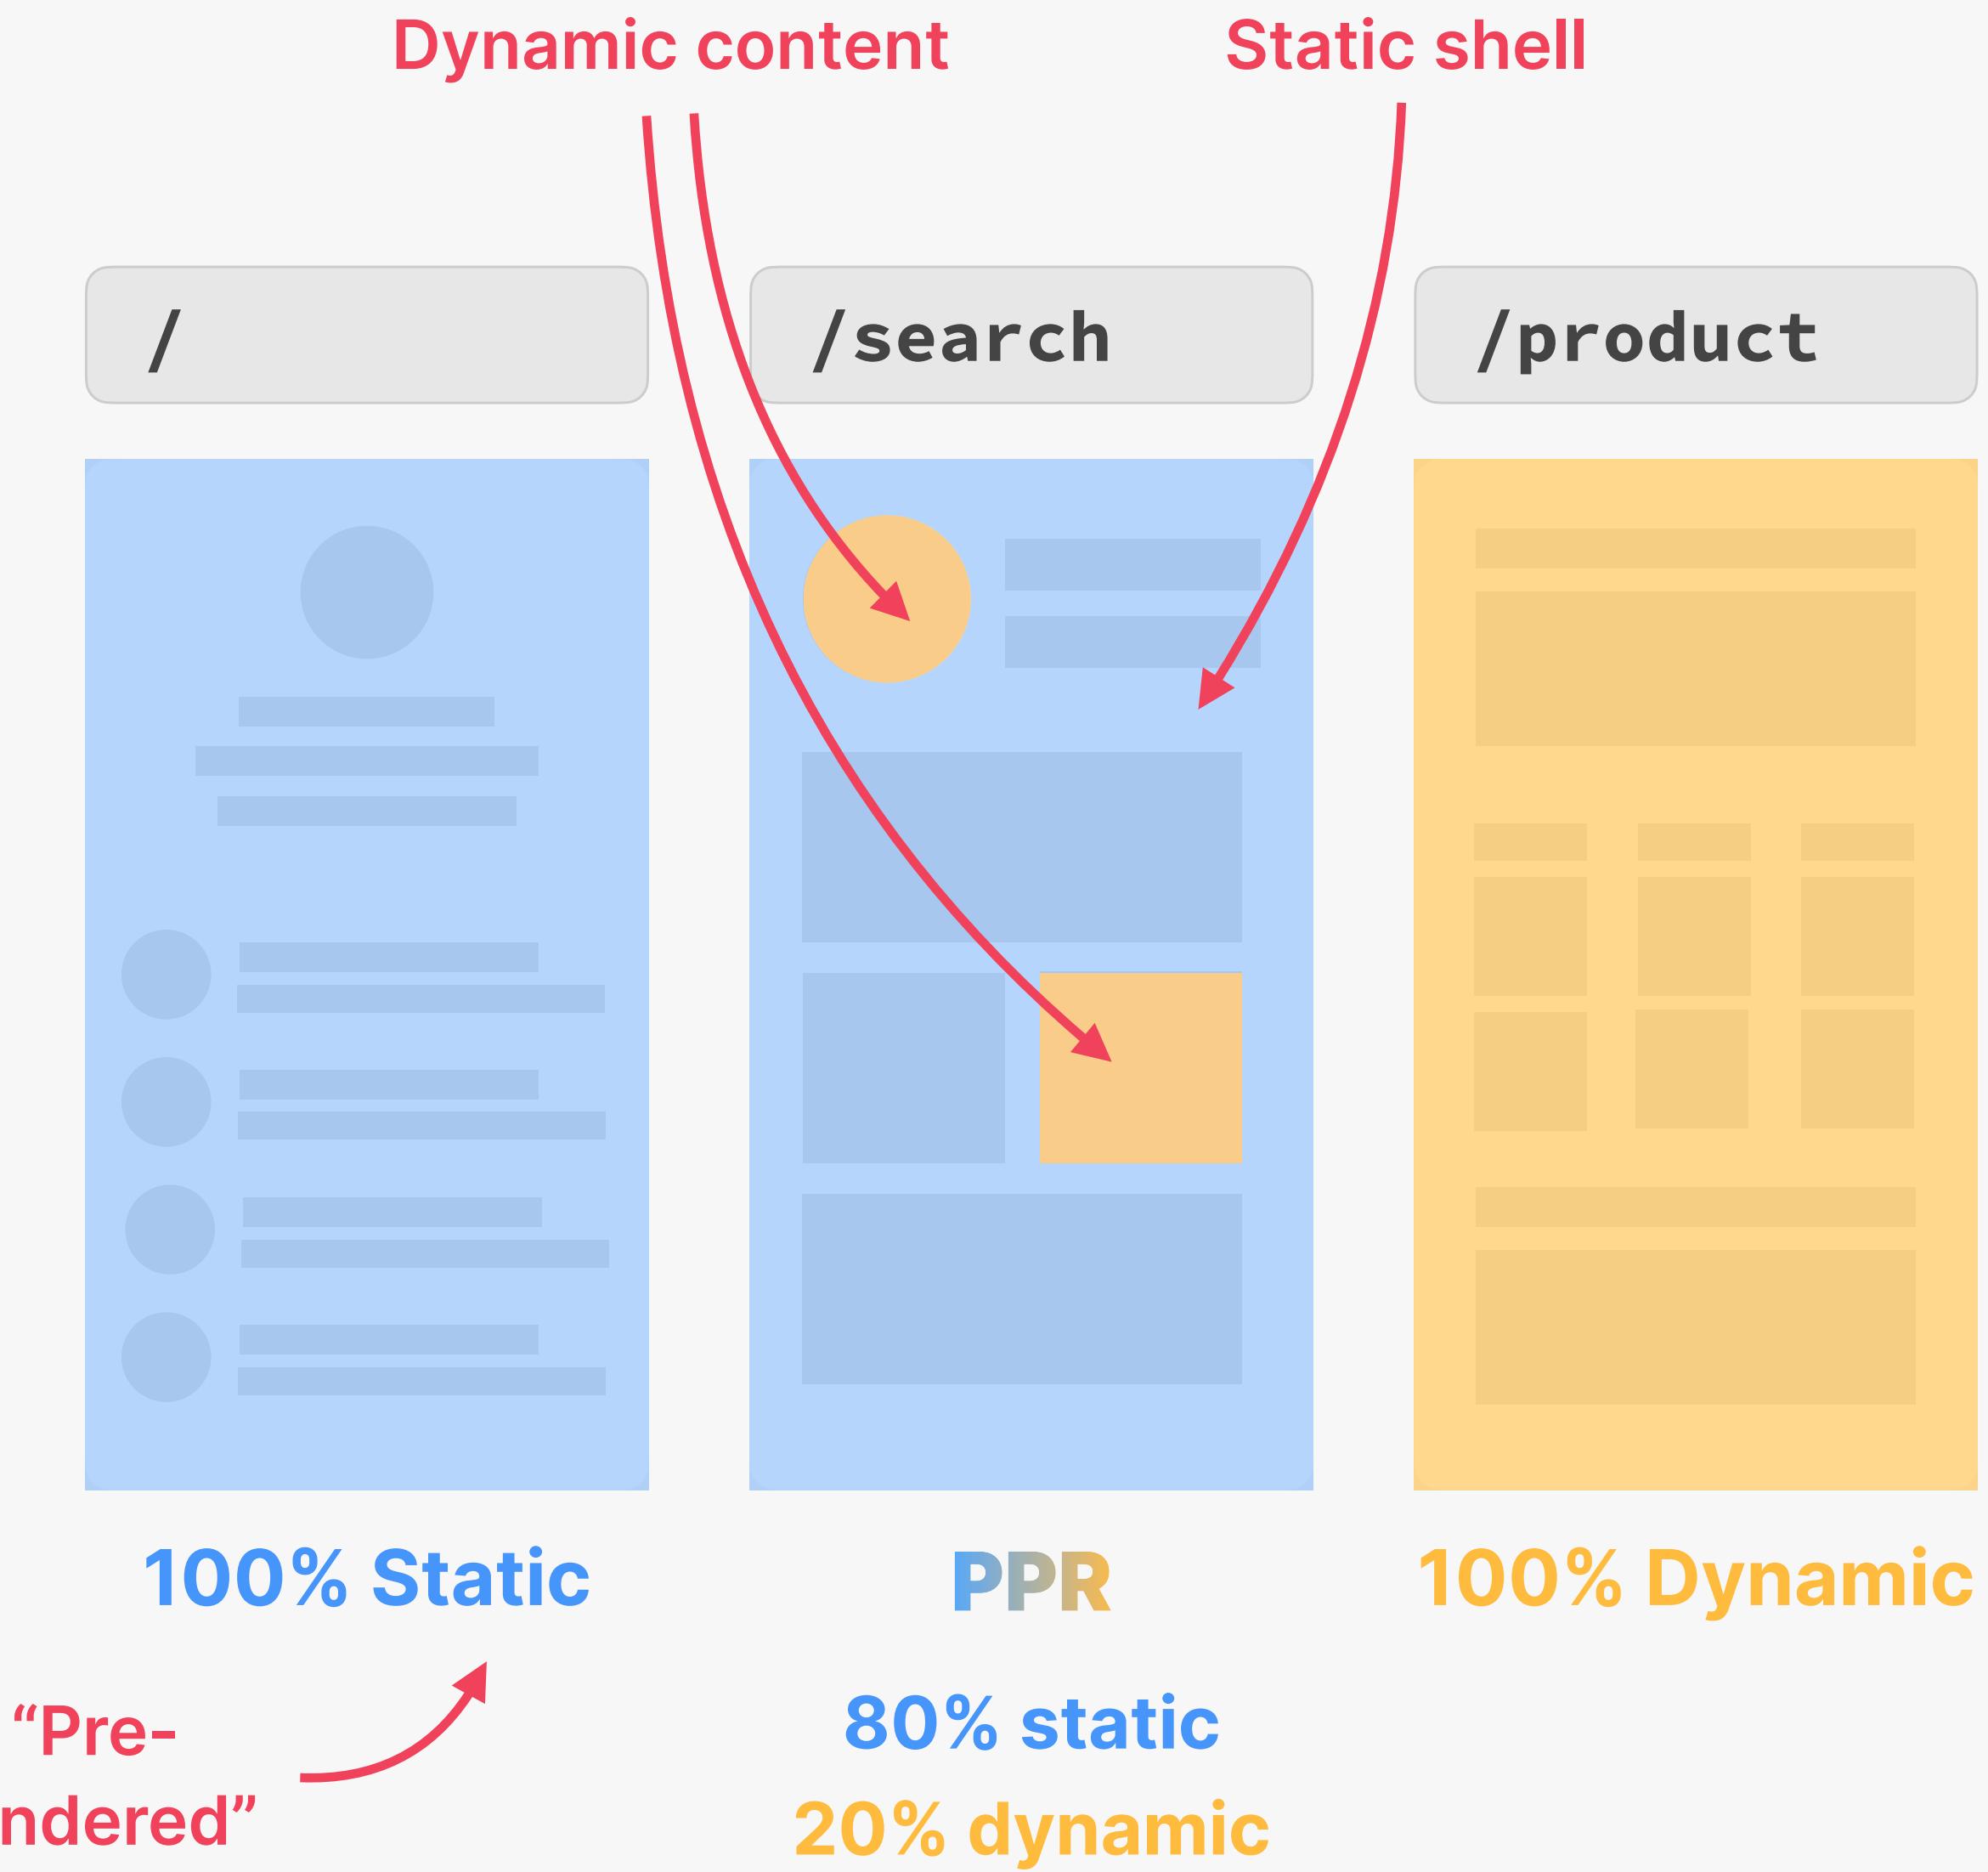

HOW TO USE PARTIAL PRE-RENDERING



As of Next.js 14, PPR is **highly experimental** and should not be used in production

- 👉 PPR needs to be **turned on** in config file
- 👉 By default, as much as possible of any route will be **statically rendered**, creating a **static shell**
- 👉 Dynamic parts (components) should be placed inside **Suspense boundaries**
- 👉 There are no new APIs to learn 🎉
- 👉 These boundaries tell Next.js that **anything within the boundary is dynamic**
- 👉 The boundary prevents the dynamic part (e.g. reading a header or making a non-cached fetch request) from spreading onto the entire route.
- 👉 We provide a **static fallback** to be shown while the dynamic part is rendering
- 👉 Dynamic components or sub-trees are **inserted** into the static shell as they become available



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

DATA FETCHING, CACHING, AND
RENDERING

LECTURE

HOW NEXT.JS CACHES DATA

CACHING IN NEXT.JS

NEXT.JS CACHING

- 👉 **Caching:** Storing fetched or computed data in a temporary location for future access, instead of having to re-fetch or re-compute the data every time it's needed
- 👉 Next.js caches **very aggressively:** everything that is possible to cache, is cached
- 👉 Next.js provides APIs for **cache revalidation:** removing data from the cache and updating it with **fresh data** (re-fetched or re-computed)
- 👍 Makes Next.js apps **more performant** and **saves costs** (computing and data access)
- 👎 **Caching always ON by default:** strange and unexpected behavior in some situations. Some caches can't be turned off 😱
- 👎 **Very confusing:** Many different Next.js APIs affect and control caching

THE CACHING MECHANISMS

	REQUEST MEMOIZATION	DATA CACHE	FULL ROUTE CACHE	ROUTER CACHE
Where?	Server	Server	Server	Client
What data?	Data fetched with similar GET requests (same url and options in fetch function)	Data fetched in a route or a single fetch request	Entire static pages (HTML and RSC payload)	Pre-fetched and visited pages: static and dynamic
How long?	One page request (one render, one user)	Indefinitely , even across de-deploys (can revalidate or opt out)	Until the “Data cache” is invalidated (or app is re-deployed)	30 sec dynamic / 5 min static (throughout one user session)
Enables	No need to fetch at the top of tree: the same fetch in multiple components only makes one request	Data for static pages + ISR when revalidated	Static pages	SPA-like navigation (instant navigation and no full reloads)
Only in components (not route handlers or server actions)		 This is the behavior in production mode . Caching doesn't work in development		

THE CACHING MECHANISMS



REQUEST MEMOIZATION



How to revalidate?

N.A.


Revalidating Data Cache also
revalidates Full Route Cache



How to opt out?

AbortController

These forces page to become
dynamic, which also opts out
of the Full Route Cache

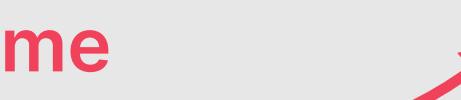

DATA CACHE



FULL ROUTE CACHE



ROUTER CACHE

👉 Time-based (automatic) for all data on page:

```
export const revalidate = <time>; (page.js)
```

👉 Time-based (automatic) for one data request:

```
fetch('...', { next: { revalidate: <time> } })
```

👉 On-demand (manual):

```
revalidatePath or revalidateTag
```

👉 revalidatePath or revalidateTag in SA

👉 router.refresh

👉 cookies.set or cookies.delete in SA

👉 Entire page:

```
export const revalidate = 0; (page.js)
```

👉 Entire page:

```
export const dynamic = 'force-dynamic'; (page.js)
```

👉 Individual request:

```
fetch('...', { cache: 'no-store' })
```

👉 Individual server component: noStore()

Not possible



Can be very
problematic

CLIENT AND SERVER INTERACTIONS



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION


CLIENT AND SERVER
INTERACTIONS

LECTURE


BLURRING THE BOUNDARY
BETWEEN SERVER AND CLIENT

THE SERVER-CLIENT BOUNDARY: FRONT-END VS. BACK-END

TRADITIONAL

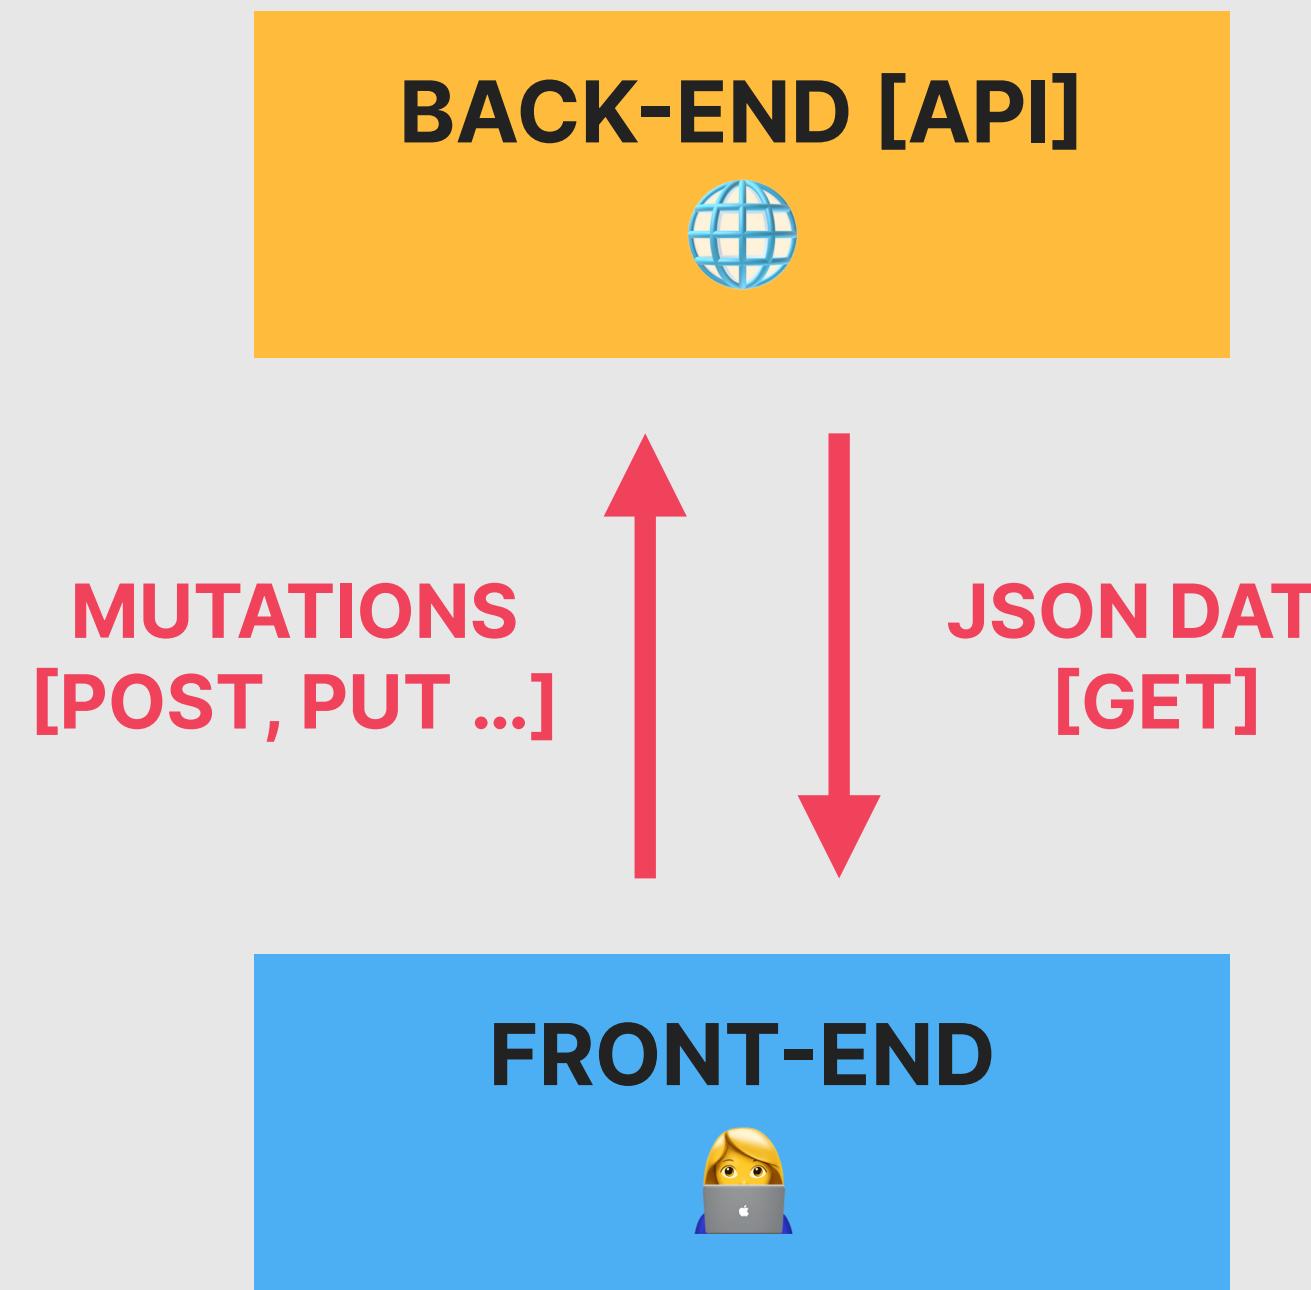

NEXT.JS WITH RSC + SA

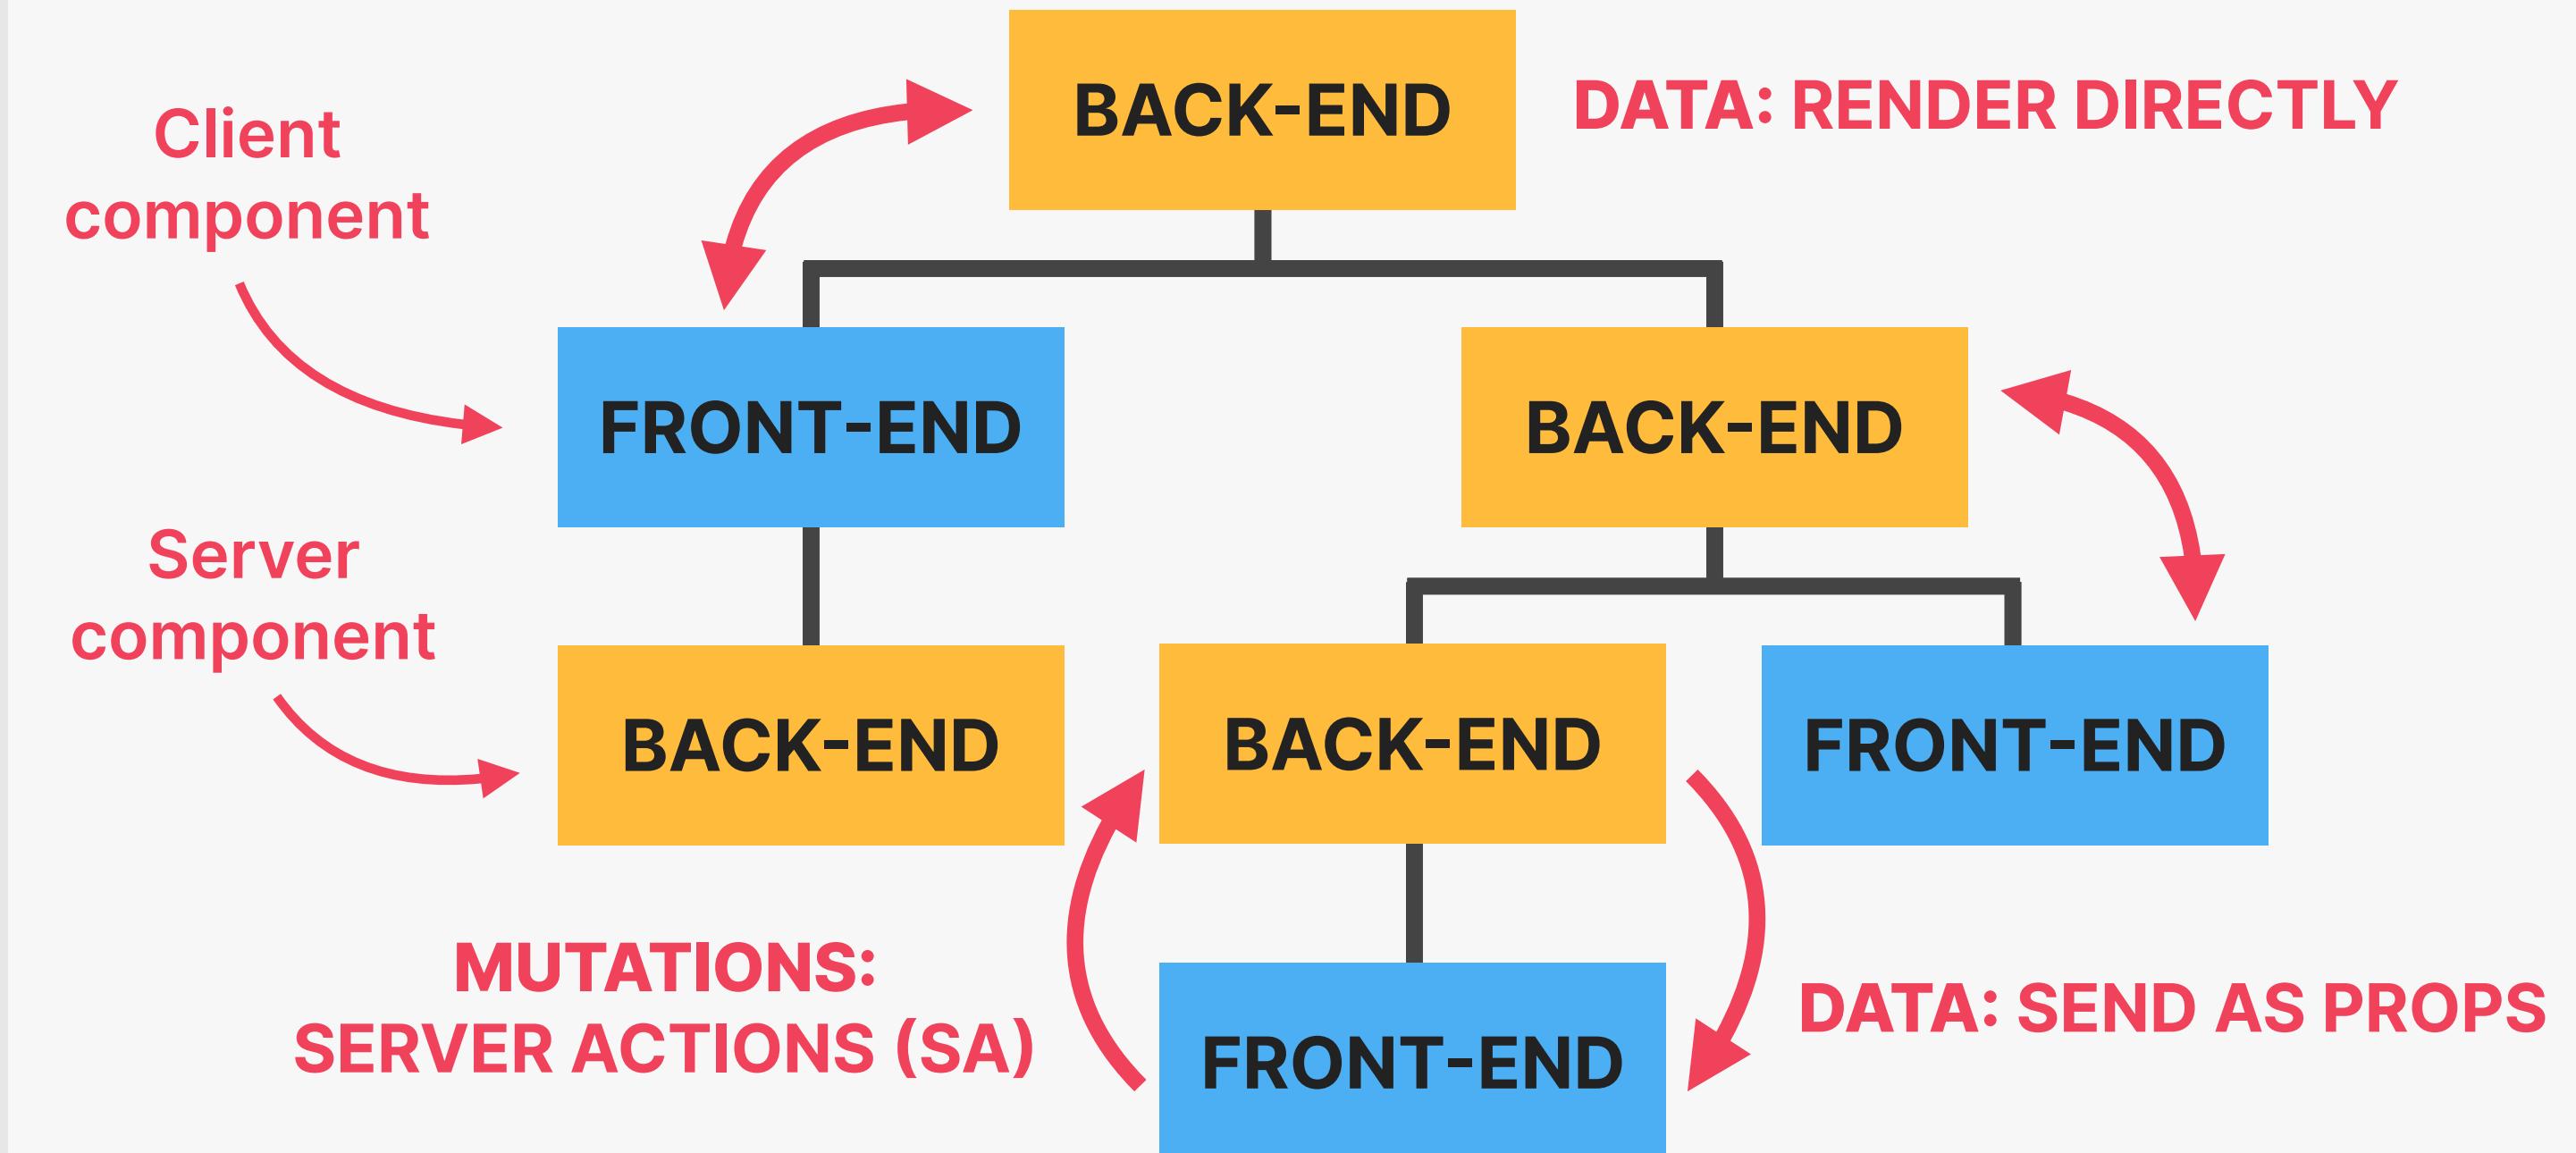


- 👉 Very clear server-client boundary
- 👉 Communication happens via an API
- 👉 Once JSON arrives from the back-end, the front-end takes over

- 👉 No clear separation between front-end and back-end anymore
- 👉 “Knitting”: pieces of server and client code interweave (composability)
- 👉 Allow us to build true **full-stack applications** in just one codebase
- 👉 No need for an intermediary API in many times

NEXT.js

IMPORTING VS. RENDERING

DEPENDENCY TREE (MODULE IMPORTS)

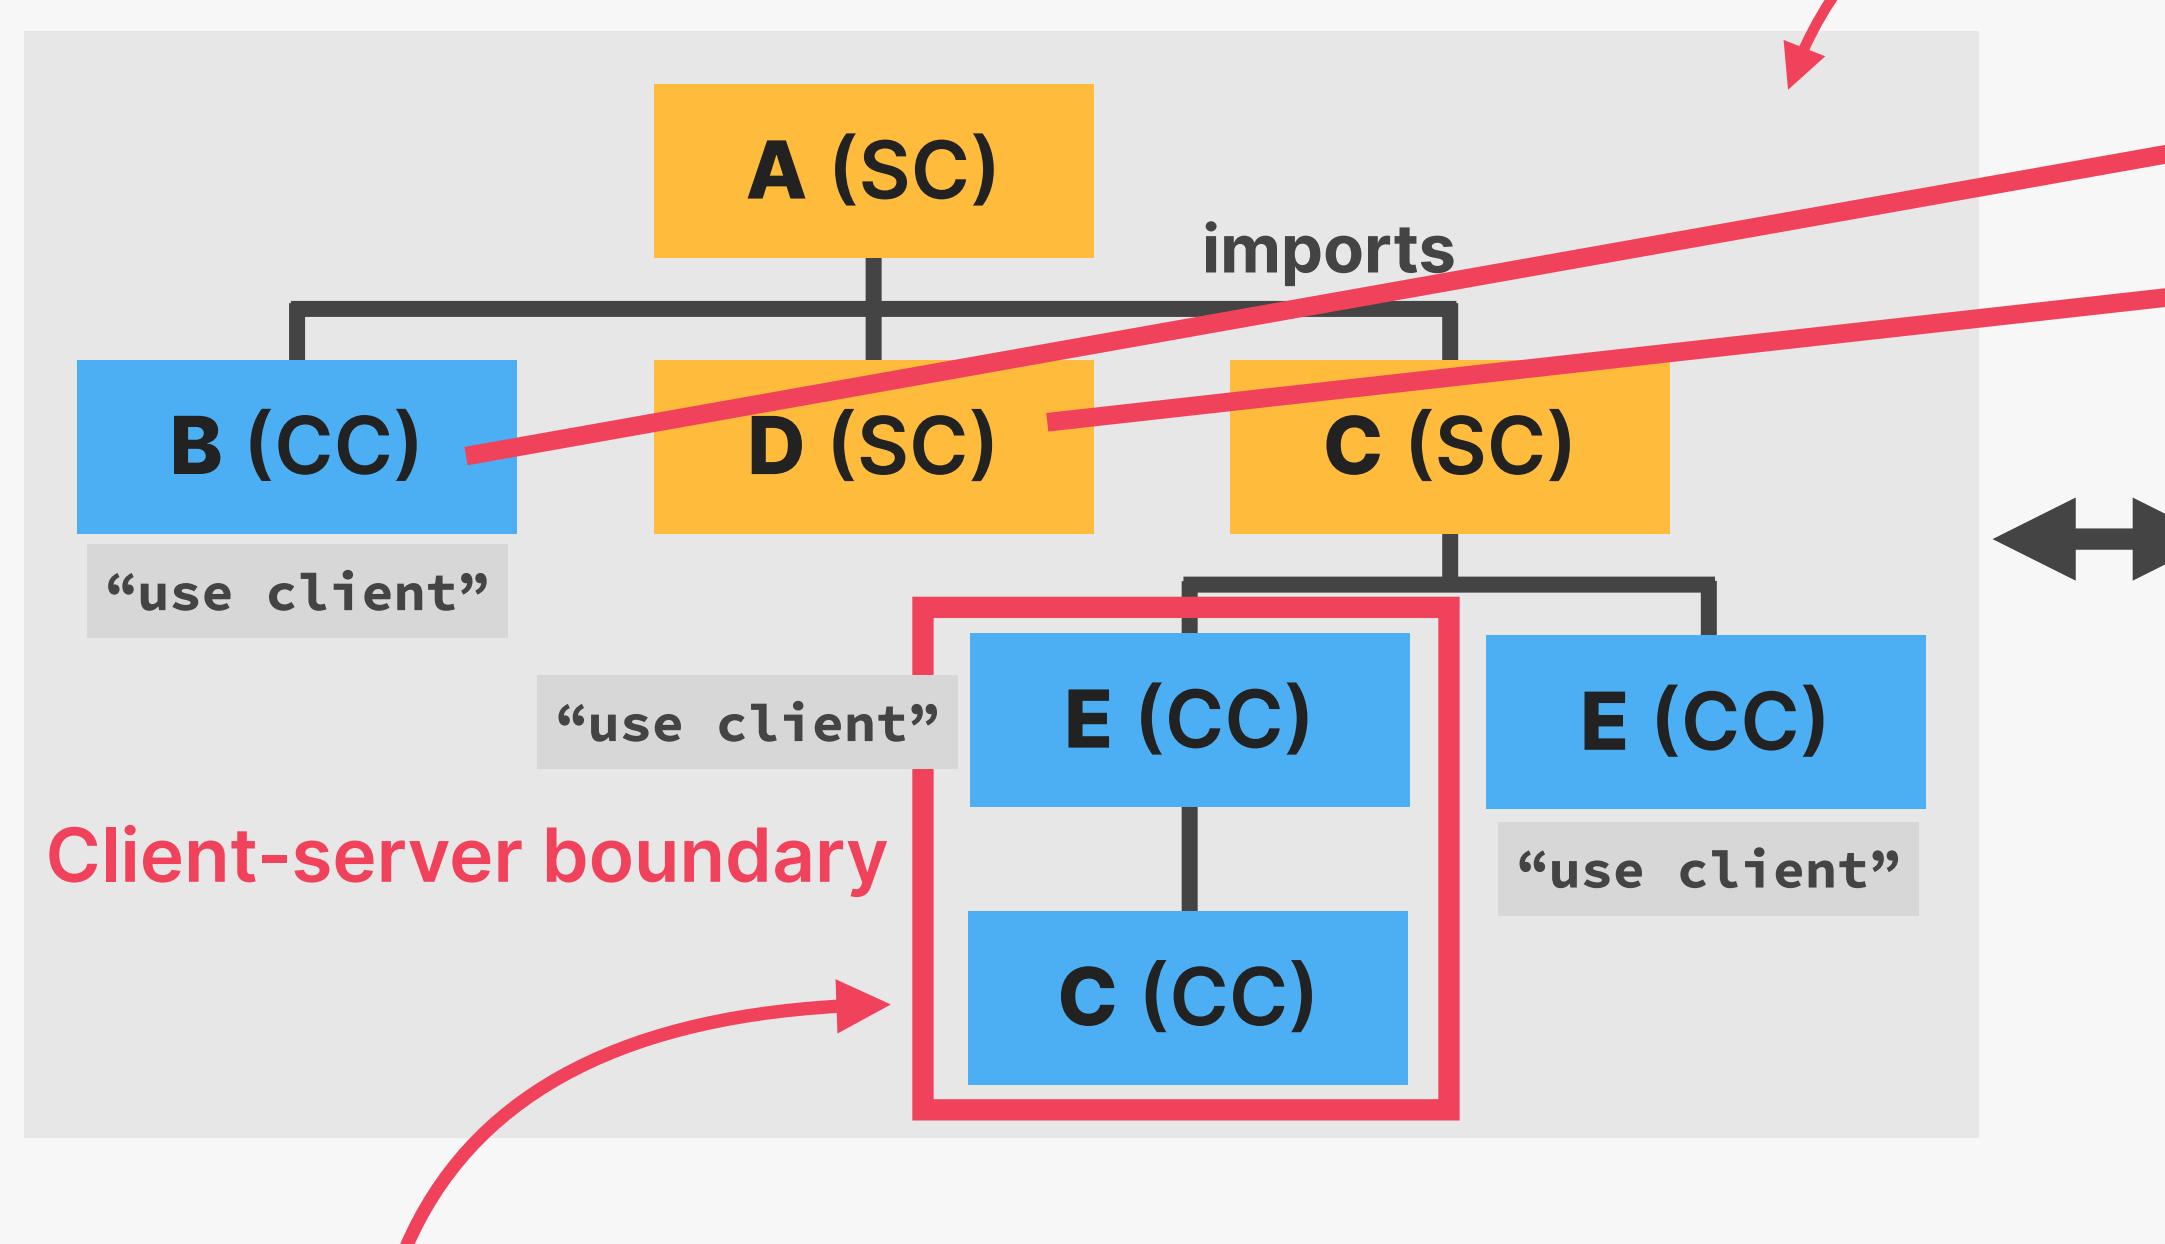

❓ Is C a **server** or a **client** component?

👉 It can be both! A component imported inside the client-server boundary creates a **client component instance**

📦 Can import


Only **client components** (can't go back in client-server boundary)

👉 Can render

Client components and server components passed as props

Where client-server boundaries are

COMPONENT TREE

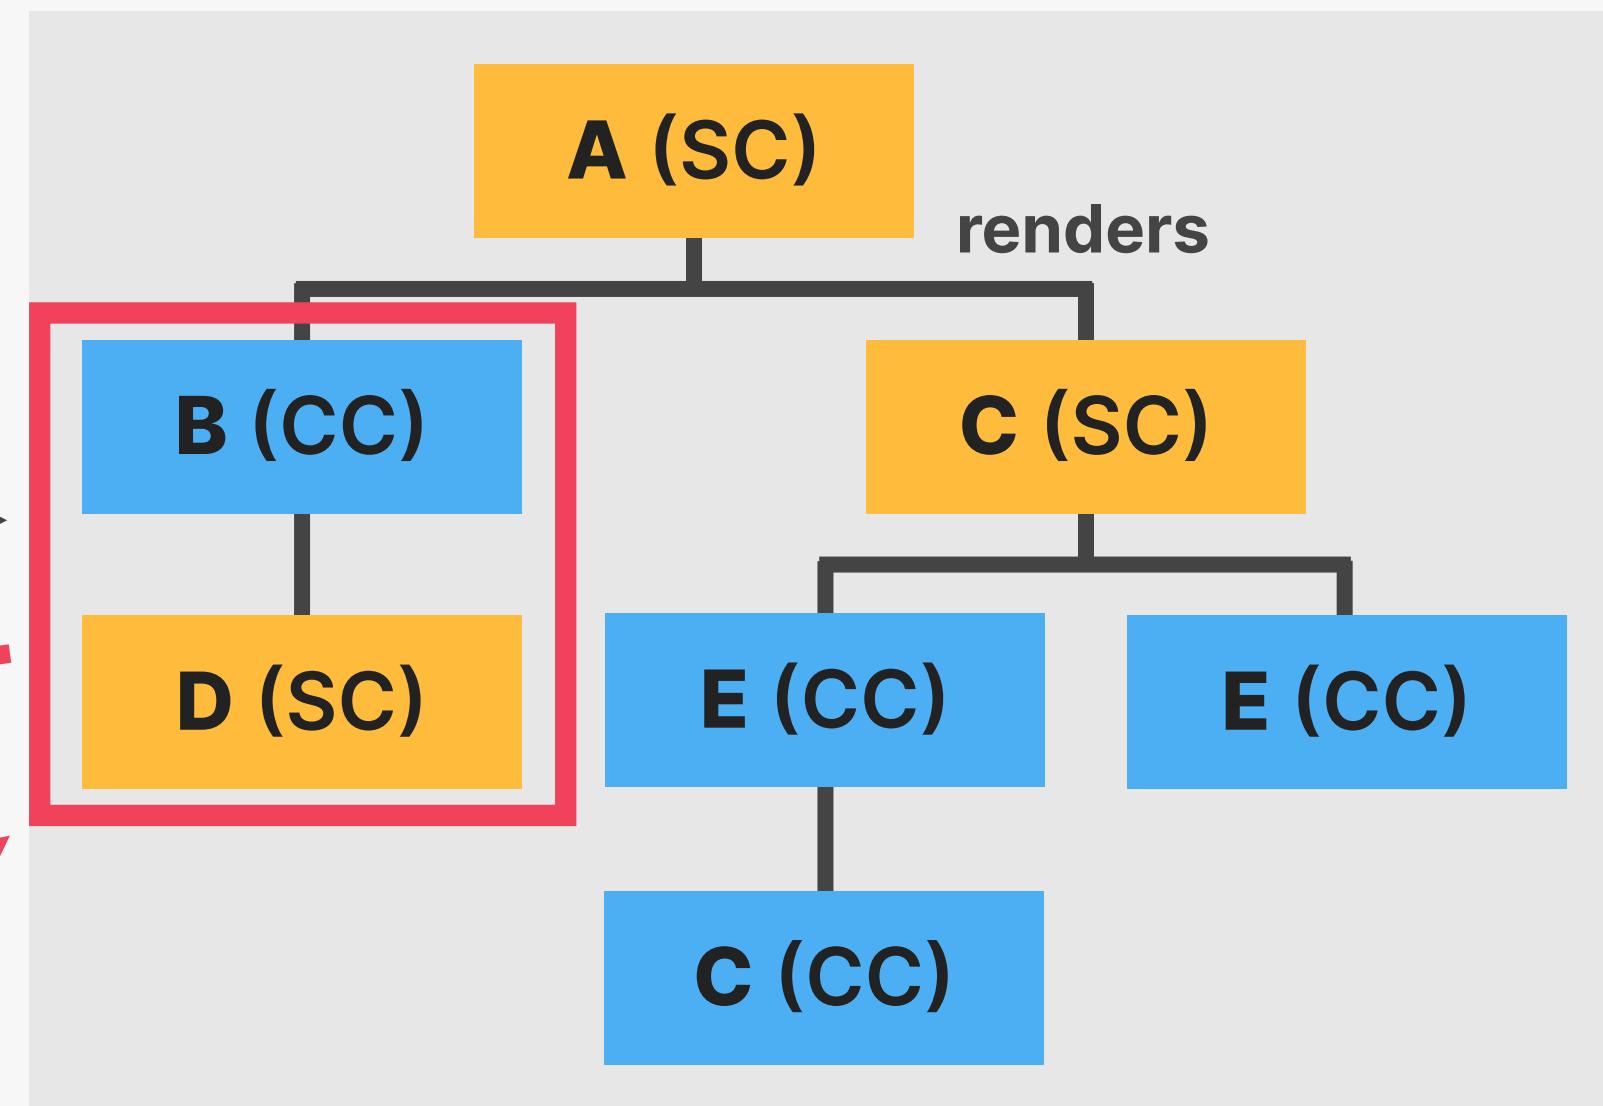

❓ A **client component** rendering a **server component**?

👉 Possible if **server component** is passed as prop (children or other)
👉 D has already been executed here...

CLIENT COMPONENTS

📦 Can import

Only **client components** (can't go back in client-server boundary)

👉 Can render

Client components and server components passed as props

SERVER COMPONENTS

Client and server components

Client and server components

AUTHENTICATION WITH NEXTAUTH (AUTH.JS)



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

AUTHENTICATION WITH
NEXTAUTH (AUTH.JS)


LECTURE

WHAT IS MIDDLEWARE IN
NEXT.JS?

HOW MIDDLEWARE WORKS IN NEXT.JS



HOW MIDDLEWARE WORKS IN NEXT.JS

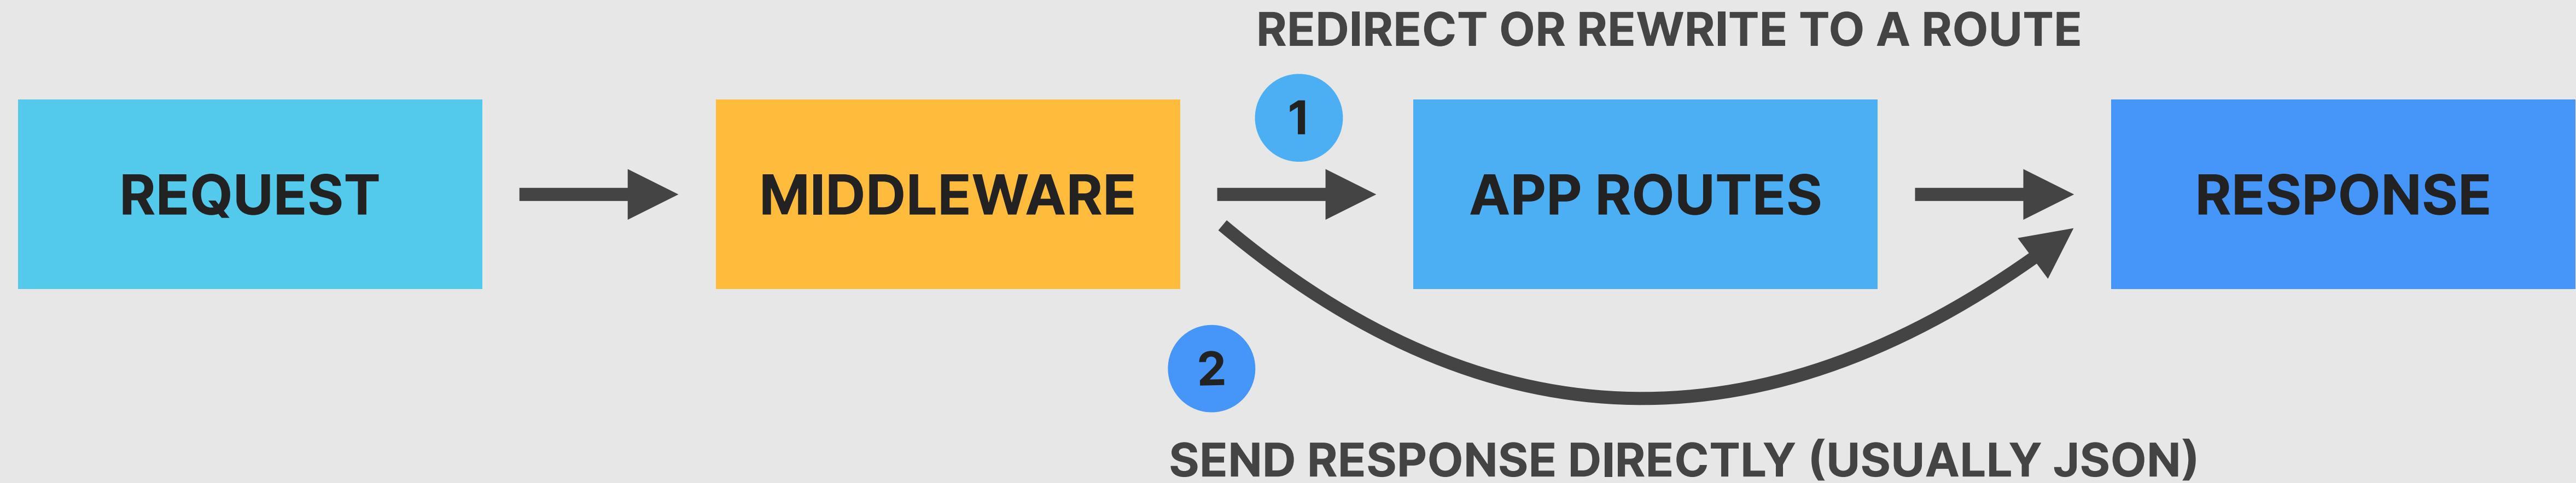

MIDDLEWARE DETAILS:

- 👉 By default, middleware runs **before every route** in a project, but we can specify which paths using a **matcher**
- 👉 **Analogy:** chunk of code that's in every `page.js` component
- 👉 Only **one** middleware function: needs to be exported from `middleware.js` (or `.ts`) in the project **root folder**
- 👉 Middleware needs to produce a response: **1** or **2**

USE CASES:

- 👉 Read and set cookies and headers
- 👉 Authentication and authorization
- 👉 Server-side analytics
- 👉 Redirect based on geolocation
- 👉 A/B testing

MUTATIONS WITH
SERVER ACTIONS +
MODERN REACT
HOOKS



JONAS SCHMEDTMANN

THE ULTIMATE REACT COURSE

 @JONASSCHMEDTMAN

SECTION

MUTATIONS WITH SERVER
ACTIONS + MODERN REACT HOOKS


LECTURE

WHAT ARE SERVER ACTIONS?

WHAT ARE SERVER ACTIONS?

SERVER ACTIONS


- 👉 The missing piece in the RSC architecture that enables *interactive full-stack applications*
- 👉 Async functions that run **exclusively on the server**, allowing us to perform **data mutations**

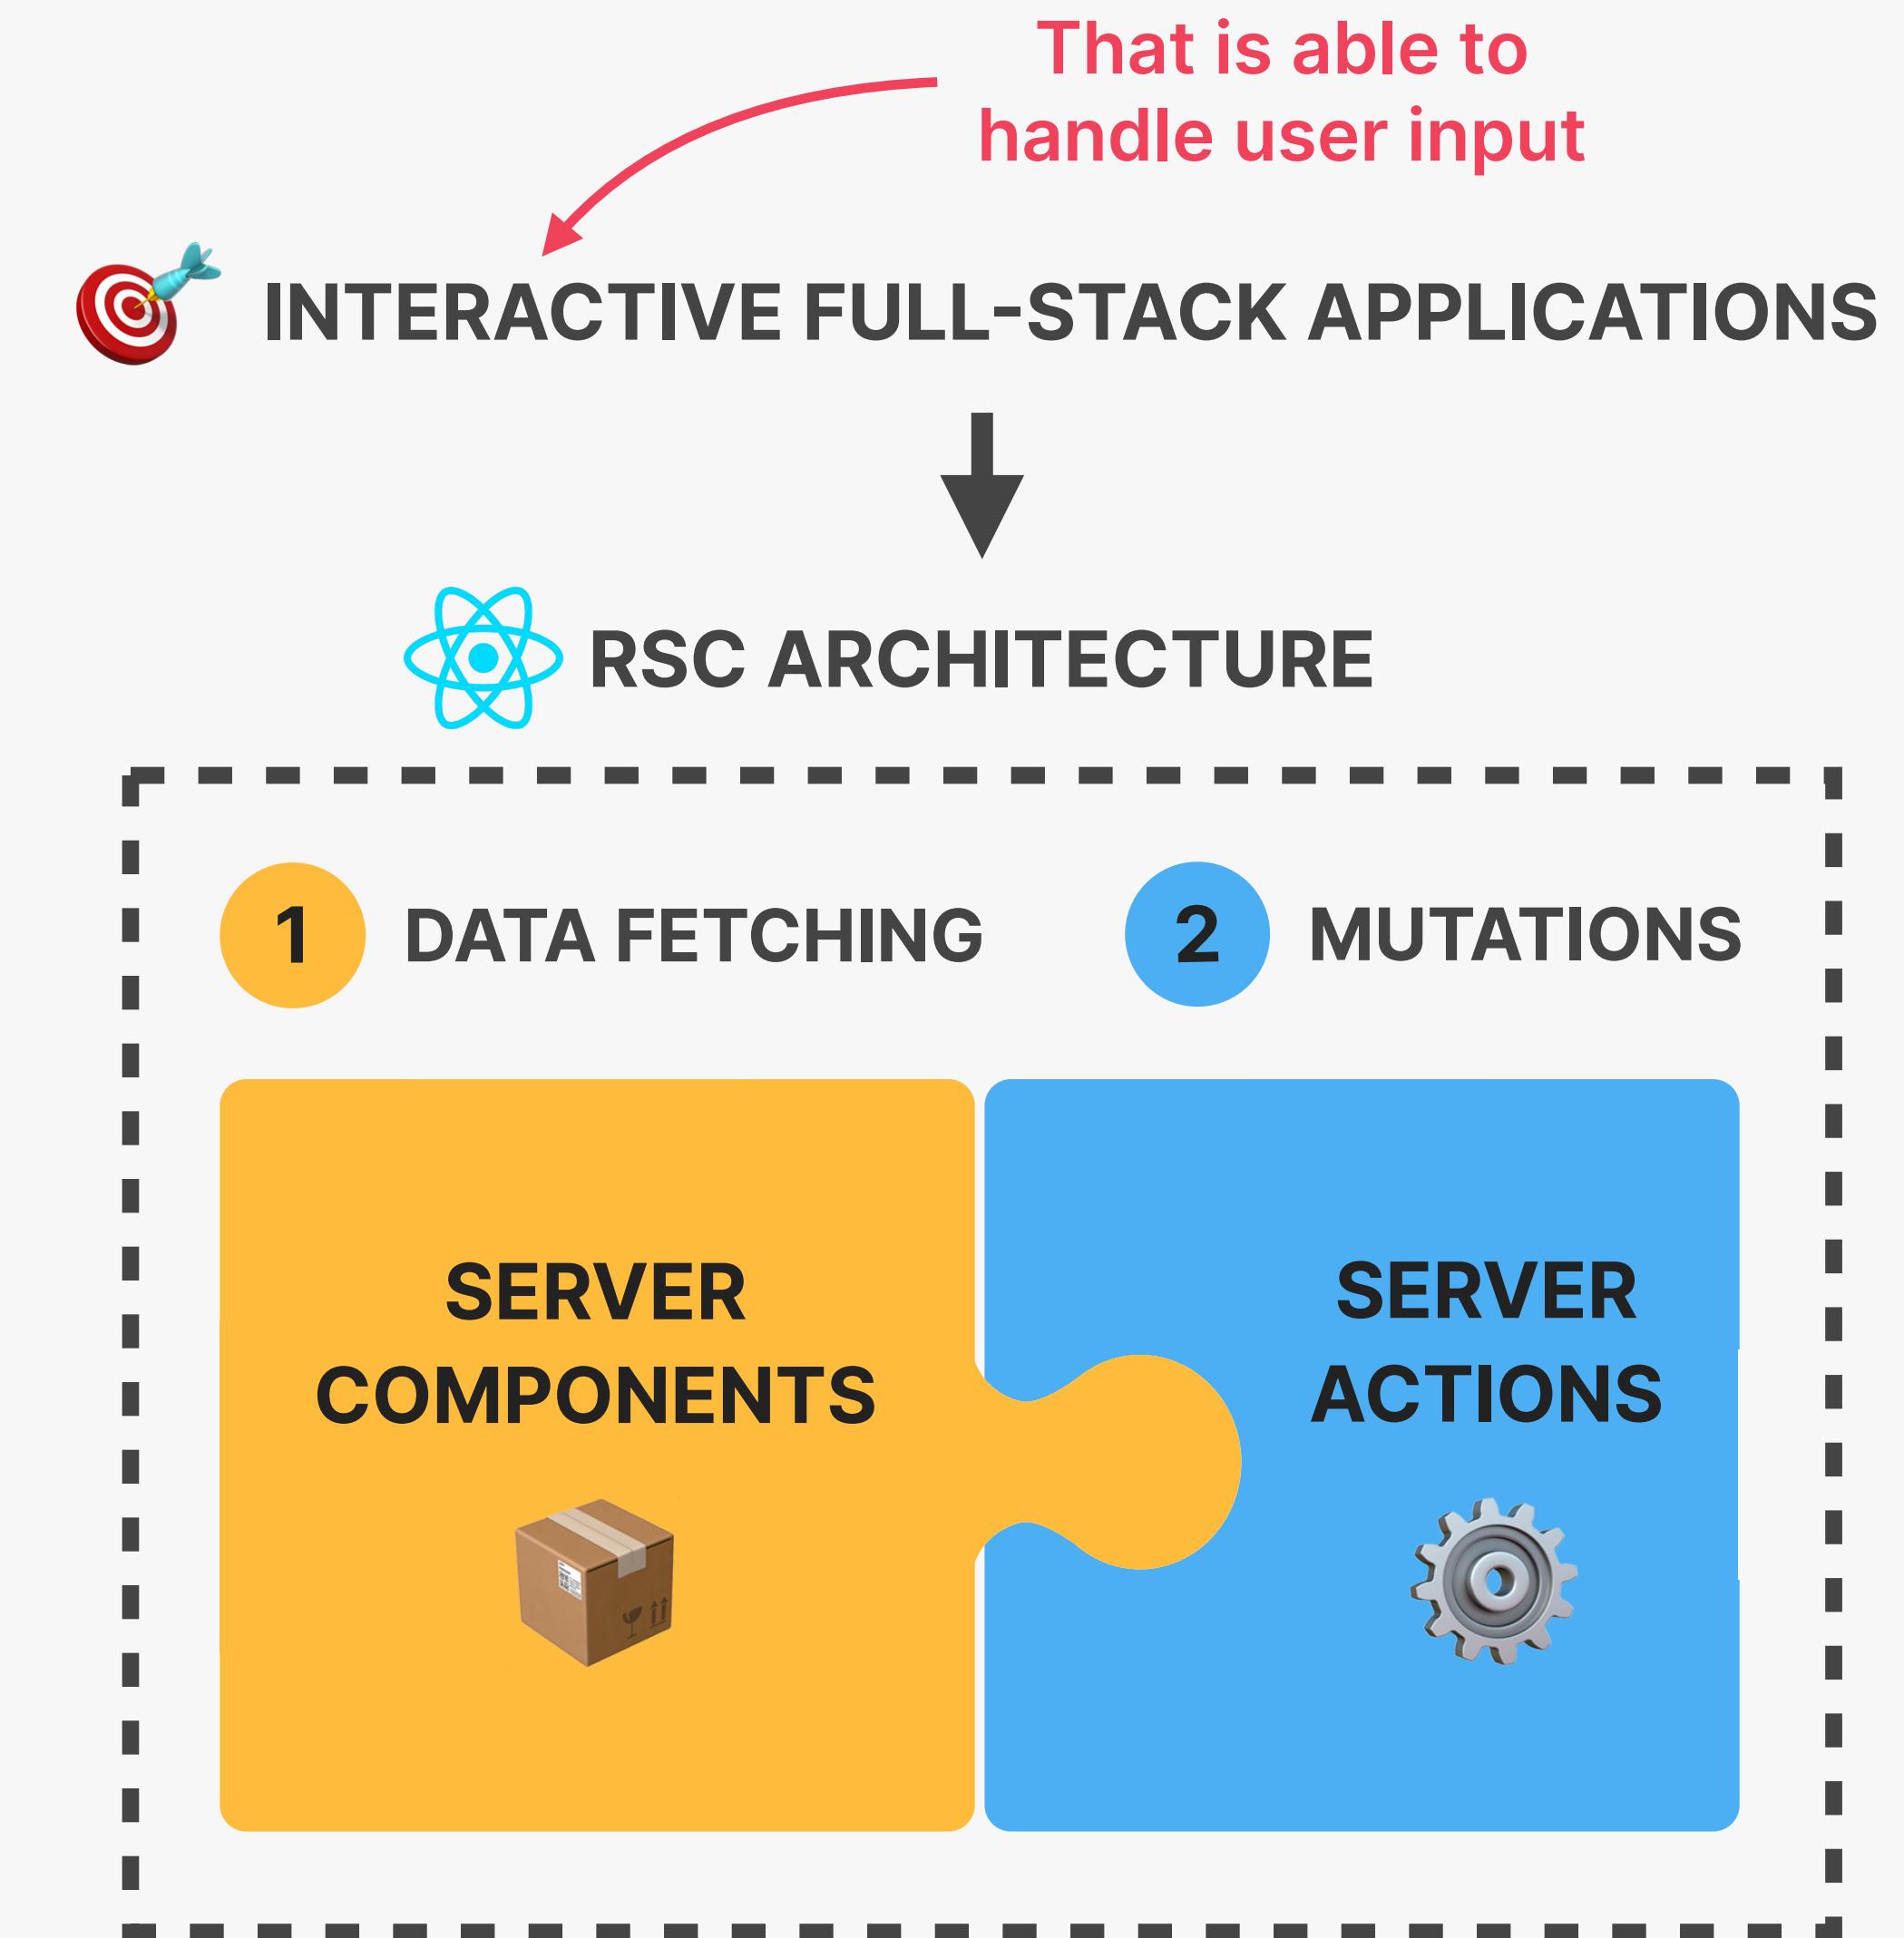

HOW TO CREATE SERVER ACTIONS

SERVER ACTIONS

- 👉 The missing piece in the RSC architecture that enables **interactive full-stack applications**
- 👉 Async functions that run **exclusively on the server**, allowing us to perform **data mutations**
- 👉 Created with the “use server” directive at the top of the function or an entire module
- 👉 Behind the scenes: Next.js creates **API endpoint** (with **URL**) for each server action. Whenever a server action is called, a **POST request** is made to its URL (the function itself never reaches client)
 - 👉 Unlike server components, server actions actually require a **running web server** or **route handlers** to mutate data 

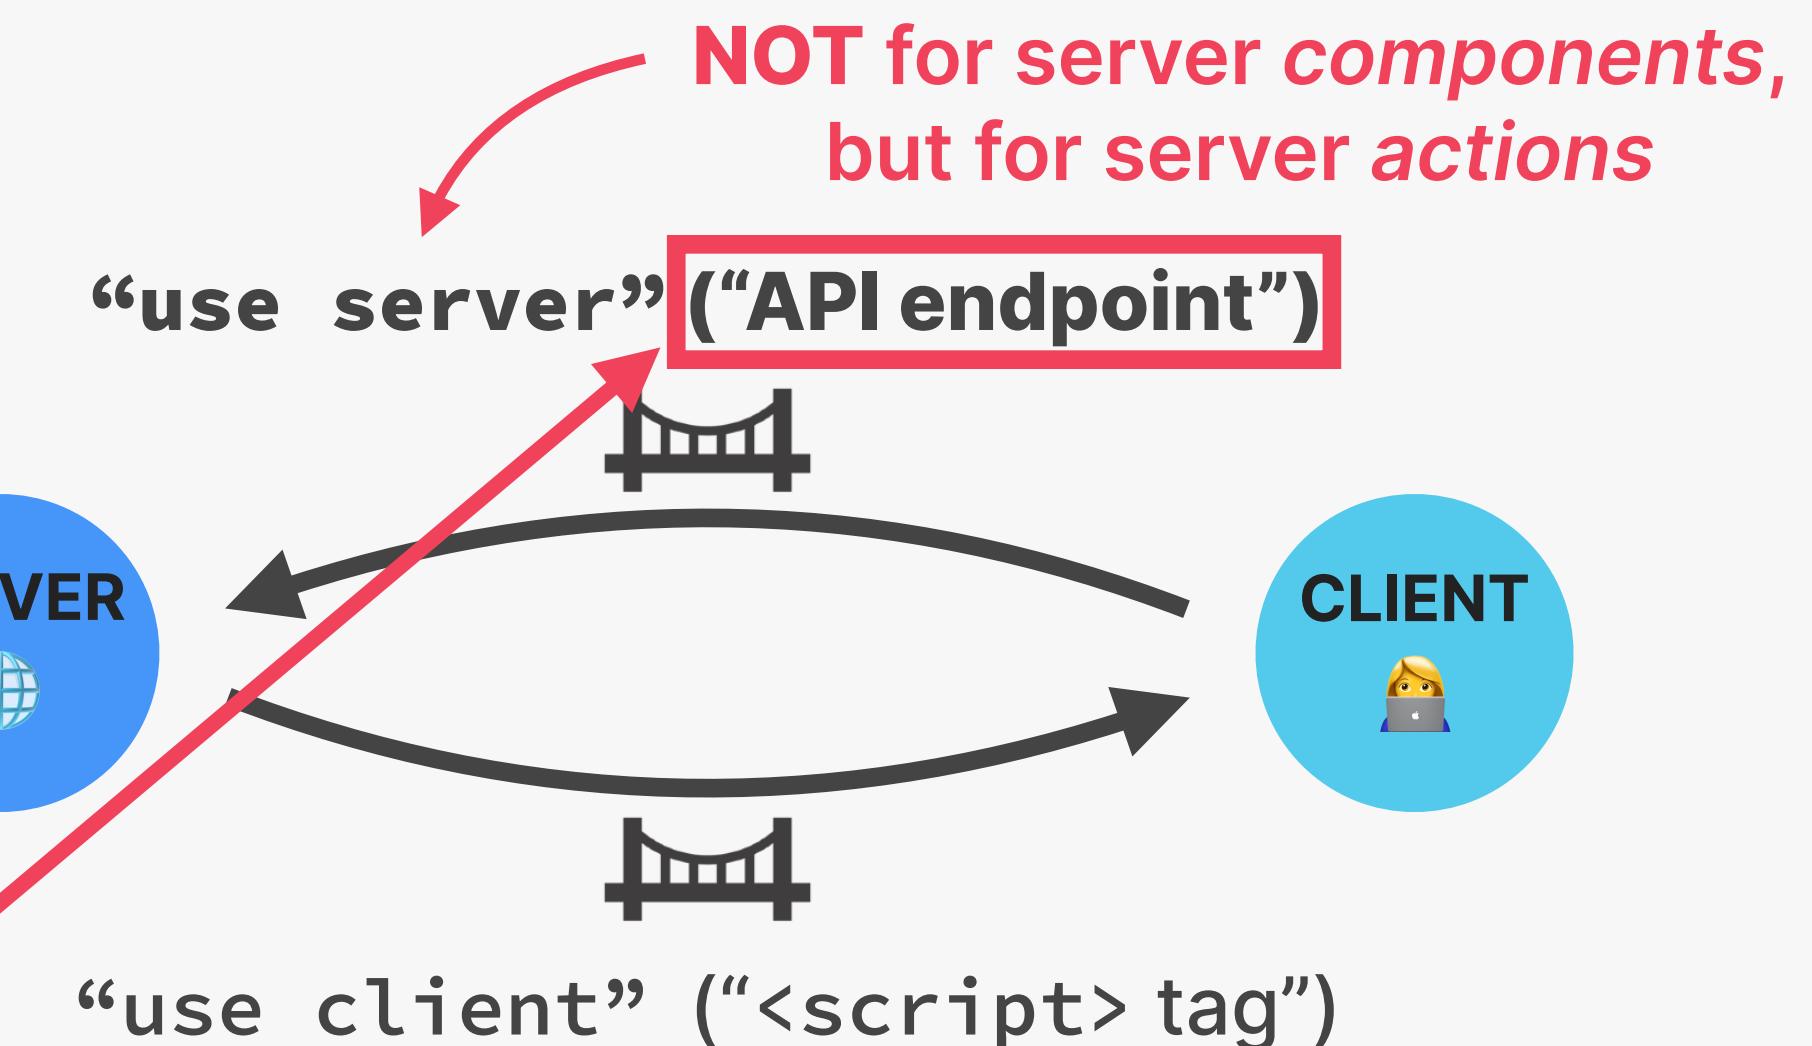

SERVER ACTIONS CAN BE DEFINED AT THE TOP OF:

- 1 An async function in a **server** component. Can be used in component or passed to a **client** component (unlike functions)
- 2 Standalone file: exported functions become server actions that can be imported into any component **[recommended]**

HOW TO USE SERVER ACTIONS

SERVER ACTIONS

- 👉 The missing piece in the RSC architecture that enables **interactive full-stack applications**
- 👉 Async functions that run **exclusively on the server**, allowing us to perform **data mutations**
- 👉 Created with the “**use server**” directive at the top of the function or an entire module
- 👉 **Behind the scenes:** Next.js creates **API endpoint** (with **URL**) for each server action. Whenever a server action is called, a **POST request** is made to its URL (the function itself never reaches client)
- 👉 Unlike server components, server actions actually require a **running web server**

SERVER ACTIONS CAN BE CALLED FROM:

- 1 **action attribute in a <form> element (in **server** and **client** components)**
- 2 **Event handlers (only **client** components)**
- 3 **useEffect (only **client** components)**

Code is running on the back-end, so we need to assume inputs are unsafe

IN SERVER ACTIONS, WE CAN:

- 👉 Perform **data mutations** (create, update, delete)
- 👉 **Update the UI with new data:** Revalidate cache with `revalidatePath` and `revalidateTag`
- 👉 Work with cookies
- 👉 Many more...