



GigaCloud

Cloud Configuration Guide

July 2019

Table of Contents

Introduction.....	1
Overview	2
Prerequisites	3
Configuration	4
Opening GTEP	14
Adding Tenants	36
Manage Policies	43
Assign Policies	66
Tenant Users - Introduction.....	71
Tenant Users - Overview	72
Security and Delegation	72
Reporting.....	77
Appendix	79
Troubleshooting	79
Glossary	80

Introduction

GigaCloud Administration (GTEP) can be configured using the Administration application to enable your Active Directory and Rights Management Services to manage third-party organization's content security policies. By leveraging GigaTrust's comprehensive integration with Microsoft's native RMS certificates and policy templates, and optionally, Microsoft's Mobile Device Extension with Active Directory Federated Services, your Enterprise can delegate Rights Management administration to sub Organizational Units (Tenants), with relatively low up-front infrastructure preparation in the cloud.

The main consideration will be designing your cloud Environment to be scalable to support the increased traffic and storage growth as you add more tenants to your organization. GigaTrust gives you the built-in features which will enable your enterprise to add more AD RMS servers, databases and other infrastructure enhancements to assist with the growth of your business. Additional AD RMS servers and GTEP instances can be added to existing RMS clusters with ease, and migration or database changes such as backups and failover can be configured using our integrated configuration tools.

GigaCloud Administration Cloud (Multi-Tenant) Mode allows an organization to:

-  Delegate Tenant administration of trusted domains for external user access and Rights Management Services.
-  Seamlessly integrate with the Mobile Device Extension for AD RMS and ADFS to enable Mobile device support.
-  Manage GigaTrust desktop software and GigaTrust mobile apps for a tenant's external users such as initial User confirmation, software management, providing upgrades and necessary documentation and other automated User Account Administration.
-  View real-time reporting and data analytics for your cloud and for the Tenant Administrators.
-  The GigaCloud AD Sync Agent and RMS Connector allow an organization's tenants to join their on premise Enterprise to GigaCloud for seamless connectivity for content protection management.

Overview

The screenshot displays the GigaTrust Cloud Administration interface. The left sidebar contains a navigation menu with options: Welcome, Dashboard, Organization, Cloud Administration, Licensing, Tenants, Software, Email Tenants, Tenant Event Log, Client Errors, Configuration, AD RMS, Policy, System, Administration, and Reports. The main content area is titled 'TENANTS' and includes a search bar with the placeholder text 'Enter portion of the tenant name' and a 'Run' button. Below the search bar is a row of action buttons: '+ New', 'Send', 'Set Expiration', 'Set User Limit', 'Set File Folders Limit', 'Contacts', and 'More'. A table lists the following tenants:

Name	Enabled	Expires	User Limit	FF Limit	Created Date
Acme Company Inc	☒	Perpetual license	Unlimited	0	Thu, Apr 26, 2018 12:18:35 PM
BigCompany1	☒	Perpetual license	Unlimited	0	Mon, Oct 29, 2018 2:33:21 PM
Company1	☒	Perpetual license	Unlimited	0	Fri, Oct 19, 2018 12:45:14 PM
Company2	☒	Perpetual license	200	0	Wed, Mar 07, 2018 10:41:26 ...
Company3	☒	Perpetual license	Unlimited	0	Wed, Apr 25, 2018 2:55:19 PM
Company4	☒	Perpetual license	Unlimited	0	Thu, Apr 26, 2018 10:55:03 AM

Our simple and easy-to-use GigaCloud Administration Site gives you the ability to create and manage multiple Tenants and provide them with the tools to administer their own Enterprise Rights Management policies. From adding new Tenants, adding new GigaTrust Desktop Software upgrades and handling account security, the GigaCloud Administration Site gives you the tools to effectively manage numerous tenant accounts.

Cloud Configuration Steps

1. Add an OU in Active Directory for Tenants.
2. Use GTEP Configuration Tool to enable Hosting Mode and to customize other environment settings.
3. Customize Application settings.
4. Add Software Types and Versions.
5. Customize default Tenant settings and email templates.

Prerequisites


This guide assumes that the cloud environment has been configured with the following:

- AD RMS has been installed, configured, and is working properly.
- AD FS has been properly installed and configured. If mobile devices are supported, the Active Directory Mobile Device Extension must be installed on your AD RMS servers and configured to work with AD FS.
- GTEP has been installed and configured on each instance of your AD RMS cluster.

Configuration

After GTEP has been successfully installed and configured on your AD RMS server(s), there are some additional steps needed to set up your new service. There are three tools included with GTEP that will assist you in initial configuration, maintaining your environment and troubleshooting:

1. **GigaCloud Configuration Tool** – This tool is for general and advanced settings for the GTEP Administrator including: Web settings, Server settings, Multi-Tenant (Cloud) Hosting and the Log Server.

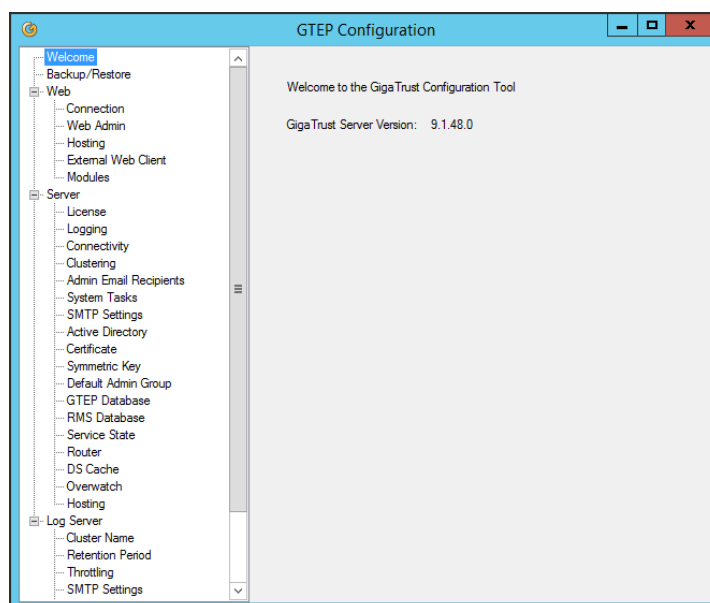

2. **GTEP Database Setup** – This tool allows you to configure your RMS database and create or upgrade your GTEP database. If you have successfully installed GTEP and the GTEP database was created during installation, you do not need to use this tool at this time.

The screenshot shows the 'GTEP Database Setup' window with three tabs: 'Configure RMS DB', 'Create GTEP DB' (selected), and 'Upgrade GTEP DB'. The window is divided into four sections: 'Instance', 'Login', 'Data', and 'Log'. The 'Instance' section has 'Server Name' set to 'localhost' and 'Database Name' set to 'GTEP'. The 'Login' section has 'Integrated Security' checked, 'User Name' set to 'sa', and an empty 'Password' field. The 'Data' section has 'File' set to 'C:\Program Files\Microsoft SQL Server\MSSQL10.SQLE', 'Size (MB)' set to '5', and 'Growth %' set to '10'. The 'Log' section has 'File' set to 'C:\Program Files\Microsoft SQL Server\MSSQL10.SQLE', 'Size (MB)' set to '2', and 'Growth %' set to '10'. There are 'Browse' buttons next to the file paths. At the bottom, there is an 'Overwrite Existing Database' checkbox and a 'Create' button.

GTEP Database Setup

Configure RMS DB | **Create GTEP DB** | Upgrade GTEP DB

GTEP Database Setup

Instance

Server Name: localhost

Database Name: GTEP

Login

☒ Integrated Security

User Name: sa

Password:

Data

File: C:\Program Files\Microsoft SQL Server\MSSQL10.SQLE [Browse]

Size (MB): 5 Growth %: 10

Log

File: C:\Program Files\Microsoft SQL Server\MSSQL10.SQLE [Browse]

Size (MB): 2 Growth %: 10

☐ Overwrite Existing Database [Create]


3. **GigaTrust Log Client** – Open this tool, click **Connect** and you can view real-time error and activity logging. This is extremely useful for troubleshooting purposes. You can optionally turn on Debug or Trace for several GTEP features and the settings are located in the **GTEP Configuration Tool**. All AD RMS servers can be configured to forward all GTEP and server Events to one server for better troubleshooting and real-time event and performance monitoring.

Application	Hostname	Level	Timestamp	Thread	Message
GTEP	RMS21V1	TRACE	9/23/2015 12:51:37 AM	103	<< IGTSRMSService.GetPolicyState[8ms]
GTEP	RMS21V1	TRACE	9/23/2015 12:51:37 AM	103	>> IGTSRMSService.GetPolicyState
GTEP	RMS21V1	TRACE	9/23/2015 12:51:37 AM	103	<< IGTSRMSService.GetPolicyRefreshTimers[19ms]
GTEP	RMS21V1	TRACE	9/23/2015 12:51:37 AM	103	>> IGTSRMSService.GetPolicyRefreshTimers
GTEP	RMS21V1	TRACE	9/23/2015 12:51:07 AM	103	<< IGTSRMSService.GetPolicyState[8ms]
GTEP	RMS21V1	TRACE	9/23/2015 12:51:07 AM	103	>> IGTSRMSService.GetPolicyState
GTEP	RMS21V1	TRACE	9/23/2015 12:51:07 AM	103	<< IGTSRMSService.GetPolicyRefreshTimers[10ms]
GTEP	RMS21V1	TRACE	9/23/2015 12:51:07 AM	103	>> IGTSRMSService.GetPolicyRefreshTimers
GTEP	RMS21V1	TRACE	9/23/2015 12:50:37 AM	103	<< IGTSRMSService.GetPolicyState[7ms]
GTEP	RMS21V1	TRACE	9/23/2015 12:50:37 AM	103	>> IGTSRMSService.GetPolicyState
GTEP	RMS21V1	TRACE	9/23/2015 12:50:37 AM	103	<< IGTSRMSService.GetPolicyRefreshTimers[16ms]
GTEP	RMS21V1	TRACE	9/23/2015 12:50:37 AM	103	>> IGTSRMSService.GetPolicyRefreshTimers
GTEPWEB	RMS21V1	INFO	9/22/2015 10:28:24 PM	11	GTEP Web stopping
GTEP	RMS21V1	INFO	9/22/2015 5:27:52 AM	112	server rms21v1.21via.local elected leader
GTEP	RMS21V1	ERROR	9/22/2015 5:27:07 AM	103	Connection Timeout Expired. The timeout period elapsed during ...
GTEP	RMS21V1	ERROR	9/22/2015 5:24:08 AM	115	A network-related or instance-specific error occurred while establi...
MODULE	RMS21V1	ERROR	9/22/2015 5:24:08 AM	63	emmc loading policy data


GTEP Configuration Tool

Use the Configuration Tool to finalize post installation settings.


1. In **Program Files**, go to **GigaTrust > GTEP Configuration Tool**.
2. In the menu pane on the left, you can select where you want to modify any settings. There are five main categories: **Welcome**, **Backup/Restore**, **Web**, **Server** and **Log Server**.
3. Choose **Web > Connection** and you can select **Test Connection** to make sure GTEP is able to connect to your local environment.

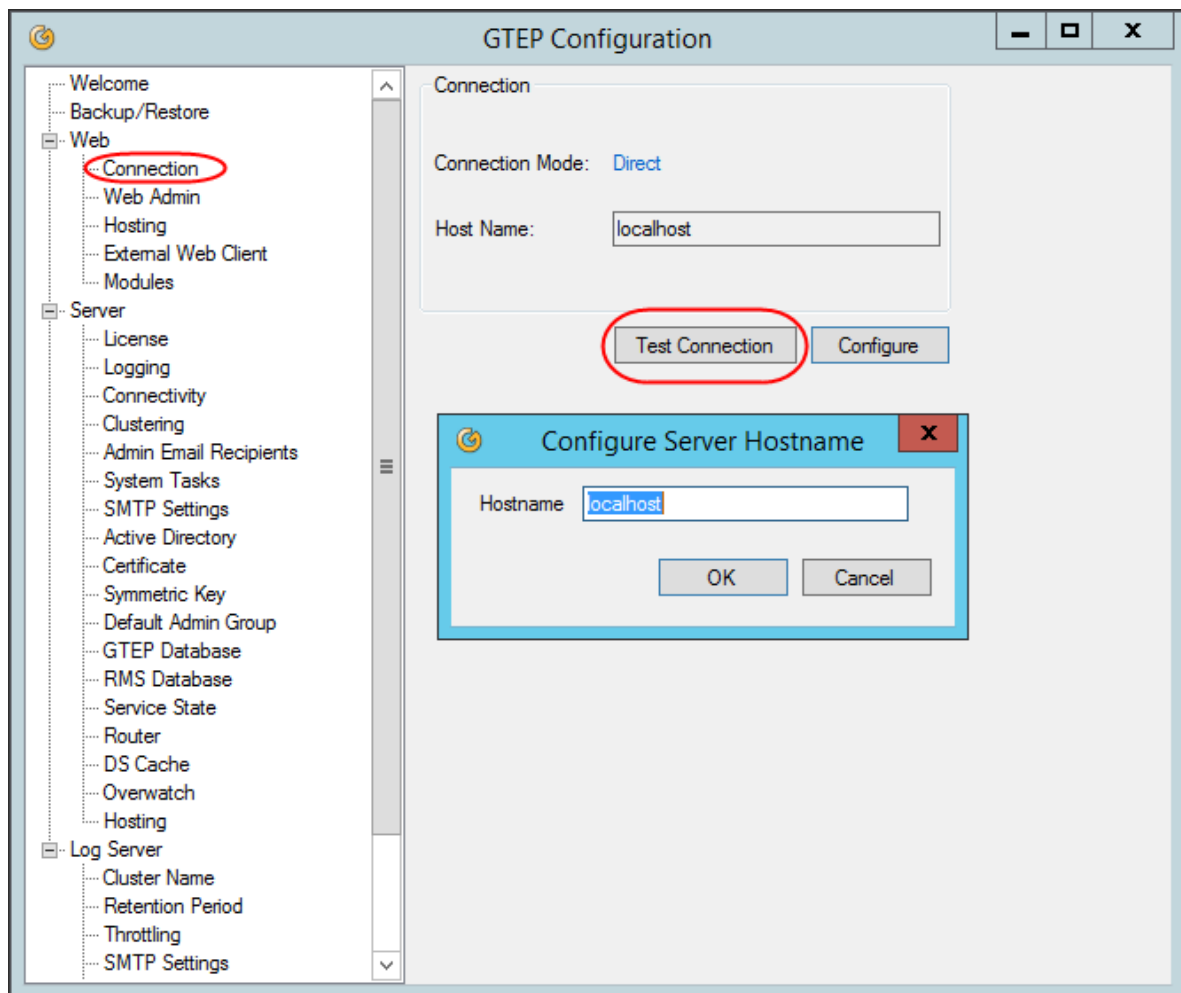

4. Choose **Server** ➤ **SMTP Settings** to configure email settings for GTEP Administration.
 - a) Click **Configure** to load a new window.
 - b) Enter **SMTP Host** and **SMTP Port**, if needed. Example: "owa.yourcompany.com"
 - c) If required, enter credentials and optionally select **TLS** and a **From Mail Address**.
 - d) Click **Send Test Email** and in the new window enter a valid sender email address and a valid recipient. If the test is successful, you can close the **Send Text Email** window, select **OK** on the **Configure SMTP** window and move on to the next step.

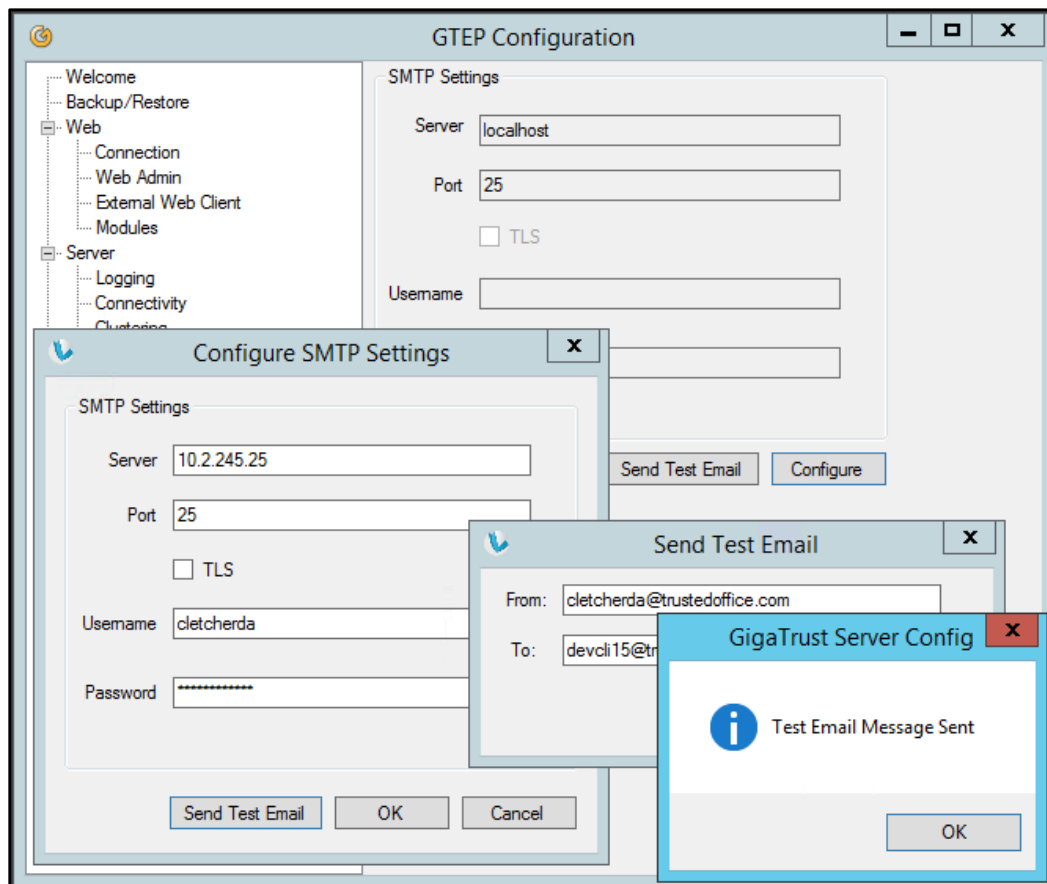

5. Choose **Log Server** ➤ **SMTP Settings** to configure email settings for server alerts.

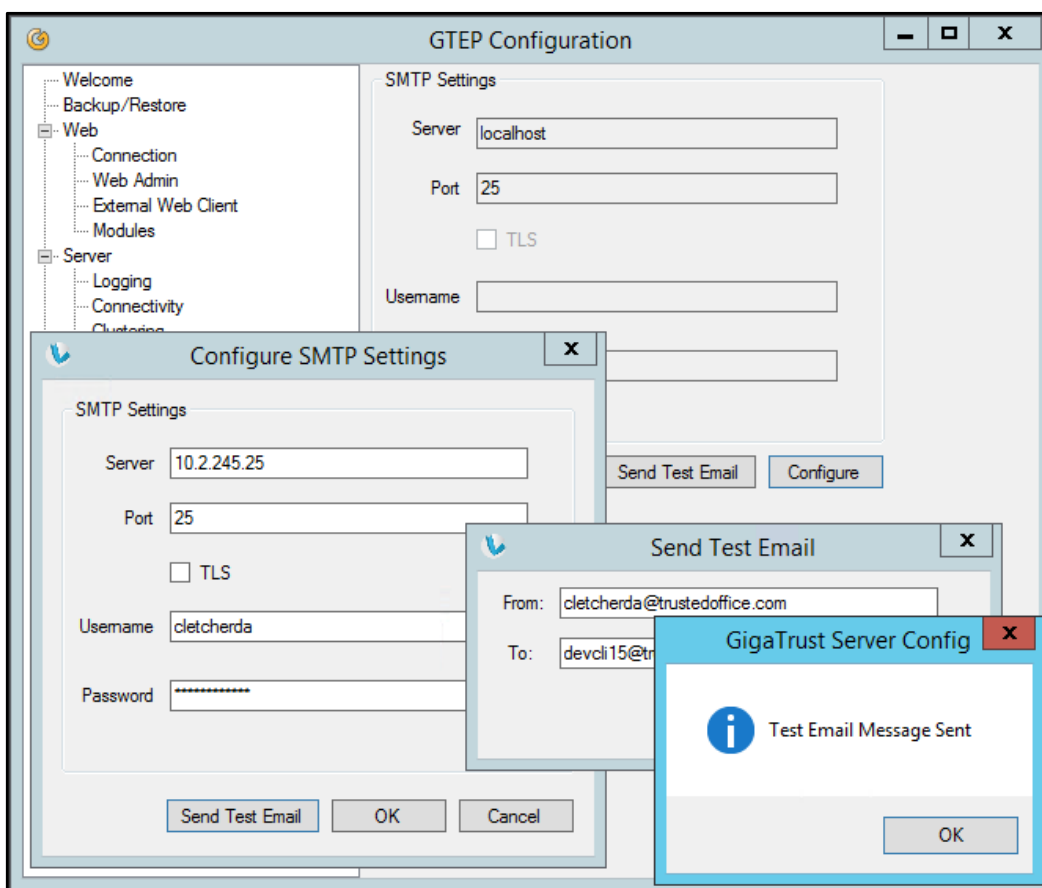

- a) Click **Configure** to load a new window.
 - b) Enter **SMTP Host** and **SMTP Port**, if needed. Example: "owa.yourcompany.com"
 - c) If required, enter credentials and optionally select **TLS**.
 - d) Click **Send Test Email** and, in the new window, enter a valid sender email address and a valid recipient. If the test is successful, you can close the **Send Text Email** window, select **OK** on the **Configure SMTP** window.
6. For more detailed instructions on the **GTEP Configuration Tool** refer to the [GigaCloud Configuration Tools Guide](#).




It is advised that you use two different email accounts for **Server** ➤ **SMTP Settings** and **Log Server** ➤ **SMTP Settings**. The reason is if one email account is disabled, or becomes deactivated, the other email account can still deliver alerts.

Multi-Tenant Organizational Unit

Before you can begin adding new Tenants, delegated Administrators and Users, an Organizational Unit (OU) needs to be added in Active Directory to contain all Tenant OUs. This will be the Root OU. In addition, the root OU needs to have certain permissions delegated to the organization's AD RMS Administrator.

To add the new root OU, login to your master domain controller and do the following steps: (Server 2012 R2 shown, Server 2016 similar)


1. Go to **Administrative Tools** ➤ **Active Directory Users and Computers**.

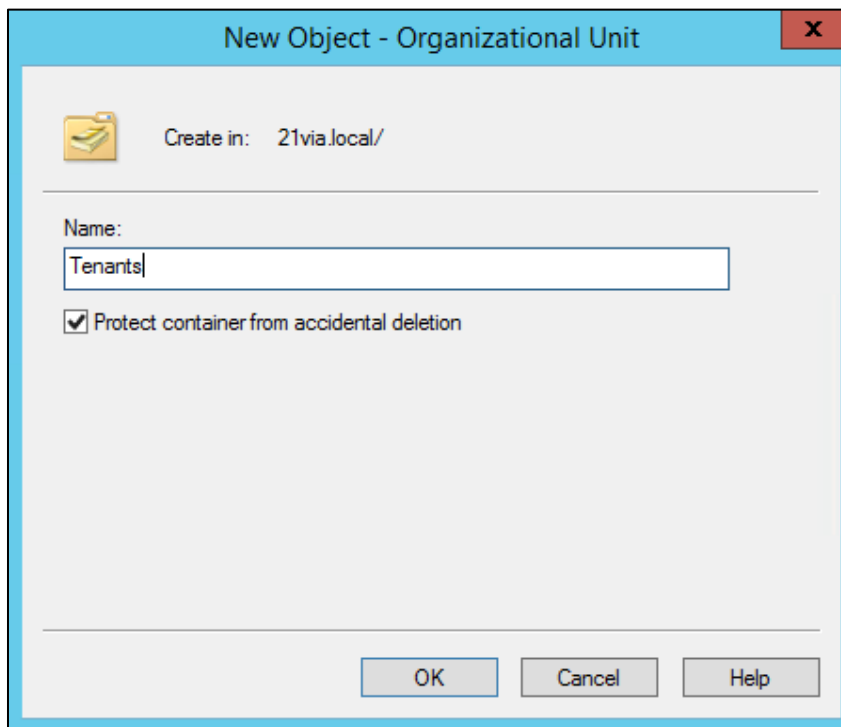


2. Right click on the root and choose **New** ➤ **Organizational Unit**
3. Enter a name for the main OU such as your organization or "Tenants", etc.
4. Click **OK**.

Enable Hosting Mode

After the OU has been configured, now you need to enable Hosting mode. Open the GTEP Configuration Tool from the Apps screen or in Programs on your server. Go to the **Server** ➤ **Hosting** node in the menu tree.

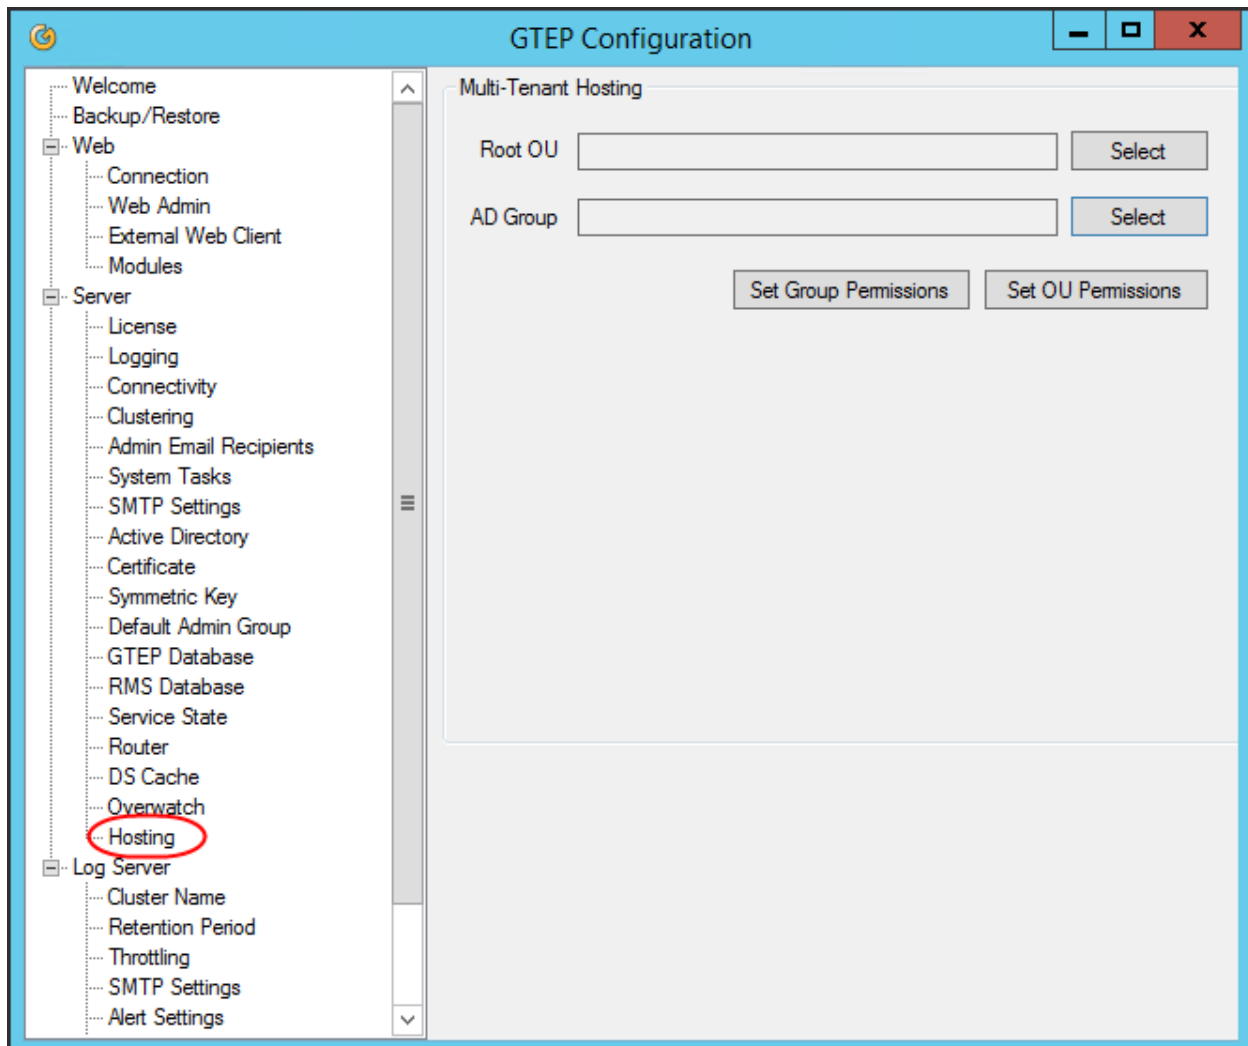


Click on the **Select** button to the right of the **Root OU** text box.

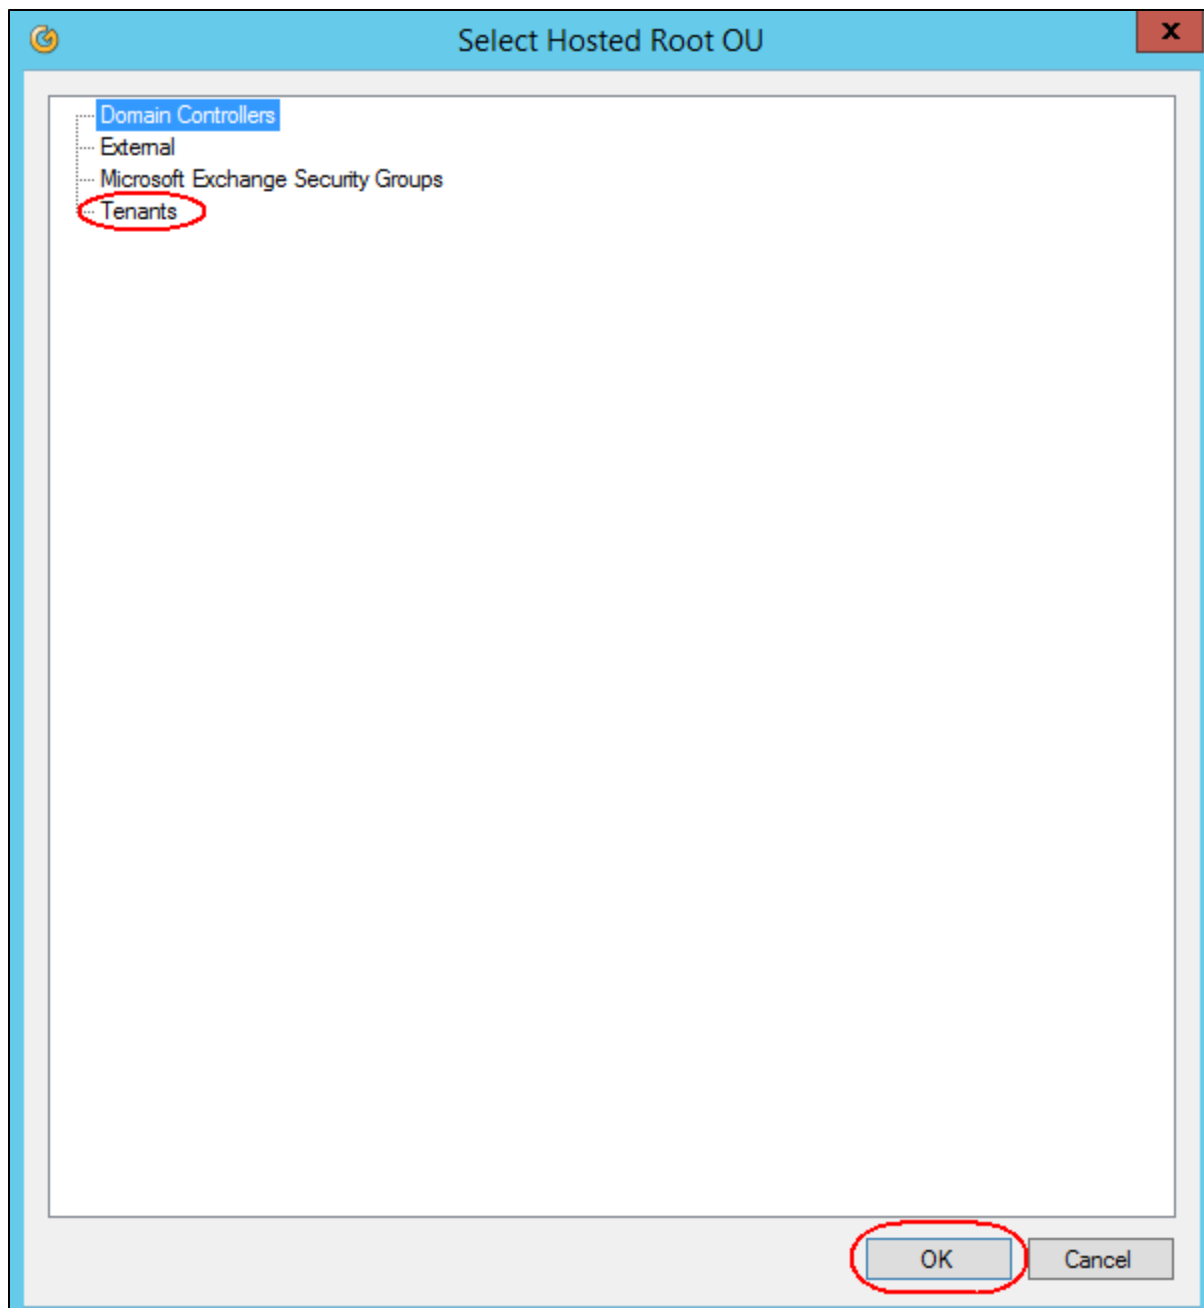

A window will display where you can select the root OU created in the previous procedure. Select the root OU and click **OK**. The root OU should now be displayed in the text box.

If you need to have the Tenant Users in a particular AD Group, select the button next to the **AD Group** text box. The **Query Hosting AD Group** window displays.

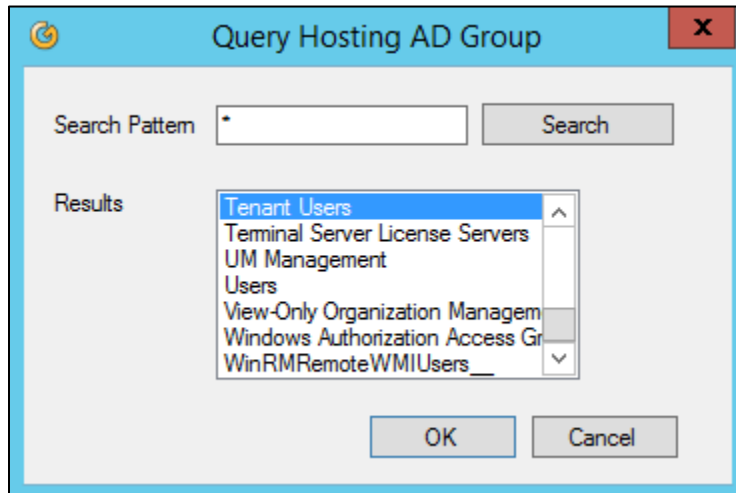


Search and select the AD Group for your Tenant Users and click **OK**. The AD Group will now be displayed in the text box.

Set Group Permissions – Click here to automatically have the Group permissions configured for the OU.

Set OU Permissions - Click here to automatically have the OU permissions configured.


Note: For Hosting mode to work, the AD RMS service group must be added to the Tenant User AD group in Active Directory. Use **Set OU Permissions** to automatically do this for you.

Opening GTEP

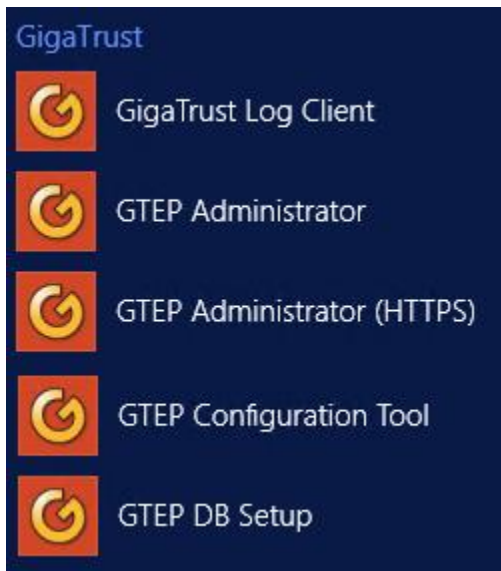


In **Program Files** ➤ **GigaTrust**, select **GTEP Administrator** to open it in a browser window or select **GTEP Administrator (HTTPS)** for a secure browser connection.

Short cuts to the **GTEP Log Client**, **GTEP Configuration Tool** and **GTEP DB Setup** are also listed here.

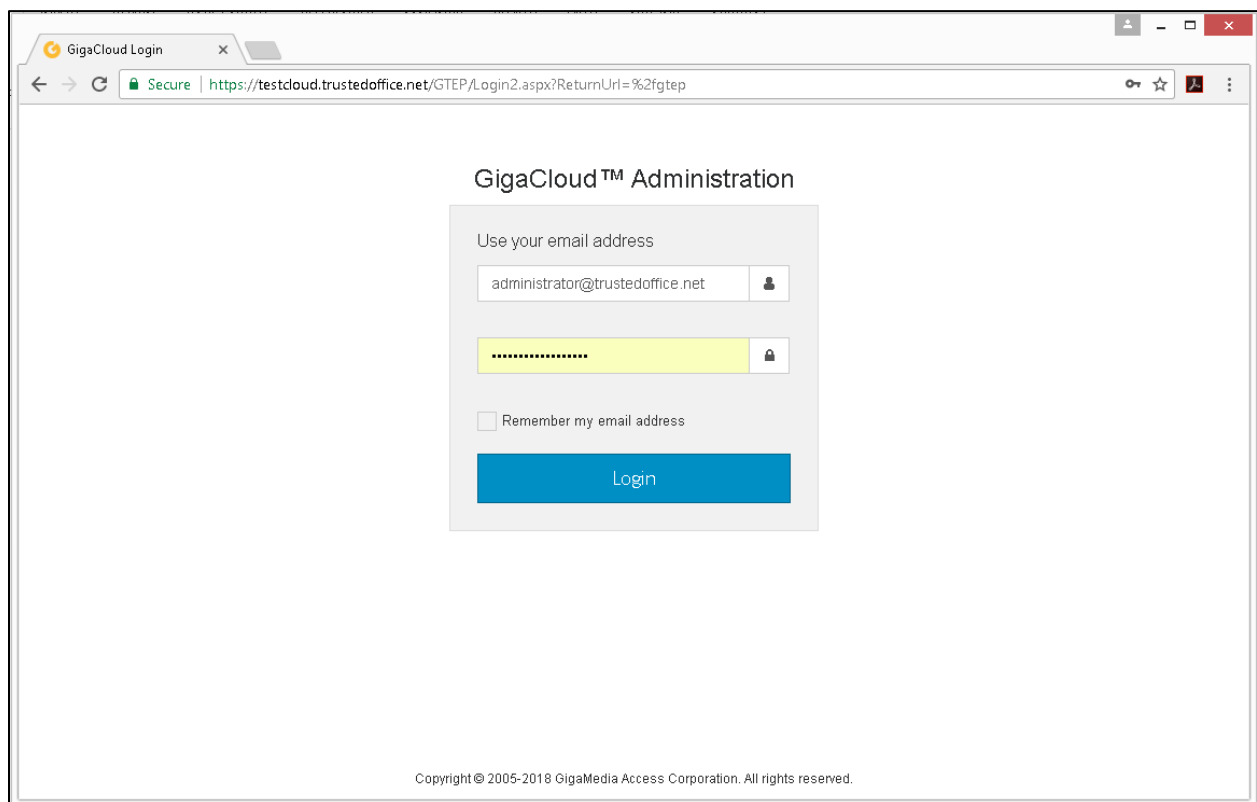


On the Login page, enter your GigaCloud Administrator credentials.

Note: GTEP uses forms authentication using your UPN (User Principle Name) which will be your email address.

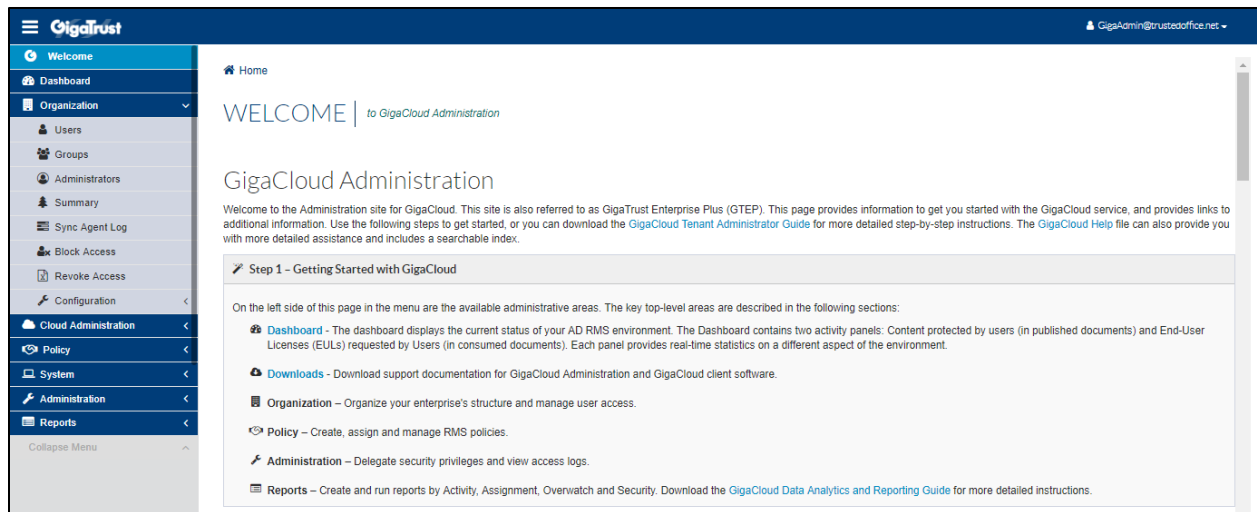

On successful login you will be presented with the Welcome page.


If you need to log out of GigaCloud click the down icon at the top right-hand side and in the sub menu select **Logout**.

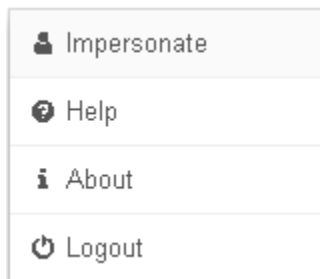

The sub menu also contains the following options:

- Select **Impersonate** if you need to Login as a delegated Tenant Administrator for maintenance.
- If you need to view the online GigaCloud Help file, select **Help**.
- **About** will display the current GigaCloud software version installed.

GigaCloud Dashboard

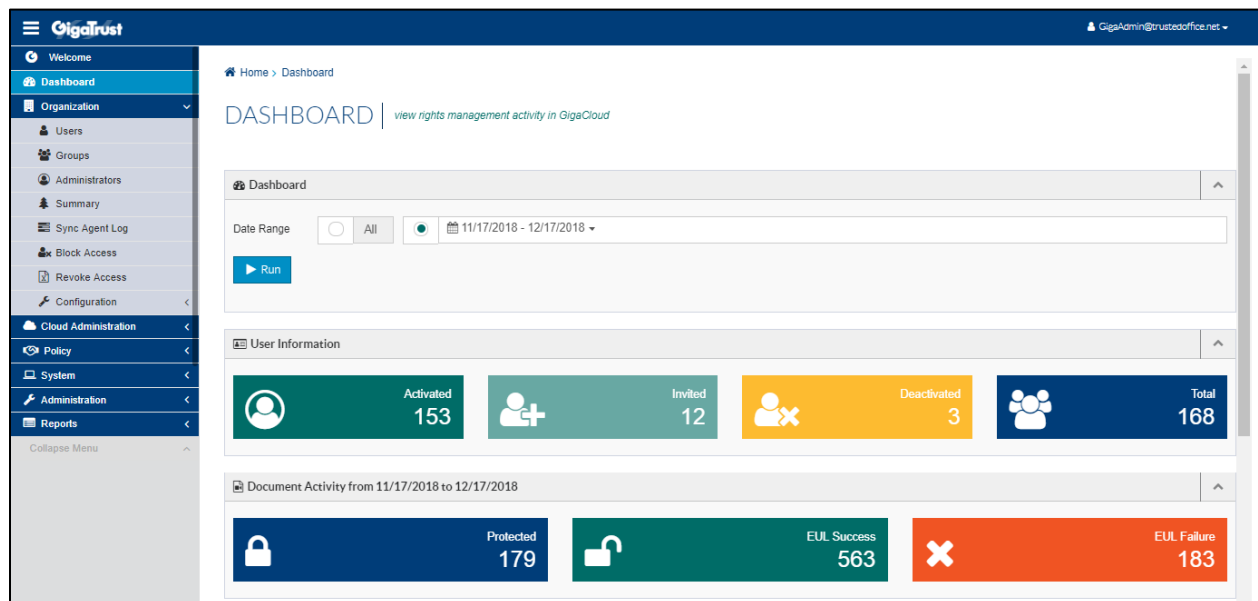

The GigaCloud Dashboard provides a graphical snapshot of the status of the GigaCloud environment. Each panel provides real-time statistics on a different aspect the AD RMS environment. The default date range for the Dashboard is the past 7 days, including the current date. The date range for the Dashboard can be customized. Set the start and end dates and click the **Run** button to refresh the Dashboard display.

The Dashboard contains four activity panels:

1. **User Information-** Informative banners list summaries of Activated, Invited, Deactivated and Total Users in your tenancy.
2. **Document Activity-** Displays totals of content Protected, EUL Success and EUL Failure(s) in GigaCloud tenant(s).
3. **Protected Content-** Interactive column chart displays the number of content protected by the users. Clicking on a column will display the User Activity report detailing AD RMS activity by users on the respective date.
4. **EUL Requests-** Interactive chart displays columns containing the number of EUL requests, broken down by success and failure. Clicking on a column will display the User Activity report detailing AD RMS activity by Users on the respective date.

Menu

The menu is divided into the following areas:

- **Welcome-** Your GigaCloud Administration Home page.
- **Dashboard** – View a graphical snapshot of the status of your GigaCloud environment.
- **Organization** – Create Connectors, organize your enterprise's structure, manage user access and revoke document access.
- **Cloud Administration-** Configure and manage multi-tenant mode including client software and default Tenant settings.
- **Policy** – Create, assign and manage RMS policies.
- **System** – View System Events and Alerts.
- **Administration** – Configure GigaCloud settings, delegate security privileges and view access logs. Also upload support documentation for GigaCloud Administration and GigaCloud client software for tenant Administrators to download.
- **Reports** – Create and run reports for Activities, Assignments, Overwatch and Security.

Application Settings

Name	Value
Activity Log Retention Period (months)	25
ADFS Server Address	https://adfs.trustedoffice.net
Alert Email Subject	GTEP Alert
Alert Retention Period (days)	90
Audit Retention Period (days)	90
Captcha Private Key	6LfK3hQUAAAAABcOBf6xPGnUN_IRYtWhLiKV89B1
Captcha Public Key	6LfK3hQUAAAAAGdFoP-ifz6TzExLTif-96J8zE7G
Cluster Friendly Name	GigaCloud
Content Classification Property Name	Classification
Default Tenant User Limit	20
Disable auto set of Allow Macros checkbox in template editor	0
Enable Mobile Auto Configuration Button	1
Enable Overwatch	1
Enable Trials	1
Event Retention Period (days)	90
GigaCloud Viewer URL	http://testGigaCloud/viewercloud.trustedoffice.net/
GTDC - Notify Password Change (days)	14
GTEP Server Address	https://testcloud.trustedoffice.net
Lockout Duration (minutes)	30

Copyright © 2005-2015 GigaMedia Access Corporation. All rights reserved.

After you log in, first go to **Administration > Application Settings** to do some initial configuration before you add any new Tenants.

Note: If you have a clustered GTEP environment you only need to set the following settings on the initial instance and the other GTEP instances will automatically replicate those settings.

At a minimum, configure the following two settings:

1. You can leave the default **GTEP Server Address** (<http://localhost/GTEP>) or you can change it to your AD RMS cluster or server FQDN. For example: <http://adrms.yourcompany.com>.
2. In order to add Software Types, customize the **Software Download Directory** setting to point to a folder or shared folder. Enter the server folder or shared folder to upload and store GTDC software. i.e. "\\GTAD1\\Software"

The following table lists All Hosting settings and the default values. Customize them to your environment.

Activity Log Retention Period (months)	The number of months the activity log is stored. The activity log records user's access to GTEP Default: 24 (months)
ADFS Server Address	If you are using AD FS for mobile clients, check this setting and make certain it points correctly to your AD FS cluster FQDN. Example: https://adfs.gtcloud9.com Default: It tries to build it based on your AD RMS FQDN.
Alert Email Subject	Enter the email subject that you prefer be used for GTEP alerts. Default: GTEP Alert
Alert Retention Period (days)	Number of days that alerts will remain in the system before being automatically purged. Define 0 to disable purging. Default: 90 (days)
Audit Retention Period (days)	Number of days that audit data will remain in the system before being automatically purged. Define 0 to disable purging. Default: 90 (days)
Captcha Private Key	Captcha private key for trial web UI. Default: null
Captcha Public Key	Captcha public key for trial web UI. Default: null
Cluster Friendly Name	This is the friendly name for your AD RMS server so your Users can identify it. Examples: "GigaCloud US", "GigaCloud China" Default: GigaCloud
Content Classification Property Name	This is the default name for Content Classification Policy in GTEP. Default: Classification
Default Tenant User Limit	This is the limit of trial Users a Tenant can have during the trial period. Default: 20
Mobile GPS Coordinates Required for Overwatch	Default: 1 (On) This setting will force mobile users to share their location on the device. Set to 0 to turn off.
GigaCloud Viewer URL	Default: off This will display a link on GTEPEXT to an installed GigaCloud Viewer. Example: http://adrms.trustedoffice.com/Viewer Set to off to turn off.
Disable auto set of Allow Macros checkbox in template editor	In the Template Editor, the checkbox for Allow Macros is selected by default. If this setting is changed to 1 the checkbox will defaulted to unchecked. (The Allow Macros permission will be required to support the Overwatch feature.) Default: 0 (off)
Enable Mobile Auto Configure Button	Enables/Disables Auto Configuration for GigaTrust Mobile Clients.


	Default: 1 (Enable: 1 / Disable: 0)
Enable Overwatch	Enables/Disables Data Overwatch support. Default: 1 (Enable: 1 / Disable: 0)
Enable Trials	Enables/Disables Tenant trials. Default: 0 (Enable: 1 / Disable: 0)
Event Retention Period (days)	Number of days that event data will remain in the system before being automatically purged. Define 0 to disable purging. Default: 90 (days)
GTDC – Notify Password Change (days)	The number of days before a password expires to notify a Managed User that their password must be changed when they log in. Default: 14 (days)
GTEP Server Address	Define the FQDN address of the GTEP server. (This link to the server is included in alert emails.) Example: https://adrms.trustedoffice.com/GTEP Default: http://localhost/GTEP
Lockout Duration (minutes)	The number of minutes a user will be locked out of their account after entering consecutive incorrect passwords. Default: 30 (minutes)
Maximum Concurrent Policy Updates (clients)	Maximum number of client requests for policy updates that will be handled at the same time. Any requests that exceed the defined value will fail and the GigaTrust Policy Agent will retry based on the Policy Polling Interval on Failure setting. Default: 20 (client requests)
Maximum Password Attempts	The number of consecutive incorrect passwords a user may enter before being locked out of their account. Default: 3 (attempts)
Mobile GPS Coordinates Required for Overwatch	Enables/Disables requirement for mobile devices to provide GPS data when reporting a Data Overwatch event. Default: 0 (Enable: 1 / Disable: 0)
Overwatch Retention Period (days)	The number of days to retain Overwatch events. Default: 90 (days)
Policy Polling Interval (seconds)	The interval, in seconds, at which the client policy agent checks the server for new policies. Client polling interval values are pushed down to the policy agent on the client. Default: 120 (seconds)
Policy Polling Interval On Failure (seconds)	The interval, in seconds, at which the client will attempt to connect to the server after a failed attempt. Client polling interval values are pushed down to the policy agent on the client. Default: 120 (seconds)
Report Page Size	The default size for reports. Default: 9000
Send Confirmation Emails for Synced Users	Enables/Disables sending a confirmation email when a User is added by syncing using the GigaCloud AD Sync Agent.

	Default: 0 (Enable: 1 / Disable: 0)
Software Download Directory	The path to a file share for software and downloads. Example: C:\share\
Trial Expiration (Days)	The default duration in days for Tenant trials. Default: 30

Downloads

The **Downloads** page provides you a method to push documentation out to Tenant Administrators and it is located here: **Administration** ➤ **Downloads**. They should be provided the following documents:

- **GigaCloud Tenant Administrator Guide**
- **GigaCloud Reporting & Data Overwatch Guide**
- **(Optionally) GigaCloud AD Sync Agent Guide**
- **(Optionally) GigaCloud RMS Connector Guide**
- **(Optionally) Any relevant GigaTrust Client software guides**

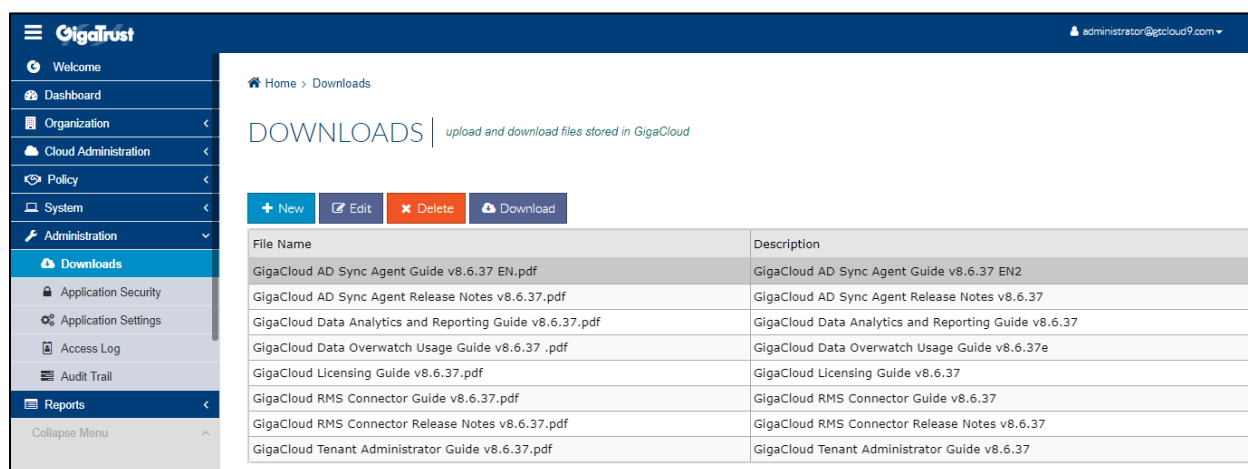


To add new documentation:

1. Select **New** from the tool bar.
2. In the **New Download File** window, select **Browse** and after selecting the document to upload, add a name or description to display for the download.
3. Click on **Upload File**.
4. Your document should be displayed in the underlying table.

To remove a document select the table row and click on **Delete**. Confirm deletion. Double-click on a row to edit the file. Selecting a file row and clicking on **Download** will allow you to test the file download.

Software Types

Before Tenant Users can use GigaTrust Desktop Client they must be provisioned with the software. The first thing that must be configured is the Software Type. This sets the group name for the software that the Desktop Client verifies when connecting to GTEP to check for software upgrades and for initial client installation of the software.

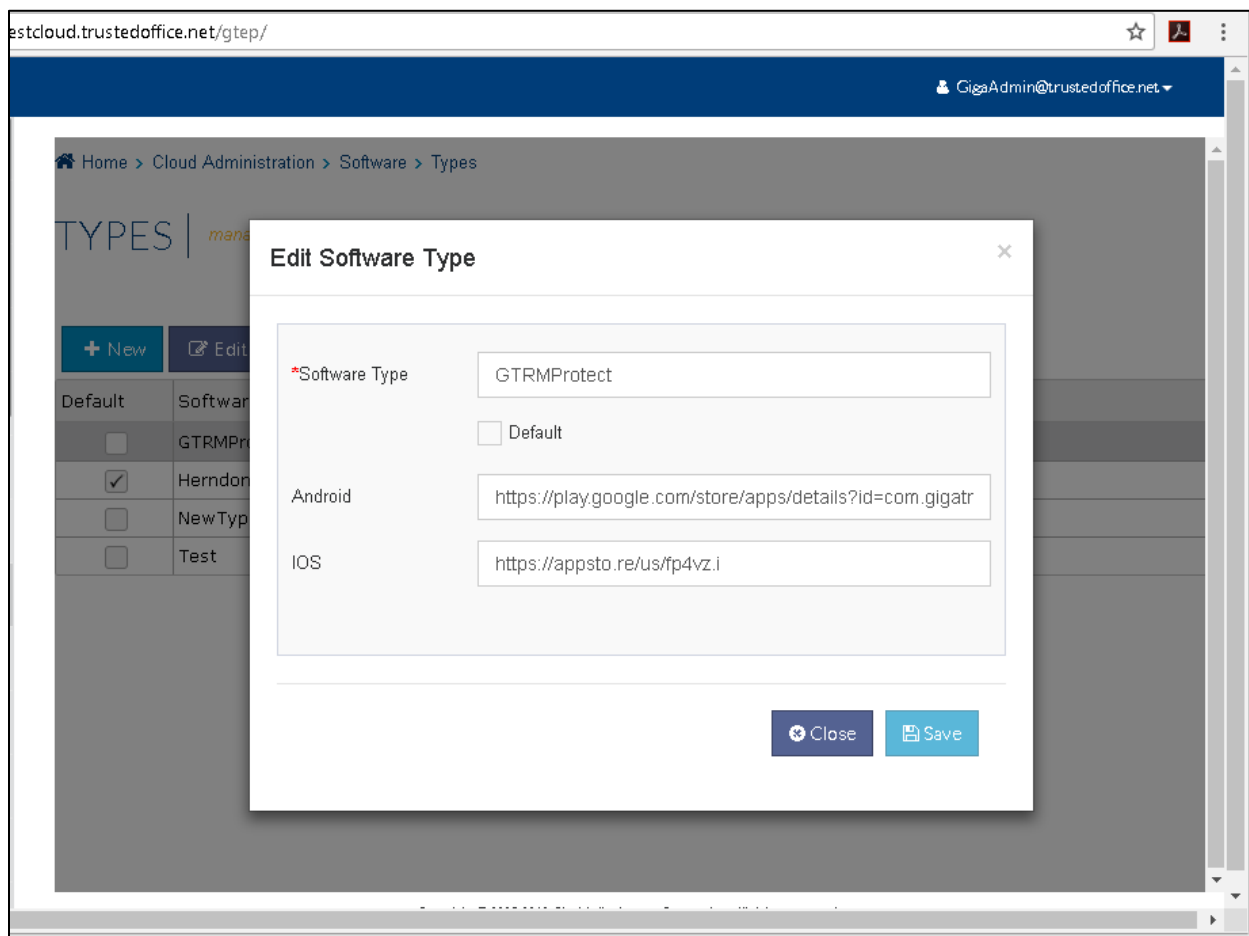

Add a new Software Type in the following steps:

1. Click on **Cloud Administration > Software > Types** in the left-hand menu.
2. Click on **New**.
3. **Software Type** - The default Software Type name required is **GTRMPProtect**. You can add a registry override named **ClientSoftwareType** in GigaTrust Desktop Client software to use other Software Type groups- refer to GigaTrust Desktop documentation for more details.
4. (Optional) Enter an **Android** URL so Users can download GigaTrust Android software to their mobile device.
5. (Optional) Enter an **iOS** URL so Users can download GigaTrust iOS software to their iPhone/iPad.
6. If this is the main Software Type, check **Default** and select **Save**.

Software Versions

After configuring Software Types, add GigaTrust Desktop Client software versions for the Tenant Users to download and install.


VERSIONS | manage software versions for GigaCloud

Software Types: Herndon

+ New Edit Download Software Download Documentation Delete Refresh

Software Type	Version	64-Bit	Optional	In Use	Date Available
Herndon	11.3.66.122113	☐	☒	☐	Wed, Mar 21, 2018 12:00:00 AM
Herndon	11.3.66.122113	☒	☒	☐	Wed, Mar 21, 2018 12:00:00 AM
Herndon	11.3.55.122091	☐	☒	☐	Tue, Mar 20, 2018 12:00:00 AM
Herndon	11.3.55.122091	☒	☒	☐	Tue, Mar 20, 2018 12:00:00 AM
Herndon	11.3.76.122177	☐	☒	☒	Mon, Mar 12, 2018 12:00:00 AM
Herndon	11.3.76.122177	☒	☒	☐	Mon, Mar 12, 2018 12:00:00 AM

1. Navigate to **Cloud Administration > Software > Versions** and select **New**.

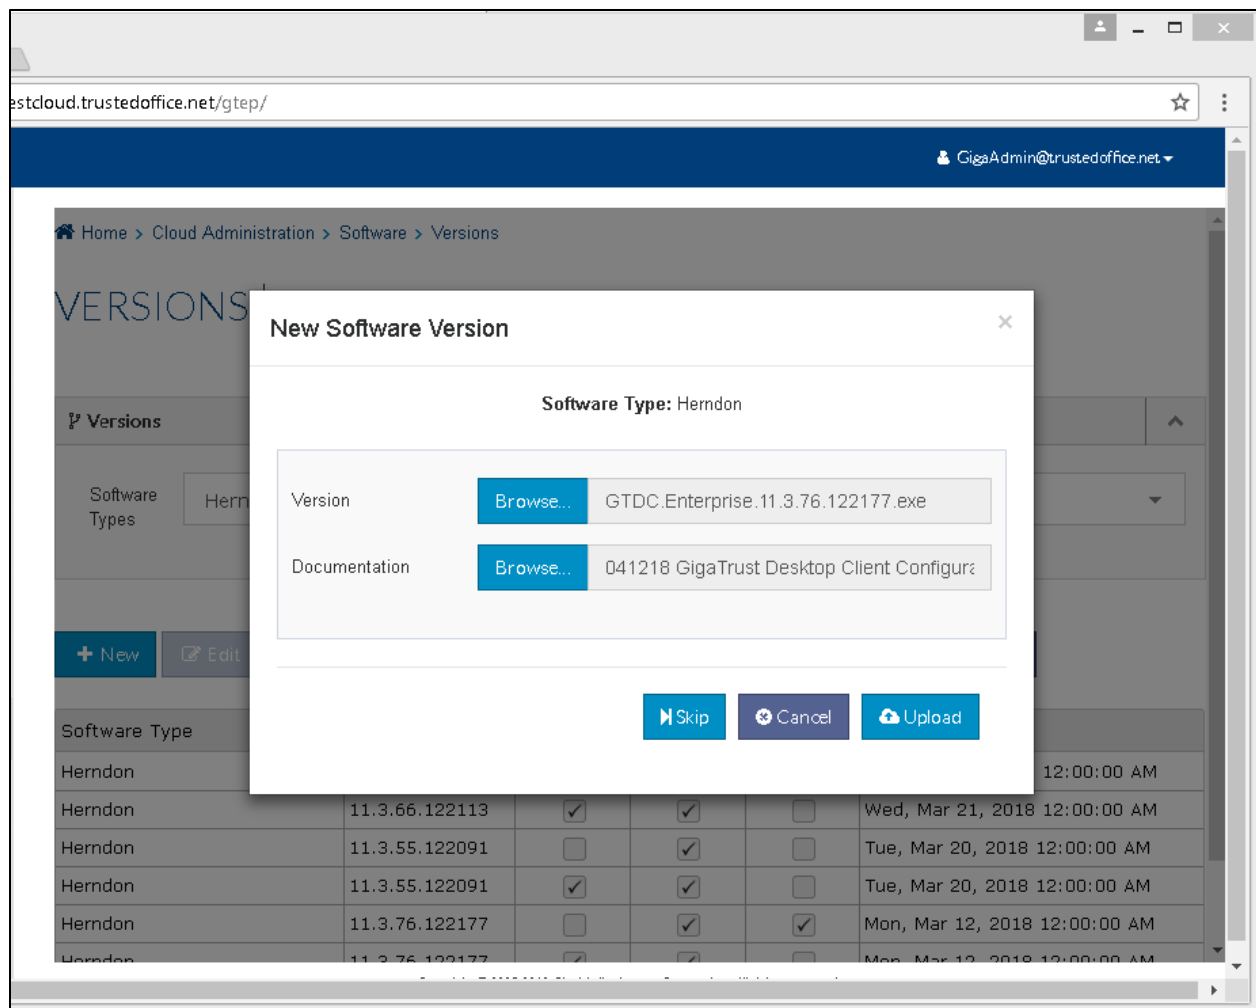

2. Browse and select the software version you need to add. You can also optionally add documentation for the software such as the User guide. Then click on **Upload**. Be patient, it may take some time to upload to the server. The next dialog page will be displayed.



GigaTrust Desktop Client software must retain the naming convention and version numbering format as you received it from GigaTrust. On Upload the name and version are pulled from the file name automatically for you, and 32 and 64 bit entries are added at the same time. Here is an example file name: **GTDC.Enterprise.11.3.123.123456.exe**

New Software Version

Software Type

Herndon

*Version

11.3.76.122177

☒ 32-Bit

☒ 64-Bit

Date Available

04/30/2018

Upgrade Message

Please enter an upgrade message...

Download Specs

Please enter download specs...

Requirements

Please enter system requirements...

*Install File

GTDC.Enterprise.11.3.76.122177.exe

☒ Install File Optional

☒ Documentation Uploaded

Close

Add

- **Software Type** – Auto-populated.
- **Version** – Auto-populated.
- **32-bit** – Auto-populated, if possible. Check this box if this version is for 32 bit Windows Operating systems. Although, GTDC v10.2 and higher EXE includes support for both 64 bit and 32 bit, GTEP requires that a version for both types be added to the database regardless of the fact they reference the same file. This is because we auto-detect the bit version of the Windows OS.


- **64-bit** – Auto-populated, if possible. Check this box if this version is for 64 bit Windows Operating systems.
- **Date Available** – Auto-populated with current date. Click in the text box and an interactive calendar will pop-up if you need to change the date. You can optionally set the Date Available to a future date. This is helpful if you need to test it beforehand. After testing you can change it to the current date which will make it available for Users to upgrade.
- **Upgrade Message** – Optional message displayed to the User on the download page. For example: “This version now supports Adobe DC.”
- **Download Specifications** – Optional message displayed to the User on the download page. For example: “This software requires 158Mb of disk space.”
- **System Requirements** – Optional message displayed to the User on the download page. For example: “Windows update 123456 is required for Windows 8 and 10 users as a prerequisite.”
- **Install File** – Auto-populated from the file name. This is the full file name including the extension. For example: **GTDC.Enterprise.10.2.123.123456.exe**
- **Install File Optional – Default: Checked.** Use this setting if this is not a required upgrade. The User will be prompted on login that an upgrade is available, but the current installed version will still function if the User does not upgrade.
- **Documentation Uploaded – Default: Checked** (if documentation was uploaded.)

*Click **Add** when you have completed configuring the new Software Version. The Software Version table will reload and you should see the new version listed (You may need to page to it.)*

Software Notes:


Note: You can delete software only if it has not yet been downloaded by any Users. Select the version row and click on the **Delete** button in the tool bar, and confirm software deletion.

The **Optional** setting is useful if you want a small group to test the version before forcing everyone to upgrade.

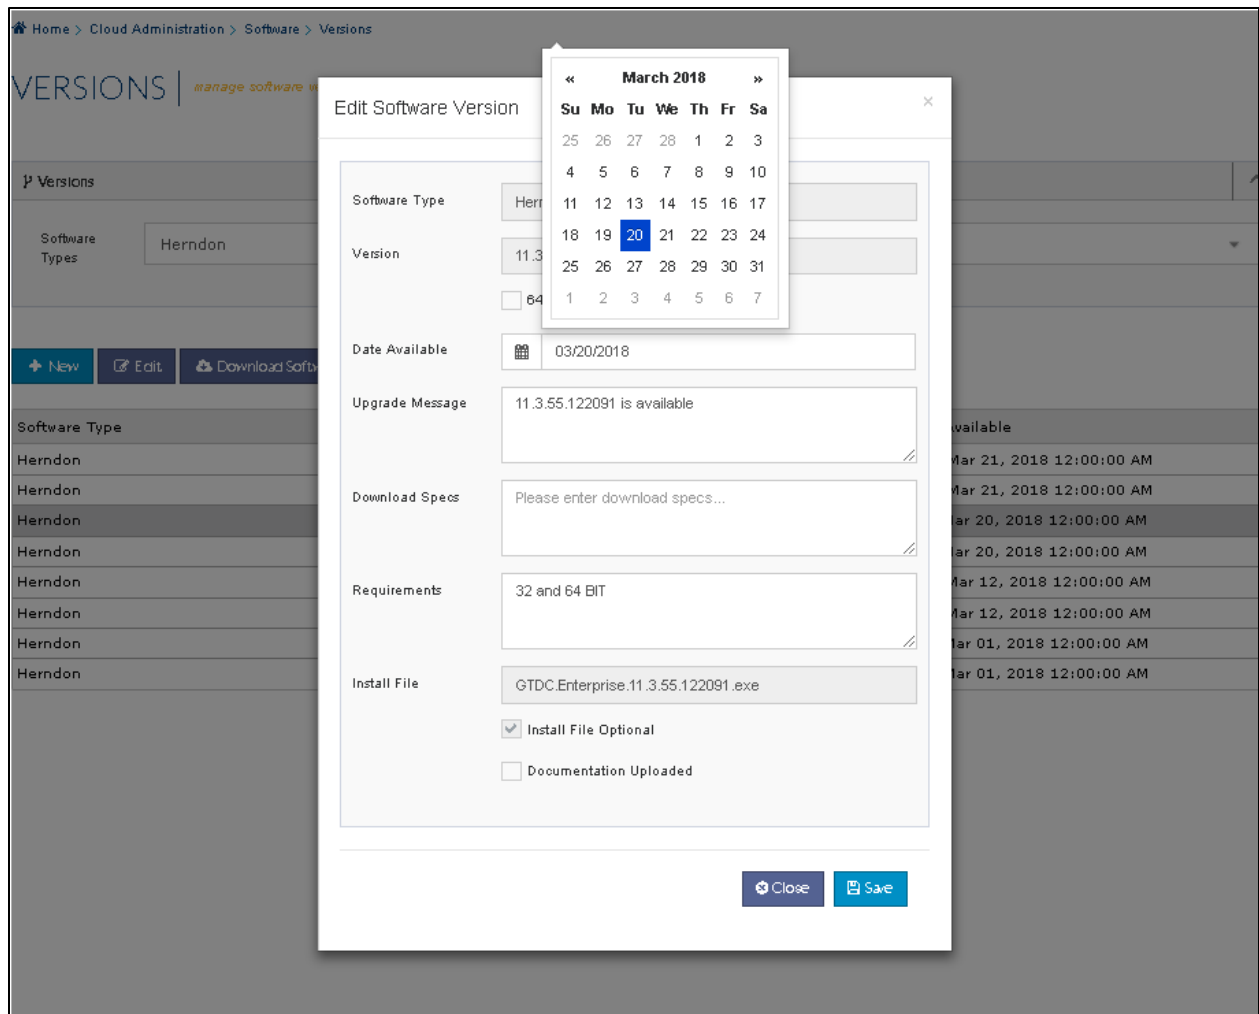

1. If you click a row in the **Software Versions** table, a window will be displayed allowing you to edit the version information and it will prompt you to add documentation if it is not present. Clicking a column header will sort by that column.
2. Clicking the **Date Available** text box will display an interactive calendar. The default date is today. Choosing a date in the future will prompt users to upgrade on that date. This also allows you to add software for future upgrade dates or push the date off in the future if you are uncertain of the date you would like to finally push out the software.


Security Questions

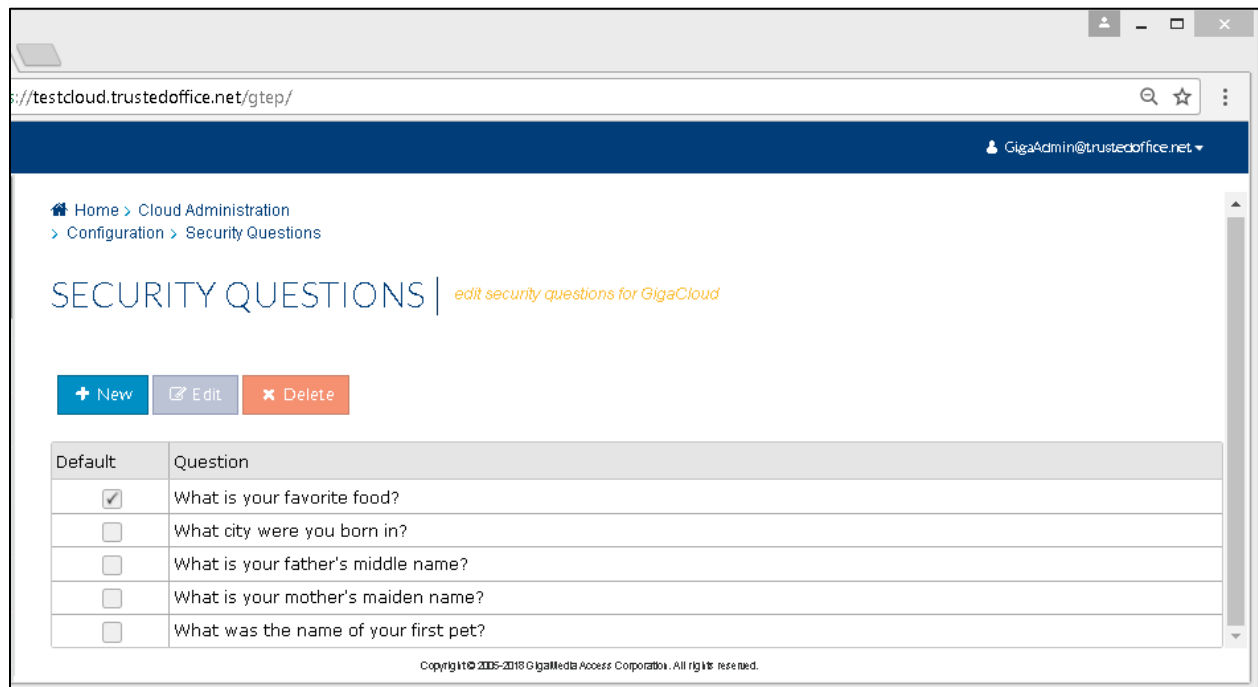

GTEP Administration comes preloaded with five Security Questions for Tenant User Password Recovery. In the **Security Questions** section, you can customize any of the questions and add or delete questions. These are the default Security Questions that are used when a Tenant is first created. The Tenant Administrator can customize them after logging into GTEP.

- Navigate here to customize: **Cloud Administration > Configuration > Security Questions**
- Double-click a question and an edit window will load allowing you to modify the question.
- Click **New** to add another Security Question or highlight a question and select **Delete** to remove it.

Email Property Defaults

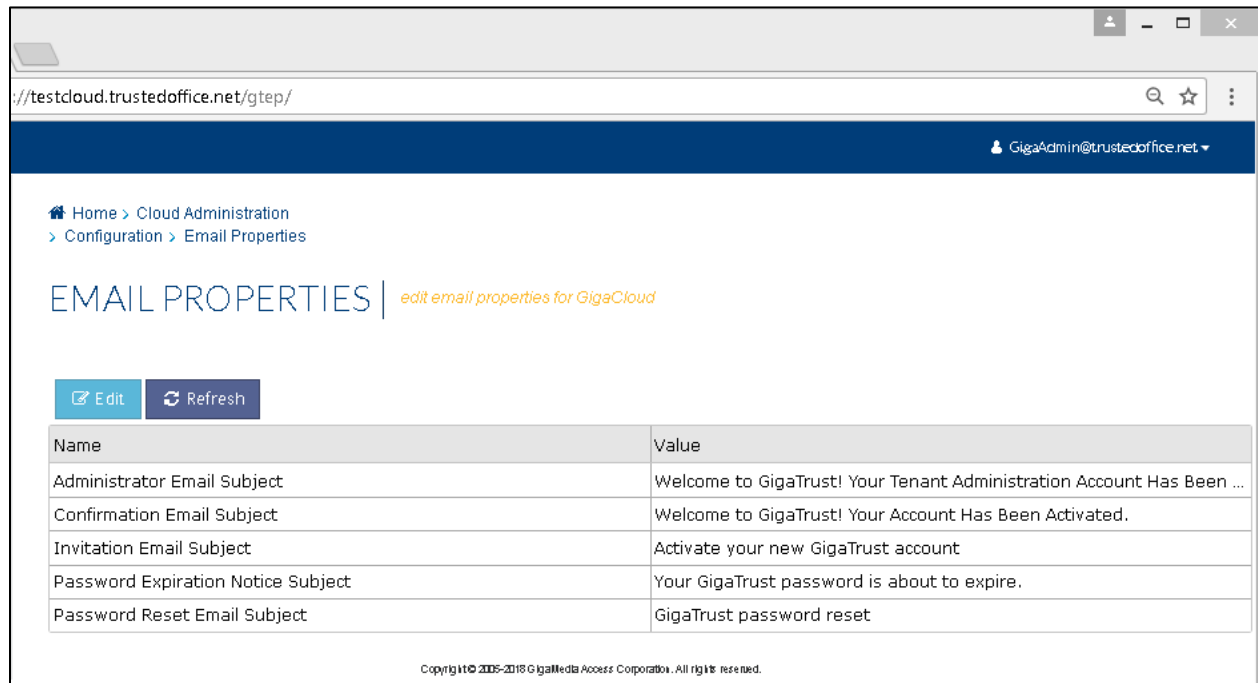

The screenshot displays the 'Email Properties' configuration page in the GigaCloud interface. The page has a dark blue header with the user 'GigaAdmin@trustedoffice.net'. Below the header, a breadcrumb trail shows 'Home > Cloud Administration > Configuration > Email Properties'. The main heading is 'EMAIL PROPERTIES' with a link to 'edit email properties for GigaCloud'. There are two buttons: 'Edit' and 'Refresh'. Below these is a table with two columns: 'Name' and 'Value'.


Name	Value
Administrator Email Subject	Welcome to GigaTrust! Your Tenant Administration Account Has Been ...
Confirmation Email Subject	Welcome to GigaTrust! Your Account Has Been Activated.
Invitation Email Subject	Activate your new GigaTrust account
Password Expiration Notice Subject	Your GigaTrust password is about to expire.
Password Reset Email Subject	GigaTrust password reset

Copyright © 2005-2018 GigaMedia Access Corporation. All rights reserved.

In **Email Properties**, you can change and personalize invitation and password recovery email configuration settings. These are the default Email Properties that are used when a Tenant is first created. The Tenant Administrator can customize them after logging into GTEP. Navigate here to customize: **Cloud Administration > Configuration > Email Properties**

- **Administrator Email Subject** – Optionally enter an alternate subject for the Administrator Email.
- **Confirmation Email Subject** – Optionally enter an alternate subject for the Confirmation Email.
- **Invitation Email Subject** – Optionally enter an alternate subject for the Invitation Email.
- **Password Expiration Notice Subject** - Optionally enter an alternate subject for the Password Expiration Notice email.
- **Password Reset Email Subject** - Optionally enter an alternate subject for the Password Reset Notice email.

Email Template Defaults

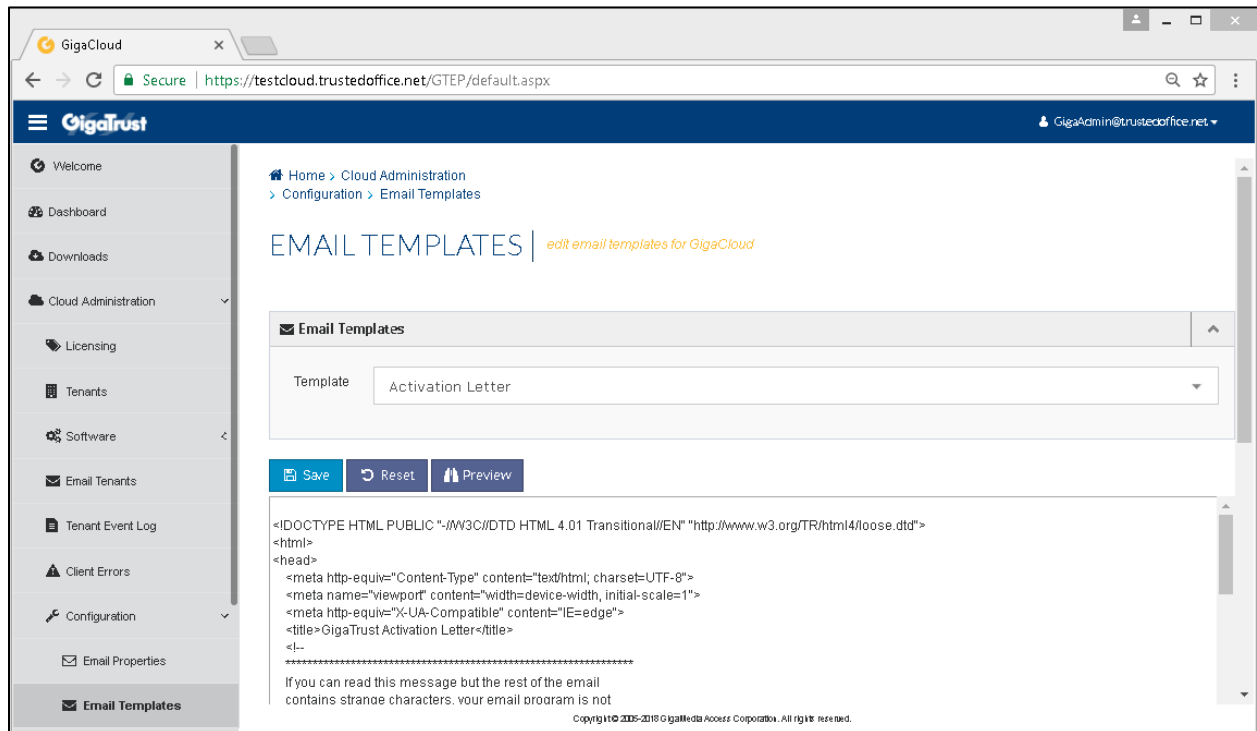


In the **Email Templates** section, there are six default email templates that can be customized for your cloud if needed: **Activation Letter**, **Administration Letter**, **Confirmation Letter**, **Password Expiration Letter**, **Password Reset Letter** and **Tenant Administrator Email**. Navigate here to customize: **Cloud Administration > Configuration > Email Templates**

These are the default Email Templates that are used when a Tenant is first created. The Tenant Administrator can customize them after logging into GTEP. Any HTML or formatting can be changed and saved as long as the link URLs and any tokens (i.e. `${LoginLink}`) are not modified. You can preview the email template in a new browser window by clicking **Preview**. Selecting **Reset** will change the template back to the default format.

Tenant Default Settings

These are additional default settings for Tenants that you can customize. These are the default Settings that are used when a Tenant is first created. The Tenant Administrator can customize them after logging into GTEP.

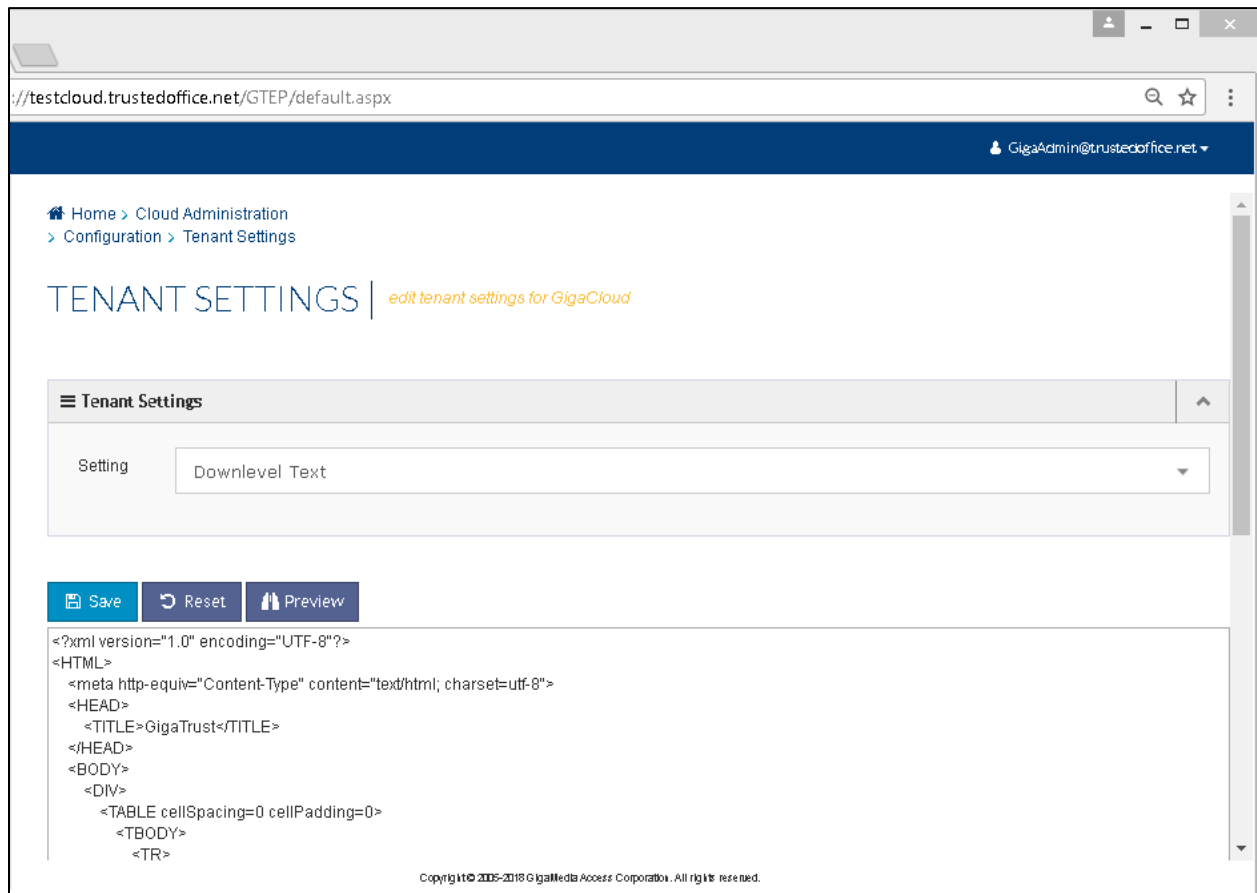

1. **Password Complexity Message** – This is the text displayed when a User changes or resets the account password. Customize for your Active Directory password policy.


Example: “Password Must Be at Least 8 Characters Long and Contain 1 Number and 1 Upper Case Letter.”

2. **Down Level Text** – Outlook in-the-clear message.
3. **Email Server** – Deprecated feature.

Navigate here to customize: **Cloud Administration > Configuration > Tenant Settings**

Activation Letter

Below is the default Activation Letter email template.

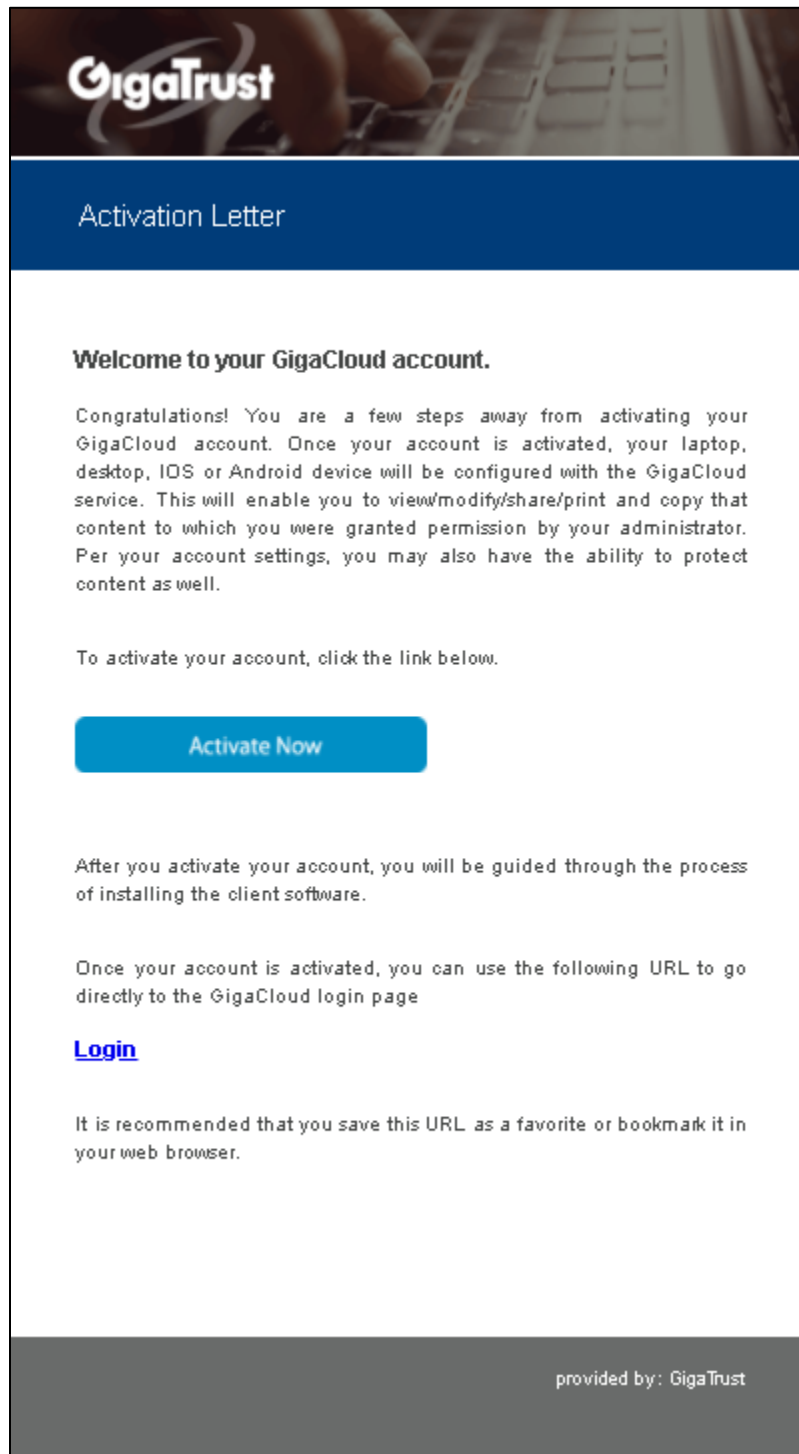


Administration Letter

Not shown.


Confirmation Letter

Below is the default Confirmation Letter email template.

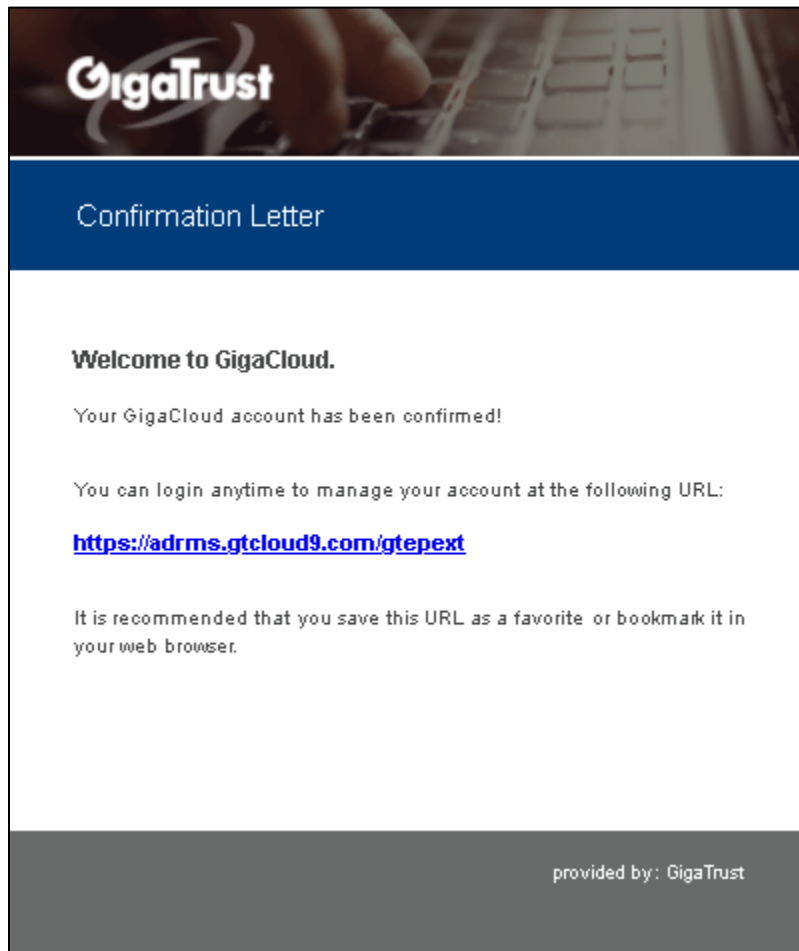


Password Expiration Notice

Below is the default Password Expiration Notice email template.

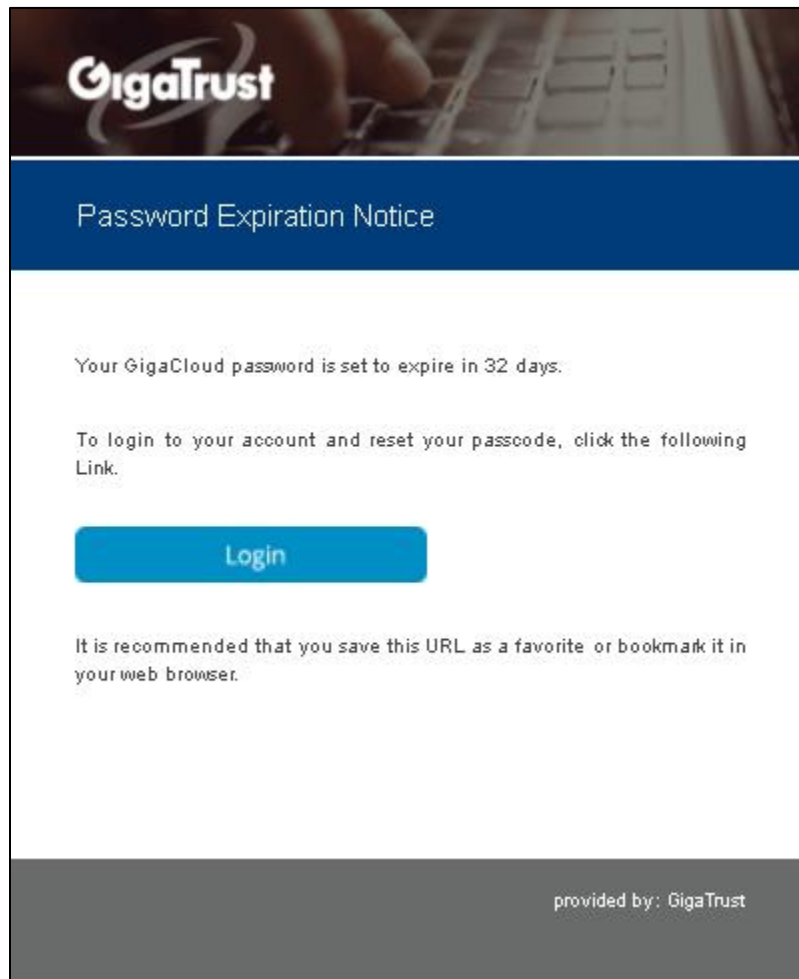

Password Reset Letter

Below is the default Password Reset Letter email template.

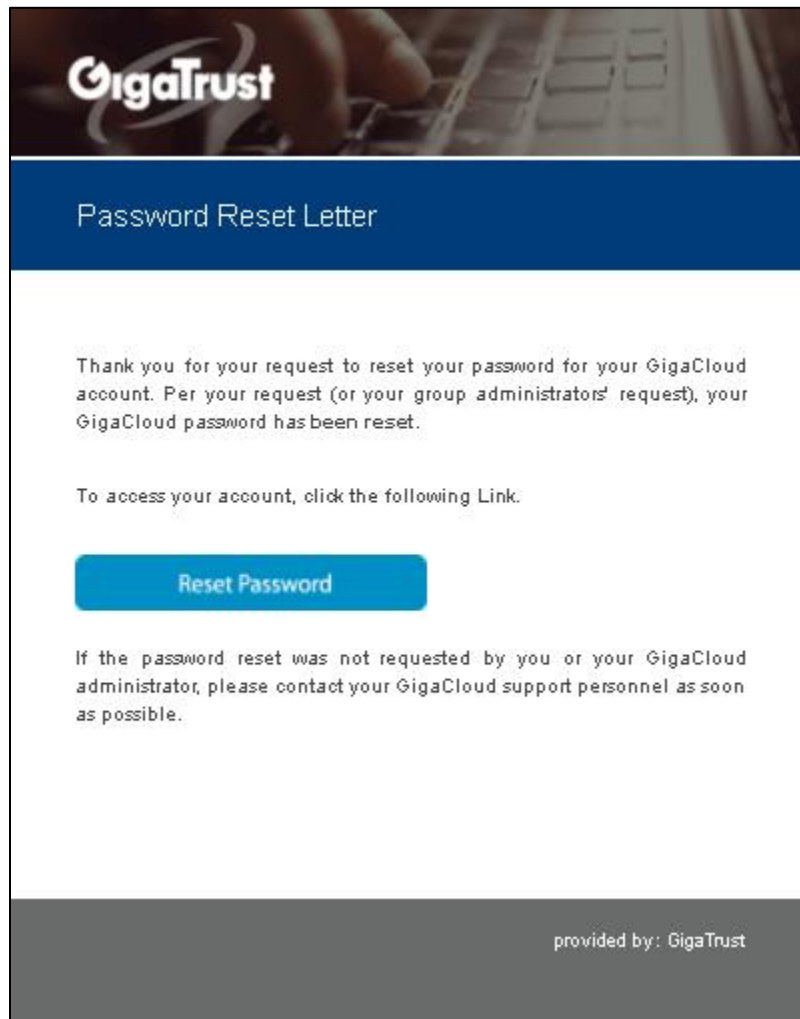

Tenant Administrator Letter

A generic template to send updates to Tenant Administrators (not shown.)

Adding Tenants

Now that Hosting has been completely configured, you can start adding and managing new Tenants and Tenant Users. It is advisable to add a test Tenant to verify your settings before adding actual Tenants. See the following procedures below on how to manage Tenants and Tenant Users.

Adding Tenants

The screenshot shows the 'Create a New Tenant' dialog box in the GigaCloud interface. The background shows the 'TENANTS' management page with a table of existing tenants. The dialog box has the following fields and options:

- Tenant Name:** Acme Inc.
- User Email:** administrator@acmeinc.com
- Trial Account:** ☐
- Unlimited Users:** ☒
- Limit Users to:** ☐ 25

Buttons at the bottom of the dialog: Close, Add.

Name	Created Date
AndroidDev	Fri, Dec 15, 2017 11:03:0...
Chris Test	Wed, Mar 28, 2018 12:27...
Internal.local	Fri, Apr 27, 2018 11:58:5...
IT Ops test	Thu, Aug 31, 2017 3:37:2...
Sakuntala	Mon, Oct 23, 2017 5:05:3...
syncme	Wed, Sep 06, 2017 5:32:...
Tenant123	Wed, Mar 07, 2018 10:07...

To add a new Tenant, select **New Tenant** and the **Create a new Tenant** window opens.

1. Enter a **Tenant Name** for the new Tenant.
2. Enter a **User Email** for the Administrator of the new Tenant.
3. If this is a trial account, check the **Trial Account** box.
4. Select **Unlimited Users** or enter a User limit.
5. Click **Add** when you are finished. The new tenant will be added to the grid.

You can also import Tenants from a file. Select **Import Tenants** from **More** in the top menu bar. If you receive an error on import, fix the corresponding row in the file and reimport it.

Import Tenants

Select the CSV or TXT file that contains a list of unique Tenant names to provision and the Tenant Administrator's email address. The file format is "Tenant","Email" (no column headers.)

Browse...


Close

Finish

Import a CSV formatted file with two columns: tenant name and email address with no column headers. See example below.

	A	B
1	Wayne Enterprises	jsmith@wayneenterprises.com
2	Widget Corp	sue@widgetcorp.com

Managing Tenants

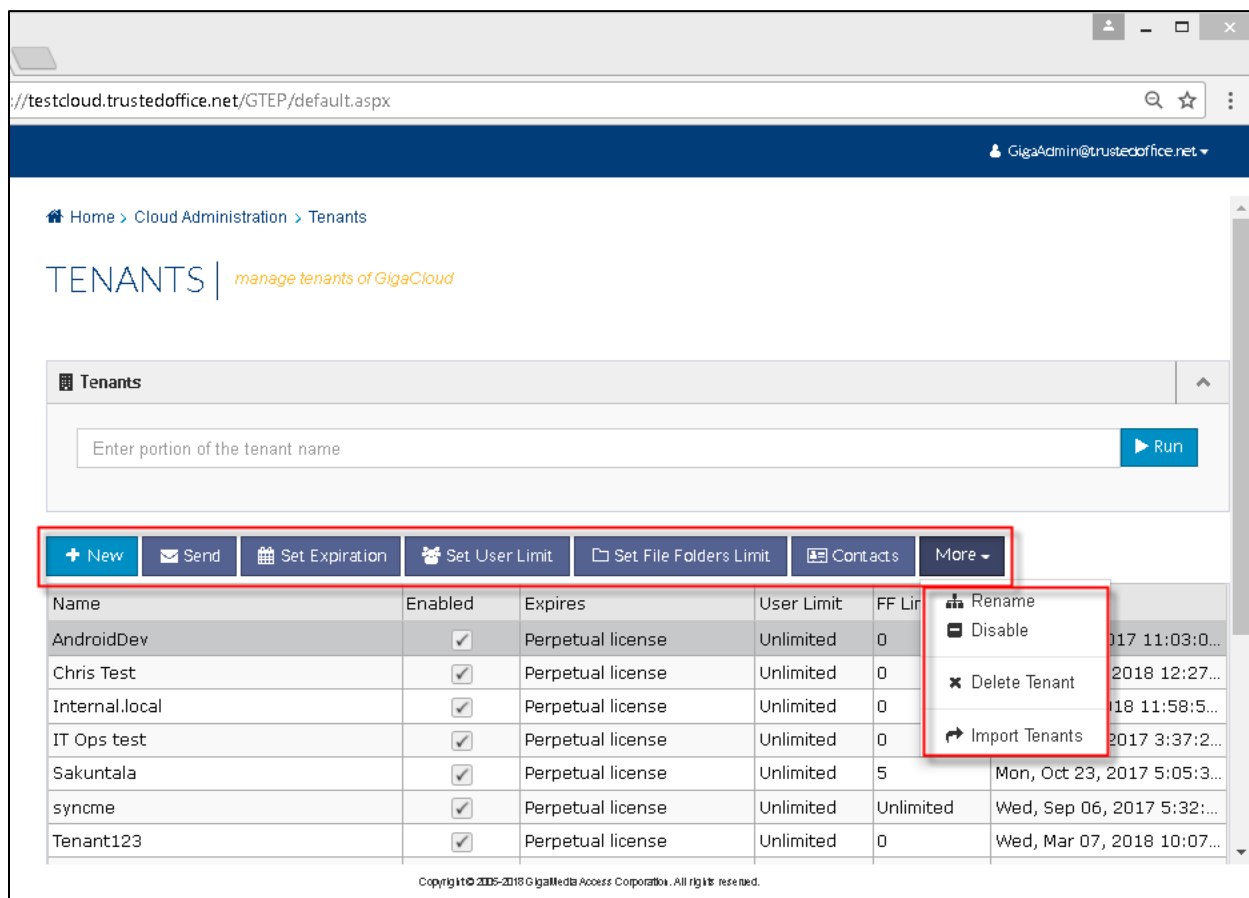

Home > Cloud Administration > Tenants

TENANTS | manage tenants of GigaCloud

Enter portion of the tenant name Run

+ New
Send
Set Expiration
Set User Limit
Set File Folders Limit
Contacts
More

Name	Enabled	Expires	User Limit	FF Limit	Last Activity
AndroidDev	☒	Perpetual license	Unlimited	0	2017 11:03:0...
Chris Test	☒	Perpetual license	Unlimited	0	2018 12:27...
Internal.local	☒	Perpetual license	Unlimited	0	2018 11:58:5...
IT Ops test	☒	Perpetual license	Unlimited	0	2017 3:37:2...
Sakuntala	☒	Perpetual license	Unlimited	5	Mon, Oct 23, 2017 5:05:3...
syncme	☒	Perpetual license	Unlimited	Unlimited	Wed, Sep 06, 2017 5:32:...
Tenant123	☒	Perpetual license	Unlimited	0	Wed, Mar 07, 2018 10:07...

Copyright © 2005-2018 GigaMedia Access Corporation. All rights reserved.

If you search and then select a Tenant row in the results, a selection of tools will be enabled to assist you in managing the tenant.

You are given the following options:

- **Send** – This will send an email to the selected Tenant Administrator and associated contacts.
- **Set Expiration** – Modify the expiration for a trial tenant or assign it a perpetual license.
- **Set User Limit** – Adjust the amount of Users the Tenant can contain.
- **Set File Folders Limit** – Adjust the amount of File Folders licenses the Tenant can use.
- **Contacts** – Add another Administrator contact for the Tenant.
- **More > Disable/Enable** – This will disable the Tenant but the account will not be deleted. If a Tenant is disabled, this button will be labeled **Enable**.
- **More > Delete Tenant** – This will **permanently** delete the Tenant and all of the Tenant Users and Policies. This is irreversible.



Deleting a Tenant removes all Users and Policies and this action is not reversible!


If you need to disable an account, but do not want to delete it, select the Tenant row. Choose **Disable** from the tool bar. You can re-enable the Tenant if necessary from the same screen using the **Enable** button.

- **More ➤ Import Tenants** – Use this feature to mass import and create Tenants.

Email Tenants


GigaCloud gives Administrators the capability to send updates by email to select Tenant Administrators and Contacts, or to ALL Tenant Administrators and Contacts.

1. To create a mailing, navigate to **Cloud Administration ➤ Email Tenants**.

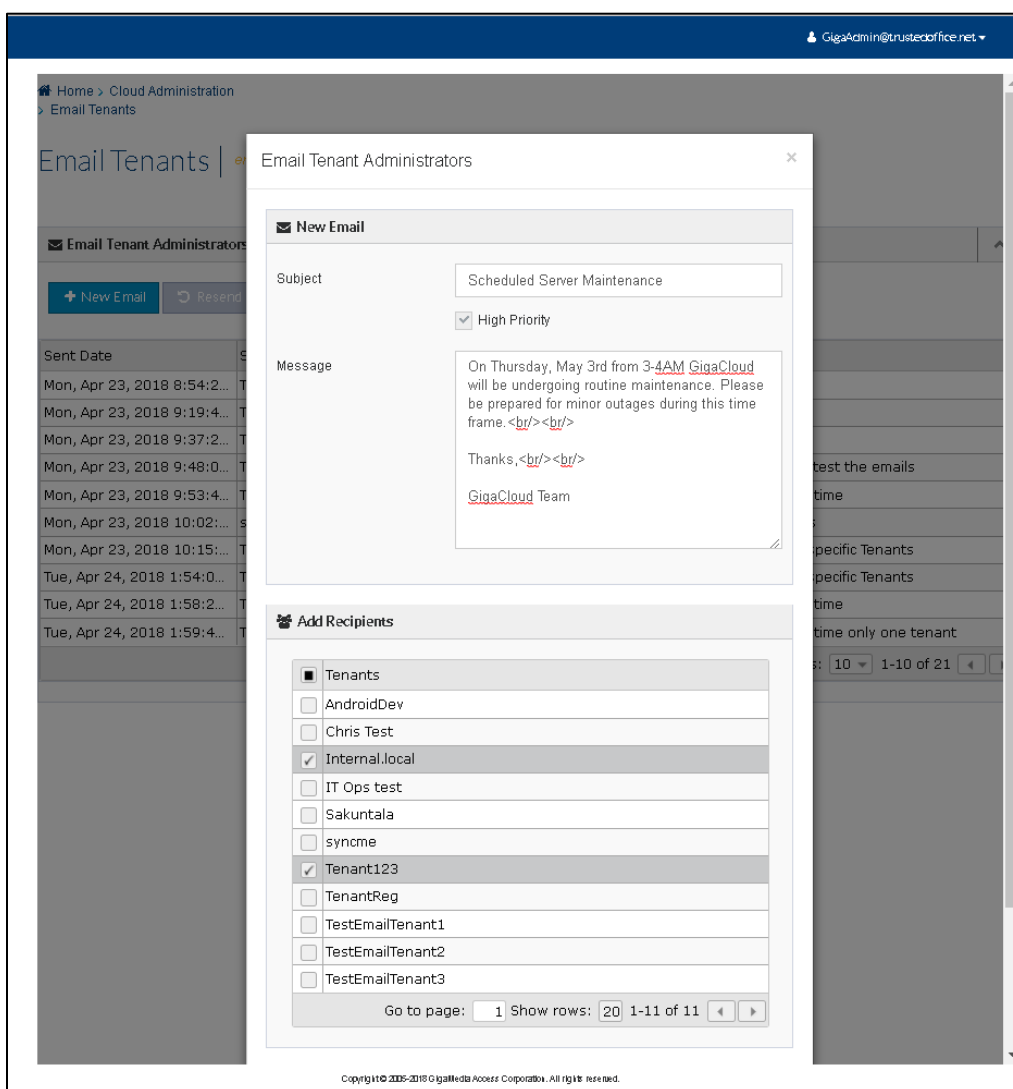

2. Select **New** from the toolbar. The **Email Tenant Administrators** dialog is displayed.

3. Enter a **Subject** and select if the email should have **High Priority** or not.
4. Customize the email **Message** with text or other Html components.

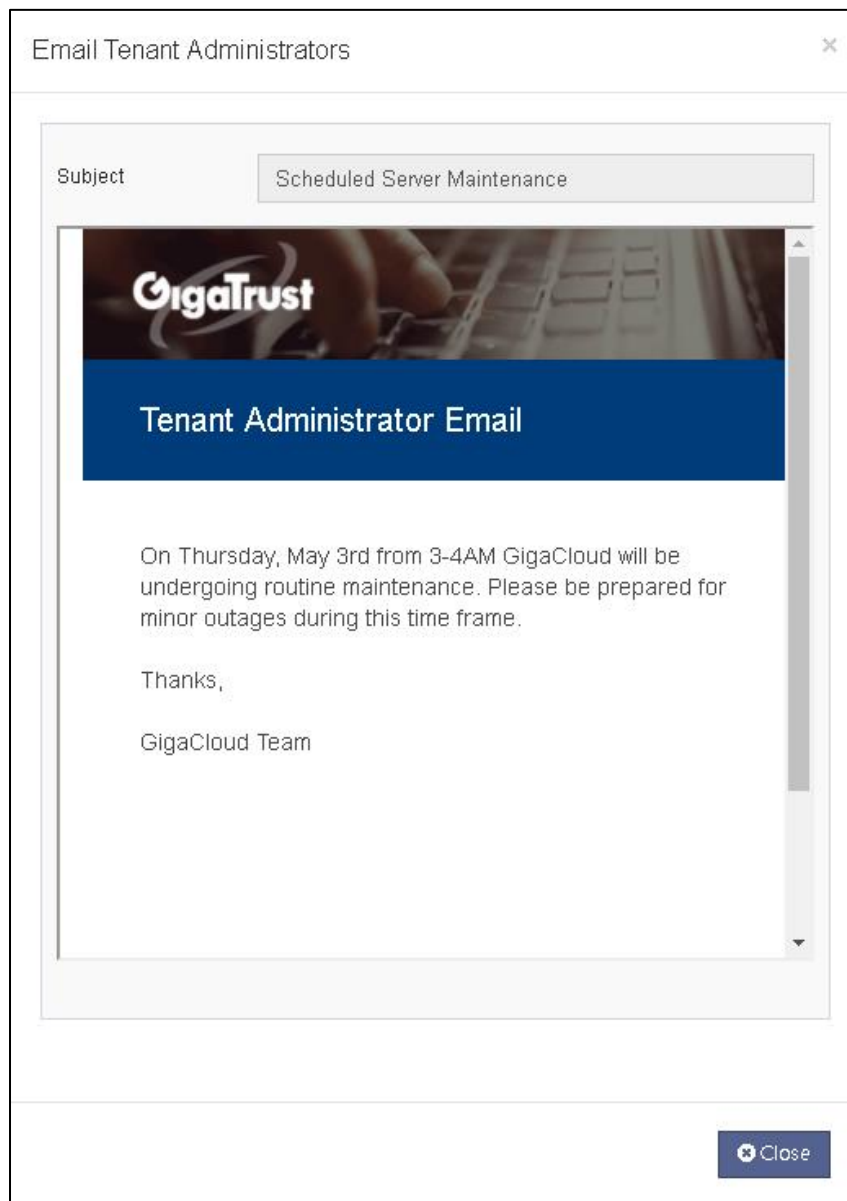

Email Tenant Administrators

Subject: Scheduled Server Maintenance

GigaTrust

Tenant Administrator Email

On Thursday, May 3rd from 3-4AM GigaCloud will be undergoing routine maintenance. Please be prepared for minor outages during this time frame.

Thanks,

GigaCloud Team

Close

5. At any time select **View** and another window will be displayed with the email and template rendered as it will look to email recipients.
6. In the **Add Recipients** select any or all recipients for the email.
7. When complete click on **Send**. The window will close and the email will now be listed in the underlying table.
8. If you select a previously sent email you can choose **Resend** and re-customize if needed.

Tenant Event Log

On the Tenant Event Log page you can view detailed information for troubleshooting Tenant Administration. You can filter the event log results by **All**, **Information**, **Warning** or **Error**. If you want to see the entire log entry details double-click on the specific row.

The screenshot displays the 'Tenant Event Log' page in the GigaCloud interface. A modal window titled 'Tenant Event Detail' is open, showing the following information:

- Tenant Name: Internal.local
- Event Type: Info
- Timestamp: Fri, Apr 27, 2018 11:59:02 AM
- Message: Provisioned Tenant
- Exception: (Empty text area)

The background shows the 'Tenant Event Log' table with columns for Tenant Name, Event Type, Timestamp, and Message. The table is filtered by 'Info' events. The bottom of the page shows pagination controls: 'Go to page: 1 Show rows: 25 1-9 of 9'.

Tenant Name	Event Type	Timestamp	Message
awdrsfgsadfgsdfg	Info		
TestTrialAccount	Info		
TenantReg	Info		
Tenant123	Info	Wed, Mar 07, 2018 11:07...	Provisioned Tenant
Chris Test	Info	Wed, Mar 28, 2018 12:27...	Provisioned Tenant
TestEmailTenant1	Info	Mon, Apr 23, 2018 5:17:2...	Provisioned Tenant
TestEmailTenant2	Info	Mon, Apr 23, 2018 5:19:0...	Provisioned Tenant
TestEmailTenant3	Info	Mon, Apr 23, 2018 5:58:4...	Provisioned Tenant
Internal.local	Info	Fri, Apr 27, 2018 11:59:0...	Provisioned Tenant

Navigate here: **Cloud Administration > Tenant Event Log**

Client Errors

Event Type

☒ All

☐ Info

☐ Warn

☐ Error

[Run](#)

Details

Tenant Name	Event Type	Timestamp	Message
awdrsfgsadfgsdfg	Info	Wed, Feb 14, 2018 2:50:40 PM	Provisioned Tenant
TestTrialAccount	Info	Thu, Feb 22, 2018 3:17:32 PM	Provisioned Tenant
TenantReg	Info	Tue, Mar 06, 2018 11:14:38 AM	Provisioned Tenant
Tenant123	Info	Wed, Mar 07, 2018 11:07:09 AM	Provisioned Tenant
Chris Test	Info	Wed, Mar 28, 2018 12:27:07 PM	Provisioned Tenant
TestEmailTenant1	Info	Mon, Apr 23, 2018 5:17:28 PM	Provisioned Tenant
TestEmailTenant2	Info	Mon, Apr 23, 2018 5:19:00 PM	Provisioned Tenant
TestEmailTenant3	Info	Mon, Apr 23, 2018 5:58:47 PM	Provisioned Tenant
Internal.local	Info	Fri, Apr 27, 2018 11:59:02 AM	Provisioned Tenant

Go to page: 1 Show rows: 25 1-9 of 9

If the client software versions support logging errors to GTEP, this is where you can view the log files. You can filter by **Android**, **IOS**, **Unknown** or **Windows** errors. Navigate here: **Cloud Administration** ➤ **Client Errors**

Click **Run** to execute the report. Double-clicking on a log entry will open a window with more details about the error.

You can optionally add email recipients to receive alerts when each error occurs, or by a specific platform type. Click on **Configure Recipient Emails** to add recipients.

Manage Policies

Overview

Content Policies are categorized in one of two different folders: Active and Archive. The Active folder contains all policies that are currently in use within the RMS environment. Archived policies are ones that are currently not in use and will not be distributed to end-users. Policies can be moved between folders using standard Windows drag and drop functionality.

Note: When a new Tenant is created, two default Rights Templates are automatically added in a Tenant Policy folder in the Active folder listed below. The first template name is the internal name in GTEP. The second name is the external name displayed for Users. The first part of the external name in blue can be culture specific. For example, if Tenant's name is Widget and they need the rights template name, Confidential, in simplified Chinese, the external name for the template would be: 机密_Widget.

1. **Confidential / Confidential_ [Your Tenant Name]** – This template contains the following recipient permissions:
 - a. Full Control – **No**
 - b. Edit Rights - **No**
 - c. View – **Yes**
 - d. Print – **No**
 - e. Edit – **Yes**
 - f. Save As – **No**
 - g. Copy – **No**
 - h. Allow Macros – **Yes**
 - i. View Rights – **Yes**
 - j. Reply – **Yes**
 - k. Reply All – **Yes**
 - l. Forward - **Yes**
2. **Confidential View Only / Confidential View Only_ [Your Tenant Name]** - This template contains the following recipient permissions:
 - a. Full Control – **No**
 - b. Edit Rights - **No**
 - c. View – **Yes**
 - d. Print – **No**
 - e. Edit – **No**

- f. Save As – **No**
- g. Copy – **No**
- h. Allow Macros – **Yes**
- i. View Rights – **No**
- j. Reply – **No**
- k. Reply All – **No**
- l. Forward – **No**

Both Rights Templates are currently preconfigured for the following cultures and external names:

- Chinese (Simplified) (zh-Hans) - 机密
- Chinese (Simplified, PRC) (zh-CN) - 机密
- Chinese (Simplified, Singapore) (zh-SG) - 机密
- Chinese (Traditional) (zh-Hant) - 机密
- Chinese (Traditional, Hong Kong, S.A.R.) (zh-HK) - 机密
- Chinese (Traditional, Macao S.A.R.) (zh-MO) - 机密
- Chinese (Traditional, Taiwan) (zh-TW) - 机密
- Chinese (zh) - 机密
- English (Australia) (en-AU) – Confidential
- English (Belize) (en-BZ) – Confidential
- English (Canada) (en-CA) – Confidential
- English (Ireland) (en-IE) – Confidential
- English (Jamaica) (en-JM) – Confidential
- English (New Zealand) (en-NZ) – Confidential
- English (Republic of the Philippines) (en-PH) – Confidential
- English (South Africa) (en-ZA) – Confidential
- English (Trinidad and Tobago) (en-TT) – Confidential
- English (United Kingdom) (en-GB) – Confidential
- English (United States) (en-US) – Confidential
- English (Zimbabwe) (en-ZW) – Confidential

- English (en) – Confidential

After selecting a folder, clicking the **New** button on the Content Policies master panel will display the **Select Content Policy Type** window. Select a type of **Policy** from the following table and press **OK** to continue or follow detailed instructions for each policy type starting on the following page.

Rights Template - Specifies access permissions such as View, Print, and Save As, as well as who is allowed access and for how long.

Email Classification - Rule used to automatically apply specific protection to outgoing email that meets defined criteria.

Content Classification – Future enhancement.

PDF Watermark - Text or user information that will appear on content when content is viewed or printed.

Folder - Folders are used for organizing policies and delegating rights to security principals.

File Folder Configuration – Create File Folders configurations for GigaTrust Dynamic File Folders.

Trusted Applications File - List of applications and associated file extensions that are supported by the GigaTrust Desktop Client.

Black List - List of applications that will be blocked if protected content is being viewed. Conversely, if a Black List application is running, protected content will be blocked from opening.


Black List Exception - This policy allows you to create exceptions to an existing GTEP Black List file. For example, if Skype is in the Black List, but you want to allow its use when protected content is open, you can create an exception for Skype.

Policies can be removed from the GTEP Administration application by selecting a policy in the Content Policies master pane and clicking the Delete button. Administrators will be required to confirm the deletion of the policy.

The Sync button will synchronize templates in the AD RMS system with the GTEP Administration application. Any additional templates that exist in the AD RMS system will be added to the GTEP database. This functionality is intended for initial setup of a GTEP installation. Thereafter, all template management must be done via GTEP.

Add a Policy – Rights Template

1. Click **Policy** ➤ **Manage** in the menu. This displays the list of Active and Archived Content Policies.

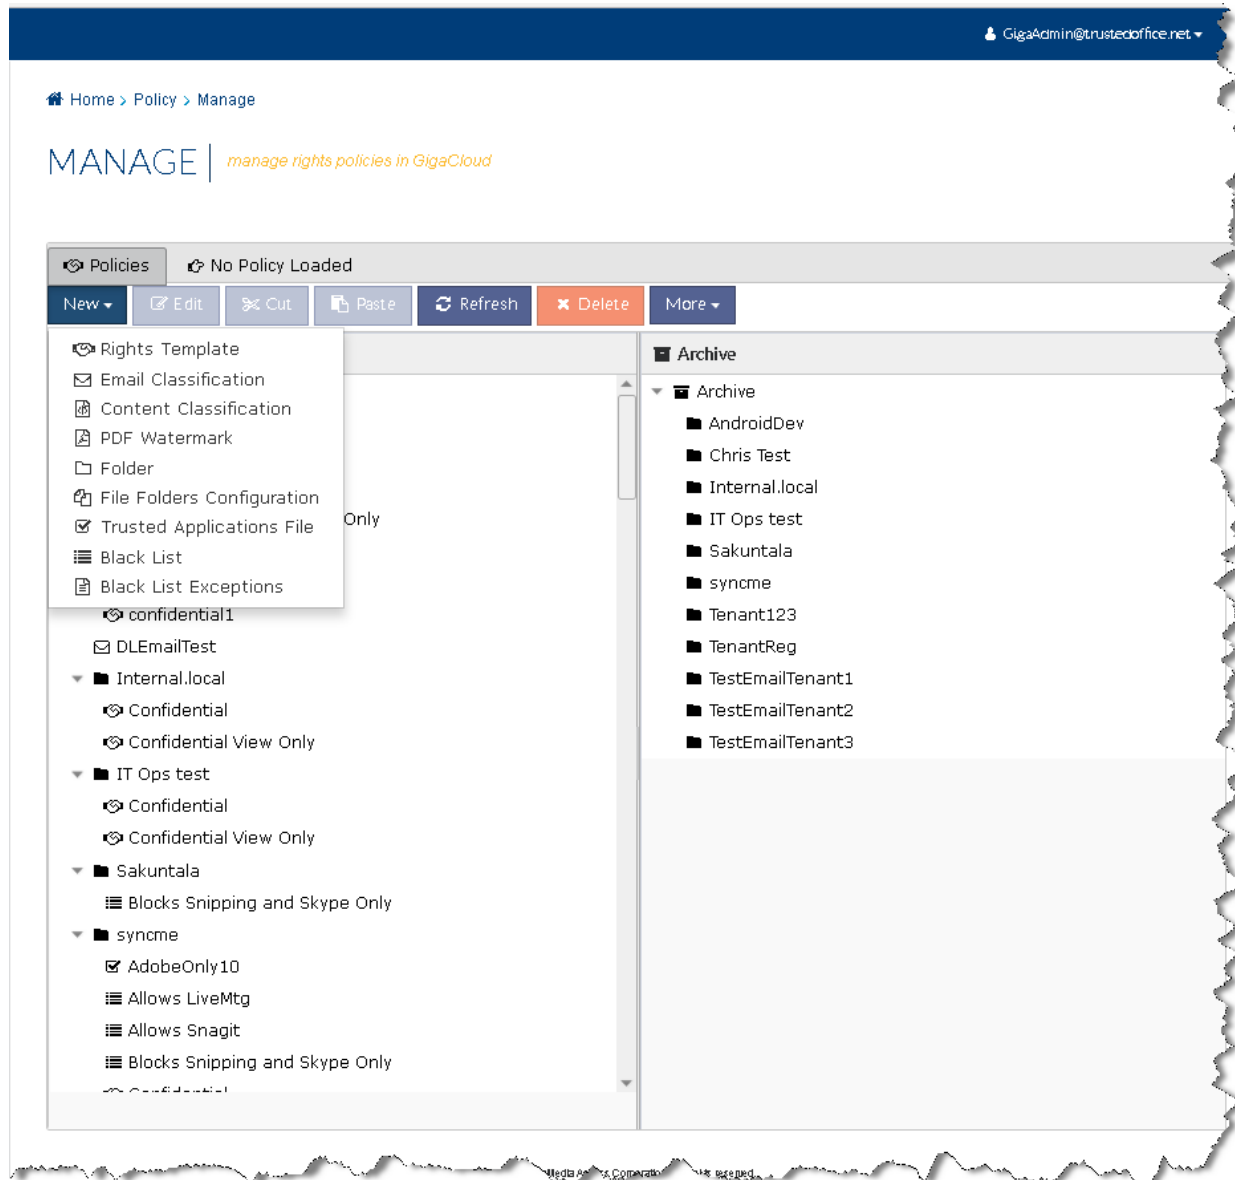

2. In the Content Policies master pane, select the **Active** or **Archive** folder (or a Tenant folder) and click **New**.
3. From the drop-down menu, select **Rights Template**. A new tab is opened.

The screenshot displays the GigaCloud interface for creating a new rights template. A modal window titled 'Create Template Descriptor' is open, showing the following fields:

- *Language:** A dropdown menu set to 'English (United States) (en-US)'.
- *Name:** A text input field containing 'Confidential'.
- *Description:** A text area containing 'Confidential Template'.

At the bottom of the modal are 'Close' and '+ Add' buttons. The background shows the 'Rights Template' configuration page with sections for 'Internal Name', 'External Name(s)', and 'Rights Request URL'.

- Complete the sections of the template definition pane as follows:

Template Identification

(Required) Enter a unique Internal Name for this template.

(Note: The Internal Name for the template cannot contain extended ASCII characters or any of the following special characters: `/ \ : * ? " < > | ! — % , ; & # .`)

(Required) Click **New** to enter a unique Template Identification. Language, Name, and Description are all required for creation of a Template Identification.

(Note: A template name cannot contain extended ASCII characters or any of the following special characters: `/ \ : * ? " < > | ! — % , ; & # .`)

Optionally enter a URL that content recipients can use to request more access rights than your template originally grants them. The corresponding URL page must be created to handle such

requests. You can also enter a **mailto:** address in the URL field using the format: **mailto:email address** or **mailto:http://email address**.

When the recipient opens an RM-enabled email (or attachments), the user has the option to see the assigned permissions. In Microsoft Office, if the recipient then selects the Request additional permissions option, the URL or email address you entered is displayed. The recipient can then select that information to go to the specified URL or open an email form.

Expiration Policy

Specify when you want the assigned permissions for the information to expire. Choose from Never (default), a specific date, or in a specific number of days/months/years after the publishing date.

The publishing date is the date/time the email is sent.

Use License Renewal Policy

When a recipient first opens a protected email, credentials are checked at the appropriate licensing RM Services server, and then a Use License is issued. For the life of the Use License, the email content is protected both online and offline per the access permissions.

If a template's permissions are changed, the new permissions will only be granted when the user next acquires an end-user license (EUL). If the **Never Renew** option is enabled in a template and a user has already acquired a EUL, any changes made to the template permissions will not be granted to that user. The user will have to delete the EUL and then acquire a new one by accessing the content again.

If a Use License must be renewed, the rights management server granting the use license must be reachable so that the renewal can occur. Other than having to be reachable, the renewal process is transparent to the user. If a Use License cannot be renewed (for example, when the user is offline or the Use License has expired), the email content cannot be accessed by the recipient.

Specify how often you want the Use License to be renewed. Choose from **Never (default)**, every time the email is opened, or in a specific number of days/months/years after the initial issuance.

Users and Groups

Checkbox: Owner has full control right with no expiration.

Owner of protected content is automatically granted perpetual and full access.

Other Users:

Define the email addresses for the persons or distribution groups for whom the template permissions will apply. (It is recommended that groups be used since they are dynamic.) Assign each user/group its own set of permissions. Assigned permissions can be modified as needed. You can also specify that the template applies to **Anyone**.

Note: A group must be related to a single email address, for example, sales@gigatrust.com.

If the template permissions apply to anyone, select the **Anyone** button. Anyone will be added to the grid.

To specify particular Users or Groups, perform the following steps:

- a) Click **Add**. This displays the **Add Users and Groups** window.

- b) Select the **Email Address** radio button.
- c) If you know the email address you want to add, enter it in the **Email Address** field and click **OK**, otherwise you can search for the address using the following steps.
 - Note:** Searches are run against the OU or domain of a selected connector, so at least one connector must exist in order to use the search feature.
- d) Use the drop-down arrow to display available connectors and select the connector in which the user/group should be found.
 - Note:** Only connectors to which you have Read permissions will be listed in the drop-down menu.
- e) Select whether you are adding a **User** or a **Group**.
- f) You can enter an address directly in the **Email Address** field at the top of the window or search for the address you want. Once the correct email address is in the **results grid**, select the row and click **Add** to add it to the template grid.

To Search:

In the **Email Pattern** field, enter the email address you want to add, optionally using the asterisk wildcard character (described below), and click Search. If the email address exists in the selected connector, your email address is returned in the **Results** field.

Select the address in the **Results** field.

Using wildcards to search: Optionally, you can use the asterisk (*) wildcard when searching for email addresses.

Examples:

Enter *smith@domain.com and click **Search** and all addresses that end with "smith@domain.com" will be listed, such as, asmith@domain.com and Andrew.Smith@domain.com.

Enter ej* and click **Search** and such addresses as ejacobsen@domain.com and ejames@domain.com will be listed.

Enter * and click **Search** to list all of the users in the selected connector.

Delete a User or Group

To remove an email address from the template, select it in the **User and Groups** grid and then click **Remove**.

Assign Rights-managed Permissions to a User or Group

Access rights are assigned per email address. By default, every listed address is assigned View permissions. To assign additional permissions to an email address, click the address and then select the permissions you want to assign to that address for this template. To clear a permission, select it again.

As necessary, assign permissions for each user or group.

5. Click **Save** to save your template. Once saved, your new template should be listed in the Content Policies tree.
6. Continue adding other policies for your organization.

Add a Policy – Email Classification

Overview

The Email Classification Policy feature works in conjunction with Microsoft Outlook on the user computer. Therefore, Outlook must be installed for the feature to work on user computers.

Email classification policies are used to automatically apply specific protection to an outgoing email that meets defined criteria. Such email classification policies can be enforced at the enterprise level, by the individual user, or a combination of both. GigaCloud Administration is used to create enterprise-level email classification policies.

Email classification policies are applied based on an email's intended recipients or recipient domain, and/or specific words or patterns found in the subject or body of the email. When an email meets an email classification policy's criteria, a confirmation message is displayed to the user. The user can then choose to send the email or cancel the send.

Note: The confirmation message can be disabled using GigaTrust Desktop Client Preferences.

An email classification policy consists of two parts:

1. Conditions and the criteria that meet those conditions.
2. A policy template whose user/access permissions are assigned to any email that meets the defined conditions and criteria.

If an email recipient is not assigned permissions in the template, that recipient will not have access to the protected email.

You create and manage enterprise email classification policies using the Enterprise Email Classifications feature. When assigning email classifications to directory entities, active email classification policies should be listed in their order of priority from top to bottom. They are applied in the listed order and only the first matching policy is applied to an email. (Inactive email classification policies are ignored when email is checked.) You can reorder the list as necessary.

You can also choose to Force an enterprise email classification policy to go into effect (when criteria is met and the email classification policy has priority), thus overruling any protection that might be assigned at the user-level.

Note: An Enterprise can disallow users from creating local GigaTrust templates and rules through SMS or group policy.

1. Click **Policy** > **Manage** in the menu.
2. In the Content Policies master pane, select the Active, Archive or another folder and click **New**.
3. From the drop-down menu, select **Email Classification**. A new tab is opened.

Home > Policy > Manage

MANAGE | manage rights policies in GigaCloud

Policies Create a New Email Classification

Email Classification

Save Reset

Identification

*Name

*Template

☒ Activate this email classification for use

☐ Force as highest priority over any user-defined classification

☐ Allow user to override this email classification

Email Address Condition

+ New Edit Delete

Domain Condition

+ New Edit Delete

Copyright © 2005-2018 GigaMedia Access Corporation. All rights reserved.

4. Enter a descriptive and unique name for this email classification and other details as follows:

Create Message Condition

*Message Type

Body

☒ Pattern

Credit Card

*Name

Credit Card

*Value

(?:^[\d])(?:4\d{3}(?:[\-\\s]?d{4}){3})5[1-5]\d{2}(?:[\-\\s]?d{

Test String

4000123412341234

Test

Tested successful

Matches major credit cards including:
Visa (length 16, prefix 4)
Mastercard (length 16, prefix 51-55)
Discover (length 16, prefix 6011)
American Express (length 15, prefix 34 or 37)

All 16 digit formats accept optional
hyphens (-) between each group of four digits.

Close

+ Add

Assign an enterprise rights management policy template to the email classification. A template is a set of predefined permissions for specified users. Use the drop-down arrow to display the list of available templates.

Important:

- If you define an email classification that is triggered by a Recipient email address, be sure to include that recipient in the template you assign to the email classification.
- Choose whether to activate the email classification policy. An inactive email classification will have no impact on outgoing user email.
- Choose whether to force the email classification. A forced email classification will override any user-defined protection for an email.

- Choose whether to allow users to override this email classification and send the email out unprotected or with the protection permissions they have defined.
- Define one or more conditions for this email classification.

Possible conditions are:

- Email address (including distribution lists)
- Specific domains (can use the * wildcard when defining)
- Specific words or patterns in the subject or body
- Individual words, phrases, and patterns can be entered as Subject or Body criteria.

Example:

Condition = Body

Criteria = confidential / secret / eyes only

This email classification will protect an outgoing email whose message body contains confidential OR secret OR eyes only.

A combination of conditions can be defined and all must be matched for an email classification to be triggered, with the exception of Recipient email address and domain condition. In that case, one or the other can be matched. [(Recipient OR Domain) AND Subject AND Body]

5. Once the necessary condition criteria are defined for the email classification, click **Save**.
6. Continue adding other policies for your organization.

Once saved, your new email classification should be listed in the selected Content Policy folder.

When an email classification is matched, the permissions specified in the template assigned to the email classification are applied to the email. Any supported, Non-protected attachments are also protected with the same permissions.

Add a Policy – Content Classification

Overview

The Content Classification Policy feature works in conjunction with Microsoft Office on the User computer with Word, Excel or PowerPoint documents. Content Classification policy is a method to add a classification (tag) to a document's Properties that meets defined criteria, and to optionally include text in the document header and/or apply a Rights Policy template to protect the file.

For example, adding a confidential tag in a Word document properties automatically if it contains a Social Security number, adding "Confidential" in the document header, and applying a "Confidential" Rights Template to encrypt and protect the file.



Note: Content Classification requires the client apps to support this feature. Please contact your GigaTrust Sales Engineer for supported software types.

A Content Classification policy consists of two parts:

1. **Content Classification Identification-** Name the classification and set the basic properties, including whether to automatically apply a Rights Policy Template to the document.
2. **Content Conditions-** Optionally define conditions and criteria to be applied based on and/or specific words or patterns found in the document.

You create and manage enterprise Content Classification policies using the Enterprise Content Classifications feature. When assigning content classifications to directory entities, active content classification policies should be listed in their order of priority from top to bottom. They are applied in the listed order and only the first matching policy is applied to a document. (Inactive content classification policies are ignored when a document is checked.) You can reorder the list as necessary.

You can also choose to Force an enterprise content classification policy to go into effect (when criteria is met and the content classification policy has priority), thus overruling any protection that might be assigned at the user-level.

Note: "Content Classification" is the default Property name for this feature. You can change this in **Administration > Application Settings**

Create a new Content Classification Policy

1. Click **Policy** ➤ **Manage** in the menu.
2. In the Content Policies master pane, select the Active or Archive folder and click **New**.
3. From the drop-down menu, select **Content Classification**. A new tab is opened.

The screenshot shows the 'Content Classification' configuration page. At the top, there's a header bar with the user email 'synone@trustedoffice.net'. Below the header, the page title 'Content Classification' is displayed. There are two buttons: 'Save' and 'Reset'. The main section is titled 'Identification' with a subtitle 'name this content classification policy'. It contains three input fields: '*Name' with a placeholder 'Enter a name for this content classification', '*Tag' with a placeholder 'Tag', and '*Template' with a dropdown menu showing 'Confidential'. Below these fields are four checkboxes: 'Activate this content classification for use' (checked), 'Force as highest priority over any user-defined classification', 'Allow user to override this content classification', and 'Display the tag in the header of the document'. At the bottom, there's a 'Content Condition' section with a subtitle 'add specific words or pattern' and a help icon. Below this section are three buttons: '+ New', 'Edit', and 'Delete'. A copyright notice 'Copyright © 2005-2018 GigaMedia Access Corporation. All rights reserved.' is visible at the very bottom.

4. In the **Content Classification Identification** section identify and customize your Content Classification policy with the following attributes:
 - a. **Name** – Enter a name for this content classification.
 - b. **Tag**- The name for the Classification that is stored in the document Properties, and if enabled in the **Show in Header** option below, the name is also displayed in the Header of the document.
 - c. **Template**- (Optional) Specify a saved Policy Template to apply automatically when specific conditions are met.
 - d. **Activate**- Activate this content classification for use.
 - e. **Forced Priority**- Force this content classification to take higher priority over any user-defined classification.
 - f. **Allow Override**- Allow User to override this Content Classification.
 - g. **Show in Header**- Optionally display the tag in the header of the document.

4. In the **Content Condition – And specific words or pattern** section optionally define conditions and criteria to be applied based on specific words or patterns found in document. There are three default options supplied: **Credit Card**, **Social Security** and **Custom** where you can create your own Regex string. For a basic string lookup look at the following example:

Example:

You enter "**confidential**" in the **Value** text box.

This Content Classification will protect a document which contains confidential in it. Enter text with the Value in it in the **Test string** box and click **Test** to verify it works as desired. A combination of conditions can be defined and all must be matched for a Content Classification to be triggered. If **Pattern** and then **Custom** is chosen, any valid Regex string can be used. To add a new content condition, click **New**. You can also **Edit** or **Delete** existing conditions.

5. Once the necessary condition criteria are defined for the Content Classification, click **Save**. Once saved, your new Content Classification should be listed in the selected Content Policy folder.

Add a Policy – PDF Watermark

Overview

The Watermark feature is only available for protected PDF files. A watermark is text that will appear on content when the content is viewed or printed. Using GigaCloud Administration, you can easily design and manage enterprise-level watermarks for use on RM-protected content. (Certain restrictions apply.)

A watermark can contain text you define, the name of the logged in user who is viewing or printing the content, the email address derived from the RMS certificate on the viewing machine, or a combination (or multiples) of any of the three. When defining the items in a watermark, you can specify the position on the page, rotation of the text, font (including size and color), and whether text appears on top of the protected content or below it.

Important: Watermarks are supported only in documents created in PDF version 1.2 and later formats.

GTEP watermarks contain watermark items (individual watermarks), allowing you to define several watermarks—each containing different information, placed in different positions on content, and having different visual characteristics—in one GTEP watermark. All items will appear on content wherever the watermark is assigned.

Create a new PDF Watermark

1. Click **Policy > Manage** in the menu.
2. In the Content Policies master pane, select the Active, Archive or other folder and click **New**.
3. In the drop-down menu, select **PDF Watermark**. A new tab is opened.

Home > Policy > Manage

syncme@trustedoffice.net

MANAGE | manage rights policies in GigaCloud

Policies Create a New PDF Watermark

PDF Watermark

Save Reset

Identification -name your pdf watermark policy

Name: Enter a name for this PDF watermark...

Watermark Elements -configure your watermark with elements ?

+ New Edit Copy Delete

4. Enter a name for your watermark. Watermark names are NOT case sensitive, but they must be unique.
5. Create Watermark items:
A PDF Watermark can be made up of multiple items.
In the details pane, click the **New** button to define a watermark item. The **Create PDF Watermark Item** window is displayed.

Create PDF Watermark

Type: Text

Value: Enter Value

Location: Center

Rotation: -90 Degrees

Layer: Overlay

Font: Times Roman

FontSize: 8

Color: [Color Swatches]

6. Select the values for the Watermark item:

Using the drop-down list, select the type of watermark item you want to define:

See table below for a list of supported parameters.

Type:	(Default: Text)
Logged In User ID	Watermark item will be the name of the logged in user viewing the protected content.
Text	(This selection enables the Text field.) Watermark item will be the text you enter in the Value field. Enter your watermark text.
User Email	Watermark item will be the email address of user viewing the protected content. (The email address is derived from the RM certificate used to view the protected content.)

For the selected type, define the position and properties for its display on the protected content:

Position:	(Defaults: Center / -90 degrees / Overlay)
Location	Using the drop-down list, select the position on the page for the watermark item.
Rotation	Using the drop-down list, select the rotation for the watermark item.
Layer	Using the drop-down list, select the layering position for the watermark item. Overlay: Watermark will appear on top of the protected content. Underlay: Watermark will appear under the protected content

Text Properties:	(Defaults: Times-Roman / 8 / Transparent)
Font	Using the drop-down list, select the font for the watermark item.
Font Size	Using the drop-down list, select the font size for the watermark item.
Color	Using the drop-down list, select the font color for the watermark item.

- Once the watermark item values are defined, select **OK** to add the item to the items table in the watermark details pane.
- Optionally add additional watermark items to the Watermark.
- Once your watermark is completely defined, select **Save**. Once saved, your new PDF Watermark should be listed in the policy tree.

Add a Policy – Folder


Overview

Content Policy folders provide a way to organize Content Policies. A user or group is granted access permissions to the folder, such as Create, Read, and Assign.

Note: A user with the appropriate access can drag existing policies into a folder.

Create a new Folder

1. Click **Policy** > **Manage** in the menu.
2. In the policy tree, select the Active, Archive or other folder and click **New**.
3. From the drop-down menu, Select **Folder** and press **OK** to continue. A new pop up window is presented.
4. Add a **Name** to the folder. Click **Add**.

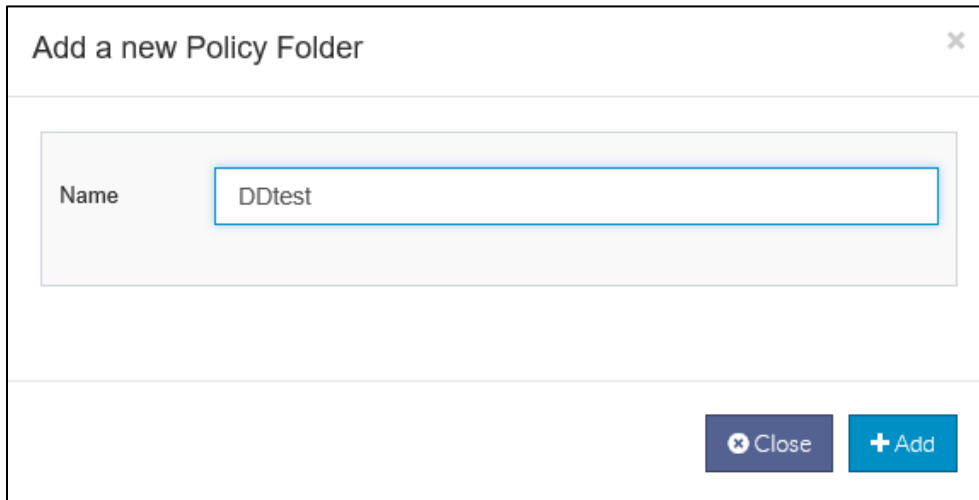

5. Policy folder names are NOT case sensitive, but they must be unique. Once saved, your new Folder should be listed in the policy tree.

Add a Policy – File Folders

Overview

GigaTrust Dynamic File Folders v8.0 can be integrated with GigaTrust Enterprise Plus (GTEP) v8.2 and above. You can fully configure and monitor GigaTrust Dynamic File Folders via GigaCloud. You can define rules for file share protection along with the Rights-Management templates to be used during the protection process. The built-in GigaTrust Policy Agent keeps GigaTrust Dynamic File Folders up to date with changes made via GigaCloud.

Benefits of using GigaTrust File Folder application:

- 🔑 Central repository of sensitive files.
- 🔑 Administrative control of activity associated with the rights protected file share.
- 🔑 Auditing and Alert events provide administrative proactive control.
- 🔑 Provide Delegated Administrative access rights to configure and manage GTFF.

🔄 End-user experience is seamless to AD RMS activity of the file share.

Adding a New File Folders Configuration

File Folder configuration is defined for each server running the File Folder application.

1. Click **Policy > Manage** in the menu.
2. In the policy tree, select the Active, Archive or other folder and click **New**.
3. The **File Folder Configuration** page is displayed in a new tab. You will define your File Folder rules here.
4. Enter a **Name** for your File Folder Configuration. File Folder Configuration names are NOT case sensitive, but they must be unique.
5. Create File Folder Configuration items:

File Folder Configuration can be made up of multiple items.

In the details pane, click **New** to define a File Folder Protection item. The **Create File Folders Protection** window is displayed.

Create File Folders Protection

Owner: Enter owner

Tag: Confidential

Move Unsupported Files: ☒ Use Default, ☐ Yes, ☐ No

*Path: C:\storage\

*Template: Confidential

Protect Pattern: Enter protect pattern

Ignore Pattern: Enter ignore pattern

☒ Subfolders

☐ FCI

Destination: C:\storage\Protected

Destination Pattern: Enter destination pattern

☒ Enabled

Close Add

5. Enter the values for the File Folder Protection item:
 - a. **Owner (Optional)** - Add a name for the owner of this file folder.
 - b. **Tag (Optional)** - Add an optional tag for this file folder.
 - c. **Move Unsupported Files** - Choose whether unsupported files are automatically moved to another folder. The three options are **Use Default**, **Yes** or **No**.
 - d. **Path (Required)** - Enter a valid path for the File Folder Protection item. This path must be valid on the server running the File Folder application.
 - e. **Template (Required)** - Select a template; assign a rights management enterprise-level policy template to the rule.
 - f. **Protect Pattern (Optional)** - Enter Protect Pattern fields, using Regular Expressions to define the files or file types you want to protect for this folder. Enter a semicolon between patterns. Do not include extra spaces.
 - g. **Ignore Pattern (Optional)** - Enter Ignore Pattern fields, using Regular Expressions to define the files or file types you want to ignore for this folder. Enter a semicolon between patterns. Do not include extra spaces.
 - h. **Subfolders (Optional)** - Select to process sub folders when protecting files. The Sub folders option is not allowed when a Destination Folder is defined.
 - i. **FCI (Optional)** - Select to use FCI rules when determining the RMS template used in protection. Please see File Folder documentation to configure the File Folder application to use FCI rules.
 - j. **Destination (Optional)** - Enter a valid path for the File Folder Protection item. This path must be valid on the server running the File Folder application.
 - k. **Destination Pattern (Optional)** - Enter a valid Destination Pattern for the File Folder Protection item. The Destination Pattern is a valid Regular Expression that converts the current path of the file being protected to obtain the destination path. Please see File Folder documentation to configure the Destination Pattern.
 - l. **Enabled** - enables or disables this File Folder Protection item.
6. Once the File Folder Configuration values are defined, select **Add** to add the item to the items table in the File Folder page.
7. You can optionally add additional File Folder Protection items to the File Folder Configuration.
8. Once your File Folder Configuration is completely defined, select **Save**.
9. Once saved, your new File Folder Configuration should be listed in the policy tree.

Add a Policy – Trusted Application List

Overview

A Trusted Applications file contains a list of the applications and their associated file extensions that are supported by the GigaTrust Desktop Client. For RM-protected Office files (Word, Excel, and PowerPoint), only the GigaTrust Black List (blocks screen capturing and desktop sharing) will be enforced. If an application is trusted, any supported file type that is RM-protected can be viewed with the native application.

A default Trusted Applications file is delivered with the Client. It supports the following:

- Adobe Reader
- Adobe Acrobat
- Microsoft Excel *
- Microsoft Notepad
- Microsoft Paint
- Microsoft PowerPoint *
- Microsoft Word *

* Black List support only. Microsoft handles the viewing of such content.

A custom Trusted Applications file can be requested through your GigaTrust representative if, for example, your enterprise wants to support PDF only.


Through GTEP, you can upload a custom Trusted Applications file and it will be delivered to the user desktops.

Note: Depending on the version of the GigaTrust Client, a restart of the Client may be necessary after a new Trusted Applications file is received on the desktop. This allows the Client to read the new file. Newer versions of the Client do not require a restart.

Supported applications and file formats can be viewed via GigaTrust Desktop Client Preferences.

Adding a New Trusted Applications List

1. Click **Policy > Manage** in the menu.
2. In the policy tree, select the Active, Archive or other folder and click **New**.
3. From the drop-down menu, select **Trusted Applications File**. A new tab is opened.
4. In the Create a new Trusted Application File window, **Choose File** and navigate to the new Trusted Applications File. Click Upload and GTEP will import the new file. It will now be displayed in the policy tree.

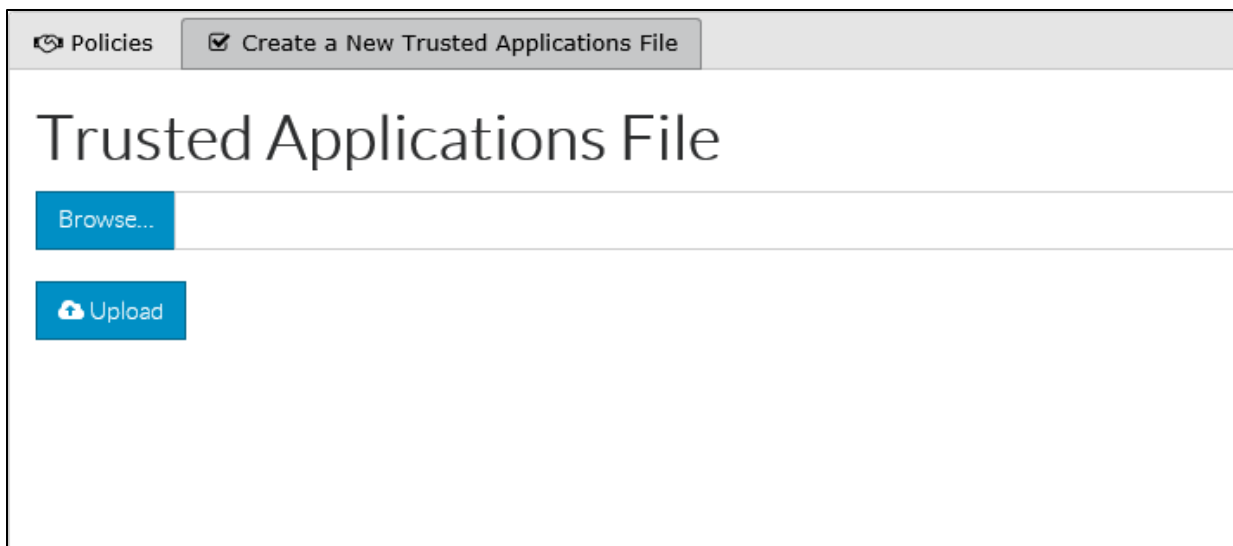

Add a Policy – Black List

Overview

The Black List is used to prevent screen captures of protected content as well as prevent the content from being revealed while a desktop sharing application is running. If a user has protected content open, the Black List will prevent a defined application from running. If a defined application is running, the Black List will prevent the protected content from being opened. In both cases, a slider window explains the block.

The Black List supports both GigaTrust-protected and RM-protected files.

The default Black List file defines 200+ applications. A custom Black List file can be requested through your GigaTrust representative. Suggested additions to the default Black List are welcome.

Through GTEP, you can upload a custom Black List file and it can be assigned and delivered to the user desktops.


Note: Depending on the version of the GigaTrust Client, a restart of the Client may be necessary after a new Black List file is received on the desktop. This allows the Client to read the new file. Newer versions of the Client do not require a restart.

The version of the Black List file is displayed in GigaTrust Desktop Client Preferences. Actual Black List-applications are not displayed in the GigaTrust Client.

Adding a New Black List

1. Click **Policy** > **Manage** in the menu.
2. In the policy tree, select the Active, Archive or other folder and click **New**.
3. From the drop-down menu, select **Black List**. A new tab is opened.

3. In the next window select **Browse** and navigate to the new Black List file. Click on Upload and GTEP will import the new file.

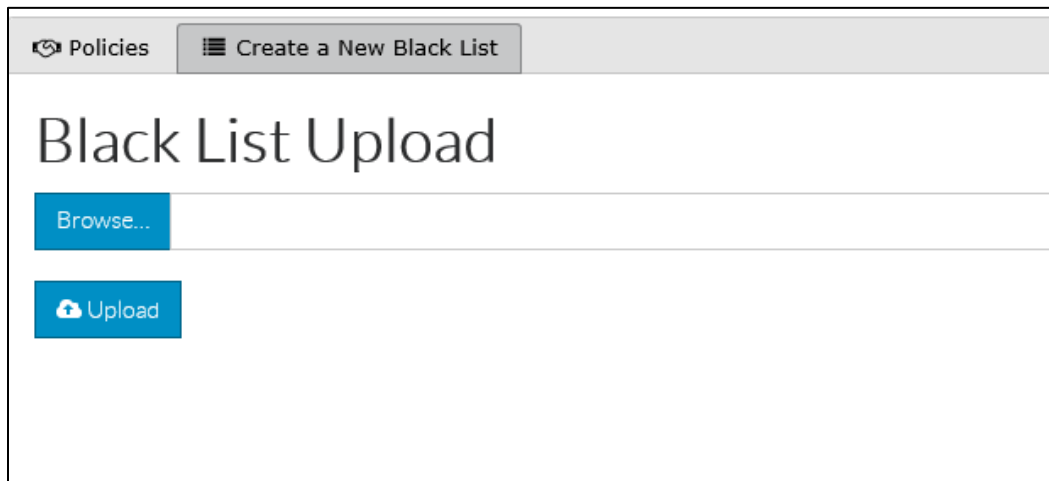

Once saved, your new Black List should be listed in the policy tree.

Add a Policy – Black List Exception

Overview

This Content Policy gives the GTEP administrator flexibility to create exceptions to an existing GTEP Black List. An Exceptions list will only work with a Black List deployed via GTEP. It will not work with the Black List delivered with the Desktop Client.

Black List Exception configuration provides a means for GTEP administrators to customize which applications are to be allowed by the GigaTrust Desktop Clients.

Adding a New Black List Exception

1. Click **Policy** > **Manage** in the menu.
2. In the policy tree, select the Active, Archive or other folder and click **New**.
3. From the drop-down menu, select **Black List Exceptions**. A new tab is opened.

The screenshot shows the 'Black List Exceptions' configuration interface. At the top, there are two tabs: 'Policies' and 'Create New Black List Exceptions'. Below the tabs, the main heading 'Black List Exceptions' is displayed. Under the heading, there are two buttons: 'Save' and 'Configure'. Below the buttons, there are two sections. The first section is 'Identification' with a sub-label '-name this black list exceptions policy'. It contains a text input field with the placeholder 'Enter a name for this black list exceptions policy'. The second section is 'Exceptions' with a checked checkbox and a sub-label '-add exceptions to your black list(s)'. There is also a help icon next to the sub-label.

4. Enter a name for your Black List Exceptions. Black List Exceptions names are case insensitive, but they must be unique.
5. Click on **Configure** to add programs to your exception list. Black List Exceptions can be made up of multiple items.
6. Once the Black List Exceptions values are defined, select **OK** to add the item to the items table in the Black List Exceptions details pane.
7. Click on **Save** to create your new Black List Exceptions Policy.

Once saved, your new Black List Exceptions should be listed in the policy tree.

Expiration

For GigaTrust Desktop Client v10.2 and Higher: Expiration occurs at 0:00 of the Expiration Date.

Example: An email is published on September 1 at 10 a.m. and has an expiration of September 8. The access to the email will expire September 9 at 0:00 UTC.

If expiration is set for an interval of months or years, the expiration matches the current day of the month for months, and the current month/day for years and then is rounded up to the 'next' day 0:00 UTC.

Example: An email is published on Tuesday, August 24, 2004 and access is set to expire after one month. Expiration will occur on Wednesday, September 25, 2004 at 0:00 UTC.

There is one caveat though. If an interval expiration setting (such as Expires after 1 day) is used late in the day locally and it is already the next day UTC. In this case, expiration occurs one day later than expected.

Example: An email is published on September 1 at 11 p.m. and has an expiration of "After one day". The access to the email will expire September 4 at 0:00 UTC. Explanation: When the email is published on September 1, its date is September 2 UTC. The UTC date is used as the start of the interval. The expiration interval of one day, takes the date to September 3 UTC. Then the rounding up sets expiration to September 4 (at 0:00) UTC.

Assign Policies

Overview – Directory Communities, Groups and Users

Native RMS is limited in the flexibility with which policy can be defined and assigned to users. GigaCloud Administration provides features for creating a delegated administrative structure in the form of a hierarchical directory that can be bound to AD users, groups or OUs. The purpose being to assign policies to users or applications, as well as for assigning administrative privileges to Users charged with managing GTEP for a given user community.

Policies assigned to entities in the hierarchy of nodes created with the feature will be applied in the order of hierarchy you establish, so that entities in lower level nodes receive policy assigned to their node and inherit policies assigned to their parent nodes. This allows you to assign unique policies to users or groups while ensuring they receive the policies defined for their parent organization(s). In addition, administrative privileges can be assigned with granularity to nodes/branches of your administrative model to delegate administrative responsibility over different aspects of GTEP Administrator in whatever manner makes the most sense for your enterprise.

For instance, you might assign the IT administrative groups in your organization rights to the GTEP Administrator features needed to manage the application for their end users. Personnel charged with managing security policy and enforcement in the organization might be granted a different set of permissions, for example, permission to the Audit Trail feature and to policy creation. Users will see only the features of the GTEP Administrator interface to which they have permission, so not all interface features

will be visible to a given user. Only an administrator with global privileges will see all GTEP Administrator features.

There are four basic entity types in the Directory. You can assign policies to any of them:

Bound Community – This is an Active Directory OU container which are used for each Tenant. These can only be added when creating a new Tenant.

Unbound Community - This is a container for assigning policies that will be applied to contained entities, such as bound communities, groups, or users. Think of it as an organizing parent container to which policies can be attached and applied to children nodes. The first directory entity, the Global node, is an unbound community that serves as the top-level node in your directory hierarchy.

Group - This directory entity is bound to an AD user group.

User - This directory entity represents an AD user from the connected directory.



The overall Directory organization you define is extremely important, since policy access is granted top-down. Whatever policies you assign to an entity are also assigned to the children of that entity.

Also note:

- Only one entity will exist at the top level of the hierarchy.
- Policies are only displayed per the parent entity to which they are assigned.
- User nodes cannot have children nodes.
- An entity can be added to the hierarchy more than once.
- A content policy can be assigned to more than one entity.

Home > Policy > Assign

ASSIGN

assign policy to users & groups in GigaCloud

+ New - Delete More

Organization

- Global
 - IT Ops test
 - syncme
 - gtffuser@syncme.local
 - Syncmesup2@syncme.local**
 - Syncmesup1@syncme.local
 - Syncmesup3@syncme.local
 - tdemay@syncme.local
 - Syncmeadmin1@syncme.local
 - Syncmeadmin2@syncme.local
 - Syncmeadmin3@syncme.local
 - DirectoryOnIpad
 - testGroupOnFirefox@trustedoffice.net
 - Devcli24@trustedoffice.com
 - gigacloud11@gmail.com
 - Devcli141@trustedoffice.com
 - Group Policy Creator Owners@syncme.local
 - TestCommunityAfterFix
 - testGroupOnFirefox@trustedoffice.net
 - Community02282018
 - TestgroupReggNewUI@trustedoffice.net
 - gttester03@yahoo.com

+ Add - Delete Security Refresh

Content Policy

Name	Type
dh2012VO_1	Template
Imviewonly	Template
Confidential	Template
dhENTtemplateVP-01	Template
WaterMark	PDF Watermark
VST1	Template
EntWatermark1	PDF Watermark
Future AutoCAD	Trusted Applications ...
DDENT	Template
dhFFCRule01	File Folder Configura...
dhABC_01	Template
dhCCC_01	Template

Copyright © 2005-2018 GigaMedia Access Corporation. All rights reserved.

When you first view the Directory it will contain the Global root, and if you have already added a Tenant, it will be displayed as an OU off of the root.

Adding to the Directory –Community

Use the **Directory** feature to create a Community (unbound) node in the GTEP directory as follows:

Click **Organization > Directory** in the Menu pane.

1. Select a parent node for the new entry from the Directory list. An empty organization will only have the top-level Global node available. The new entry will be added under the selected parent.

Note: You can click any entity and select **More** in the toolbar for options such as Security, Refresh, Audit and Properties.

2. From the Directory pane menu bar, click **New**. The **Create a Directory Entry** wizard appears. Click **Next**.
3. Select **Community** from the **Select a Directory Entry Type** list. Click **Next**.
4. In **Community Name** add a name for it. **Examples:** Human Resources, Sales.
5. Click **Finish**.
6. You can go back to the new node you just created and add other nodes to it.

Adding to the Directory – Group

Use the **Directory** feature to create a **Group** node in the GTEP directory as follows:

Click **Organization > Directory** in the Menu pane.

1. Select a parent node for the new entry from the Directory list. The new entry will be added under the selected parent.
2. From the Directory pane menu bar, click **New**. The Create a Directory Entry wizard appears. Click **Next**.
3. Select **Group** from the **Select a Directory Entry Type** list. Click **Next**.
4. Select a connector from the **Connector** drop-down menu.
Note: Only connectors to which you have Read permissions will be listed in the drop-down menu.
5. In the Search **Pattern** field, enter the name of a group contained in the OU associated with the selected connector. Use one or more wildcard characters (*) with zero or more matching characters to search for a group.
6. Click **Search**. Matching groups are listed in the **Results** field.
7. Select a **Group** from the **Results** field and click **Next**.
8. Enter a description for the directory entry in the **Notes** textbox.
9. Click **Finish**.
10. Continue adding Communities, Groups and Users to set up your organization.

Adding to the Directory - User

Use the **Directory** feature to create a **User** node in the GTEP directory as follows:

Click **Organization > Directory** in the Menu pane.

1. Select a parent node for the new entry from the Directory list. The new entry will be added under the selected parent.
Note: User nodes cannot be parents to other nodes.
2. From the Directory pane menu bar, click **New**. The **Create a Directory Entry** wizard appears. Click **Next**.
3. Select **User** from the **Select a Directory Entry Type** list. Click **Next**.
4. Select a connector from the **Connector** drop-down menu.
Note: Only connectors to which you have Read permissions will be listed in the drop-down menu.

5. In the Search **Pattern** field, enter the name of a user contained in the OU associated with the selected connector. Use one or more wildcard characters (*) with zero or more match characters to search for a user.
6. Click **Search**. Matching users are listed in the **Results** field.
7. Select a user from the **Results** grid and click **Next**.
8. Enter a description for the directory entry in the **Notes** textbox.
9. Click **Finish**.

Assign Tools

The following options are available in the **Organization Pane**:

New – This option lets you create a directory entry (Community, Group or User).

Delete - This option lets you delete a directory entry (Community, Group or User).

Security – This provides the list of users and its access rights and permissions. It also allows adding new user or group and its permissions using the **Add** Option. The **Edit** option is used to edit the access permission. The **Delete** option is used to delete the user or group.

Refresh – This option refreshes the organization pane.

Audit – This option provides the details of all the actions performed by the users along with timestamp of when it was performed.

Properties – For the selected directory entity, the properties such as Display Name, Internal Name, Creator, Connector, DN, and Notes are displayed.

The following options are available for **Content Policy Pane**:

Add - The Select Content Policy window opens listing available content policies. Select a content policy and click Add. The policy is added to the bottom of the content policy list.

Delete – Select the policy that must be deleted and click Delete. Confirm deletion.

Security – This provides the list of users and its access rights and permissions. It also allows adding new user or group and its permissions using the **Add** Option. The **Edit** option is used to edit the access permission. The **Delete** option is used to delete the user or group.

Refresh – This option refreshes the organization pane.



You can use the **Priority** buttons to the left of the policies to set priority order for classification policies. Priority has no impact on other types of policies.

Tenant Users - Introduction

GigaCloud Administration incorporates an External component (GTEPEXT) that allows for the management of Active Directory Bound OUs (Tenants) to provision Users outside of an organization. GTEP provides a complete set of Administrative functions for provisioning (facilitating the acquisition of Rights Management certificates), managing, and organizing Managed Users and the community they reside in. Once a Managed user is provisioned, that User and internal Users can exchange Microsoft® Rights-Managed protected content.

GigaCloud Administration Managed Communities allows an organization to:

- 🔑 Manage Users externally from their organization with automated Confirmation and Software provisioning processes.
- 🔑 Manually add or import new Managed Users.
- 🔑 Add and manage Groups for Managed Users.
- 🔑 Promote/Demote Users to a Delegated Administrator.
- 🔑 Push mandatory or optional Software upgrades to Users.
- 🔑 Provision GigaTrust Desktop Client Software directly from the AD RMS server/cluster down to the User.
- 🔑 Provide a provisioning URL to push down GigaTrust Android and GigaTrust iOS Client applications directly to those clients.
- 🔑 Activate/Deactivate/Reactivate Users instantaneously.
- 🔑 Use automated User Password Change/Reset component with customizable Security Question settings.
- 🔑 Customize email templates for Activation, Confirmation and Password Recovery.
- 🔑 Run specific User activity and provisioning reporting.

Tenant Users - Overview

GigaCloud Administration provides a complete set of Administrative functions for provisioning (facilitating the acquisition of Rights Management certificates), managing, and organizing Managed Users and the community they reside in. Once a Managed User is provisioned, that User and internal Users can exchange Microsoft® Rights-Managed protected content.

Before Users can be added, the Tenant, **Software > Types**, and **Software > Versions** must be defined.

The GTEP Managed Users interface includes features for exporting Users from the OU or domain you specified for your Managed Users (that is, specified in the connector associated with the Managed User bound community or Tenant). It also has a feature for importing the file created by the export feature. This allows you to Export a group of Managed Users followed by Importing into the required OU versus adding each User individually to GTEP.

User Deactivation and Reactivation

You can also create an import file by hand to import invited (non-on demand) Managed Users.

Managed users can be deactivated and reactivated. When a Managed User is deactivated, other users can still consume the deactivated User's protected content. Additionally, the deactivated User:

- Can still protect content.
- Cannot open protected content.
- Cannot reacquire RM Certificates (RACs)

When a deactivated User is reactivated, the User:

- Can protect content.
- Can reacquire RM Certificates (RACs)
- Can open protected content.

Note: Once a User is listed in the Managed Users table, you can use the context menu to carry out a variety of actions for that User account such as, Edit, see Details, Activate, Unlock, Reset Password, and Audit.



For more detailed instructions on Tenant User management and other features in the **Organization** node, refer to the [GigaCloud Tenant Administrator Guide](#).

Security and Delegation

Security Overview

The Application Security feature (available under the Administration node) provides granular control over who can administer individual GigaCloud Administration features, and who can assign permissions to these features. It allows responsibility for individual features, such as creating policies, generating reports, and viewing audit trails, to be delegated to different users or security groups. For instance, you might want to assign full control over all of the GTEP Administration features to specific administrator users or a group of GTEP administrators, while assigning to the users or groups in your organization who are

responsible for security only the ability to create policies and review audit records. Additionally, you may want to delegate the ability to make assignments of permissions.

Go to **Administration** ➤ **Application Security** in the menu which opens the **Application Security** feature.

The screenshot displays the 'Application Security' configuration page in the GigaCloud interface. The top navigation bar shows the user 'GigaAdmin@trustedoffice.net'. The breadcrumb trail is 'Home > Administration > Application Security'. The main heading is 'APPLICATION SECURITY' with a subtitle 'configure application security for GigaCloud'. Below this is a section titled 'Application Security' containing a list of email addresses: administrator@internal.local, Administrator@syncme.local, amoer@gigatrust.com, detcherda@trustedoffice.com (highlighted), deeleete@test.com, Devcli141@trustedoffice.com, Devcli24@trustedoffice.com, and Devcli34@trustedoffice.com. Above the list are buttons for Save, Add, Delete, Reset, and Refresh. Below the list are two panels: 'Permissions' and 'Assignments'. Both panels have a 'Select All' checkbox and a list of permissions with checkboxes: Access, System, Allow/Block Access, Document Revocation, Application Security, Application Settings, and Audit Trail. In the 'Permissions' panel, 'Access', 'System', 'Document Revocation', 'Application Security', and 'Audit Trail' are checked. In the 'Assignments' panel, 'Access', 'System', 'Document Revocation', 'Application Security', and 'Audit Trail' are also checked. The footer of the interface states 'Copyright © 2005-2018 Gigamon Access Corporation. All rights reserved.'

The application permissions are:

- **Select All** - Allows a User or Group Full access to GigaCloud Administration application.
- **Access** - Permits access to the GigaCloud Administration application.
- **System** - Permits access to System, including System Events, System Alerts, and Access Log.
- **Allow/Block Access** - Permits access to Allow/Block Access.
- **Document Revocation** - Permits access to Document Revocation.
- **Application Security** - Permits access to Application Security.
- **Application Settings** - Permits access to Application Settings.
- **Audit Trail** - Permits access to the Audit Trail.
- **Managed Communities** - Permits access to the Managed Communities
- **Reports** - Permits access to running Reports. Also permits access to Policy Assignments.

Available permissions have two properties, represented by two sets of checkboxes in the **Application Security** form:

The column called **Permissions** is used to assign permissions to a selected user or group to use GTEP Administrator features, and the second column called **Assignments** is used to specify features the selected user or group will be able to grant others permission to use.

Think of the Assignments properties as allowing a specified user to delegate to other users. This allows them the ability to assign permissions to a given feature, in effect making them sub-administrators of the GTEP installation.


Permission to use the Application Security feature itself is controlled in the Application Security screen and can be assigned to users or groups without granting permissions to other GTEP Administration module features.

Security – Directory and Connectors and Content Policies

The following table list the permissions for the **Directory** and **Content Policies**.

Security Permissions – Directory

Go to **Policy ➤ Assign**, click on a node and choose **Security** to edit/assign permissions from the tool bar.

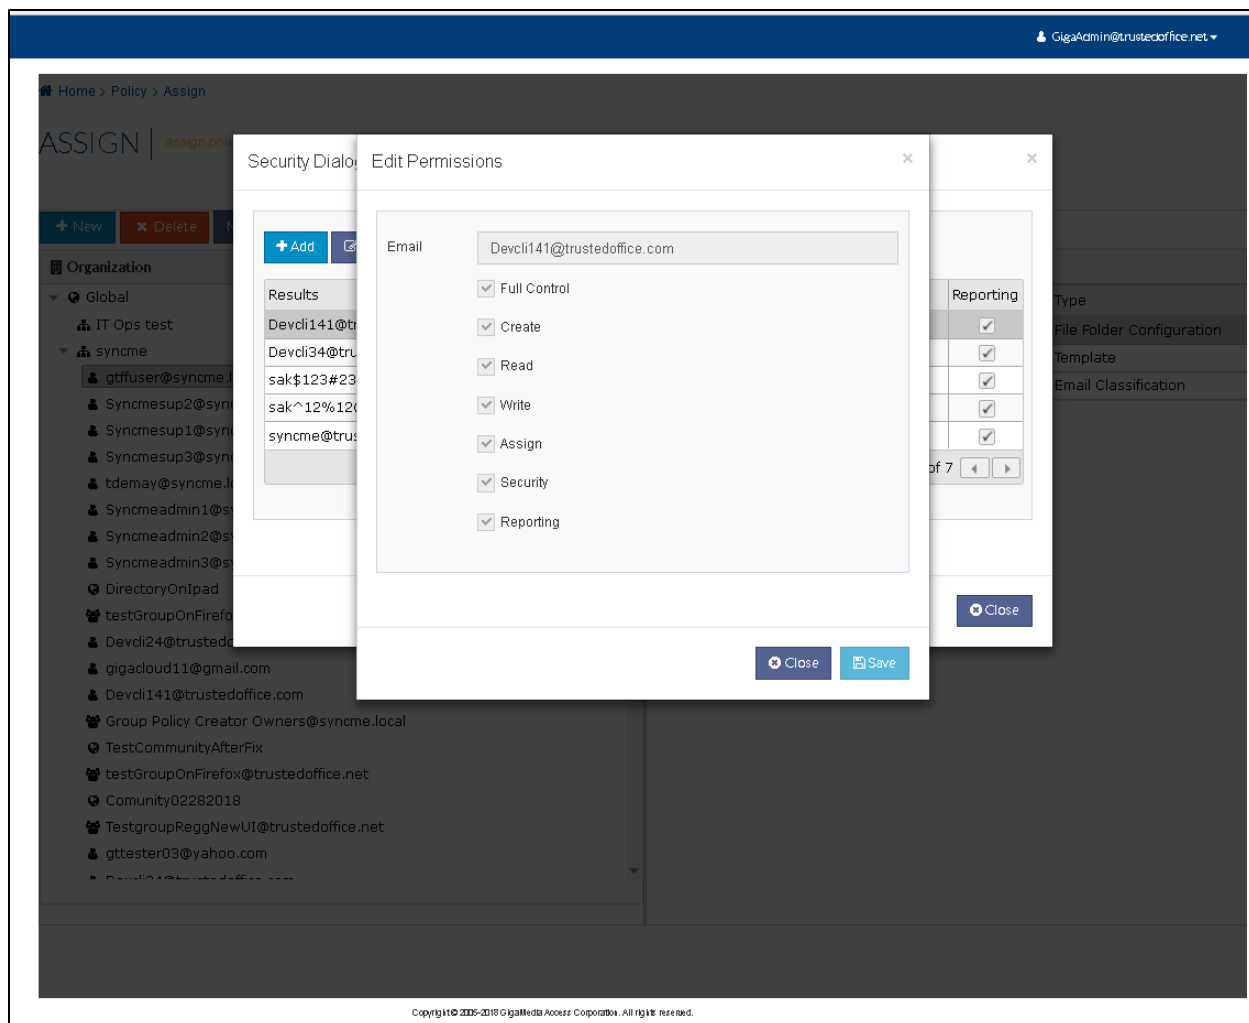

Full Control	User will have full access to the item (includes all the permissions below).
Read	User can view and use the item.
Create	User can create new Content Policies when given this permission at the Folder level. When assigned to a Content Policy, results are Read permissions.
Write	User can modify the item.
Assign	User can assign the item to a directory node. (Note: User must also have assign rights to the intended directory node.)
Security	User can set security permissions for the item.
Reporting	User is able to view report results with the associated Content Policy.

Security Permissions – Content Policies

Go to **Policy** ➤ **Manage**, click on a node and choose **Security** to edit/assign permissions from the tool bar.

Full Control	User will have full access to the item (includes all the permissions below).
Read	User can view and use the item.
Create	(Folder permission) User can create content policies in the folder.
Write	User can modify the item.
Assign	User can assign the item to a directory node. (Note: User must also have assign rights to the intended directory node.)
Security	User can set security permissions for the item.
Reporting	User can view reports for AD RMS/GTEP templates when this box is checked. Note: This only works on AD RMS and GTEP templates and is disabled for all other Content Policies (i.e. Email Classifications, Watermarks, Black Lists, etc.)

Reporting

GigaCloud Reports Overview

GigaTrust enterprise reports are listed under **Reports** in the menu. Using these reports, you can generate usage information such as the number of documents that have been protected by a user, or the number of end-use licenses that have been requested for a document and by whom. Data Overwatch is also reported here and you can drill-down into reports to get detailed document statistics.

The following table lists the various reports you can run in GTEP. More detailed instructions on reporting can be found in the [GigaCloud Reporting & Data Overwatch Guide](#).

GigaCloud Reports

Category	Name	Description
Administration	Application Security	Security Principals and their associated Application Rights within GTEP Administration Report displays Security Principals, their Application Rights, and the Application Rights that they can assign. Security Principal and Security Type are the criteria for this report.
	Content Policy Assignment	Current directory structure with assigned policies Report displays the assignment of templates, email classifications, and watermarks to directory items. Criteria for this report consists of Policy Name, Policy Type, Assignee ID, Assignee Type, and Directory Path.
	Content Policy Security	Defined policies Report lists all assigned policies and their type (Template, Watermark, or Email Classification), along with their assigned Security Principals and associated rights. Criteria for this report consists of Security Principal, Policy Name, and Policy Type.
	Directory Security	Current directory structure with assigned Security Principals and their associated rights Report displays the directory structure and the Security Principal(s) (if any) who have been assigned to directory items. The rights (read, write, security, and assign) to directory items assigned to the listed Security Principals are also displayed. Criteria for this report consists of Security Principal, Directory Name, Directory Type, and Directory Path.

	Software Assignment	Defined software types and their assignment to directory items Report displays software types and the directory items they have been assigned. Report criteria consists of Software Type, Assignee ID, Assignee Type, and Directory Path.
	System Activity	Data Overwatch Report This report displays ALL User Document activity by Overwatch Event type. Criteria for this report consists of Date Range.
Document	Document Activity	All protected documents, including emails Report lists all protected documents and emails. Listed items include document name, type, date protected, username of the person who protected the document, and the number of successful, failed, and blocked EUL requests. Links are provided to drill-down into separate reports that display document details and end-user access. Criteria for this report consists of Document Name, Owner Email, Activity Type and Protection Date Range.
	Templates Used in Protection	All templates (enterprise-level and user-created), including template descriptions Select a template link to view a Template Report. Template Report details include who used the template, for what file or email, and when it was used. On the Template Report, select a document link to view a Document Report containing document details and end-user access. Criteria for this report consists of Template Name, Activity Type and Activity Date Range.
	File Folders	All file activity in Dynamic File Folders Report details include File Name, Date Protected, Creation Date, Modified Date, Owner and File Path. Date Range is the only the criteria for this report.
	User Documents	Data Overwatch Report Run this report to display displays specific User activity by Document name and by Event type: Protect, File Unprotect, Unauthorized Open, Changes Protection, Open, Revoke, Print and Screenshot. Criteria for this report consists of Owner Email.
User	Managed User Status	Invited, activated, and deactivated Managed users Report displays the email address, directory path, status, date invited, date activated, and date

		deactivated of managed users. Criteria for this report consists of User ID, User Status, and Directory Path.
	User Activity	Authenticated users Select a user link to view a User Report that displays details on the documents protected and consumed. Criteria for this report consist of User ID, User Type, Activity Type, and Activity Date Range.
	User Events	Data Overwatch Report This report provides a data rich report with Timestamp, Overwatch Event, User Name and Document Name. Criteria for this report consists of User Id.

Appendix

Using Wildcards in Search Fields

You may optionally use the asterisk (*) wildcard character in most search fields to search for items, such as user or group names or email addresses. Search strings may contain zero or more wildcard characters and zero or more characters to match. Leaving a field blank or entering a single asterisk matches (returns) all items in the collection being searched.

Examples:

- *smith@domain.com matches all items that end with "smith@domain.com", such as asmith@domain.com and Andrew.Smith@domain.com.
- *smith* matches all items containing the substring smith, such as asmith, JohnSmithfield, etc.

Troubleshooting

Start by connecting to the GigaTrust Log Client. This will display real-time errors to assist in troubleshooting GTEP. For further troubleshooting assistance, use the [GigaCloud Troubleshooting Guide](#).



The GigaTrust Log Client will also display real-time Data Overwatch Events as they occur.

Glossary

Access List	Controls non-enterprise consumption of information protected by the enterprise AD RMS server. Control can be established for an entire company or for specific users at the company. Both Allow and Block lists can be created.
Trusted Applications File	List of applications and related file types that are supported by the GigaTrust Desktop Client.
Black List	Blocks screen capture and desktop sharing applications from compromising protected content.
CLC (Client Licenser Certificate)	Allows user to publish protected content.
EUL (End-user License)	Allows user to consume protected content once the user RAC is certified by the AD RMS server. When published, protected information is bundled with an issuance license. When a user accesses the protected information, the issuance license is presented to the appropriate AD RMS server. The credentials are checked and then, if allowed, an end-user license is issued.
GIC (Group Identity Certificate)	See RAC.
RAC (RM Account Certificate)	Uses the machine certification (acquired during RM activation) to bind user account to a specific RM network. Allows user to acquire an EUL from the AD RMS server so protected content can be consumed. (Also known as a GIC.)
Email classification policy	Provides a means to automatically protect outgoing enterprise email. Email classification policies are prioritized from top to bottom. Each enterprise email classification policy has an enterprise template (see below) associated with it. When an email classification policy goes in to effect, the permissions in its assigned template are applied to the outgoing email contents.
Template	Specifies access permissions for protected content such as View, Print, and Save As, as well as who is allowed access and for how long. (Also known as a Policy Template or RM Policy.) An enterprise template can be associated with an enterprise email classification policy.