



GigaCloud

Tenant Administrator Guide

July 2019

Table of Contents

<i>Introduction.....</i>	<i>1</i>
<i>Step 1 – Open GigaCloud Administration (GTEP).....</i>	<i>2</i>
<i>Step 2 – Manage Users</i>	<i>5</i>
<i>Step 3 – Create Policies.....</i>	<i>19</i>
<i>Step 4 – Assigning Policies.....</i>	<i>43</i>
<i>Step 5 – Security and Delegation</i>	<i>45</i>
<i>Step 6 – Reporting</i>	<i>49</i>
<i>Appendix</i>	<i>52</i>
<i>Glossary</i>	<i>53</i>

Introduction

Welcome to GigaCloud Administration! GigaTrust (GTEP) gives you the tools to easily manage your new tenant community's Rights Management Policies and users. This guide will show you how to configure and maintain your community and implement policies to protect information in your organization.

Tenant Administrators have access and permission to manage their own community and users. They do not have access to other GTEP communities. Tenant Administrators can also delegate other Users to administer the different areas of GTEP.

GigaCloud Administration allows a Tenant Administrator to:

-  Use a browser-based console that provides streamlined management of your community from virtually anywhere.
-  Use an interactive and fully customizable Policy tool to create Rights Management Policies that fit your organization's requirements.
-  Synchronize your local Enterprise Users (Passwords) and Groups with your tenancy using the GigaCloud AD Sync Agent.
-  Use the NEW GigaTrust RMS Connector to synchronize an on premise AD RMS instance with GigaCloud.

Step 1 – Open GigaCloud Administration (GTEP)

1. Open a browser and go to the URL for GTEP that was provided to you. (eg: **https://gigacloud.gigatrust.net/GTEP**)
2. On the Login page, enter your GigaCloud Administrator credentials.


Note: GTEP uses forms authentication using your UPN (User Principle Name) which will be your email address.

Menu

The menu is divided into the following areas:

- **Welcome** – A quick overview of GTEP's features and helpful tips.
- **Dashboard** – The GigaCloud Administration Home page. View a snapshot of the tenancy in GigaCloud.
- **Organization** – Add and edit your Tenant Users, create and manage User Groups, Promote and Demote Users from a Delegated Administrator, view tenant summary, revoke access, check Sync Agent logs customize email templates and much more.
- **Policy** – Create, assign and manage RMS policies.
- **System** – View detailed system events and customize specific event alerts.

- **Administration** – Delegate security privileges and view access logs.
- **Reports** – Create and run reports by Activity, Assignment, Overwatch and Security.

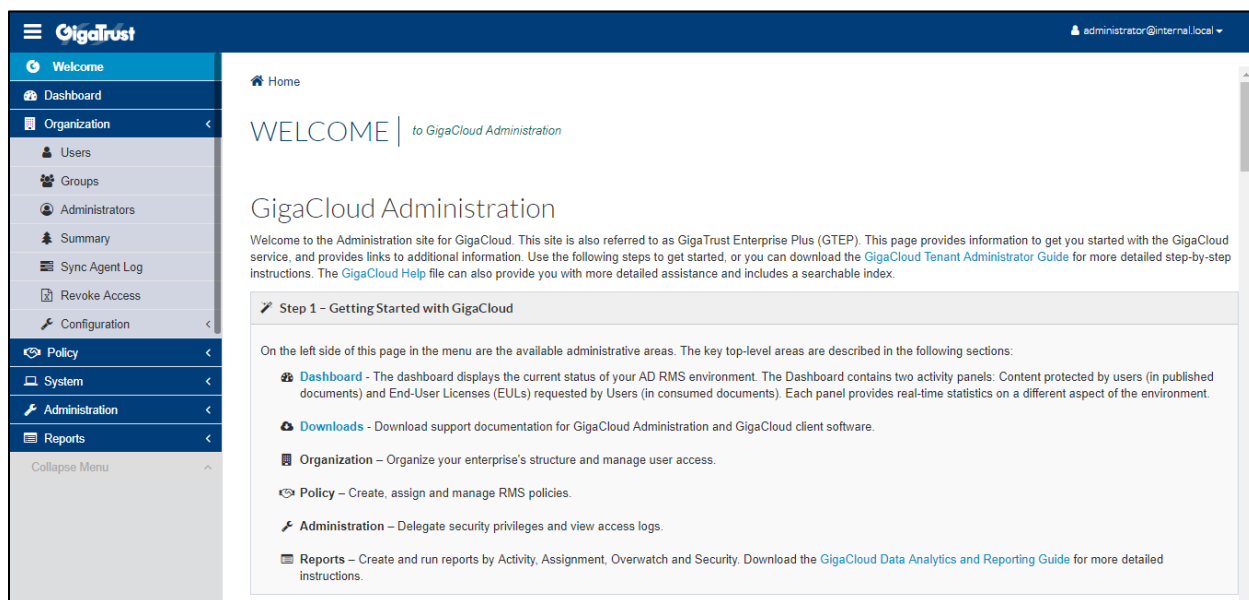


Welcome page

The Welcome to GigaCloud Administration page displays a quick overview of GTEP's features and helpful tips. This includes links to the corresponding GigaCloud Help file and/or references to additional documentation providing you with more detailed instructions.

- **Reports** – Create and run reports by Activity, Assignment and Security. Also, run real-time access reports by System Activity, Document Activity and User Events and Audit Users for potential Security breaches using Overwatch. See the [Gig Cloud Reporting and Data Overwatch Guide](#) for more detailed instructions.

Dashboard page

The GTEP Dashboard provides a graphical snapshot of the current status of your GigaCloud environment. Each panel provides real-time statistics on a different aspect of your AD RMS environment. The default date range for the Dashboard is the past 7 days, including the current date. The date range for the Dashboard can be modified, but can only contain up to 30 days' worth of information. Set the start and end dates and click the **Submit** button to refresh the Dashboard display.

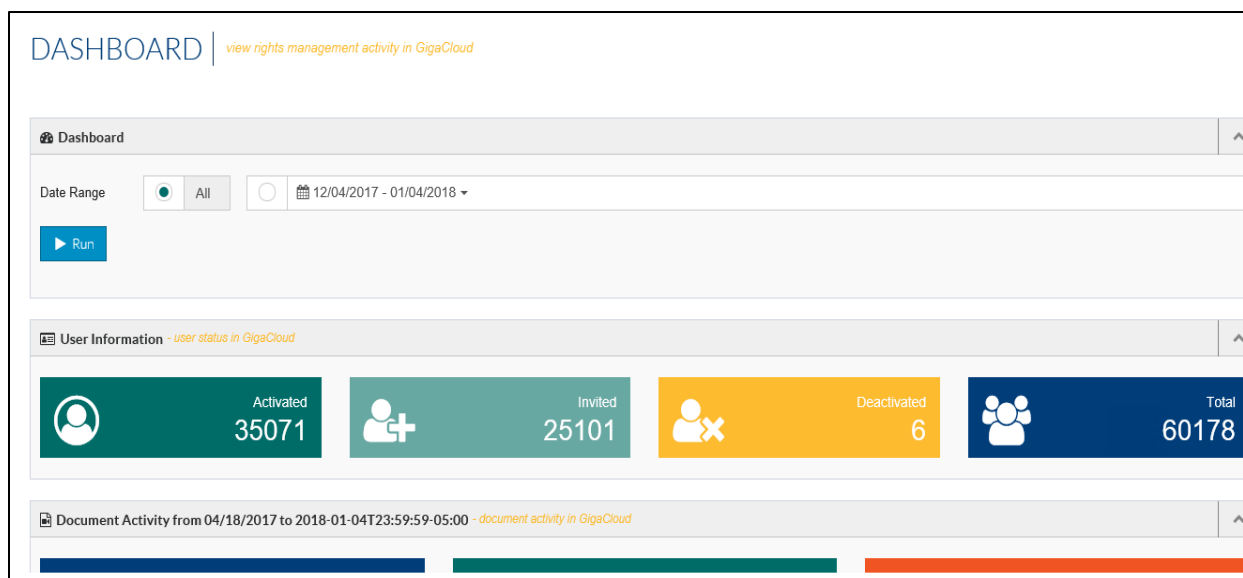

The Dashboard contains four activity panels:

1. **User Information-** Informative banners list summaries of Activated, Invited, Deactivated and Total Users in your tenancy.
2. **Document Activity-** Displays totals of content Protected, EUL Success and EUL Failure(s) in your GigaCloud tenant.
3. **Protected Content-** Interactive column chart displays the number of content Protected by your Users. Clicking on a column will display the User Activity report detailing AD RMS activity by Users on the respective date.
4. **EUL Requests-** Interactive chart displays columns containing the number of EUL requests broken down by success and failure. Clicking on a column will display the User Activity report detailing AD RMS activity by Users on the respective date.

Downloads page

Located here: **Administration** ➤ **Downloads**, the Downloads page contains any documentation that the GTEP Administrator has provided to you for downloading such as product guides and product release notes. Select the file you need to view and then click download.

Keep GigaCloud Administration open and go to Step 2 ➡

Step 2 – Manage Users

Overview

Manage all of your Users including adding new Users, activating/deactivating accounts, editing Users, exporting User list, Tenant email properties, email template customization and other settings. In the following steps let's customize some default settings for users.

In the menu navigate to: **Organization ➤ Configuration ➤ Email Properties**


Name	Value
Administrator Email Subject	Welcome to GigaTrust! Your Tenant Administration Account Has Been Activated.
Confirmation Email Subject	Welcome to GigaTrust! Your Account Has Been Activated.
Invitation Email Subject	Activate your new GigaTrust account
Password Expiration Notice Subject	Your GigaTrust password is about to expire.
Password Reset Email Subject	GigaTrust password reset

Copyright © 2004-2018 Gigamon, Inc. All rights reserved.

In this section, you can change any of the default email subjects for your tenant. The following table lists the subjects available to you.


Setting	Description	Default Value
Administrator Email Subject	Customize if needed.	Welcome to GigaTrust! Your Tenant Account Has Been Activated.
Confirmation Email Subject	Customize if needed.	Welcome to GigaTrust! Your Account Has Been Activated.
Invitation Email Subject	Customize if needed.	Activate your new GigaTrust account
Password Expiration Notice Subject	Customize if needed.	Your GigaTrust password is about to expire.
Password Reset Email Subject	Customize if needed.	GigaTrust password reset

Navigate to: **Organization** ➤ **Configuration** ➤ **Email Templates**

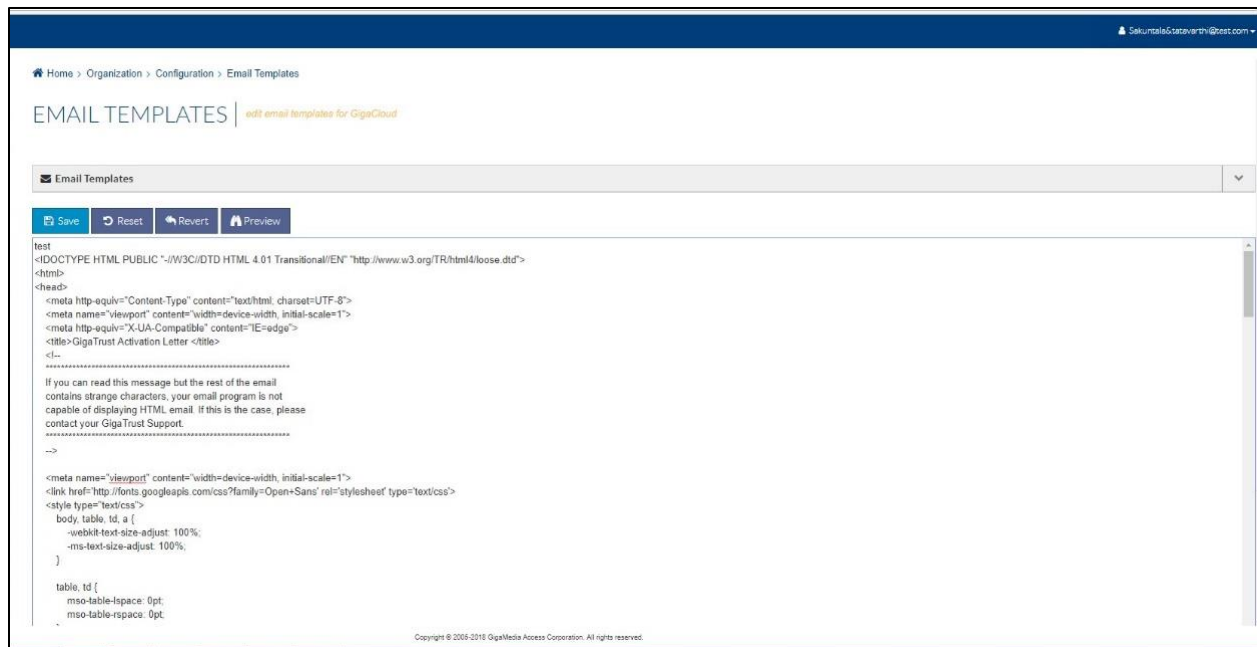

You can edit/customize your email templates for your User's Activation and for resetting their password. Click **Preview** to open the template in another browser tab so you can verify the layout. **Revert** will remove all changes made to the template and restore it to the default. **Reset** will remove immediate changes to the template. When you have completed editing the template click **Save**.

Navigate to: **Organization** ➤ **Configuration** ➤ **Default Settings**

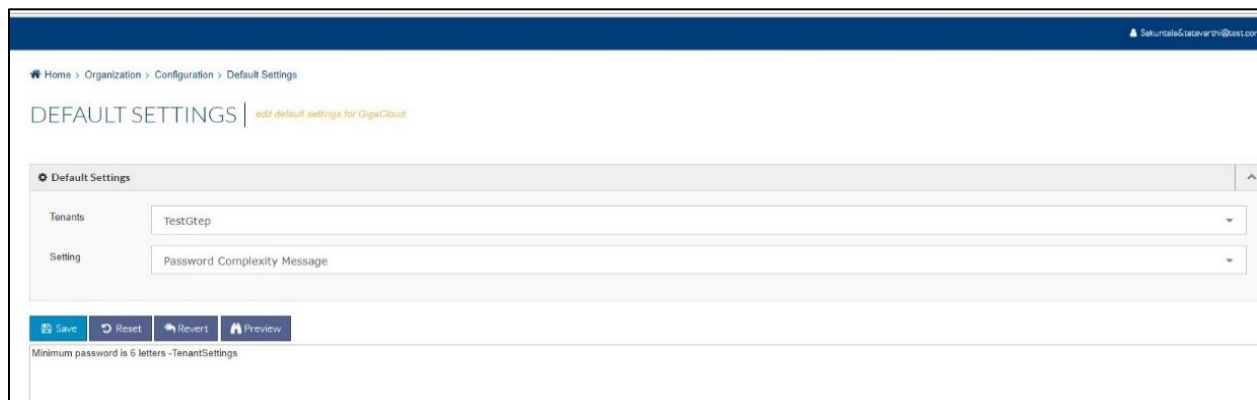

From the Setting drop down select from:

1. **Password Complexity Message** – This is the text displayed when a User changes or resets their account password. Customize to your Active Directory password policy.
Example: “Password Must Be at Least 8 Characters Long and Contain 1 Number and 1 Upper Case Letter.”
2. **Down Level Text** – Outlook in-the-clear message.

3. Email Server - Deprecated.

Users

In the following steps we will guide you through managing users. In the menu navigate to: **Organization**
 ➤ **Users**

The users section allows the user to add new users, edit their details, set password, unlock the users, deactivate users, delete users, resend the email, reset the password, promote a user to administrator, demote from administrator, view the group the user is assigned to, track user activity, and export or import users.


Email	Synced	Admin	Software Type	Status	Creator	Created
devcli0011@trustedoffice.com	☐	☐	GTRMPProtect	Active	Administrator@gtepcloud.I...	Mon, Sep 25, 2017 1:28:57 PM
devcli0021@trustedoffice.com	☐	☒	GTRMPProtect	Active	Administrator@gtepcloud.I...	Tue, Aug 08, 2017 4:24:35 PM
foobar@trustedoffice.com	☐	☐	GTRMPProtect	Active	Administrator@gtepcloud.I...	Tue, Aug 08, 2017 2:59:17 PM
regression@gmail.com	☐	☒	GTRMPProtect	Active	test603@gmail.com	Wed, Sep 27, 2017 1:49:29 PM

The tenant field should automatically default to the name of your tenant. In the Email text box in the top menu bar, type in any email address for which you want to view the details. Entering partial email address will also return the search with the results. In the results, you can sort by any column by clicking the column header.

The following options are available for Users:

- **New** – Click to create a new User account. Enter details and click Add.

- **Edit** – Select to edit a User account. The following window is displayed. Here, you can edit the tenant's first name, last name, address, aliases, telephone, software, and add notes. Under the **More** label, details such as tenant name, status, license status, date created, creator, date issued, date activated, date deactivated, security question, user URL can be viewed.

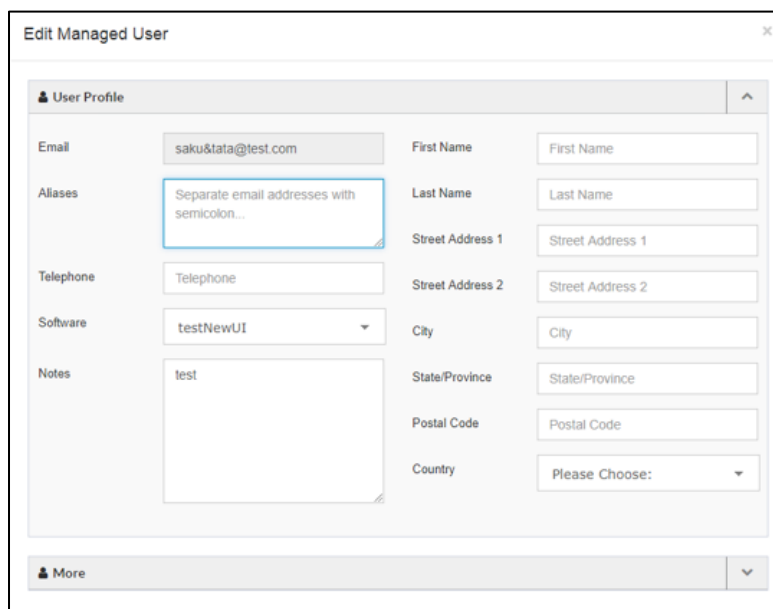

The screenshot shows a window titled "Edit Managed User" with a close button (X) in the top right corner. Inside the window, there is a tab labeled "User Profile" with an upward arrow. The form is divided into two columns. The left column contains fields for "Email" (saku&tata@test.com), "Aliases" (with a tooltip "Separate email addresses with semicolon..."), "Telephone", "Software" (testNewUI), and "Notes" (test). The right column contains fields for "First Name", "Last Name", "Street Address 1", "Street Address 2", "City", "State/Province", "Postal Code", and "Country" (Please Choose:). At the bottom of the window, there is a "More" button with a downward arrow.

- **Set Password:** Select the email and click Set Password to manually set the password.
- **Unlock:** If the User entered an incorrect password too many times and gets locked in the process, you can unlock the account by clicking Unlock.
- **Deactivate:** If you need to disable or deactivate a user account but do not want to delete the account from the database, highlight the user's row and select **Deactivate**, and then confirm deactivation.
- **Delete:** Select the email and click delete to delete the email from the user list.
- **Activate:** Select activate to activate the user's account without a password being created.
- **Resend Email:** Activation Letter email is sent to the user again.
- **Reset Password:** A Reset Password email will be sent to the User with instructions.
- **Promote to Administrator:** Select this option to add Administrative privileges for the user.
- **Demote from Administrator:** Select this option to remove Administrative privileges for the user.
- **Groups:** Select the email and click groups to view the group(s) the email is assigned to.
- **Audit:** Audit is used to view user account activity for the selected user.

- **User Activity Report:** Selecting this option will display the user activity such as number of files protected, revoked documents, blocked requests, and other activities for the selected account.
- **Import:** Import new Users into your Managed Community from a .CSV file using the import option.
- **Export:** If you need to export your community to a file, simply click Export and a .CSV file using your Tenant name will be created for you.

* **Note:** Only External, Software Type and Notes can be edited. Aliases can only be edited if the account is not synced.

Groups

GTEP gives Tenants the ability to add and manage groups allowing them greater control over Content Policies by providing a method to assign policy on a group level. The groups created in GTEP can be either a **Security** or a **Distribution** group. They can also contain, in addition to Users, other groups to further simplify Policy assignment.

In the menu navigate to: **Organization ➤ Groups**

Home > Organization > Groups

GROUPS | manage user groups of GigaCloud

Groups

Tenant: syncme

Group: Enter portion of the group name

Run

Group	Email	Synced
Administrators@syncme.local		☒
Denied RODC Password Replication Group@...		☒
divtest@trustedoffice.net		☐
Domain Admins@syncme.local		☒
Enterprise Admins@syncme.local		☒
Group Policy Creator Owners@syncme.local		☒
Organization Management@syncme.local		☒
Remote Desktop Users@syncme.local		☒
Schema Admins@syncme.local		☒
Super User group@syncme.local	SuperUserGroup@Syncme.local	☒

Go to page: 1 Show rows: 25 1-10 of 10

Group Members	Type
Domain Admins@syncme.local	Group
Enterprise Admins@syncme.local	Group
Group Policy Creator Owners@syncme.local	Group
Schema Admins@syncme.local	Group

Go to page: 1 Show rows: 25 1-4 of 4

The top is for Tenant selection and searches, on the lower left is a table that will list Tenant Groups and on the lower right is a table that will list Users/Groups in the selected Group. Entering partial group name will also return the search with the results.. Entering only the wildcard character will return all Groups for the selected Tenant. Groups are listed in a table below. If you single-click/select a group's row ALL Users in the selected group will be displayed in the Users table on the right-hand side.

If using the **GigaCloud AD Sync Agent**, any Groups that are synced cannot be edited or deleted from GTEP. They will need to be edited from the synced Active Directory Enterprise. All Groups added in GTEP can be edited and deleted.

The following options are available for groups:


- **New** – Click to create a new User group. Enter the group name and select the group to be Security (default) or a Distribution group. Provide email address and click Add.
- **Edit** - Select the group for which details have to be edited. If a group is synced, the group can only be edited using active directory. For the groups that are not synced, the group type and email can be edited.
- **Delete** – Select the group to be deleted. If a group is synced, the group can only be deleted using active directory. The groups that are not synced can be selected and deleted using the Delete button.

Viewing Groups

1. Choose the Tenant from the drop down.
2. Enter a Group or search string to search for in the Tenant or use only the Wildcard (*) to return all groups for the Tenant.
3. Groups will be displayed in the table below.
4. If you click on the Group row, it will load the Managed Users in that group in the Users table to the right.

Adding Users to Groups

1. To add Managed Users or other existing Groups to the selected Group, select the group from the table and choose **Add** on the User table tool bar. The **Add Group Members** window will be displayed.

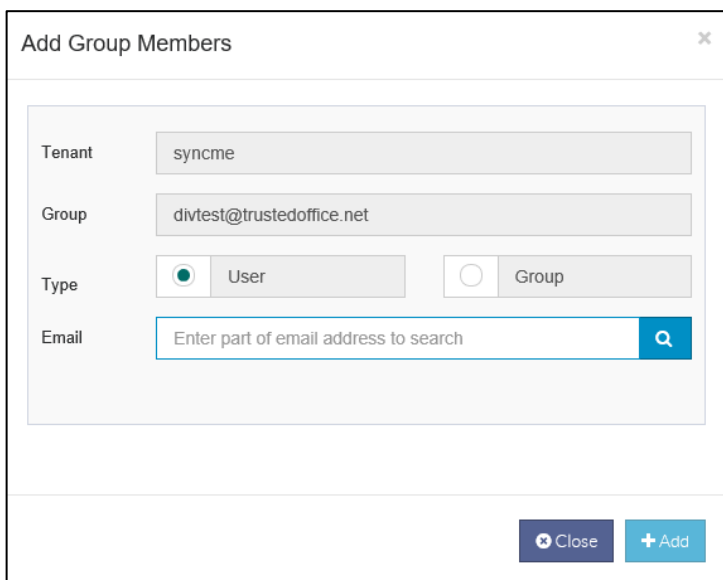

The screenshot shows a modal window titled "Add Group Members". It contains the following elements:

- Tenant:** A text field containing "syncme".
- Group:** A text field containing "divtest@trustedoffice.net".
- Type:** Two radio buttons. The "User" button is selected, and the "Group" button is unselected.
- Email:** A search input field with the placeholder text "Enter part of email address to search" and a blue search icon button.
- Buttons:** At the bottom right, there are two buttons: a grey "Close" button and a blue "+ Add" button.


2. Search for the User(s) / Group(s) and they will be listed in the **Results:** box below.
3. Select the Users to add to the Group. Use **CTRL + Click** to add multiple Users.
4. Click on **Add**.

5. The Users will now be displayed in the **Users** table.

Administrators

GTEP gives its users the ability to add, delete and manage the administrators.

In the Menu navigate to: **Organization ➤ Administrators**

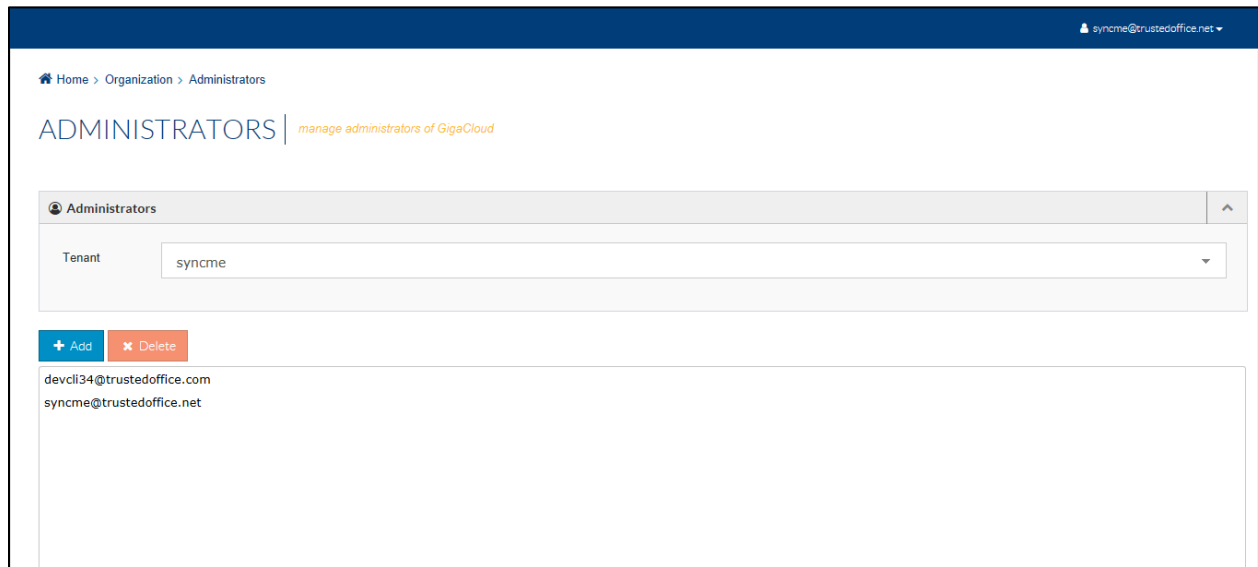

The following options are available for administrators:

- **Add** – To add an administrator, click add. Enter the email to be added and click Add.
- **Delete** – Select the email to be deleted and click Delete. A confirmation required screen is presented asking if the email is to be removed from the administrators list. Click **Yes** to delete the email from the administrators list.

Summary

Summary provides the summary of the community configuration in GigaCloud. It provides details about the users, groups for a given tenant. It gives a summary of number of internal users, external users, invited users, deactivated users, licensed users and others.

In the Menu navigate to: **Organization** ➤ **Summary**

The screenshot displays the 'Tenant Summary' interface in GigaCloud. At the top, a blue header bar shows the user 'syncme@trustedoffice.net'. Below this, a section titled 'Tenant Summary' contains a dropdown menu for the tenant, currently set to 'syncme'. The main content area is a tree view showing the following structure:

- ▼ syncme
 - ▼ Users: 50
 - Internal Users: 50
 - External Users: 0
 - Manually Created Users: 12
 - Synchronized Users: 38
 - Invited Users: 6
 - Active Users: 43
 - Deactivated Users: 1
 - Licensed Users: 21
 - Valid Temporary Licensed Users: 0
 - Expired Temporary Licensed Users: 0
 - ▼ Groups: 10
 - Managed Groups: 1
 - Synchronized Groups: 9
 - ▼ Synchronized Forests
 - ▼ syncme.local
 - Last Synchronized: Thursday, January 25, 2018 2:14:51 AM Utc
 - ▼ Users: 38


At the bottom of the page, a small copyright notice reads: 'Copyright © 2005-2018 GigaMedia Access Corporation. All rights reserved.'

Sync Agent Log

Sync Agent Log allows to view AD Sync Agent activity in GigaCloud.

In the Menu navigate to: **Organization ➤ Sync Agent Log**

To view the logs for a particular tenant, select tenant from the drop-down menu. Optionally, enter a part or full email addresses of the users. Select Run. The log is returned with the details of email, timestamp, operation and its status.

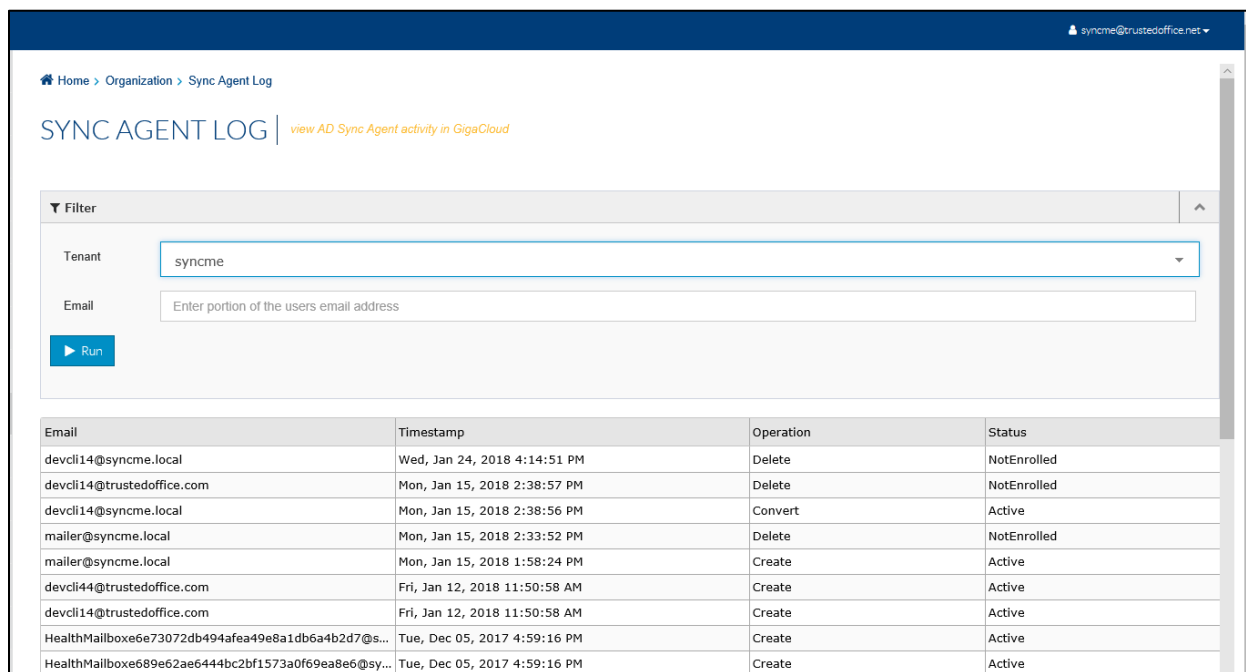

Home > Organization > Sync Agent Log

SYNC AGENT LOG | [view AD Sync Agent activity in GigaCloud](#)

Filter

Tenant:

Email:

Run

Email	Timestamp	Operation	Status
devcli14@syncme.local	Wed, Jan 24, 2018 4:14:51 PM	Delete	NotEnrolled
devcli14@trustedoffice.com	Mon, Jan 15, 2018 2:38:57 PM	Delete	NotEnrolled
devcli14@syncme.local	Mon, Jan 15, 2018 2:38:56 PM	Convert	Active
mailer@syncme.local	Mon, Jan 15, 2018 2:33:52 PM	Delete	NotEnrolled
mailer@syncme.local	Mon, Jan 15, 2018 1:58:24 PM	Create	Active
devcli44@trustedoffice.com	Fri, Jan 12, 2018 11:50:58 AM	Create	Active
devcli14@trustedoffice.com	Fri, Jan 12, 2018 11:50:58 AM	Create	Active
HealthMailboxe6e73072db494afea49e8a1db6a4b2d7@s...	Tue, Dec 05, 2017 4:59:16 PM	Create	Active
HealthMailboxe689e62ae6444bc2bf1573a0f69ea8e6@sy...	Tue, Dec 05, 2017 4:59:16 PM	Create	Active

Revoke Access


Revoke access lets the users to revoke content access in GigaCloud.

In the Menu navigate to: **Organization** ➤ **Revoke Access**

The documents can be filtered using the document name, document owner, document status, and revoked date range.

The following options are available for revoking access:

- **Revoke** – To revoke access, select the document from the document list and click Revoke. The Revoked column for that document is checked.
- **Allow** - To allow access, select the document which is already revoked from the document list and click Allow. The Revoked column for that document is unchecked.
- **Audit** – Audit provides the list of activities performed for the selected document. Select the document for which you want to view the details and click Audit. Revoke Access Audit Trail window opens with the list of revoked/unrevoked items. Furthermore, an item can be selected from this list to view further details as to what the action was, who the user was and the timestamp for the same.

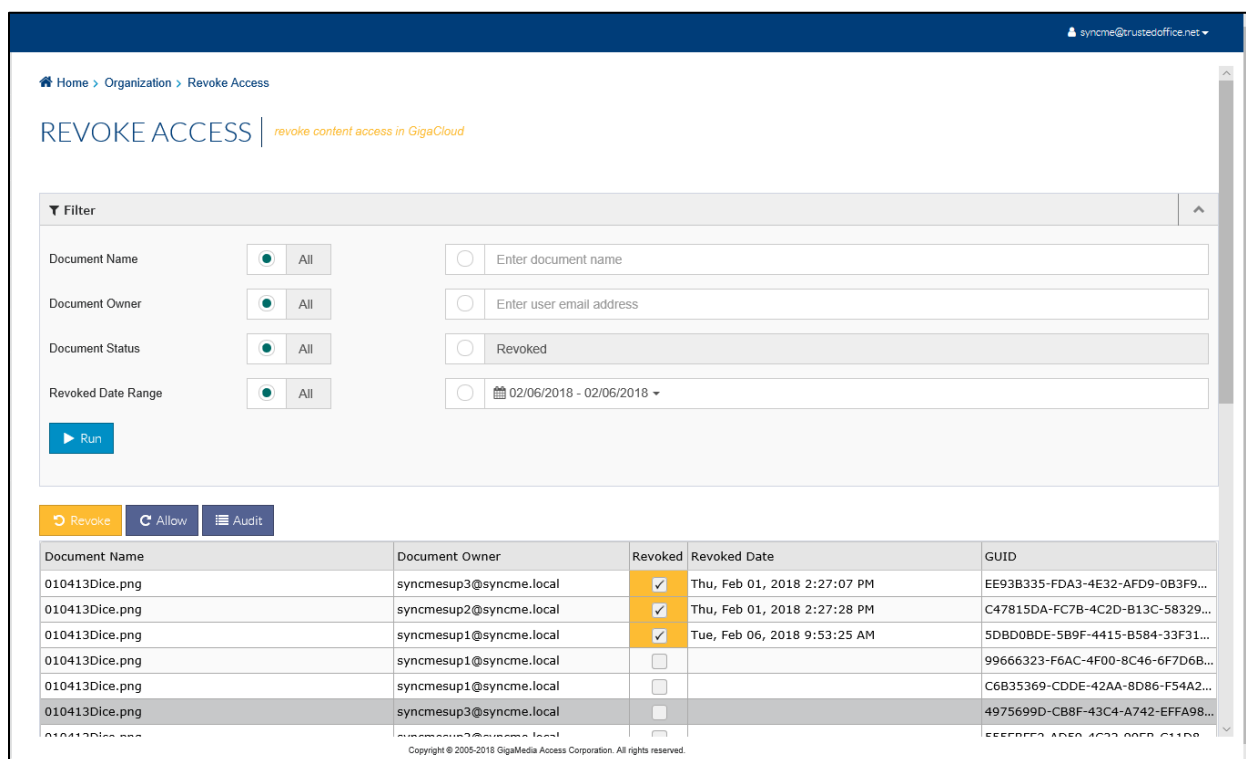

REVOKE ACCESS | revoke content access in GigaCloud

Filter

Document Name: ☐ All

Document Owner: ☐ All

Document Status: ☐ All ☐ Revoked

Revoked Date Range: ☐ All

Run

Revoke **Allow** **Audit**

Document Name	Document Owner	Revoked	Revoked Date	GUID
010413Dice.png	syncmesup3@syncme.local	☒	Thu, Feb 01, 2018 2:27:07 PM	EE93B335-FDA3-4E32-AFD9-0B3F9...
010413Dice.png	syncmesup2@syncme.local	☒	Thu, Feb 01, 2018 2:27:28 PM	C47815DA-FC7B-4C2D-B13C-58329...
010413Dice.png	syncmesup1@syncme.local	☒	Tue, Feb 06, 2018 9:53:25 AM	5DBD0BDE-5B9F-4415-B584-33F31...
010413Dice.png	syncmesup1@syncme.local	☐		99666323-F6AC-4F00-8C46-6F7D6B...
010413Dice.png	syncmesup1@syncme.local	☐		C6B35369-CDDE-42AA-8D86-F54A2...
010413Dice.png	syncmesup3@syncme.local	☐		4975699D-CB8F-43C4-A742-EFFA98...

Copyright © 2005-2018 GigaMedia Access Corporation. All rights reserved.

Configuration

Configuration provides a platform to change and configure email properties, email templates and settings.


In the Menu, navigate to: **Organization > Configuration > Email Properties**

Name	Value
Administrator Email Subject	Welcome to GigaTrust! Your Tenant Administration Account Has Been Activated.
Confirmation Email Subject	Welcome to GigaTrust! Your Account Has Been Activated.
Invitation Email Subject	Activate your new GigaTrust account
Password Expiration Notice Subject	Your GigaTrust password is about to expire.
Password Reset Email Subject	GigaTrust password reset

In this section, you can change any of the default email subjects for your tenant. The following table lists the subjects available to you.


Setting	Description	Default Value
Administrator Email Subject	Customize if needed.	Welcome to GigaTrust! Your Tenant Account Has Been Activated.
Confirmation Email Subject	Customize if needed.	Welcome to GigaTrust! Your Account Has Been Activated.
Invitation Email Subject	Customize if needed.	Activate your new GigaTrust account
Password Expiration Notice Subject	Customize if needed.	Your GigaTrust password is about to expire.
Password Reset Email Subject	Customize if needed.	GigaTrust password reset

In the menu navigate to: **Organization > Configuration > Email Templates**

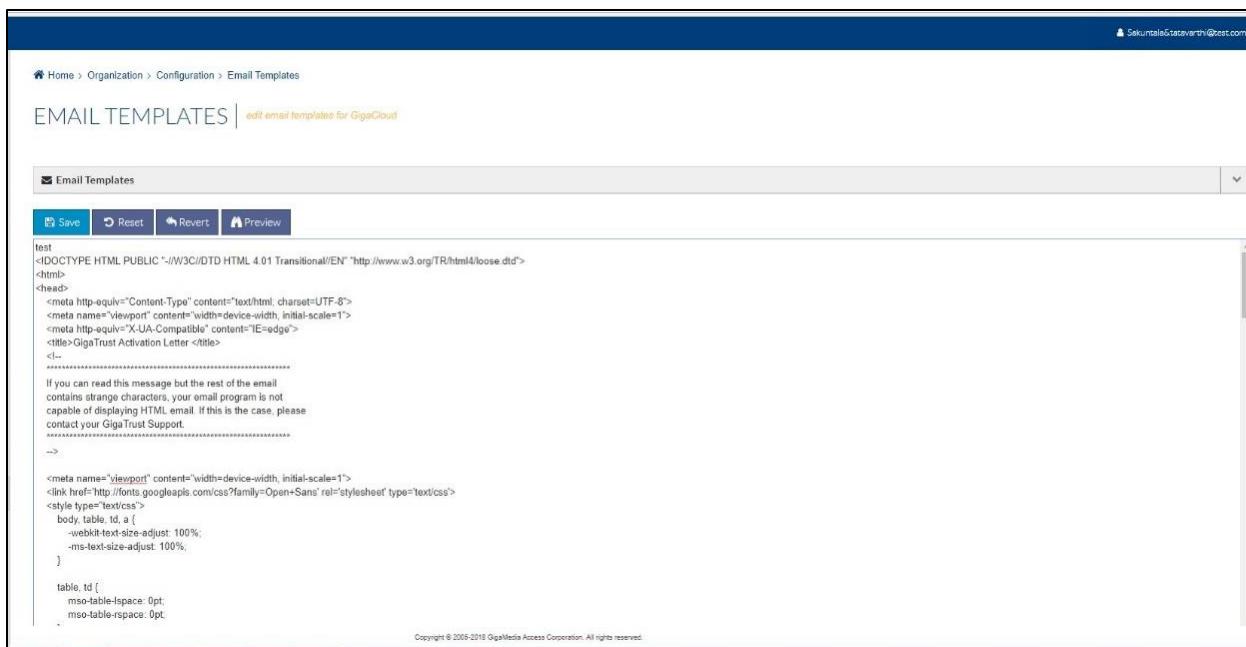

Here you can edit/customize your email templates for your User's Activation and for resetting their password. Click Preview to open the template in another browser to verify the layout. Revert will remove all changes made to the template and restore will restore it to the default. Reset will remove immediate changes to the template. When you have completed editing the template click Save.

In the Menu navigate to: **Organization ➤ Configuration ➤ Default Settings**

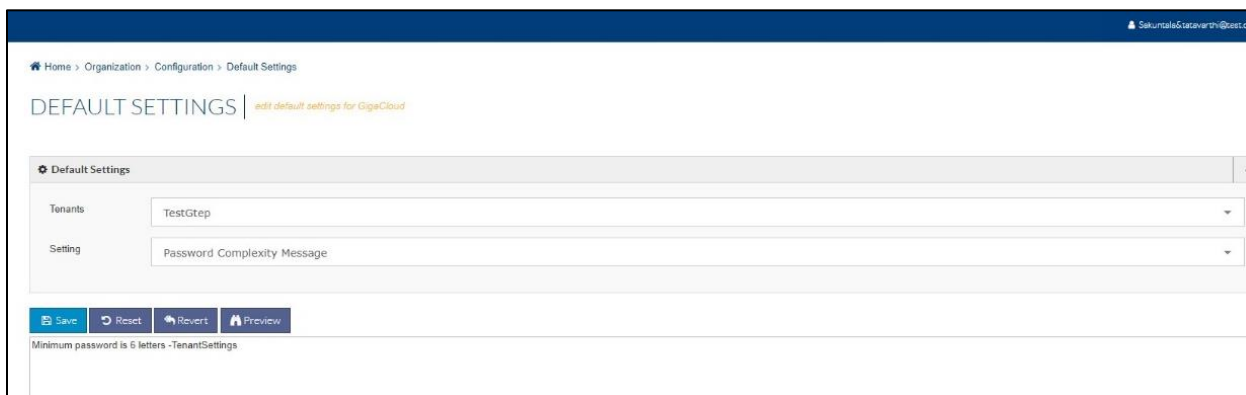

From the Setting drop down select from:

1. **Password Complexity Message** – This is the text displayed when a User changes or resets their account password. Customize to your Active Directory password policy.

Example: “Password Must Be at Least 8 Characters Long and Contain 1 Number and 1 Upper Case Letter.”

2. **Down Level Text** – Outlook in-the-clear message.
3. **Email Server** - Deprecated.

Import Users

Easily import new Users into your Tenant from a .CSV file.

In the Menu navigate to: **Organization > Users**

Import Users

Tenant: Demo

☒ Send Email Notification

☐ External Users

Browse... Email Format Test.csv

Select the CSV file that contains a list of unique user emails.

Email	Imported	Error Message
disposable.style.email.with...	false	Invalid Email Address
Abc.example.com	false	Invalid Email Address
chris@plannerlinks.com	true	
niceandsimple@example.com	true	
very.common@example.com	true	
a.little.lengthy.but.fine@de...	true	
other.email-with-dash@exa...	true	
user@localhost	false	Invalid email to address: 'user...
asdfas@wsdfasdf.com	true	

Go to page: 1 Show rows: 10 1-10 of 10

Close Imported

1. Click **More > Import** on the top tool bar of the Users page.
2. If you want to send each imported User an email notification, select the **Send Email Notification** box.
3. If these Users will be issued external licenses then select the **External Users** check box.
4. On the Import window that is displayed, click **Browse**. Navigate to the .CSV file to import. The file should only contain a column (comma delimited) of email addresses with no column header.
5. Click **Import**. The file will be imported and in the text box the status of each user email address will be displayed. The format will be checked and the email will be verified that it is not already a current user.
6. Click **Close**.

Export Users

If you need to export your tenancy to a file, simply click **More** ➤ **Export** and a .CSV file using your Tenant name will be created for you.

Keep GTEP open and go to Step 3 

Step 3 – Create Policies

Overview

Content Policies are categorized in one of two different folders: Active and Archive. The Active folder contains all policies that are currently in use within the RMS environment. Archived policies are ones that are currently not in use and will not be distributed to end-users. Policies can be moved between folders using standard Windows drag and drop functionality.

Note: When a new Tenant is created, two default Rights Templates are automatically added in a Tenant Policy folder in the Active folder listed below. The first template name is the internal name in GTEP. The second name is the external name displayed for Users. The first part of the external name in blue can be culture specific. For example, if Tenant's name is Widget and they need the rights template name, Confidential, in simplified Chinese, the external name for the template would be: 机密_Widget.

1. **Confidential / Confidential_ [Your Tenant Name]** – This template contains the following recipient permissions:
 - a. Full Control – **No**
 - b. Edit Rights - **No**
 - c. View – **Yes**
 - d. Print – **No**
 - e. Edit – **Yes**
 - f. Save As – **No**
 - g. Copy – **No**
 - h. Allow Macros – **Yes**
 - i. View Rights – **Yes**
 - j. Reply – **Yes**
 - k. Reply All – **Yes**
 - l. Forward - **Yes**
2. **Confidential View Only / Confidential View Only_ [Your Tenant Name]** - This template contains the following recipient permissions:
 - a. Full Control – **No**
 - b. Edit Rights - **No**
 - c. View – **Yes**
 - d. Print – **No**
 - e. Edit – **No**

- f. Save As – **No**
- g. Copy – **No**
- h. Allow Macros – **Yes**
- i. View Rights – **No**
- j. Reply – **No**
- k. Reply All – **No**
- l. Forward – **No**

Both Rights Templates are currently preconfigured for the following cultures and external names:

- Chinese (Simplified) (zh-Hans) - 机密
- Chinese (Simplified, PRC) (zh-CN) - 机密
- Chinese (Simplified, Singapore) (zh-SG) - 机密
- Chinese (Traditional) (zh-Hant) - 机密
- Chinese (Traditional, Hong Kong, S.A.R.) (zh-HK) - 机密
- Chinese (Traditional, Macao S.A.R.) (zh-MO) - 机密
- Chinese (Traditional, Taiwan) (zh-TW) - 机密
- Chinese (zh) - 机密
- English (Australia) (en-AU) – Confidential
- English (Belize) (en-BZ) – Confidential
- English (Canada) (en-CA) – Confidential
- English (Ireland) (en-IE) – Confidential
- English (Jamaica) (en-JM) – Confidential
- English (New Zealand) (en-NZ) – Confidential
- English (Republic of the Philippines) (en-PH) – Confidential
- English (South Africa) (en-ZA) – Confidential
- English (Trinidad and Tobago) (en-TT) – Confidential
- English (United Kingdom) (en-GB) – Confidential
- English (United States) (en-US) – Confidential
- English (Zimbabwe) (en-ZW) – Confidential

- English (en) – Confidential

After selecting a folder, clicking the **New** button on the Content Policies master panel will display the **Select Content Policy Type** window. Select a type of **Policy** from the following table and press **OK** to continue or follow detailed instructions for each policy type starting on the following page.

Rights Template - Specifies access permissions such as View, Print, and Save As, as well as who is allowed access and for how long.

Email Classification - Rule used to automatically apply specific protection to outgoing email that meets defined criteria.

Content Classification – Future enhancement.

PDF Watermark - Text or user information that will appear on content when content is viewed or printed.

Folder - Folders are used for organizing policies and delegating rights to security principals.

File Folder Configuration – Create File Folders configurations for GigaTrust Dynamic File Folders.

Trusted Applications File - List of applications and associated file extensions that are supported by the GigaTrust Desktop Client.

Black List - List of applications that will be blocked if protected content is being viewed. Conversely, if a Black List application is running, protected content will be blocked from opening.


Black List Exception - This policy allows you to create exceptions to an existing GTEP Black List file. For example, if Skype is in the Black List, but you want to allow its use when protected content is open, you can create an exception for Skype.

Policies can be removed from the GTEP Administration application by selecting a policy in the Content Policies master pane and clicking the Delete button. Administrators will be required to confirm the deletion of the policy.

The Sync button will synchronize templates in the AD RMS system with the GTEP Administration application. Any additional templates that exist in the AD RMS system will be added to the GTEP database. This functionality is intended for initial setup of a GTEP installation. Thereafter, all template management must be done via GTEP.

Add a Policy – Rights Template

1. Click **Policy** ➤ **Manage** in the menu. This displays the list of Active and Archived Content Policies.

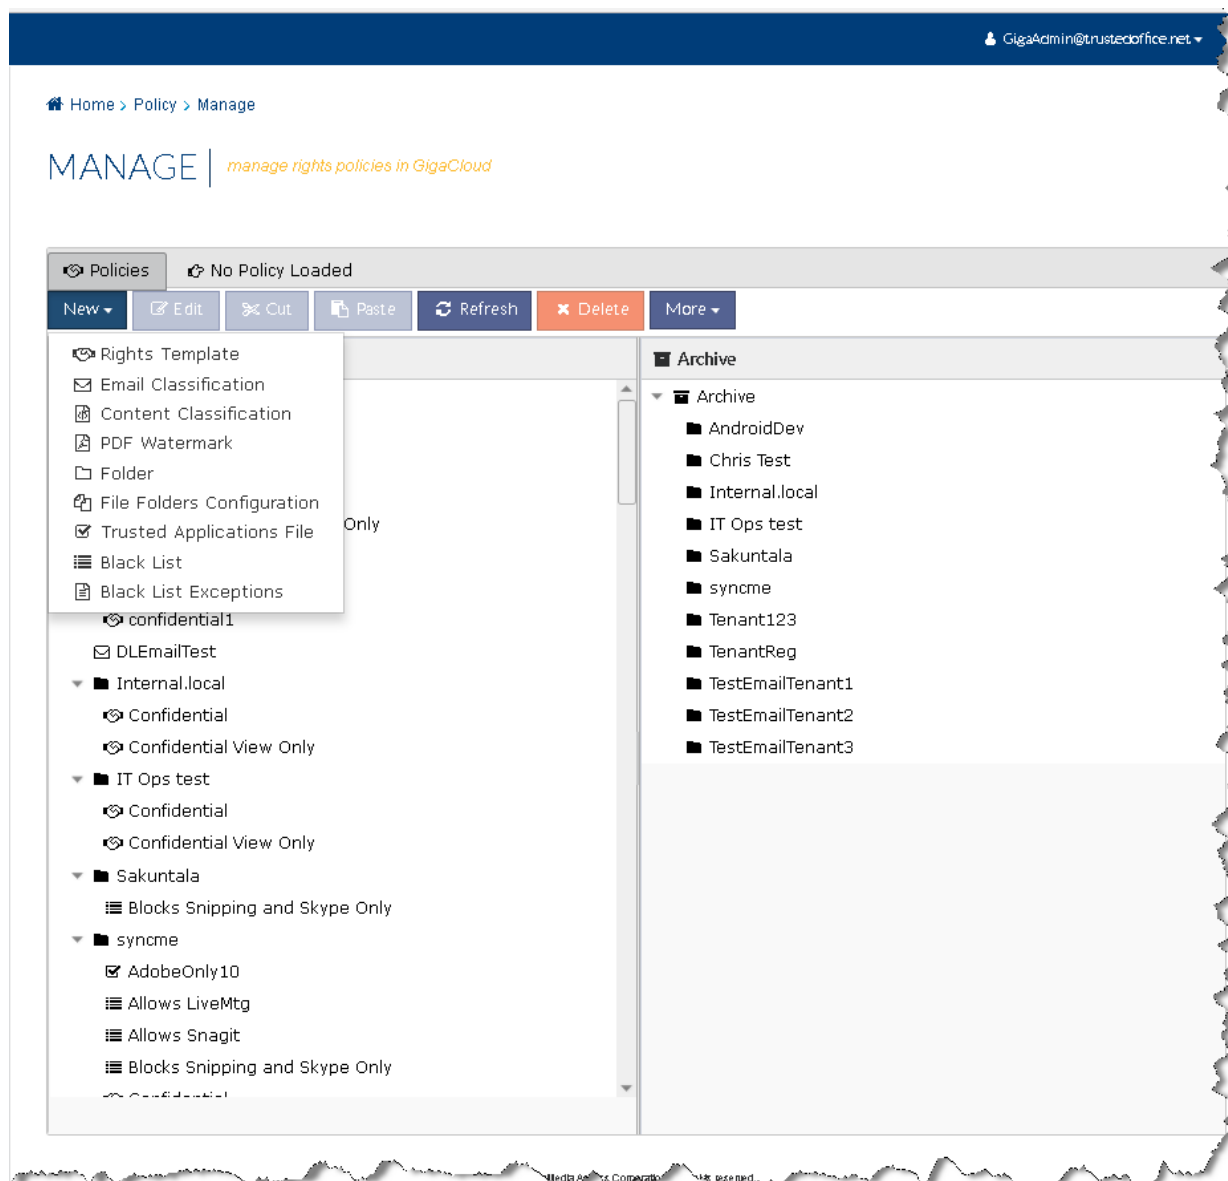

2. In the Content Policies master pane, select the **Active** or **Archive** folder (or a Tenant folder) and click **New**.
3. From the drop-down menu, select **Rights Template**. A new tab is opened.

The screenshot shows the GigaCloud Tenant Administrator interface. At the top, the user is logged in as GigaAdmin@trustedoffice.net. The breadcrumb trail is Home > Policy > Manage. The main heading is 'MANAGE | manage rights policies in GigaCloud'. Below this, there are tabs for 'Policies' and 'Create a New Rights Template'. The 'Create a New Rights Template' tab is active, showing the 'Rights Template' form. A modal window titled 'Create Template Descriptor' is open, allowing the user to define the template's descriptor. The modal contains three fields: '*Language' (a dropdown menu set to 'English (United States) (en-US)'), '*Name' (a text input field containing 'Confidential'), and '*Description' (a text area containing 'Confidential Template'). At the bottom of the modal are 'Close' and '+ Add' buttons. The background form has sections for 'Internal Name' (with a '*Name' field), 'External Name(s)' (with '+ Add' and 'Edit' buttons), and 'Rights Request URL' (with an 'Enter URL' field and an example: 'account@domain.com OR mailto://account@domain.com OR https://adrms.website.com').

- Complete the sections of the template definition pane as follows:

Template Identification

(Required) Enter a unique Internal Name for this template.

(Note: The Internal Name for the template cannot contain extended ASCII characters or any of the following special characters: `/ \ : * ? " < > | ! — % , ; & # .`)

(Required) Click **New** to enter a unique Template Identification. Language, Name, and Description are all required for creation of a Template Identification.

(Note: A template name cannot contain extended ASCII characters or any of the following special characters: `/ \ : * ? " < > | ! — % , ; & # .`)

Optionally enter a URL that content recipients can use to request more access rights than your template originally grants them. The corresponding URL page must be created to handle such

requests. You can also enter a **mailto:** address in the URL field using the format: **mailto:email address** or **mailto:http://email address**.

When the recipient opens an RM-enabled email (or attachments), the user has the option to see the assigned permissions. In Microsoft Office, if the recipient then selects the Request additional permissions option, the URL or email address you entered is displayed. The recipient can then select that information to go to the specified URL or open an email form.

Expiration Policy

Specify when you want the assigned permissions for the information to expire. Choose from Never (default), a specific date, or in a specific number of days/months/years after the publishing date.

The publishing date is the date/time the email is sent.

Use License Renewal Policy

When a recipient first opens a protected email, credentials are checked at the appropriate licensing RM Services server, and then a Use License is issued. For the life of the Use License, the email content is protected both online and offline per the access permissions.

If a template's permissions are changed, the new permissions will only be granted when the user next acquires an end-user license (EUL). If the **Never Renew** option is enabled in a template and a user has already acquired a EUL, any changes made to the template permissions will not be granted to that user. The user will have to delete the EUL and then acquire a new one by accessing the content again.

If a Use License must be renewed, the rights management server granting the use license must be reachable so that the renewal can occur. Other than having to be reachable, the renewal process is transparent to the user. If a Use License cannot be renewed (for example, when the user is offline or the Use License has expired), the email content cannot be accessed by the recipient.

Specify how often you want the Use License to be renewed. Choose from **Never (default)**, every time the email is opened, or in a specific number of days/months/years after the initial issuance.

Users and Groups

Checkbox: Owner has full control right with no expiration.

Owner of protected content is automatically granted perpetual and full access.

Other Users:

Define the email addresses for the persons or distribution groups for whom the template permissions will apply. (It is recommended that groups be used since they are dynamic.) Assign each user/group its own set of permissions. Assigned permissions can be modified as needed. You can also specify that the template applies to **Anyone**.

Note: A group must be related to a single email address, for example, sales@gigatrust.com.

If the template permissions apply to anyone, select the **Anyone** button. Anyone will be added to the grid.

To specify particular Users or Groups, perform the following steps:

- a) Click **Add**. This displays the **Add Users and Groups** window.

- b) Select the **Email Address** radio button.
- c) If you know the email address you want to add, enter it in the **Email Address** field and click **OK**, otherwise you can search for the address using the following steps.
 - Note:** Searches are run against the OU or domain of a selected connector, so at least one connector must exist in order to use the search feature.
- e) Use the drop-down arrow to display available connectors and select the connector in which the user/group should be found.
 - Note:** Only connectors to which you have Read permissions will be listed in the drop-down menu.
- f) Select whether you are adding a **User** or a **Group**.
- g) You can enter an address directly in the **Email Address** field at the top of the window or search for the address you want. Once the correct email address is in the **results grid**, select the row and click **Add** to add it to the template grid.

To Search:

In the **Email Pattern** field, enter the email address you want to add, optionally using the asterisk wildcard character (described below), and click Search. If the email address exists in the selected connector, your email address is returned in the **Results** field.

Select the address in the **Results** field.

Using wildcards to search: Optionally, you can use the asterisk (*) wildcard when searching for email addresses.

Examples:

Enter *smith@domain.com and click **Search** and all addresses that end with "smith@domain.com" will be listed, such as, asmith@domain.com and Andrew.Smith@domain.com.

Enter ej* and click **Search** and such addresses as ejacobsen@domain.com and ejames@domain.com will be listed.

Enter * and click **Search** to list all of the users in the selected connector.

Delete a User or Group

To remove an email address from the template, select it in the **User and Groups** grid and then click **Remove**.

Assign Rights-managed Permissions to a User or Group

Access rights are assigned per email address. By default, every listed address is assigned View permissions. To assign additional permissions to an email address, click the address and then select the permissions you want to assign to that address for this template. To clear a permission, select it again.

As necessary, assign permissions for each user or group.

5. Click **Save** to save your template. Once saved, your new template should be listed in the Content Policies tree.
6. Continue adding other policies for your organization.

Add a Policy – Email Classification

Overview

The Email Classification Policy feature works in conjunction with Microsoft Outlook on the user computer. Therefore, Outlook must be installed for the feature to work on user computers.

Email classification policies are used to automatically apply specific protection to an outgoing email that meets defined criteria. Such email classification policies can be enforced at the enterprise level, by the individual user, or a combination of both. GigaCloud Administration is used to create enterprise-level email classification policies.

Email classification policies are applied based on an email's intended recipients or recipient domain, and/or specific words or patterns found in the subject or body of the email. When an email meets an email classification policy's criteria, a confirmation message is displayed to the user. The user can then choose to send the email or cancel the send.

Note: The confirmation message can be disabled using GigaTrust Desktop Client Preferences.

An email classification policy consists of two parts:

1. Conditions and the criteria that meet those conditions.
2. A policy template whose user/access permissions are assigned to any email that meets the defined conditions and criteria.

If an email recipient is not assigned permissions in the template, that recipient will not have access to the protected email.

You create and manage enterprise email classification policies using the Enterprise Email Classifications feature. When assigning email classifications to directory entities, active email classification policies should be listed in their order of priority from top to bottom. They are applied in the listed order and only the first matching policy is applied to an email. (Inactive email classification policies are ignored when email is checked.) You can reorder the list as necessary.

You can also choose to Force an enterprise email classification policy to go into effect (when criteria is met and the email classification policy has priority), thus overruling any protection that might be assigned at the user-level.

Note: An Enterprise can disallow users from creating local GigaTrust templates and rules through SMS or group policy.

1. Click **Policy** > **Manage** in the menu.
2. In the Content Policies master pane, select the Active, Archive or another folder and click **New**.
3. From the drop-down menu, select **Email Classification**. A new tab is opened.

Home > Policy > Manage

MANAGE | *manage rights policies in GigaCloud*

Policies Create a New Email Classification

Email Classification

Save Reset

Identification

*Name

*Template

☒ Activate this email classification for use

☐ Force as highest priority over any user-defined classification

☐ Allow user to override this email classification

Email Address Condition

+ New Edit Delete

Domain Condition

+ New Edit Delete

Copyright © 2005-2018 GigaMedia Access Corporation. All rights reserved.

4. Enter a descriptive and unique name for this email classification and other details as follows:

Create Message Condition

*Message Type

Body

☒ Pattern

Credit Card

*Name

Credit Card

*Value

(?:^[\d])(?:4\d{3}(?:[\-\\s]?d{4}){3})5[1-5]\d{2}(?:[\-\\s]?d{

Test String

4000123412341234

Test

Tested successful

Matches major credit cards including:
Visa (length 16, prefix 4)
Mastercard (length 16, prefix 51-55)
Discover (length 16, prefix 6011)
American Express (length 15, prefix 34 or 37)

All 16 digit formats accept optional
hyphens (-) between each group of four digits.

Close

+ Add

Assign an enterprise rights management policy template to the email classification. A template is a set of predefined permissions for specified users. Use the drop-down arrow to display the list of available templates.

Important:

- If you define an email classification that is triggered by a Recipient email address, be sure to include that recipient in the template you assign to the email classification.
- Choose whether to activate the email classification policy. An inactive email classification will have no impact on outgoing user email.
- Choose whether to force the email classification. A forced email classification will override any user-defined protection for an email.

- Choose whether to allow users to override this email classification and send the email out unprotected or with the protection permissions they have defined.
- Define one or more conditions for this email classification.

Possible conditions are:

- Email address (including distribution lists)
- Specific domains (can use the * wildcard when defining)
- Specific words or patterns in the subject or body
- Individual words, phrases, and patterns can be entered as Subject or Body criteria.

Example:

Condition = Body

Criteria = confidential / secret / eyes only

This email classification will protect an outgoing email whose message body contains confidential OR secret OR eyes only.

A combination of conditions can be defined and all must be matched for an email classification to be triggered, with the exception of Recipient email address and domain condition. In that case, one or the other can be matched. [(Recipient OR Domain) AND Subject AND Body]

5. Once the necessary condition criteria are defined for the email classification, click **Save**.
6. Continue adding other policies for your organization.

Once saved, your new email classification should be listed in the selected Content Policy folder.

When an email classification is matched, the permissions specified in the template assigned to the email classification are applied to the email. Any supported, Non-protected attachments are also protected with the same permissions.

Add a Policy – Content Classification

Overview

The Content Classification Policy feature works in conjunction with Microsoft Office on the User computer with Word, Excel or PowerPoint documents. Content Classification policy is a method to add a classification (tag) to a document's Properties that meets defined criteria, and to optionally include text in the document header and/or apply a Rights Policy template to protect the file.

For example, adding a confidential tag in a Word document properties automatically if it contains a Social Security number, adding "Confidential" in the document header, and applying a "Confidential" Rights Template to encrypt and protect the file.



Note: Content Classification requires the client apps to support this feature. Please contact your GigaTrust Sales Engineer for supported software types.

A Content Classification policy consists of two parts:

1. **Content Classification Identification-** Name the classification and set the basic properties, including whether to automatically apply a Rights Policy Template to the document.
2. **Content Conditions-** Optionally define conditions and criteria to be applied based on and/or specific words or patterns found in the document.

You create and manage enterprise Content Classification policies using the Enterprise Content Classifications feature. When assigning content classifications to directory entities, active content classification policies should be listed in their order of priority from top to bottom. They are applied in the listed order and only the first matching policy is applied to a document. (Inactive content classification policies are ignored when a document is checked.) You can reorder the list as necessary.

You can also choose to Force an enterprise content classification policy to go into effect (when criteria is met and the content classification policy has priority), thus overruling any protection that might be assigned at the user-level.

Note: "Content Classification" is the default Property name for this feature. You can change this in **Administration > Application Settings**

Create a new Content Classification Policy

1. Click **Policy** ➤ **Manage** in the menu.
2. In the Content Policies master pane, select the Active or Archive folder and click **New**.
3. From the drop-down menu, select **Content Classification**. A new tab is opened.

The screenshot shows the 'Content Classification' configuration page. At the top, there's a header bar with a user profile 'synone@trustedoffice.net'. Below the header, the page title 'Content Classification' is displayed. A 'Save' button and a 'Reset' button are visible. The main form is divided into two sections: 'Identification' and 'Content Condition'. The 'Identification' section includes fields for 'Name' (with a placeholder 'Enter a name for this content classification'), 'Tag' (with a placeholder 'Tag'), and 'Template' (a dropdown menu currently set to 'Confidential'). Below these fields are four checkboxes: 'Activate this content classification for use' (checked), 'Force as highest priority over any user-defined classification', 'Allow user to override this content classification', and 'Display the tag in the header of the document'. The 'Content Condition' section has a header with a gear icon and a link to 'add specific words or pattern'. Below this, there are three buttons: '+ New', 'Edit', and 'Delete'. At the bottom of the page, a small copyright notice reads 'Copyright © 2005-2018 GigaMedia Access Corporation. All rights reserved.'

4. In the **Content Classification Identification** section identify and customize your Content Classification policy with the following attributes:
 - a. **Name** – Enter a name for this content classification.
 - b. **Tag**- The name for the Classification that is stored in the document Properties, and if enabled in the **Show in Header** option below, the name is also displayed in the Header of the document.
 - c. **Template**- (Optional) Specify a saved Policy Template to apply automatically when specific conditions are met.
 - d. **Activate**- Activate this content classification for use.
 - e. **Forced Priority**- Force this content classification to take higher priority over any user-defined classification.
 - f. **Allow Override**- Allow User to override this Content Classification.
 - g. **Show in Header**- Optionally display the tag in the header of the document.

5. In the **Content Condition – And specific words or pattern** section optionally define conditions and criteria to be applied based on specific words or patterns found in document. There are three default options supplied: **Credit Card**, **Social Security** and **Custom** where you can create your own Regex string. For a basic string lookup look at the following example:

Example:

You enter "**confidential**" in the **Value** text box.

This Content Classification will protect a document which contains confidential in it. Enter text with the Value in it in the **Test string** box and click **Test** to verify it works as desired. A combination of conditions can be defined and all must be matched for a Content Classification to be triggered. If **Pattern** and then **Custom** is chosen, any valid Regex string can be used. To add a new content condition, click **New**. You can also **Edit** or **Delete** existing conditions.

6. Once the necessary condition criteria are defined for the Content Classification, click **Save**. Once saved, your new Content Classification should be listed in the selected Content Policy folder.

Add a Policy – PDF Watermark

Overview

The Watermark feature is only available for protected PDF files. A watermark is text that will appear on content when the content is viewed or printed. Using GigaCloud Administration, you can easily design and manage enterprise-level watermarks for use on RM-protected content. (Certain restrictions apply.)


A watermark can contain text you define, the name of the logged in user who is viewing or printing the content, the email address derived from the RMS certificate on the viewing machine, or a combination (or multiples) of any of the three. When defining the items in a watermark, you can specify the position on the page, rotation of the text, font (including size and color), and whether text appears on top of the protected content or below it.

Important: Watermarks are supported only in documents created in PDF version 1.2 and later formats.

GTEP watermarks contain watermark items (individual watermarks), allowing you to define several watermarks—each containing different information, placed in different positions on content, and having different visual characteristics—in one GTEP watermark. All items will appear on content wherever the watermark is assigned.

Create a new PDF Watermark

1. Click **Policy > Manage** in the menu.
2. In the Content Policies master pane, select the Active, Archive or other folder and click **New**.
3. In the drop-down menu, select **PDF Watermark**. A new tab is opened.

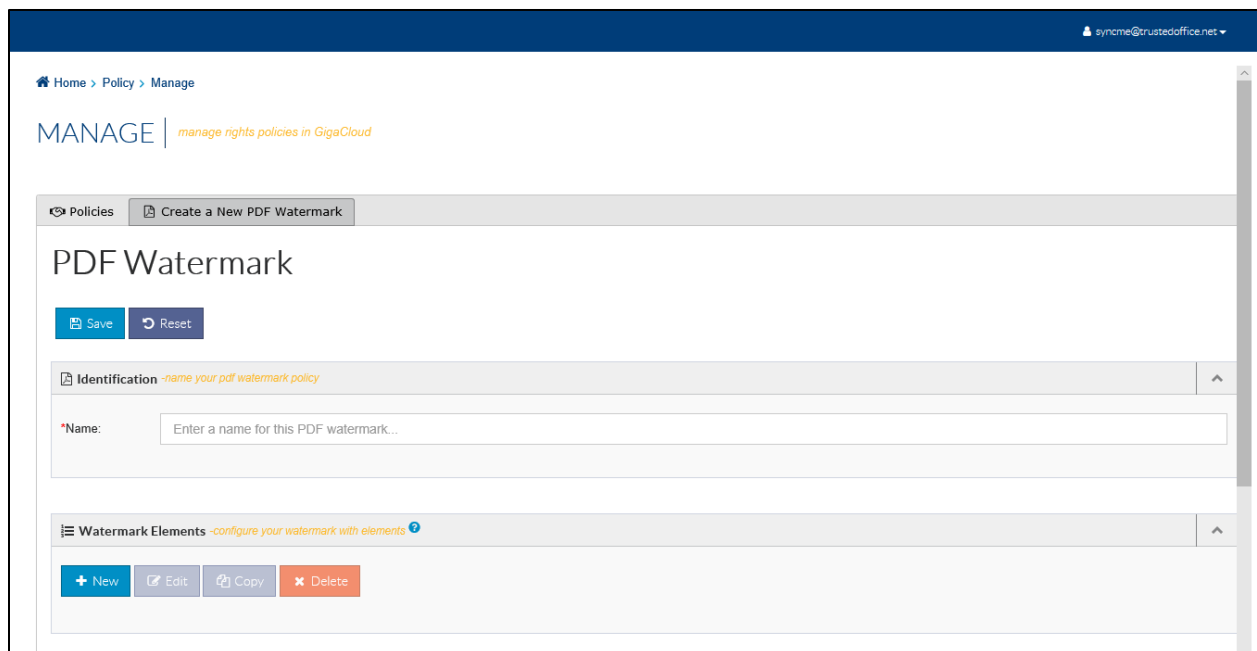


4. Enter a name for your watermark. Watermark names are NOT case sensitive, but they must be unique.

5. Create Watermark items:

A PDF Watermark can be made up of multiple items.

In the details pane, click the **New** button to define a watermark item. The **Create PDF Watermark Item** window is displayed.

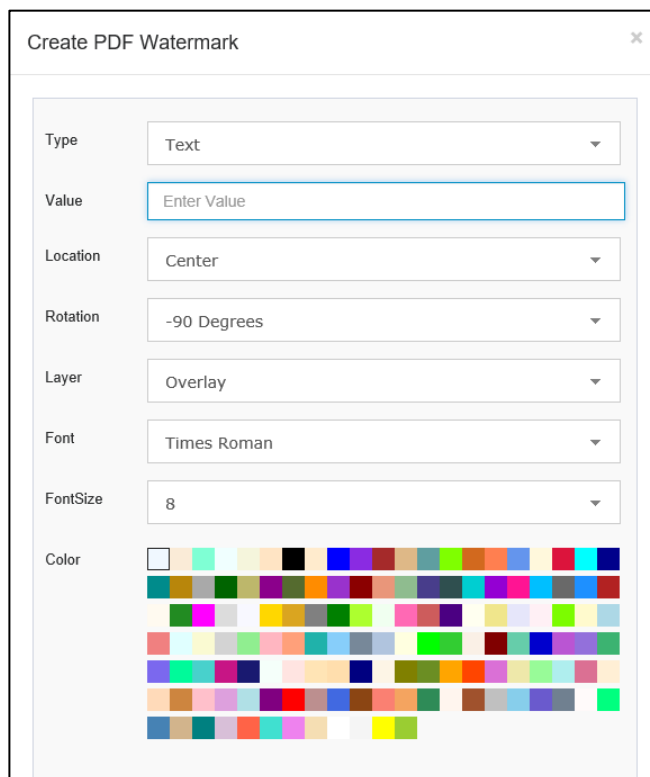

6. Select the values for the Watermark item:

Using the drop-down list, select the type of watermark item you want to define:

See table below for a list of supported parameters.

Type:	(Default: Text)
Logged In User ID	Watermark item will be the name of the logged in user viewing the protected content.
Text	(This selection enables the Text field.) Watermark item will be the text you enter in the Value field. Enter your watermark text.
User Email	Watermark item will be the email address of user viewing the protected content. (The email address is derived from the RM certificate used to view the protected content.)

For the selected type, define the position and properties for its display on the protected content:

Position:	(Defaults: Center / -90 degrees / Overlay)
Location	Using the drop-down list, select the position on the page for the watermark item.
Rotation	Using the drop-down list, select the rotation for the watermark item.
Layer	Using the drop-down list, select the layering position for the watermark item. Overlay: Watermark will appear on top of the protected content. Underlay: Watermark will appear under the protected content

Text Properties:	(Defaults: Times-Roman / 8 / Transparent)
Font	Using the drop-down list, select the font for the watermark item.
Font Size	Using the drop-down list, select the font size for the watermark item.
Color	Using the drop-down list, select the font color for the watermark item.

7. Once the watermark item values are defined, select **OK** to add the item to the items table in the watermark details pane.
8. Optionally add additional watermark items to the Watermark.
9. Once your watermark is completely defined, select **Save**. Once saved, your new PDF Watermark should be listed in the policy tree.

Add a Policy – Folder


Overview

Content Policy folders provide a way to organize Content Policies. A user or group is granted access permissions to the folder, such as Create, Read, and Assign.

Note: A user with the appropriate access can drag existing policies into a folder.

Create a new Folder

1. Click **Policy** > **Manage** in the menu.
2. In the policy tree, select the Active, Archive or other folder and click **New**.
3. From the drop-down menu, Select **Folder** and press **OK** to continue. A new pop up window is presented.
4. Add a **Name** to the folder. Click **Add**.

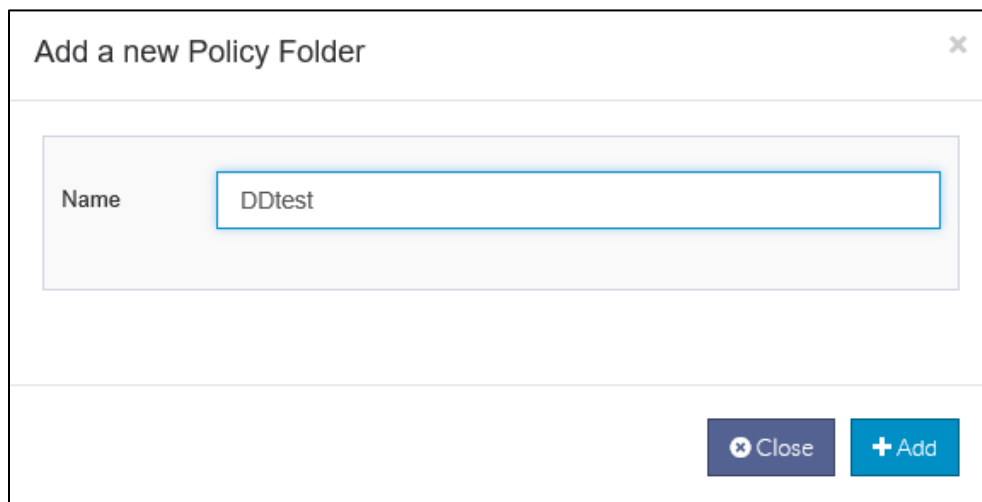

5. Policy folder names are NOT case sensitive, but they must be unique. Once saved, your new Folder should be listed in the policy tree.

Add a Policy – File Folders

Overview

GigaTrust Dynamic File Folders v8.0 can be integrated with GigaTrust Enterprise Plus (GTEP) v8.2 and above. You can fully configure and monitor GigaTrust Dynamic File Folders via GigaCloud. You can define rules for file share protection along with the Rights-Management templates to be used during the protection process. The built-in GigaTrust Policy Agent keeps GigaTrust Dynamic File Folders up to date with changes made via GigaCloud.

Benefits of using GigaTrust File Folder application:

- 🔑 Central repository of sensitive files.
- 🔑 Administrative control of activity associated with the rights protected file share.
- 🔑 Auditing and Alert events provide administrative proactive control.
- 🔑 Provide Delegated Administrative access rights to configure and manage GTFF.

- 🔄 End-user experience is seamless to AD RMS activity of the file share.

Adding a New File Folders Configuration

File Folder configuration is defined for each server running the File Folder application.

1. Click **Policy > Manage** in the menu.
2. In the policy tree, select the Active, Archive or other folder and click **New**.
3. The **File Folder Configuration** page is displayed in a new tab. You will define your File Folder rules here.
4. Enter a **Name** for your File Folder Configuration. File Folder Configuration names are NOT case sensitive, but they must be unique.
5. Create File Folder Configuration items:

File Folder Configuration can be made up of multiple items.

In the details pane, click **New** to define a File Folder Protection item. The **Create File Folders Protection** window is displayed.

Create File Folders Protection

Owner:

Tag:

Move Unsupported Files: ☒ Use Default, ☐ Yes, ☐ No

*Path:

*Template:

Protect Pattern:

Ignore Pattern:

☒ Subfolders

☐ FCI

Destination:

Destination Pattern:

☒ Enabled

5. Enter the values for the File Folder Protection item:
 - a. **Owner (Optional)** - Add a name for the owner of this file folder.
 - b. **Tag (Optional)** - Add an optional tag for this file folder.
 - c. **Move Unsupported Files** - Choose whether unsupported files are automatically moved to another folder. The three options are **Use Default**, **Yes** or **No**.
 - d. **Path (Required)** - Enter a valid path for the File Folder Protection item. This path must be valid on the server running the File Folder application.
 - e. **Template (Required)** - Select a template; assign a rights management enterprise-level policy template to the rule.
 - f. **Protect Pattern (Optional)** - Enter Protect Pattern fields, using Regular Expressions to define the files or file types you want to protect for this folder. Enter a semicolon between patterns. Do not include extra spaces.
 - g. **Ignore Pattern (Optional)** - Enter Ignore Pattern fields, using Regular Expressions to define the files or file types you want to ignore for this folder. Enter a semicolon between patterns. Do not include extra spaces.
 - h. **Subfolders (Optional)** - Select to process sub folders when protecting files. The Sub folders option is not allowed when a Destination Folder is defined.
 - i. **FCI (Optional)** - Select to use FCI rules when determining the RMS template used in protection. Please see File Folder documentation to configure the File Folder application to use FCI rules.
 - j. **Destination (Optional)** - Enter a valid path for the File Folder Protection item. This path must be valid on the server running the File Folder application.
 - k. **Destination Pattern (Optional)** - Enter a valid Destination Pattern for the File Folder Protection item. The Destination Pattern is a valid Regular Expression that converts the current path of the file being protected to obtain the destination path. Please see File Folder documentation to configure the Destination Pattern.
 - l. **Enabled** - enables or disables this File Folder Protection item.
6. Once the File Folder Configuration values are defined, select **Add** to add the item to the items table in the File Folder page.
7. You can optionally add additional File Folder Protection items to the File Folder Configuration.
8. Once your File Folder Configuration is completely defined, select **Save**.
9. Once saved, your new File Folder Configuration should be listed in the policy tree.

Add a Policy – Trusted Application List

Overview

A Trusted Applications file contains a list of the applications and their associated file extensions that are supported by the GigaTrust Desktop Client. For RM-protected Office files (Word, Excel, and PowerPoint), only the GigaTrust Black List (blocks screen capturing and desktop sharing) will be enforced. If an application is trusted, any supported file type that is RM-protected can be viewed with the native application.

A default Trusted Applications file is delivered with the Client. It supports the following:

- Adobe Reader
- Adobe Acrobat
- Microsoft Excel *
- Microsoft Notepad
- Microsoft Paint
- Microsoft PowerPoint *
- Microsoft Word *

* Black List support only. Microsoft handles the viewing of such content.

A custom Trusted Applications file can be requested through your GigaTrust representative if, for example, your enterprise wants to support PDF only.


Through GTEP, you can upload a custom Trusted Applications file and it will be delivered to the user desktops.

Note: Depending on the version of the GigaTrust Client, a restart of the Client may be necessary after a new Trusted Applications file is received on the desktop. This allows the Client to read the new file. Newer versions of the Client do not require a restart.

Supported applications and file formats can be viewed via GigaTrust Desktop Client Preferences.

Adding a New Trusted Applications List

1. Click **Policy > Manage** in the menu.
2. In the policy tree, select the Active, Archive or other folder and click **New**.
3. From the drop-down menu, select **Trusted Applications File**. A new tab is opened.
4. In the Create a new Trusted Application File window, **Choose File** and navigate to the new Trusted Applications File. Click Upload and GTEP will import the new file. It will now be displayed in the policy tree.

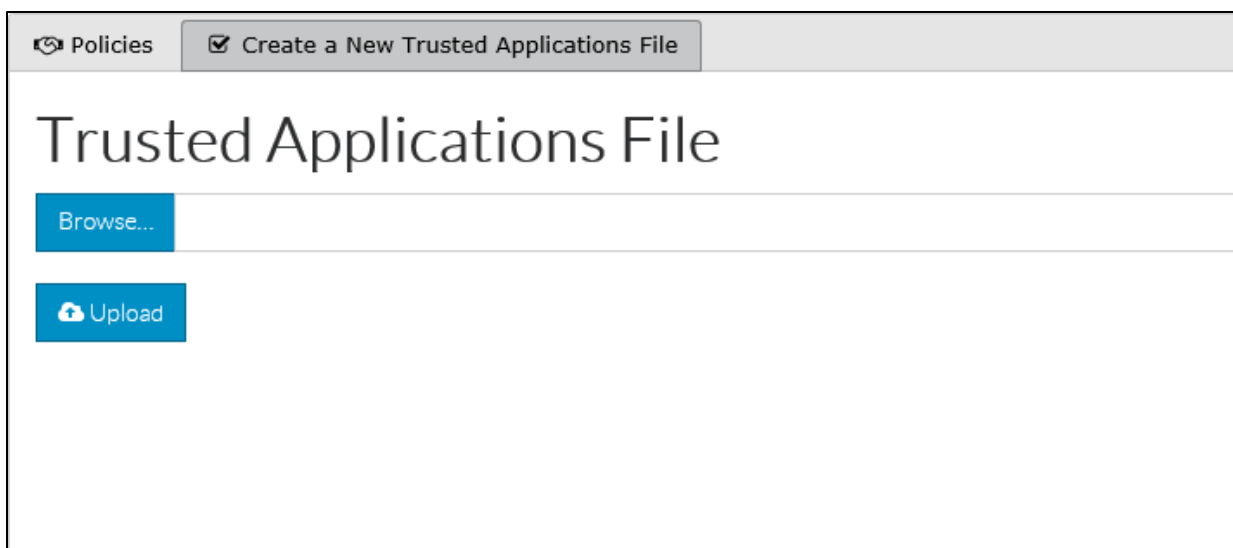

Add a Policy – Black List

Overview

The Black List is used to prevent screen captures of protected content as well as prevent the content from being revealed while a desktop sharing application is running. If a user has protected content open, the Black List will prevent a defined application from running. If a defined application is running, the Black List will prevent the protected content from being opened. In both cases, a slider window explains the block.

The Black List supports both GigaTrust-protected and RM-protected files.

The default Black List file defines 200+ applications. A custom Black List file can be requested through your GigaTrust representative. Suggested additions to the default Black List are welcome.

Through GTEP, you can upload a custom Black List file and it can be assigned and delivered to the user desktops.


Note: Depending on the version of the GigaTrust Client, a restart of the Client may be necessary after a new Black List file is received on the desktop. This allows the Client to read the new file. Newer versions of the Client do not require a restart.

The version of the Black List file is displayed in GigaTrust Desktop Client Preferences. Actual Black List-applications are not displayed in the GigaTrust Client.

Adding a New Black List

1. Click **Policy** > **Manage** in the menu.
2. In the policy tree, select the Active, Archive or other folder and click **New**.
3. From the drop-down menu, select **Black List**. A new tab is opened.

4. In the next window select **Browse** and navigate to the new Black List file. Click on Upload and GTEP will import the new file.

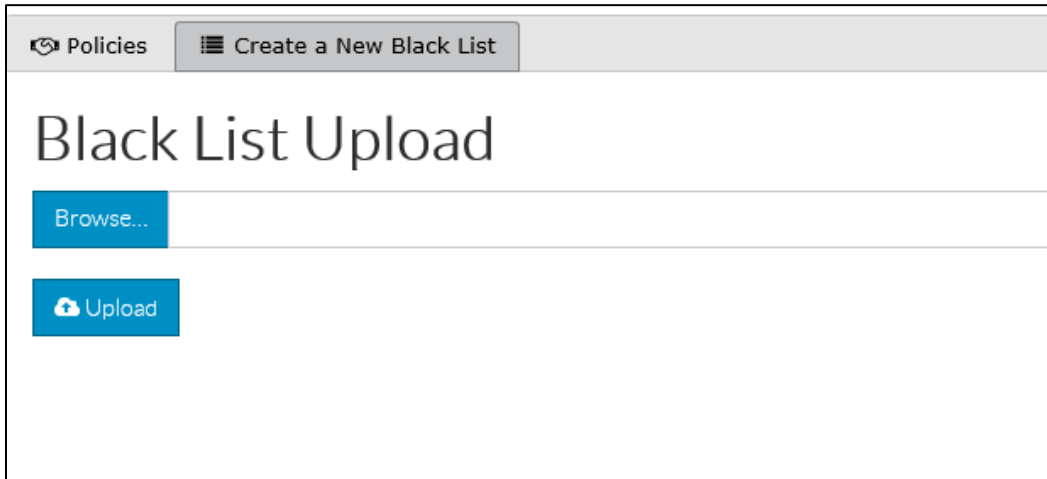

Once saved, your new Black List should be listed in the policy tree.

Add a Policy – Black List Exception


Overview

This Content Policy gives the GTEP administrator flexibility to create exceptions to an existing GTEP Black List. An Exceptions list will only work with a Black List deployed via GTEP. It will not work with the Black List delivered with the Desktop Client.

Black List Exception configuration provides a means for GTEP administrators to customize which applications are to be allowed by the GigaTrust Desktop Clients.

Adding a New Black List Exception

1. Click **Policy** > **Manage** in the menu.
2. In the policy tree, select the Active, Archive or other folder and click **New**.
3. From the drop-down menu, select **Black List Exceptions**. A new tab is opened.

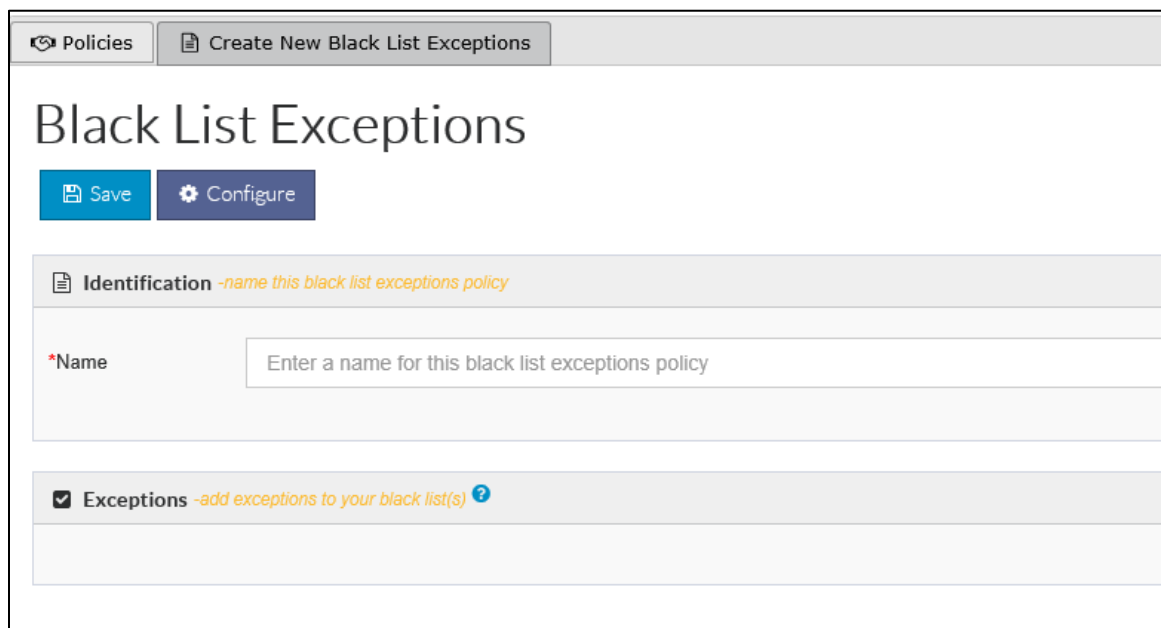

4. Enter a name for your Black List Exceptions. Black List Exceptions names are case insensitive, but they must be unique.
 5. Click on **Configure** to add programs to your exception list. Black List Exceptions can be made up of multiple items.
 6. Once the Black List Exceptions values are defined, select **OK** to add the item to the items table in the Black List Exceptions details pane.
 7. Click on **Save** to create your new Black List Exceptions Policy.
- Once saved, your new Black List Exceptions should be listed in the policy tree.

Expiration

For GigaTrust Desktop Client v10.2 and Higher: Expiration occurs at 0:00 of the Expiration Date.

Example: An email is published on September 1 at 10 a.m. and has an expiration of September 8. The access to the email will expire September 9 at 0:00 UTC.

If expiration is set for an interval of months or years, the expiration matches the current day of the month for months, and the current month/day for years and then is rounded up to the 'next' day 0:00 UTC.

Example: An email is published on Tuesday, August 24, 2004 and access is set to expire after one month. Expiration will occur on Wednesday, September 25, 2004 at 0:00 UTC.

There is one caveat though. If an interval expiration setting (such as Expires after 1 day) is used late in the day locally and it is already the next day UTC. In this case, expiration occurs one day later than expected.

Example: An email is published on September 1 at 11 p.m. and has an expiration of "After one day".

The access to the email will expire September 4 at 0:00 UTC. Explanation: When the email is published on September 1, its date is September 2 UTC. The UTC date is used as the start of the interval. The expiration interval of one day, takes the date to September 3 UTC. Then the rounding up sets expiration to September 4 (at 0:00) UTC.


Keep GTEP open and go to Step 4 

Step 4 – Assigning Policies

Assign Content Policies to a User, Group, Computer, or Community

After creating a directory entity (User, Group or Community), you can assign one or more content policies to the users and groups.

1. Navigate to **Policy** ➤ **Assign** in the menu.
2. In the Organization pane, select a directory entity. The Content Policy pane listing any content policies assigned to the directory entity appears on the right.

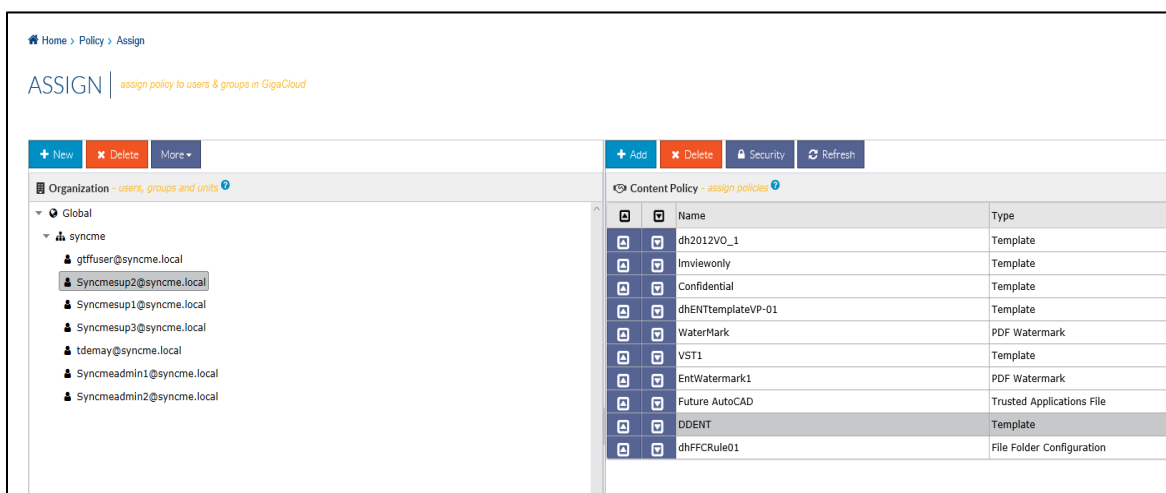

3. The following options are available in the Organization Pane:
 - New** – This option lets you create a directory entry (User, Group or Community.)
 - Delete** - This option lets you delete a directory entry (User, Group or Community.)
 - Security** – This provides the list of users and its access rights and permissions. It also allows adding new user or group and its permissions using the **Add** Option. The **Edit** option is used to edit the access permission. The **Delete** option is used to delete the user or group.
 - Refresh** – This option refreshes the organization pane.
 - Audit** – This option provides the details of all the actions performed by the users along with timestamp of when it was performed.
 - Properties** – For the selected directory entity, the properties such as Display Name, Internal Name, Creator, Connector, DN, and Notes are displayed.
4. The following options are available for Content Policy Pane:
 - Add** - The Select Content Policy window opens listing available content policies. Select a content policy and click Add. The policy is added to the bottom of the content policy list.
 - Delete** – Select the policy that must be deleted and click Delete. Confirm deletion.
 - Security** – This provides the list of users and its access rights and permissions. It also allows adding new user or group and its permissions using the **Add** Option. The **Edit** option is used to edit the access permission. The **Delete** option is used to delete the user or group.
 - Refresh** – This option refreshes the organization pane.

You can use the **Priority** buttons to the right of the policies to set priority order for classification policies. Priority has no impact on other types of policies.

Search Policies

Provides a list of all Content Policies assigned to a specific User account. Searching for a User can be performed using the default domain or a connector. After a User is selected from the search results, the policies assigned to that User are displayed in the grid below.

The screenshot displays the 'Search Policies' interface in GigaCloud. At the top, there's a 'Search' header with a link to 'view assigned policies for users in GigaCloud'. Below this is a 'Search Assignments' section with a 'Domain' dropdown set to 'syncme' and a 'Search by Account Name' input field containing 'syncmead'. The 'Search Results' section shows a list of three users: 'Syncmeadmin1@syncme.local', 'Syncmeadmin2@syncme.local', and 'Syncmeadmin3@syncme.local'. Below the results is a 'Policy Assignments' table.

Name	Type	Creator
Confidential	Template	GigaAdmin@trustedoffice.net
Imviewonly	Template	syncme@trustedoffice.net

Keep GTEP open and go to Step 5



Step 5 – Security and Delegation

Security Overview

The Application Security feature provides granular control over who can administer individual GigaCloud Administration features, and who can assign permissions to these features. It allows responsibility for individual features, such as generating reports, and viewing audit trails, to be delegated to different users or security groups. For instance, you might want to assign full control for all of the GTEP Administration features to specific administrator users or a group of GTEP administrators, while assigning to the users or groups in your organization who are responsible for security only the ability to review audit records. Additionally, you may want to delegate the ability to make assignments of permissions.

Navigate to: **Administration** ➤ **Application Security** in the Menu.

The screenshot displays the 'Application Security' configuration page. At the top, there is a header bar with the title 'Application Security' and a subtitle 'choose or add users to edit permissions'. Below the header, there is a toolbar with buttons for 'Save', '+ Add', 'Delete', 'Reset', and 'Refresh'. A text input field contains the email address 'administrator@internal.local'. The main content area is divided into two panels: 'Permissions' and 'Assignments'. Both panels have a 'Select All' checkbox and a list of features with checkboxes. In the 'Permissions' panel, the following features are checked: Access, System, Document Revocation, Application Security, Audit Trail, Managed Communities, and Reports. In the 'Assignments' panel, the same features are checked: Access, System, Document Revocation, Application Security, Audit Trail, Managed Communities, and Reports.

Permissions	Assignments
☐ Select All	☐ Select All
☒ Access	☒ Access
☒ System	☒ System
☐ Allow/Block Access	☐ Allow/Block Access
☒ Document Revocation	☒ Document Revocation
☒ Application Security	☒ Application Security
☐ Application Settings	☐ Application Settings
☒ Audit Trail	☒ Audit Trail
☒ Managed Communities	☒ Managed Communities
☒ Reports	☒ Reports

The application permissions are:

- **Select All** - Allows a User or Group Full access to GigaCloud Administration application.
- **Access** - Permits access to the GigaCloud Administration application.
- **System** – Permits access to configure System Alerts and to view System Events.
- **Allow/Block Access** – **Unavailable***
- **Document Revocation** – Permits access to view document revocation activity.
- **Application Security** - Permits access to Application Security.
- **Application Settings** – **Unavailable***
- **Audit Trail** - Permits access to the Audit Trail.
- **Managed Communities** - Permits access to the Managed Communities
- **Reports** - Permits access to running Reports. Also permits access to Policy Assignments.

***Unavailable – You do not have the required permissions to access these features.**

Available permissions have two properties, represented by two sets of checkboxes in the **Application Security** form:

The column called **Permissions** is used to assign permissions to a selected user or group to use GTEP Administrator features. The second column called **Assignments** is used to specify features the selected user or group will be able to grant others permission to use.

Think of the Assignments properties as allowing a specified user to delegate to other users the ability to assign permissions to a given feature, in effect making them sub-administrators of the GTEP installation.

Permission to use the Application Security feature itself is controlled in the Application Security screen and can be assigned to users or groups without granting permissions to other GTEP Administration module features.

Security – Directory

The following table lists the permissions for **Directory**. The security settings can be edited by right-clicking on the directory node. Navigate to: **Policy** ➤ **Assign** in the Menu.

Full Control	User will have full access to the item (includes all the permissions below).
Read	User can view and use the item.
Create	User can create new Content Policies when given this permission at the Folder level. When assigned to a Content Policy, results are Read permissions.
Write	User can modify the item.
Security	User can set security permissions for the item.

Security Permissions – Content Policies

Go to **Organization** ➤ **Directory** and right click on a node and choose **Security** to edit/assign permissions. Navigate to: **Policy** ➤ **Manage** in the Menu.

Full Control	User will have full access to the item (includes all the permissions below).
Read	User can view and use the item.
Create	(Folder permission) User can create content policies in the folder.
Write	User can modify the item.
Security	User can set security permissions for the item.

Audit Trail

Navigate to: **Administration** ➤ **Audit Trail**

AUDIT TRAIL | [view audit trail for GigaCloud](#)

Filter [customize your report](#)

Date Range: ☐ All ☒ 02/07/2018 - 02/07/2018

Administrator: ☒ All ☐ Enter part of email address to search

[Run](#)

[View](#) CSV [Export](#)

Timestamp	User	Action
Wed, Feb 07, 2018 4:43:55 PM	syncme@trustedoffice.net	Deleted alert condition with description ''.
Wed, Feb 07, 2018 4:43:38 PM	syncme@trustedoffice.net	Created or modified alert condition with description ''.
Wed, Feb 07, 2018 3:39:11 PM	syncme@trustedoffice.net	Set ACL 'trustedoffice.net\Administrator@syncme.local' on directory node 'Sync...
Wed, Feb 07, 2018 3:38:53 PM	syncme@trustedoffice.net	Set ACL 'trustedoffice.net\Administrator@syncme.local' on directory node 'Sync...
Wed, Feb 07, 2018 3:35:38 PM	syncme@trustedoffice.net	Deleted directory node 'Administrators@syncme.local'.
Wed, Feb 07, 2018 3:35:31 PM	syncme@trustedoffice.net	Deleted directory node 'DDT'.
Wed, Feb 07, 2018 3:30:17 PM	syncme@trustedoffice.net	Created or modified directory node 'bugtest@syncme.local'.
Wed, Feb 07, 2018 3:29:59 PM	syncme@trustedoffice.net	Created or modified directory node 'Administrators@syncme.local'.
Wed, Feb 07, 2018 3:29:32 PM	syncme@trustedoffice.net	Created or modified directory node 'DDT'.
Wed, Feb 07, 2018 3:27:02 PM	syncme@trustedoffice.net	Changed policy 'DDENT' priority from 9 to 8 on directory node 'Syncmesup2@sy...
Wed, Feb 07, 2018 3:26:28 PM	syncme@trustedoffice.net	Associated directory node 'Syncmesup2@syncme.local' with content policy 'DDE...
Wed, Feb 07, 2018 3:09:27 PM	syncme@trustedoffice.net	Associated directory node 'syncme' with content policy 'DDENT'.
Wed, Feb 07, 2018 1:44:54 PM	syncme@trustedoffice.net	Created folder 'DDtest'.

Go to page: 1 Show rows: 25 1-13 of 13

With the Audit Trail, you can view reports on User Account activity, and Export the results to a file if required. The default duration is one day.

Provides a list of actions performed. The audit trail can be filtered using Date Range and Administrator

Date Range – Select All or Specific date range.

Administrator – Select All or enter email address for administrator.

Keep GTEP open and go to Step 6 ➡

Step 6 – Reporting

Overview

GigaTrust enterprise reports are listed under **Reports** in the Menu pane. Using these reports, you can generate usage information such as the number of documents that have been protected by a user, or the number of end-use licenses that have been requested for a document and by whom. The following table lists the various reports you can run in GTEP. For more details on reporting in GigaCloud, refer to the [GTEP Reporting & Data Overwatch Guide](#).

GigaCloud Reports

Activity

Document Activity

All protected documents, including emails

Report lists all protected documents and emails. Listed items include document name, type, date protected, username of the person who protected the document, and the number of successful, failed, blocked and revoked EUL requests. Links are provided to drill-down into separate reports that display document details and end-user access. Criteria for filtering this report consist of Document Name, Owner Email, Activity Type and Protection Date Range.

File Folders

All events for File Folders

Report lists all event activities that occur for File Folders. Listed items include Date, Event type, Status and Description. Links are provided to drill-down into separate reports that display event specifics in detail. These reports can be filtered through Date Range.

User Status

Status for all managed users in GigaCloud

Report lists activated, invites, deactivated statuses for all managed users in GigaCloud. Listed items include User ID, Directory Path, and Status. Links are provided to drill-down into separate reports that display details for each User ID in detail. These reports can be filtered through All Status and Directory Path.

Templates Used in Protection

All templates (enterprise-level and user-created), including template descriptions

Select a template link to view a Template Report. Template Report details include who used the template, for what file or email, and when it was used. On the Template Report, select a document link to view a Document Report containing document details and end-user access. Criteria for this report consist of Template Name, Activity Type and Activity Date Range.

User Activity

All user activity in GigaCloud

Report lists all activities for users in GigaCloud. Listed items include User ID, Revoked documents, Protected Documents, the number of successful, failed, blocked and revoked EUL requests, number of CLC Success and Failure, and RAC Request Success and Failure. Links are provided to drill-down into separate reports that display further details. Criteria for filtering this report consist of User ID, User Type, Activity Type and Date Range.

Assignment

Policy Assignment

Current directory structure with assigned policies

Report displays the assignment of templates, email classifications, and watermarks to directory items. Criteria for this report consist of Policy Name, Policy Type, Assignee ID, Assignee Type, and Directory Path.

Software Assignment

Defined software types and their assignment to directory items

Report displays software types and the directory items they have been assigned. Report criteria consist of Software Type, Assignee ID, Assignee Type, and Directory Path.

Overwatch

GigaCloud Data Overwatch is a valuable management tool to protect information access throughout your organization. It allows Administrators to know what is protected and where that content resides, and all the retained information is configurable and location sensitive. Events are captured from applications interacting with the secure content and extensive analytic data is captured for each event. Data Overwatch “Events” provide information about Users, Devices, Content and Policies.

System Activity

System Activity looks at the activity from the perspective of Users, Documents and Devices and the AD RMS events that were transacted: **Change Protection, Open, Print, Protect, Revoke, Screenshot, Unauthorized Open** and **Unprotect**.

This report is set to a default date range of one month of activity. Simply click on the **Run** button to query the GTEP Data Overwatch database. You can also modify the date range before executing to focus on a particular date range to display.

User Documents

User Documents provides a report on what AD RMS protected documents the User has accessed.

To access this report, enter a User's email address and then click **Run**.

Once the report is displayed there are additional drill down functions, simply click on the links to drill down to access additional information.

User Events

User Events displays a time stamp event chronology of activities for a specific User. Simply enter a User's email address and click **Run** to view the detailed information. Once the report is displayed there are navigation buttons to browse through the event activities.

Security

Application Security

Security Principals and their associated Application Rights within GTEP Administration

Report displays Security Principals, their Application Rights, and the Application Rights that they can assign. Security Principal and Security Type are the criteria for this report.

Directory Security

Current directory structure with assigned Security Principals and their associated rights

Report displays the directory structure and the Security Principal(s) (if any) who have been assigned to directory items. The rights (read, write, security, and assign) to directory items assigned to the listed Security Principals are also displayed. Criteria for this report consist of Security Principal, Directory Name, Directory Type, and Directory Path.

Policy Security

Defined policies

Report lists all assigned policies and their type (Template, Watermark, or Email Classification), along with their assigned Security Principals and associated rights. Criteria for this report consist of Security Principal, Policy Name, and Policy Type.



Congratulations!

***You should now have GTEP configured and ready for use.
Refer to the online help in GTEP for more detailed assistance if required.***

Appendix

Using Wildcards in Search Fields

You may optionally use the asterisk (*) wildcard character in most search fields to search for items, such as user or group names or email addresses. Search strings may contain zero or more wildcard characters and zero or more characters to match. A single asterisk matches (returns) all items in the collection being searched.

Examples:

- *smith@domain.com matches all items that end with "smith@domain.com", such as asmith@domain.com and Andrew.Smith@domain.com.
- *smith* matches all items containing the substring smith, such as asmith, JohnSmithfield, etc.

Glossary

Access List	Controls non-enterprise consumption of information protected by the enterprise AD RMS server. Control can be established for an entire company or for specific users at the company. Both Allow and Block lists can be created.
Trusted Applications File	List of applications and related file types that are supported by the GigaTrust Desktop Client.
Black List	Blocks screen capture and desktop sharing applications from compromising protected content.
CLC (Client Licensor Certificate)	Allows user to publish protected content.
EUL (End-user License)	Allows user to consume protected content once the user RAC is certified by the RM server. When published, protected information is bundled with an issuance license. When a user accesses the protected information, the issuance license is presented to the appropriate AD RMS server. The credentials are checked and then, if allowed, an end-user license is issued.
GIC (Group Identity Certificate)	See <i>RAC</i> .
RAC (RM Account Certificate)	Uses the machine certification (acquired during RM activation) to bind user account to a specific RM network. Allows user to acquire an EUL from the AD RMS server so protected content can be consumed. (Also known as a GIC.)
Email classification policy	Provides a means to automatically protect outgoing enterprise email. Email classification policies are prioritized from top to bottom. Each enterprise email classification policy has an enterprise template (see below) associated with it. When an email classification policy goes in to effect, the permissions in its assigned template are applied to the outgoing email contents.
Template	Specifies access permissions for protected content such as View, Print, and Save As, as well as who is allowed access and for how long. (Also known as a Policy Template or RM Policy.) An enterprise email classification policy requires that a template be associated with it.
Use License	See <i>EUL</i> .