



API INTEGRATION DOCUMENTATION

Table of Contents	1
1. Introduction	2
2. What Is an API?	2
3. API Used by the Sentry Application	2
4. Prerequisites	3
5. Activating the API in Sentry	3
6. Creating a User Role for API Access	4
7. Installing and Opening Postman	5
7.1 Install Postman	5
7.2 Open Postman	5
8. Generating an Authorization Token	6
8.1 Set the request method to GET.	6
8.2 Enter Credentials	6
8.3 Token Request Format	6
9. Requesting API Data Using the Token	7
9.1 Create New Request	7
9.2 Insert Bearer Token	7
9.3 Enter Token	8
9.4 Add Request Body Parameters	8
10. Retrieving Transaction Data	9
11. Configuring Transaction Parameters in Sentry	10
12. API Response Data	11

1. Introduction

This document provides step-by-step instructions for integrating with the Sentry REST API, including token generation, authorization, and retrieving transaction data using Postman.

2. What Is an API?

API stands for **Application Programming Interface**.

It is a software intermediary that allows two applications to communicate with each other.

An API defines how requests and responses should be structured, enabling different systems to exchange data and functionality securely and efficiently.

3. API Used by the Sentry Application

The Sentry application uses a REST API.

A REST API typically follows an architectural pattern where a client communicates with a server using standard HTTP methods:

GET

POST

PUT

DELETE

These requests allow systems to interact with back end services and databases through defined endpoints.

4. Prerequisites

Before starting the API integration, ensure the following:

API feature is enabled in Sentry

Personnel account has a password

Personnel account is assigned a role with API permission


Postman is installed

5. Activating the API in Sentry

5.1 Go to Settings.

5.2 Click Advanced Features.

5.3 Enable or activate the API feature.

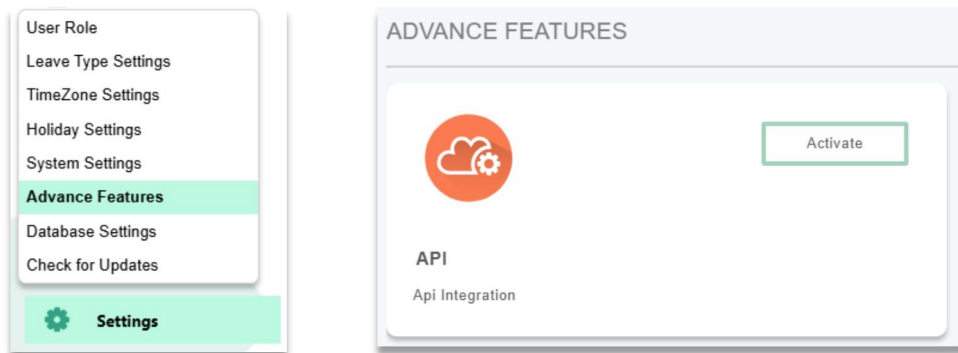

6. Creating a User Role for API Access

Defines how transaction data is displayed in the FTP file.

6.1 Go to Settings.

6.2 Click User Role.

6.3 Enable API permission for the selected role.

6.4 Assign the role to the personnel account that will be used for token authorization.


Note: The personnel account must have API access enabled to generate a token.

The screenshot displays the SENTRY application interface. On the left is a sidebar with the SENTRY logo and a menu containing: Dashboard, Personnel, Time Entries, Official Business, Leaves, Event Logs, Devices, Device Linkage, Access Group, User Role, Leave Type Settings, TimeZone Settings, Holiday Settings, System Settings, Advance Features, Database Settings, and Check for Updates. The 'Settings' option at the bottom of the sidebar is highlighted with a green box and labeled '6.1'. An arrow points from this box to the 'User Role' option in the menu, which is labeled '6.2'. The main content area is titled 'USER ROLE' and features a list of roles: Admin, Custom, Enroller, and User. An arrow points from the 'User' role to the 'Admin' role, labeled '6.4'. The 'Admin' role is selected, showing configuration options. Under 'ASSIGNED USERROLE BY PERSONNEL', there is a dropdown menu. Below this, under 'ASSIGNED USERROLE BY GROUP', there is a toggle switch for 'Allow Access To All Groups' and another dropdown menu. The 'PERMISSIONS' section includes a 'Grant All Access' toggle, followed by 'Access Groups' permissions (view, add, modify, delete, restore), 'Advance Feature' permissions (view add ons, use API Integration, modify login token settings), 'Configuration' permissions (configure database, change system settings, change holidays, add licenses, change Access Time Zones), and 'Groups' permissions (view groups, add groups). An arrow points from the '6.3' label to the 'Allow user to use API Integration' toggle, which is currently turned on.

7. Installing and Opening Postman


7.1 Install Postman

Download and install Postman if it is not already installed.

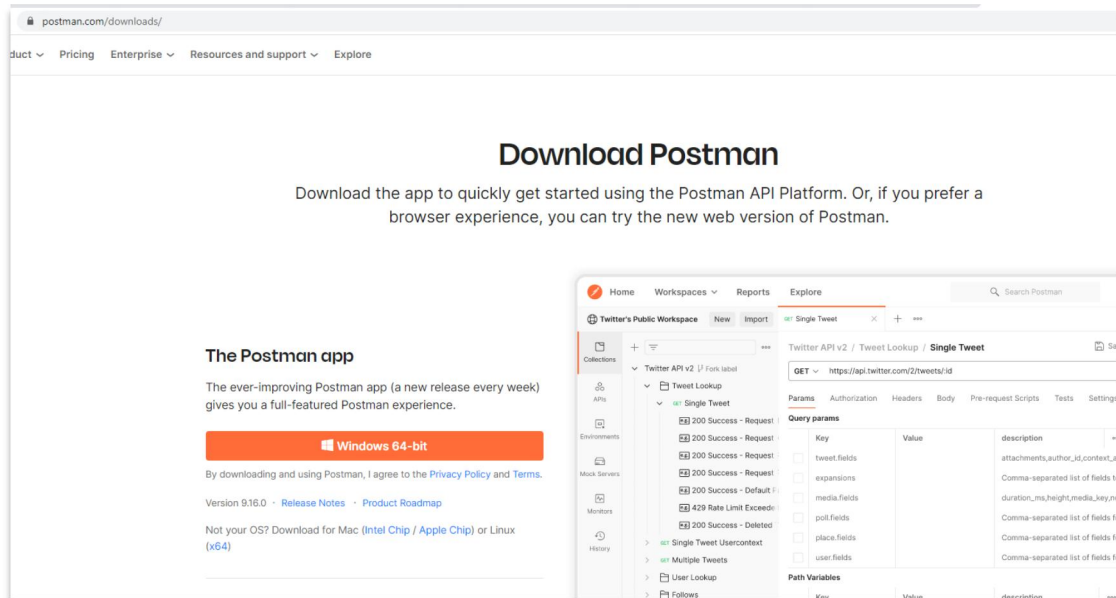

7.2 Open Postman

- Launch Postman.
- Click APIs.
- Click the + (Add Tab) button to create a new request.

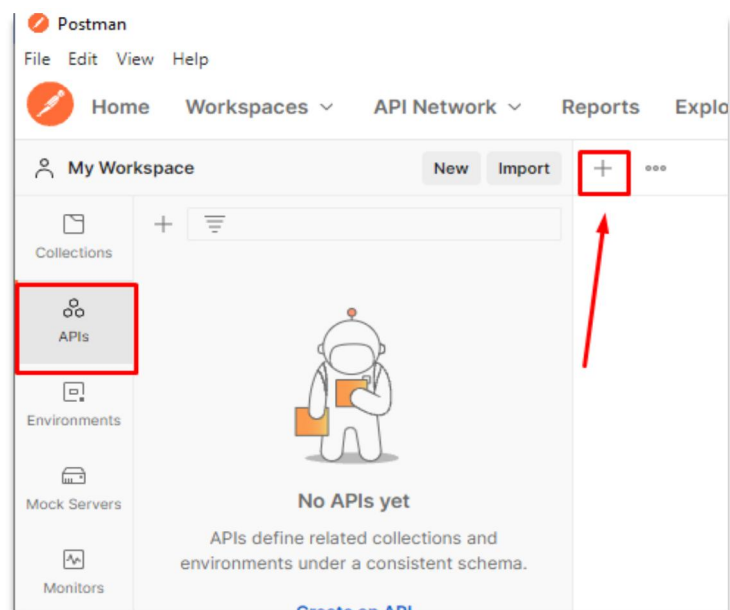

8. Generating an Authorization Token

8.1 Set Request Method

- Set the request method to GET.

8.2 Enter Credentials

- Use Sentry personnel credentials as parameters.
- Enter the username and password of the personnel account.
-

Important Note: The default password is blank, and Postman does not accept blank passwords. Make sure the personnel account has a password set.

☒	Key	Value
☒	username	5555
☒	password	1
	Key	Value

8.3 Token Request Format

- Sentry Base URL Example: <http://localhost:8080/>

Token Request URL Format


[http://\(SENTRY_URL\)/api/Integration/GetToken?username=\(username\)&password=\(password\)](http://(SENTRY_URL)/api/Integration/GetToken?username=(username)&password=(password))

Example: <http://localhost:8080/api/Integration/GetToken?username=5555&password=1>

Click **Send**.




A token will be returned in the response.

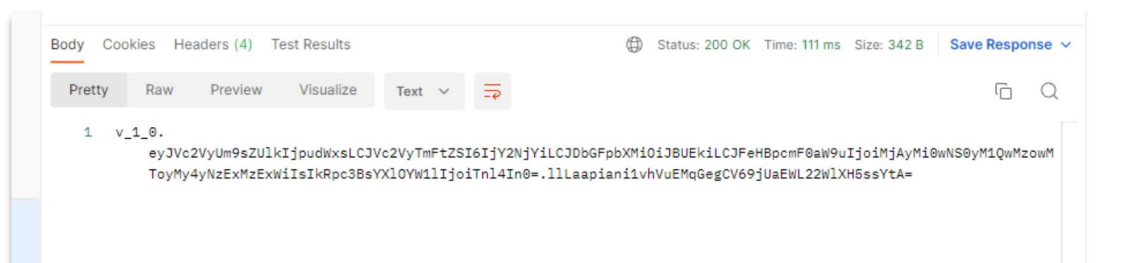

9. Requesting API Data Using the Token


9.1 Create New Request

- Open a new tab in Postman.

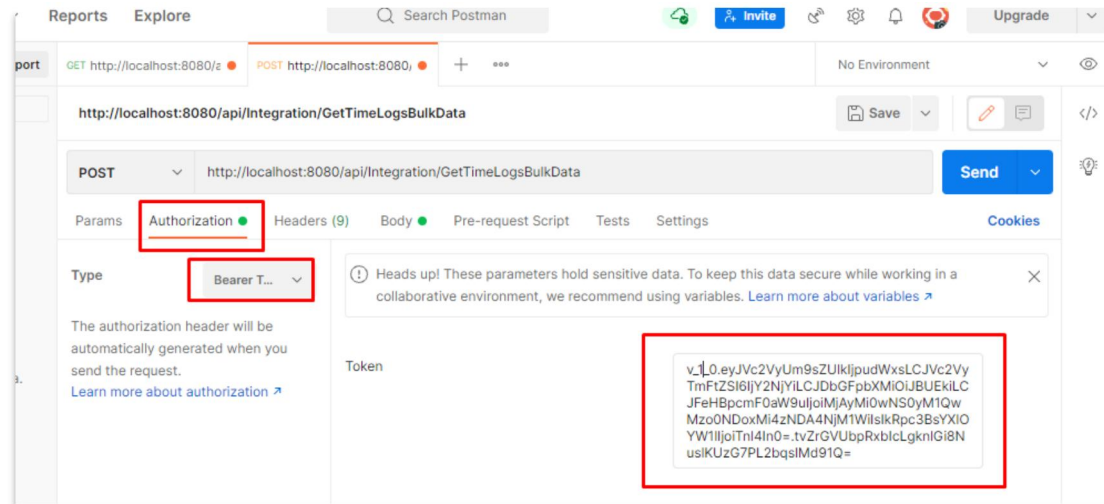


9.2 Insert Bearer Token

- Click the Authorization tab.
- Set Type to Bearer Token.

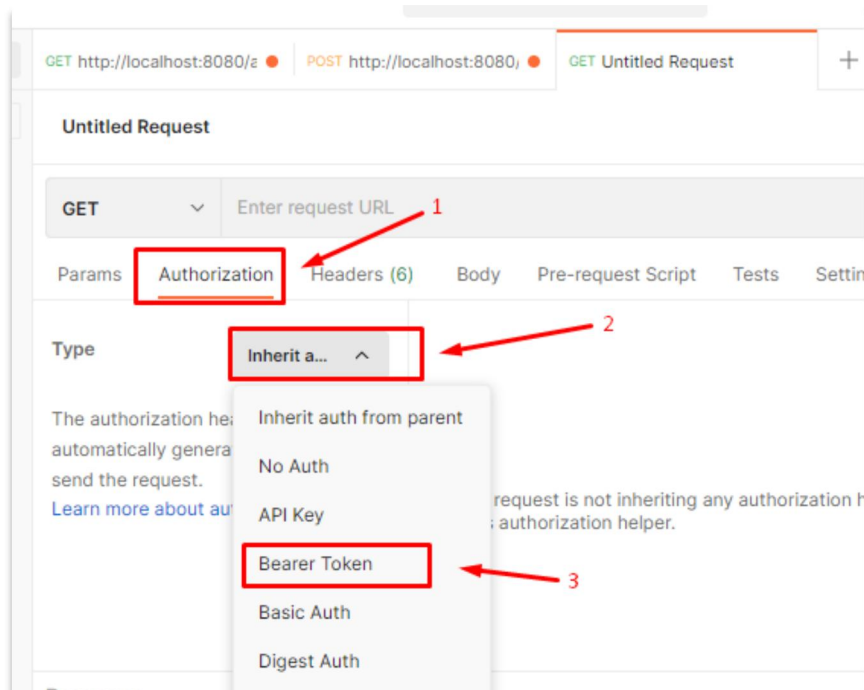

9.3 Enter Token


- Paste the generated token into the Token field.

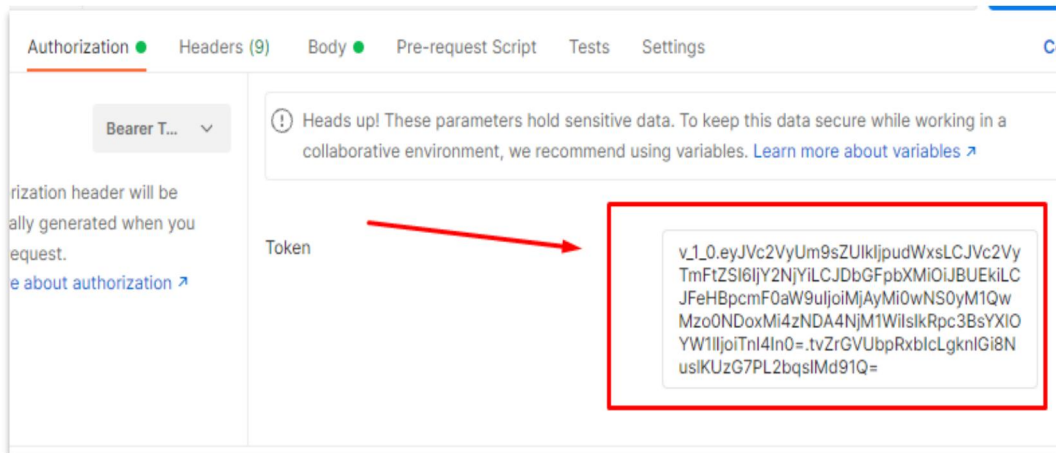

9.4 Add Request Body Parameters

- Click the Body tab.
- Select raw.
- Set the format to JSON.
- Insert the following parameters:

```
{
  "PersonnelNo": "",
  "StartDate": "YYYY-MM-dd",
  "EndDate": "YYYY-MM-dd",
  "start": 0,
  "max": 100
}
```

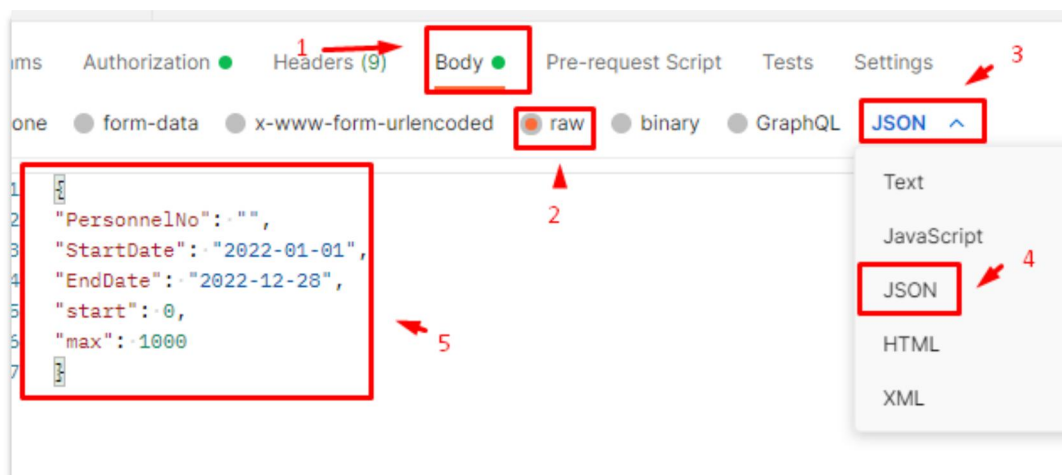


Parameter Description

- **PersonnelNo** - Personnel number in Sentry (leave blank to retrieve all)
- **StartDate** - Start date of the transaction range
- **EndDate** - End date of the transaction range
- **Start** - Starting index of transaction data
- **Max** - Maximum number of records to retrieve

10. Retrieving Transaction Data

- Set the request method to POST.
- Use the following API endpoint:
<http://localhost:8080/api/Integration/GetTimeLogsBulkData>
- Click Send.

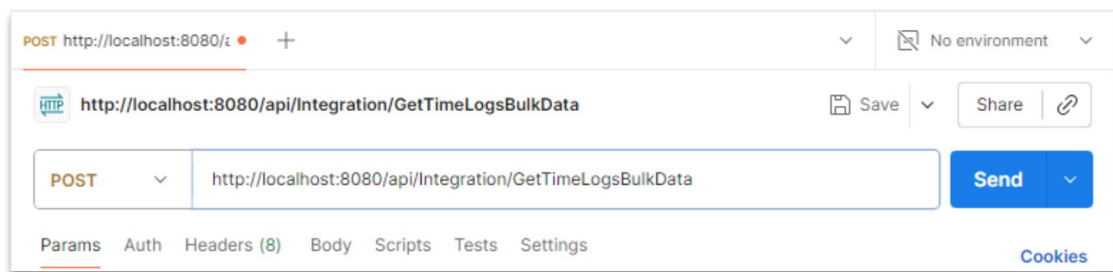

Result: Transaction data will be returned from the Sentry API.



11. Configuring Transaction Parameters in Sentry

- Go to Advanced Features in Sentry.
- Click **API Settings**.
- Configure the transaction parameters as required.
- Click **Save**.

The image shows two parts of the Sentry configuration interface. The top part is the 'ADVANCE FEATURES' section, which includes a sidebar with options like 'User Role', 'Leave Type Settings', 'TimeZone Settings', 'Holiday Settings', 'System Settings', 'Advance Features' (highlighted), 'Database Settings', and 'Check for Updates'. The main content area shows the 'API' integration, which is 'Activated' and has a 'Setting' button. The bottom part is the 'AddOns' modal, titled 'Timelog Properties'. It contains a search bar and a list of properties: 'PERSONNEL ID', 'DEVICE NAME', 'PERSONNEL MIDDLENAME', and 'LOGTYPE'. Each property has icons for up/down arrows, edit, and delete. At the bottom of the modal are 'Save' and 'Close' buttons.

ADVANCE FEATURES

API
Api Integration

AddOns

Timelog Properties

PERSONNEL ID

DEVICE NAME

PERSONNEL MIDDLENAME

LOGTYPE

Save Close

12. API Response Data

- After configuring the API settings and submitting the request, the response will include personnel data such as:
 - ✓ Personnel ID
 - ✓ Device Name
 - ✓ Personnel Middle Name
 - ✓ Log Type

A screenshot of a web interface showing a JSON response. At the top, there are two tabs: 'raw' and 'JSON'. The 'JSON' tab is selected and highlighted in blue. Below the tabs, a code editor displays a JSON object with the following structure: { "personnelid": "12345", "devicename": "inbio260", "personnelmiddlename": "Gonzales", "logtype": "1" }. The code is syntax-highlighted, with keys in red and values in blue. Line numbers 1 through 7 are visible on the left side of the editor.

```
1  {  
2    "personnelid": "12345",  
3    "devicename": "inbio260",  
4    "personnelmiddlename": "Gonzales",  
5    "logtype": "1"  
6  }  
7
```