


Figure 1. Evidence-to-criterion architecture with the three compatibility boundaries and content-addressed identity

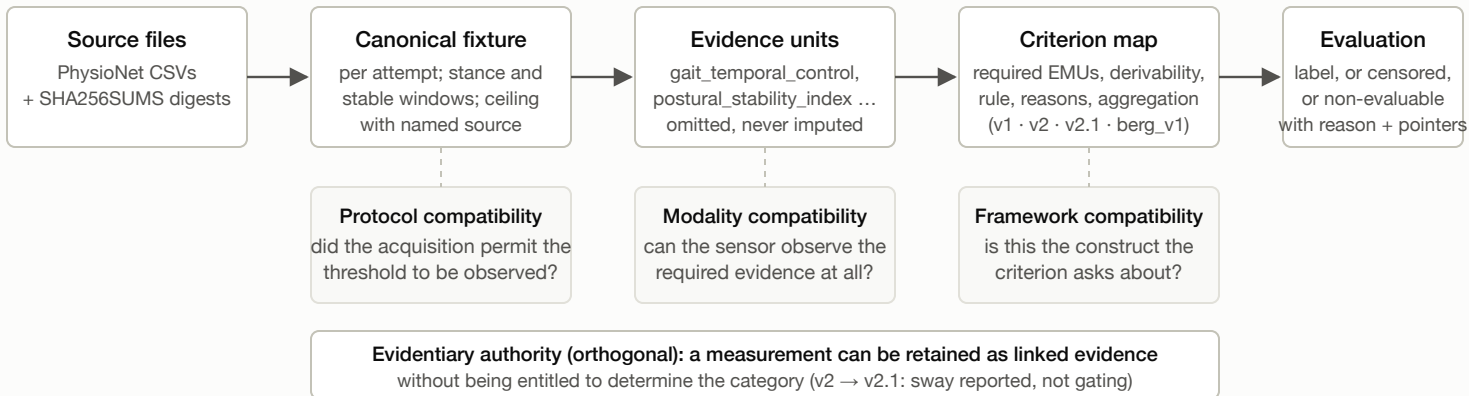

Content-addressed identity

```
fixture_id = SHA-256(fixture bytes) spec_id = SHA-256(canonicalization spec) criterion_map_id = SHA-256(map JSON) harness_version = SHA-256(harness JSON)
run_id = SHA-256(fixture_id, dataset_version, mapping_spec_version, spec_id, criterion_map_id, harness_version)
output_hash = SHA-256(canonical{emu_outputs, criterion_evaluations, non_evaluable_criteria, traceability, mapping_spec_version, harness_version})
```

Comparing digests names the cause of any divergence: map changed (v1 → v2 → v2.1), acquisition metadata changed (spec v1.3 → v1.4: new fixture_id, same decision), or harness changed (Berg needed a rule type: harness_version moved, spec and store did not). Store: ingest → recall → verify_replay, bit-for-bit.