

# Practical-1

Name: Clive Fernandes

PRN:- 202501050019

## 1.1.1 Calculate Momentum

Write a program that accepts the mass of an object (in kilograms) and its velocity (in meters per second), then calculates and displays the momentum of the object. The momentum is calculated using the formula: where: is the mass of the object (in kilograms). is the velocity of the object (in meters per second).

### Input Format:

- A single floating-point number representing the mass of the object in kilograms.
- A single floating-point number representing the velocity of the object in meters per second.

### Output Format:

- The output will display calculated momentum with appropriate units (kgm/s) (rounded up to 2 decimal places).

### Code:

```
mass = float(input()) velocity
```

```
= float(input())
```

```
momentum = mass*velocity print(f"{momentum:.2f}kgm/s")
```

The screenshot displays the CodeTANTRA IDE interface. At the top, the header includes the logo, navigation links (Home, Learn Anywhere), a user profile (202501050019@mitaoe.ac.in), and a Logout button. The main area shows test results for a program. A summary bar indicates '2 out of 2 shown test case(s) passed' and '2 out of 2 hidden test case(s) passed'. Below this, two test cases are detailed. Test case 1 shows an expected output of 5.8, 18.0, and 50.00kgm/s, with an actual output of 5.8, 18.0, and 50.00kgm/s. Test case 2 shows an expected output of 2.3, 4.8, and 11.04kgm/s, with an actual output of 2.3, 4.8, and 11.04kgm/s. The interface also includes an Explorer panel on the left and a Debugger panel on the right.

## 1.1.2. Conditional Calculation Based on the Number of Digits

Write a Python program that accepts an integer as input. Depending on the number of digits in .

### Constraints:

$1 \leq \leq 999$

### Input Format:

- The input consists of a single integer .

#### Output Format:

- If  $n$  is a single-digit number, print its square.
- If  $n$  is a two-digit number, print its square root (rounded to two decimal places).
- If  $n$  is a three-digit number, print its cube root (rounded to two decimal places).
- Else print "Invalid".

#### Code:

```
n=int(input()) if
```

```
0<=n and n<=9:
```

```
    print(n*n)        elif
```

```
10<=n and n<=99:
```

```
    print(f"{n**(1/2):.2f}") elif
```

```
100<=n and n<=999:
```

```
    print(f"{n**(1/3):.2f}") else:
```

```
    print("Invalid")
```

#### 1.1.3. Days between Two Dates

Write a Python program to calculate number of days between two dates.

#### Input Format:

- The first line contains the first date in the format YYYY-MM-DD
- The second line contains the second date in the format YYYY-MM-DD

#### Output Format:

- An integer representing the number of days between the given dates.

**Code:** from datetime import datetime

date1=input().strip() date2=input().strip()

d1=datetime.strptime(date1,"%Y-%m-%d")

d2=datetime.strptime(date2,"%Y-%m-%d")

difference = d2-d1 print(difference.days)

CODETANTRA Home Learn Anywhere 202501050019@mitaoe.ac.in Support Logout

Average time: 0.027 s Maximum time: 0.056 s  
26.75 ms 56.00 ms

2 out of 2 shown test case(s) passed  
2 out of 2 hidden test case(s) passed

Test case 1 69 ms Debug

| Expected output | Actual output |
|-----------------|---------------|
| 2014-07-02      | 2014-07-02    |
| 2014-11-02      | 2014-11-02    |
| 123             | 123           |

Test case 2 48 ms Debug

| Expected output | Actual output |
|-----------------|---------------|
| 2014-07-02      | 2014-07-02    |
| 2014-07-11      | 2014-07-11    |
| 9               | 9             |

#### 1.1.4. Reverse a Number

Write a Python program to reverse the digits of the number and print the reversed number.

**Input Format:**

- The input is a single integer.

**Output Format:**

- The output prints a single integer, which is the reversed number.

**Code:**

num = int(input()) reversed\_num=

int(str(num)[::-1])

print(reversed\_num)

CODETANTRA Home Learn Anywhere 202501050019@mitaoe.ac.in Support Logout

Average time: 0.011 s Maximum time: 0.013 s  
11.00 ms 13.00 ms

2 out of 2 shown test case(s) passed  
3 out of 3 hidden test case(s) passed

Test case 1 42 ms Debug

| Expected output | Actual output |
|-----------------|---------------|
| 5367            | 5367          |
| 7635            | 7635          |

Test case 2 43 ms Debug

| Expected output | Actual output |
|-----------------|---------------|
| 0132            | 0132          |
| 231             | 231           |

### 1.1.5. Multiplication Table

Write a Python program that takes an integer as input and prints the multiplication table for that integer from 1 to 10.

#### Input Format:

- The first line of input contains an integer that represents the number for which the multiplication table is to be printed.

#### Output Format:


- Print the multiplication table for the given number in the format: **<number> x**

**<multiplier> = <result>** Code:

```
num = int(input()) for
```

```
i in range(1,11):
```

```
print(f"{num} x {i} = {num * i}")
```

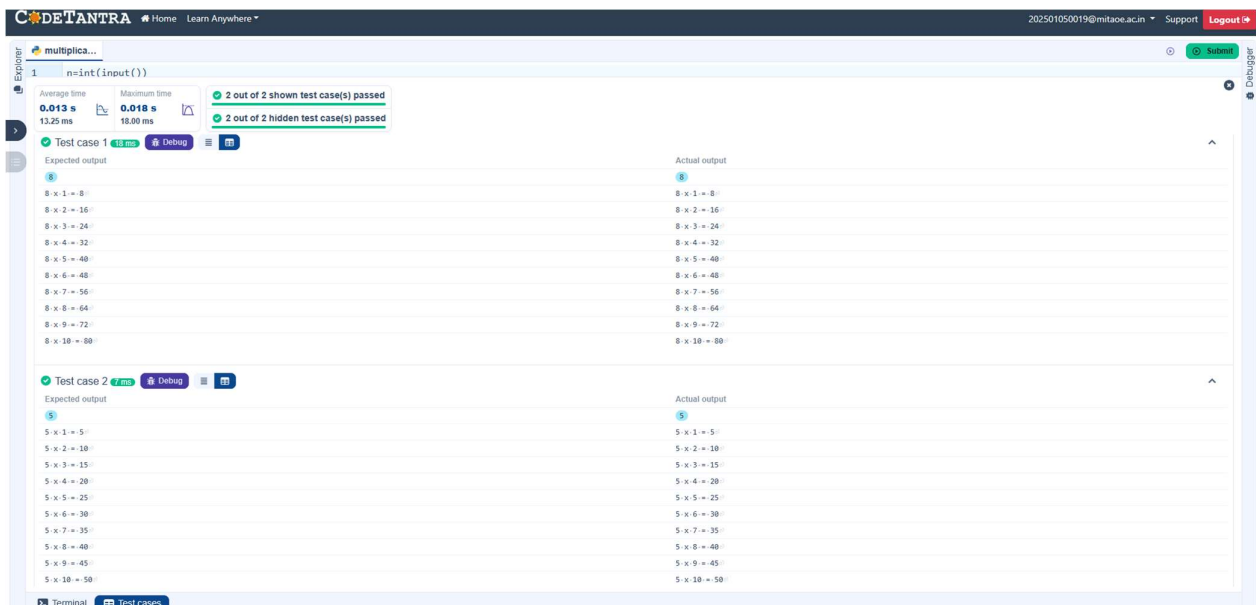

### 1.2.1. Pass or Fail

Write a Python program that accepts the number of courses and the marks of a student in those courses.

The grade is determined based on the aggregate percentage:

- If the aggregate percentage is greater than 75, the grade is Distinction.
- If the aggregate percentage is greater than or equal to 60 but less than 75, the grade is First Division.
- If the aggregate percentage is greater than or equal to 50 but less than 60, the grade is Second Division.

- If the aggregate percentage is greater than or equal to 40 but less than 50, the grade is Third Division.

**Input Format:**

- The first input will be an integer , the number of courses.
- The second input will be integers representing the marks of the student in each of the courses, separated by a space.

**Output Format:**

If the student passes all courses:

- Print the aggregate percentage (formatted to two decimal places).
- Print the grade based on the aggregate percentage.

If the student fails any course (marks < 40 in any course), print:

- "Fail".

**Code:**

```
def cal(marks, total_courses):
    if any(mark < 40 for mark in marks):
        return "Fail"
    total_marks = sum(marks)
    aggregate_percentage=(total_marks/(total_courses *100))*100
    if aggregate_percentage >75:
        grade="Distinction"
    elif aggregate_percentage >=60:
        grade= "First Division"
    elif aggregate_percentage >=50:
        grade= "Second Division"
    elif aggregate_percentage >=40:
        grade= "Third Division"
    return (aggregate_percentage,grade)

num_courses= int(input())
marks= list(map(int,input().split()))
result= cal(marks,num_courses)
if result == "Fail":
    print("Fail")
else:
    aggregate_percentage,grade=result
    print(f"Aggregate Percentage: {aggregate_percentage:.2f}")
    print(f"Grade: {grade}")
```

**CODETANTRA** Home Learn Anywhere 202501050019@mitaoe.ac.in Support Logout

Average time: 0.025 s (24.70 ms) Maximum time: 0.044 s (44.00 ms) 5 out of 5 shown test case(s) passed 5 out of 5 hidden test case(s) passed

| Test Case           | Expected output     | Actual output       | Aggregate Percentage | Grade           |
|---------------------|---------------------|---------------------|----------------------|-----------------|
| Test case 1 (23 ms) | 4<br>55 65 78 89    | 4<br>55 65 78 89    | 71.75                | First Division  |
| Test case 2 (41 ms) | 5<br>56 78 97 86 93 | 5<br>56 78 97 86 93 | 82.00                | Distinction     |
| Test case 3 (19 ms) | 5<br>99 85 43 97 34 | 5<br>99 85 43 97 34 | Fail                 | Fail            |
| Test case 4 (17 ms) | 3<br>55 54 53       | 3<br>55 54 53       | 54.00                | Second Division |
| Test case 5 (17 ms) | 5<br>40 45 42 48 41 | 5<br>40 45 42 48 41 | 43.20                | Third Division  |

< Prev Reset Submit Next >

### 1.2.2. Fibonacci Series

Write a Python program that uses recursion to print the first terms of the Fibonacci series.

#### Input Format:

- A single integer representing the number of terms to generate.

#### Output Format:

- A single line containing the first terms of the Fibonacci sequence, separated by spaces.

**Code:** def

fibonacci(n):

if n == 1:

return 0

elif n == 2:


return 1

else:

return fibonacci(n - 1) + fibonacci(n - 2)

n = int(input()) for i in range(1, n + 1):

print(fibonacci(i), end=" ")

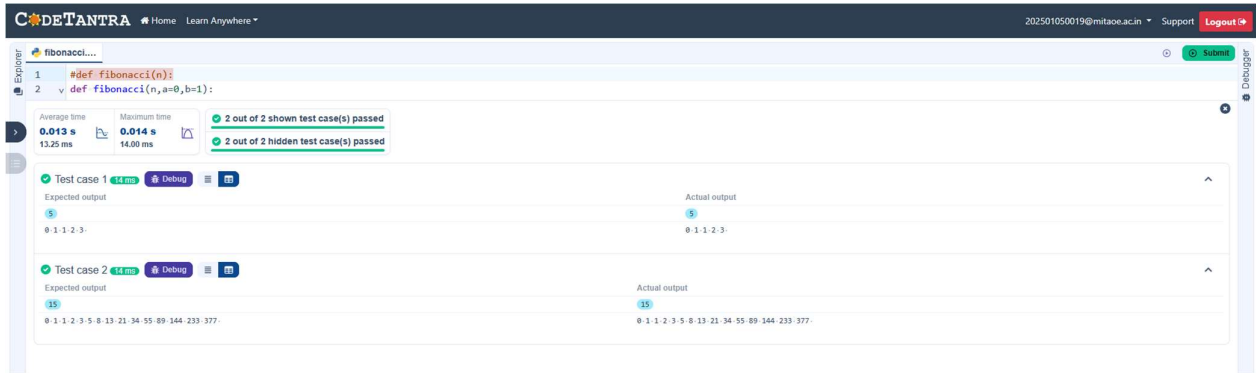

### 1.2.3. Pattern -1


Write a Python program to print a pattern of asterisks in the form of a right-angled triangle.

**Input Format:**

- The input is an integer, representing the number of rows in the pattern. **Output Format**
- The output should display the pattern of asterisks (\*), with each row containing an increasing number of asterisks.

**Code:**

```
n = int(input())
for i in range(1, n+1):
    print('* ' * i)
```

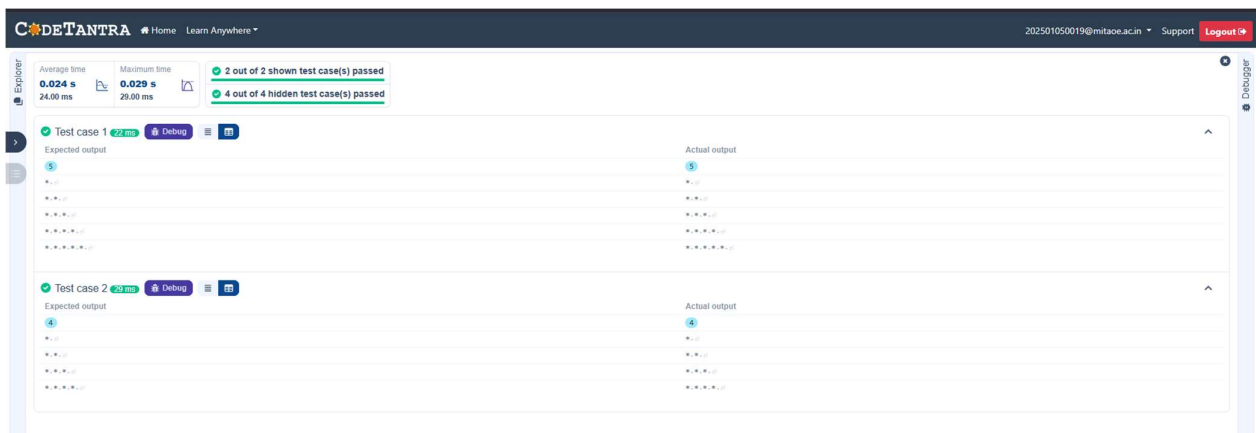

### 1.2.4. Pattern -2

Write a Python program to print a right-angled triangle pattern of numbers.

**Input Format:**

- The input is an integer, representing the number of rows in the pattern.

**Output Format:**

- The output should display the pattern of numbers separated by space, with each row containing increasing numbers starting from 1 up to the row number.

Code:

```
n = int(input()) for i in
```

```
range(1, n+1): for j in
```

```
range(1, i+1):
```

```
    print(j,end=" ")
```

```
print()
```

**CODETANTRA** Home Learn Anywhere 202501050019@mitaoe.ac.in Support Logout

Explorer Average time: 0.015 s, 15.00 ms Maximum time: 0.028 s, 28.00 ms 2 out of 2 shown test case(s) passed 2 out of 2 hidden test case(s) passed

Test case 1 0.015 ms Debug

| Expected output | Actual output |
|-----------------|---------------|
| 5               | 5             |
| 1 -             | 1 -           |
| 1 2 -           | 1 2 -         |
| 1 2 3 -         | 1 2 3 -       |
| 1 2 3 4 -       | 1 2 3 4 -     |
| 1 2 3 4 5 -     | 1 2 3 4 5 -   |

Test case 2 0.015 ms Debug

| Expected output   | Actual output     |
|-------------------|-------------------|
| 8                 | 8                 |
| 1 -               | 1 -               |
| 1 2 -             | 1 2 -             |
| 1 2 3 -           | 1 2 3 -           |
| 1 2 3 4 -         | 1 2 3 4 -         |
| 1 2 3 4 5 -       | 1 2 3 4 5 -       |
| 1 2 3 4 5 6 -     | 1 2 3 4 5 6 -     |
| 1 2 3 4 5 6 7 -   | 1 2 3 4 5 6 7 -   |
| 1 2 3 4 5 6 7 8 - | 1 2 3 4 5 6 7 8 - |