


Git Guide **Clodagh Canavan** **C00333603**

1. **[git init]**
   Makes the folder you are currently in a local Git repository.

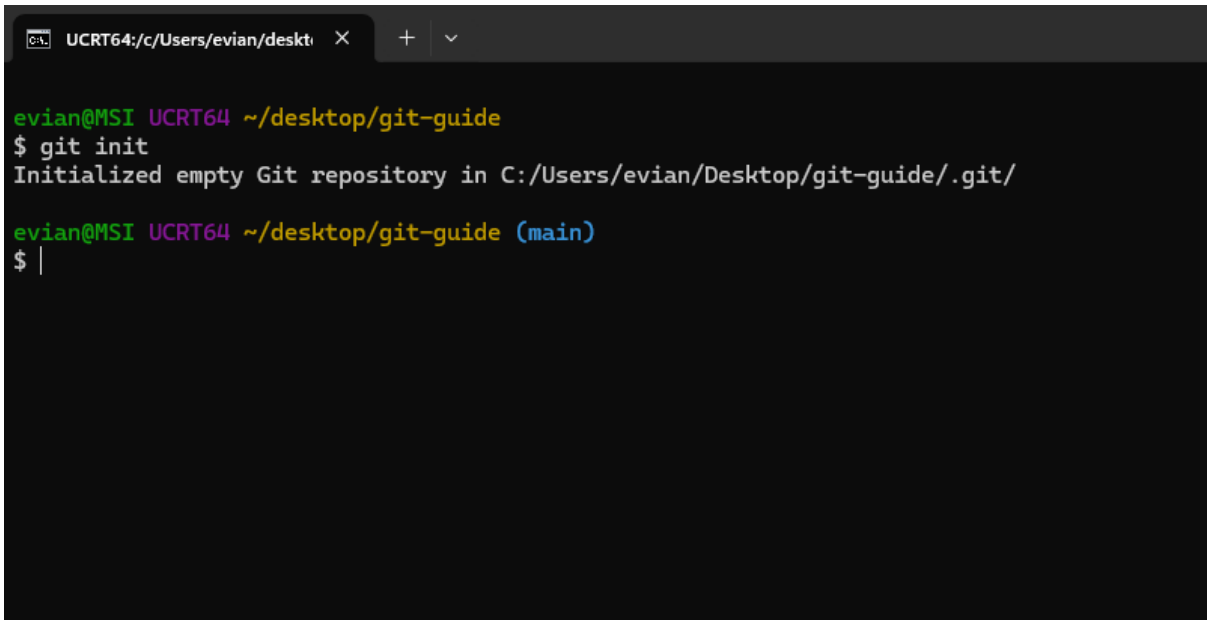

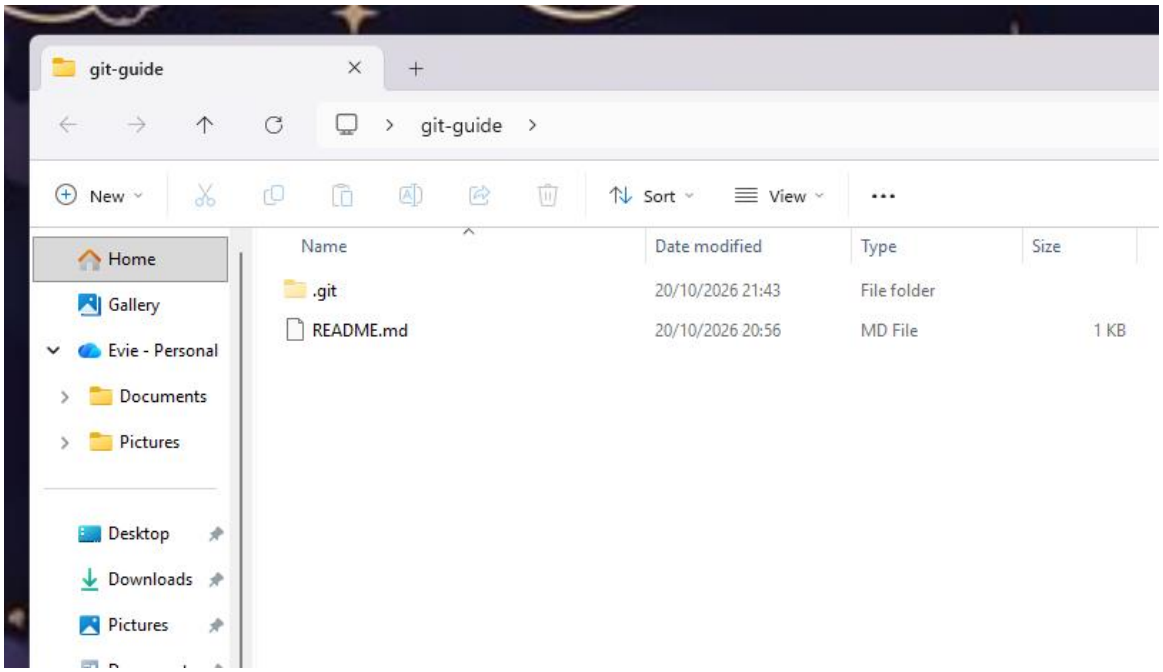

2. **[git add <filename>]**
   Stages specified files (in place of <>) for use in next commit.

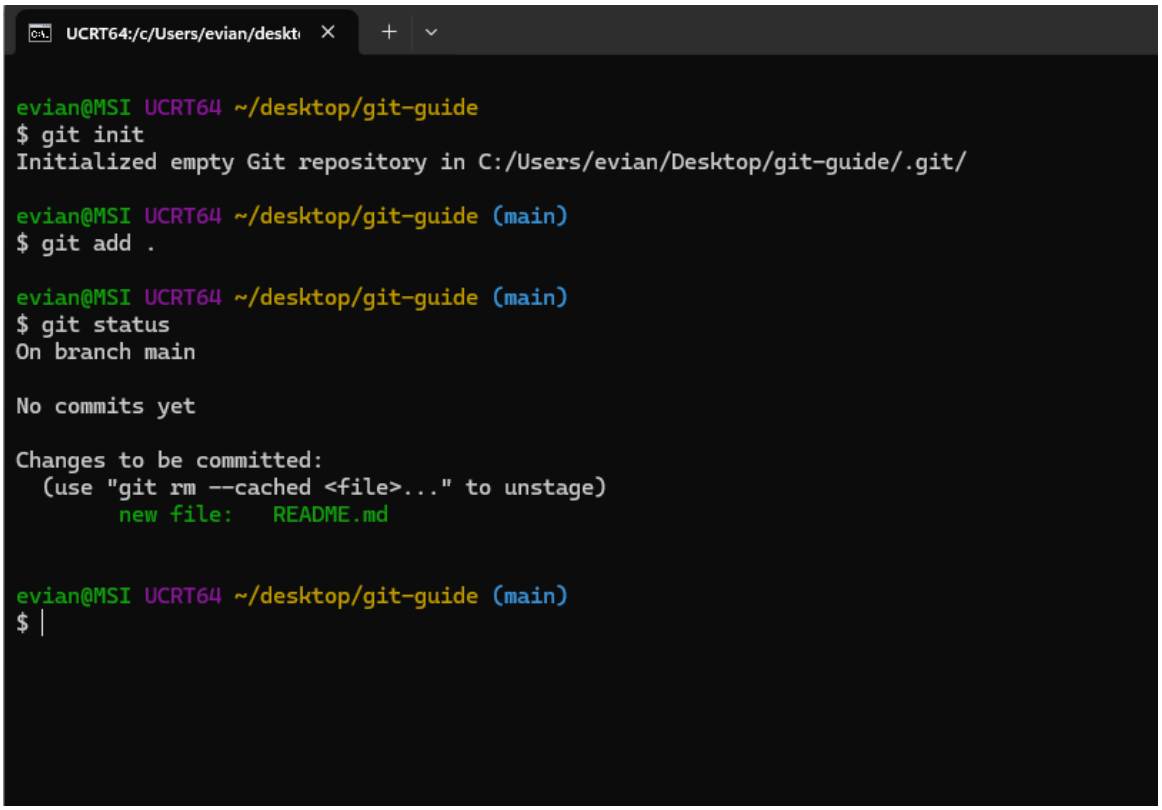

3. **[git status]**
   Shows details of current local repository.

```
evian@MSI UCRT64 ~/desktop/git-guide (main)
$ git status
On branch main

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   README.md


evian@MSI UCRT64 ~/desktop/git-guide (main)
$
```

4. **[git commit]**
   Takes a snapshot of staged files in repository, they can be accessed later in time.

```
UCRT64:/c/Users/evian/deskt
evian@MSI UCRT64 ~/desktop/git-guide (main)
$ git commit -m "First Commit :)"
Author identity unknown

*** Please tell me who you are.

Run

  git config --global user.email "you@example.com"
  git config --global user.name "Your Name"

to set your account's default identity.
Omit --global to set the identity only in this repository.

fatal: unable to auto-detect email address (got 'evian@MSI.(none)')

evian@MSI UCRT64 ~/desktop/git-guide (main)
$ git config --global user.email "c00333603@setu.ie"


evian@MSI UCRT64 ~/desktop/git-guide (main)
$ git config --global user.name "clodaghcanavan"

evian@MSI UCRT64 ~/desktop/git-guide (main)
$ git commit -m "First Commit"
[main (root-commit) a609663] First Commit
 1 file changed, 1 insertion(+)
 create mode 100644 README.md

evian@MSI UCRT64 ~/desktop/git-guide (main)
$
```


5. **[git remote]**

Tells git where to push local repository up to online.

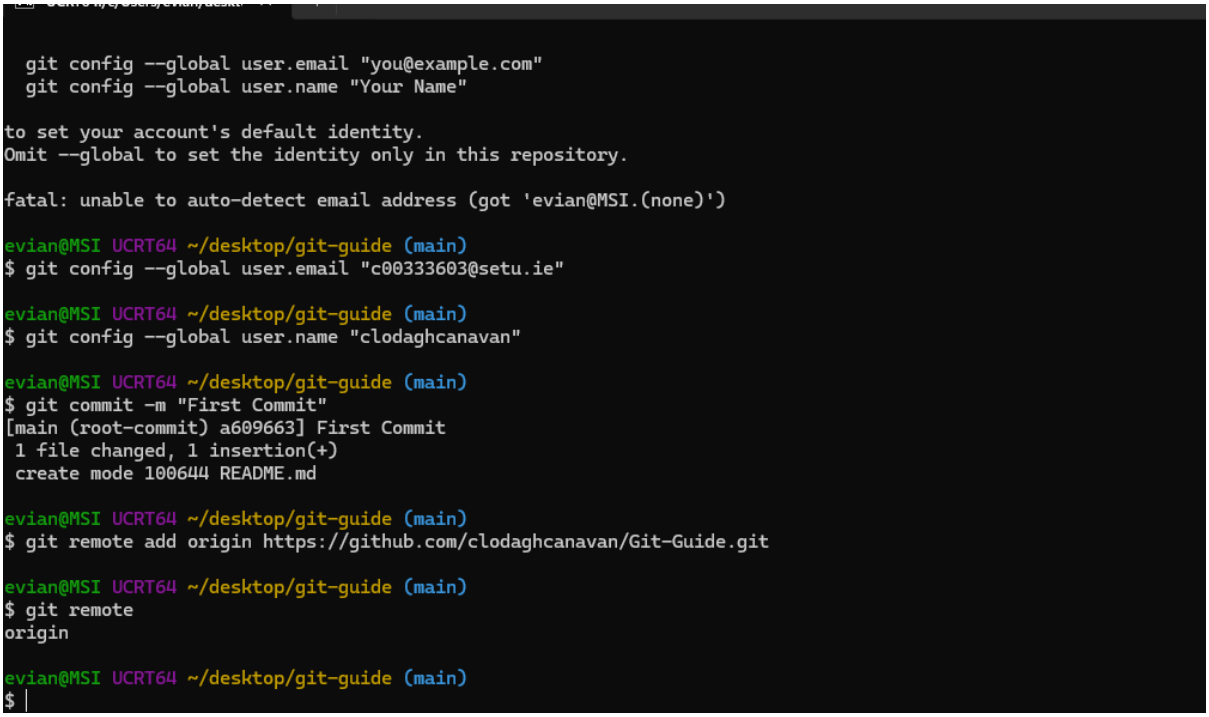


6. **[git push]**

Pushes all local commits since last push to online repository.

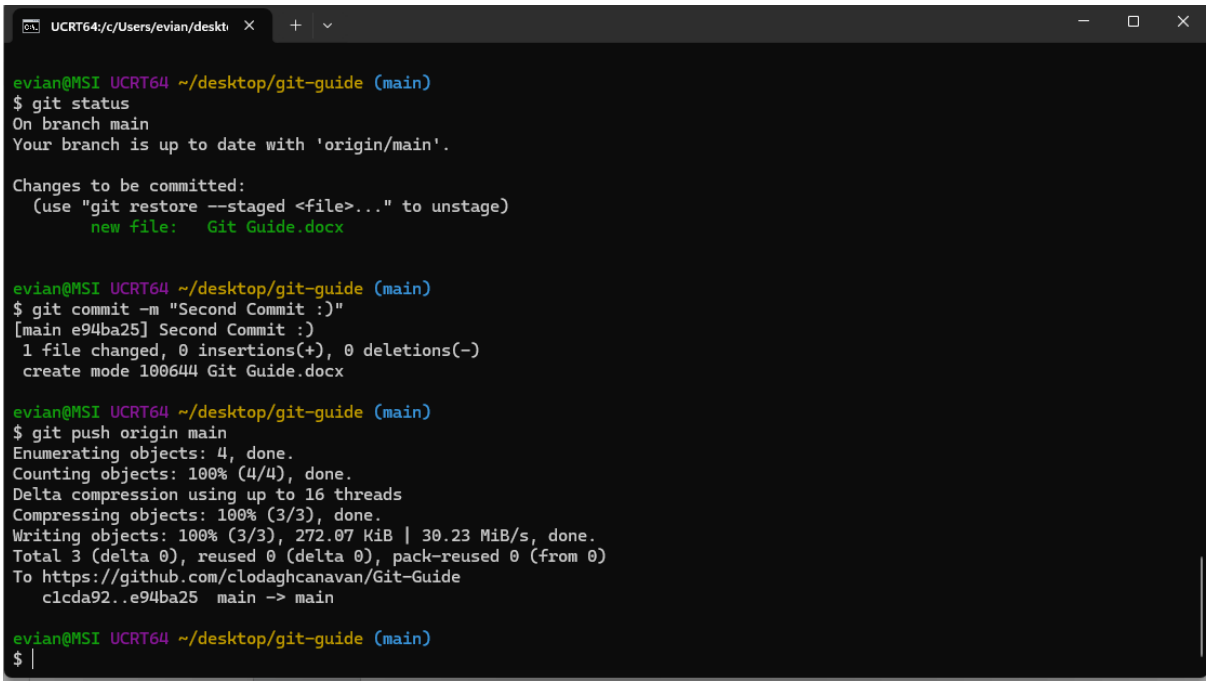


7. **[git branch]**
   Lists all local branches, if a name is specified creates a new branch without switching to it.

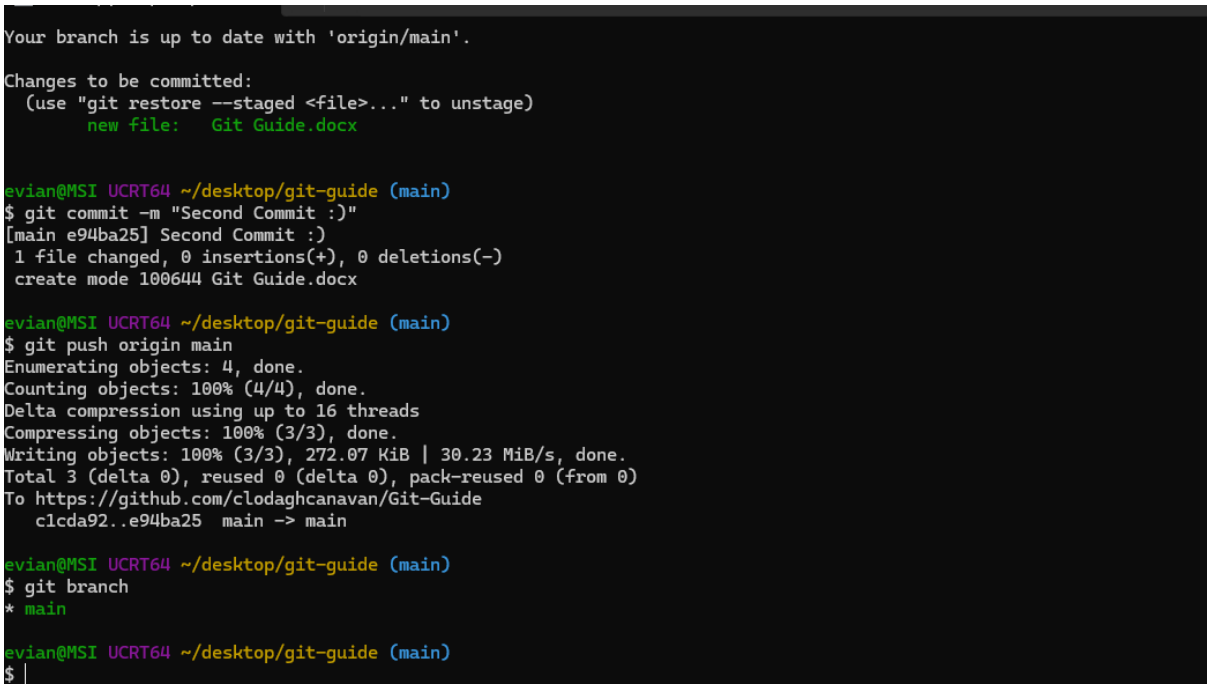


8. **[git checkout]**


Manages branches with functions like switching, adding and removing.

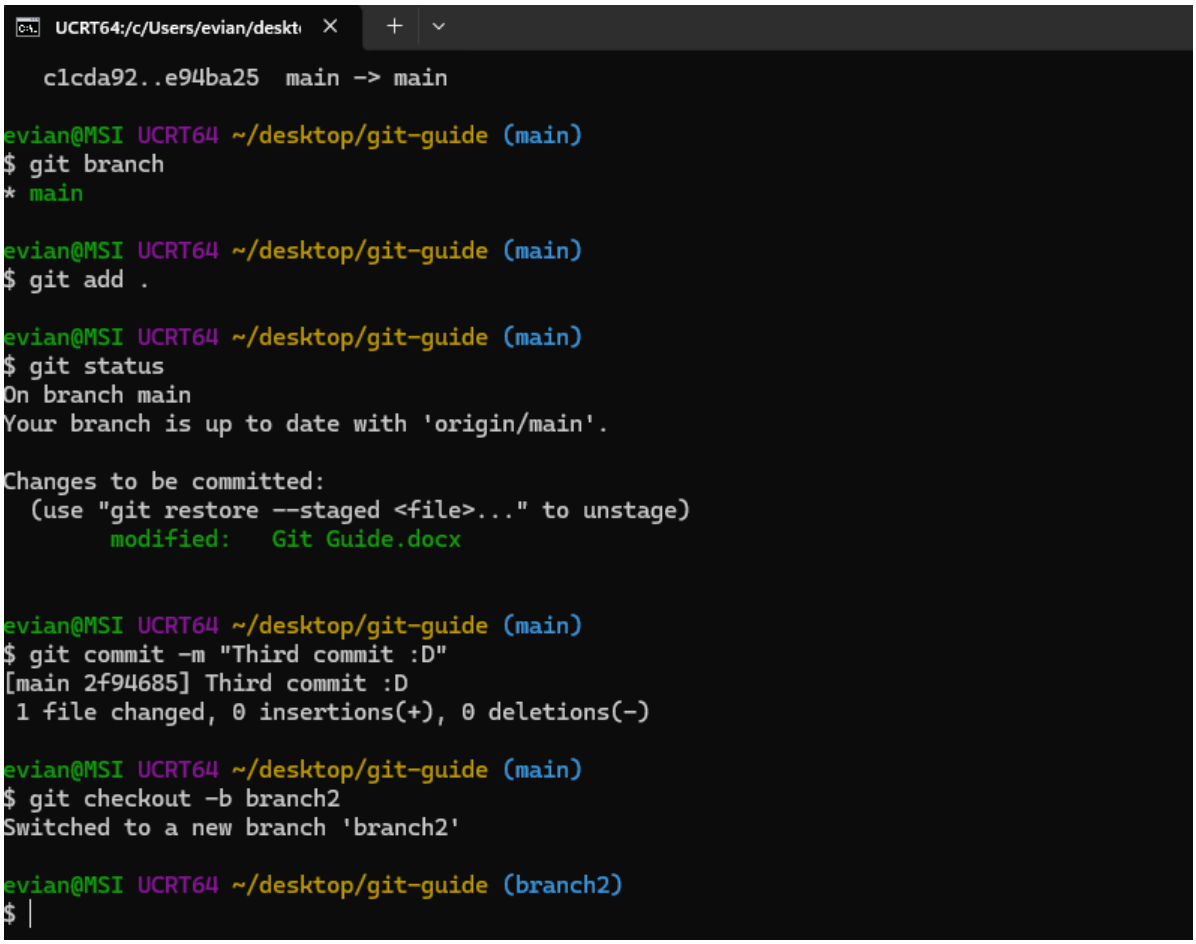

9. **[git merge]**

   Merges 2 branches into 1.

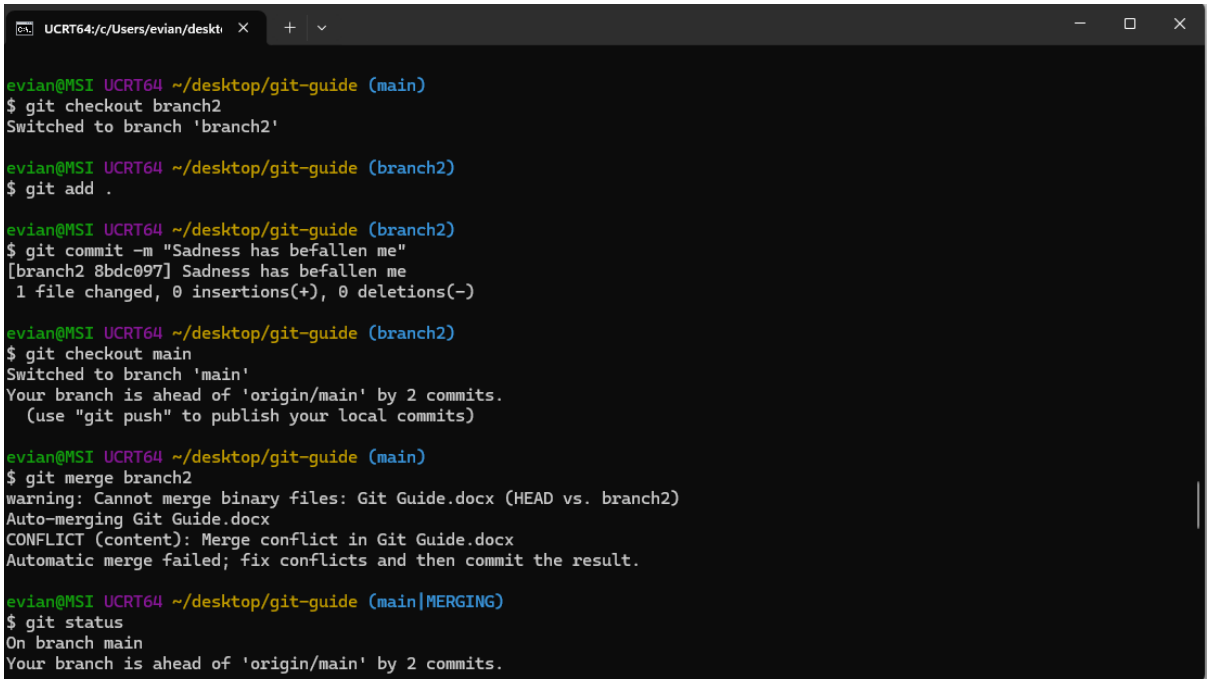

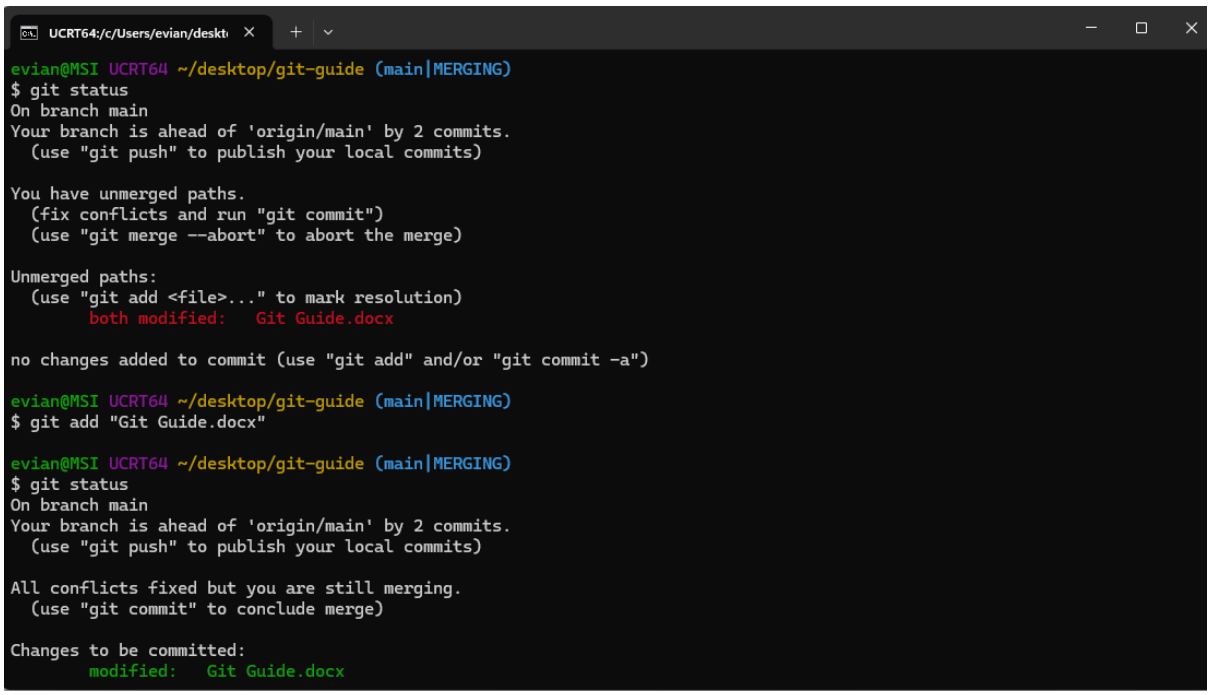

10. **[git config]**

    Changes options git uses to complete task, e.g name and email it pushes commits under. Like a settings function for git.

