Cross-Channel Agreement Beats Consensus: Compositional Verification for Geometry Reasoning

Anonymous Author(s)
Affiliation
Address
email

Abstract

Multimodal geometry reasoning requires models to jointly perceive diagrams and perform symbolic derivations. Test-time verification methods such as majority voting assume voter errors are roughly independent, but in geometry this assumption breaks down: all candidates perceive the same diagram, so perceptual biases cascade into correlated errors that produce confident but wrong consensus. We observe that neuro-symbolic candidates contain compositional structure that can serve as a verification resource. We introduce SKETCH, a format decomposing each candidate into a neural pathway (natural-language claim) and a symbolic pathway (visual grounding $\rightarrow$ typed DSL $\rightarrow$ deterministic execution). These pathways are governed by different error processes—symbolic errors are correlated across candidates through shared perception, while neural errors are more dispersed. Our method, Compositional Consensus Verification (CCV), gates consensus on cross-channel agreement: because the two pathways fail for different reasons, accidental agreement is rare, making each concordant vote far more precise than a raw majority vote. Across four geometry benchmarks, CCV achieves 81.0% accuracy (+10.4 pp over majority voting) without external scorers or additional inference. Seven non-compositional baselines—including trained PRMs—cluster at 70–71%, while compositional cross-layer features jump to 79–81%, confirming that structural diversity is the core verification resource, and that a principled gating algorithm effectively unlocks its potential.

1 Introduction

The verification bottleneck in geometry reasoning. Geometry reasoning differs from purely textual mathematical tasks in a fundamental way: it requires joint visual perception and symbolic derivation. A model must read spatial relationships from a diagram—angles, parallel lines, congruences—and then chain these percepts through multi-step logical deductions. This conjunction makes geometry a task that current vision-language models find difficult Gao et al. [2023], GeoX Contributors [2024], Zhang et al. [2025], and it also creates a distinctive failure mode for test-time verification. Figure 1 summarizes our proposed solution.

The standard approach for improving reasoning accuracy at test time is self-consistency Wang et al. [2023b]: sample K candidates and select the most frequent answer via majority voting (MV). This rests on the Condorcet assumption that voter errors are approximately independent, so that the majority converges to truth as K grows. In geometry, this assumption breaks down in a specific and measurable way. All K candidates perceive the *same* diagram; if the model harbors a systematic perceptual bias—misidentifying a perpendicular as supplementary, or misreading an angle label—then a majority of candidates will share the same error. Votes become correlated because they reflect the same perceptual errors. Formally, when the pairwise error correlation ρ is substantial, the effective

Submitted to 40th Conference on Neural Information Processing Systems (NeurIPS 2026). Do not distribute.

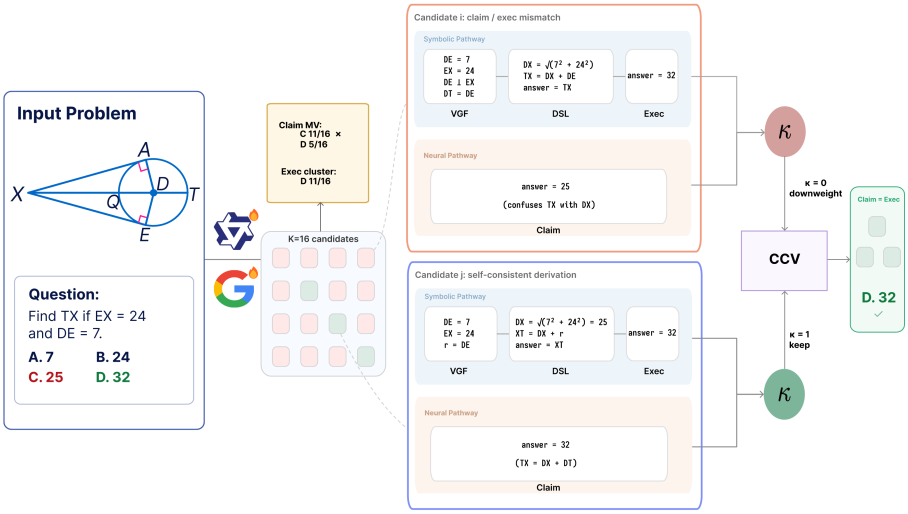


Figure 1: **Method overview.** A geometry problem is sampled into $K{=}16$ SKETCH candidates. Each candidate exposes a symbolic pathway (VGF $\rightarrow$ typed DSL $\rightarrow$ execution) and a neural pathway (claim). Cross-channel agreement κ filters reliable candidates; if the κ-pool is empty, CCV falls back to a high-confidence execution majority or claim majority vote.

sample size degrades as $N_{\text{eff}} = K/(1 + (K{-}1)\rho)$ Ladha [1992], Nitarach et al. [2026]. At $\rho = 0.5$, sixteen candidates carry the information of barely two independent votes. In our experiments, wrong execution consensus clusters of size 8–16 account for 86% of all verification failures—strong majorities that are confidently wrong because they derive from the same misperceived geometric facts.

Compositional structure as a verification resource. Since the problem is within-channel error correlation, a natural response is to seek a structurally independent verification signal. We observe that neuro-symbolic reasoning candidates are not opaque votes. Unlike standard chain-of-thought outputs—a single text sequence mapping to a single answer—a neuro-symbolic candidate decomposes into layers with distinct computational character:

$$\text{Candidate} = \big(\underbrace{\text{VGF}}_{\text{perception}} , \underbrace{\text{DSL}}_{\text{logic}}, \underbrace{\text{exec}}_{\text{computation}} , \underbrace{\text{claim}}_{\text{intuition}} \big) \tag{1}$$

where VGF (Visual Grounding Facts) captures geometric relations extracted from the diagram, DSL is a typed program encoding the reasoning steps, exec is its deterministic execution result, and claim is the model's stated answer.

The claim and exec arise from *structurally different pathways*. The claim is produced by the neural pathway—the model's implicit reasoning, subject to the dispersed noise of autoregressive generation. The execution result is produced by the symbolic pathway—a deterministic computation on extracted premises, subject to the correlated noise of shared visual perception. These two pathways have different error correlation structures: neural errors are relatively independent across candidates, while symbolic errors are highly correlated because candidates see the same diagram.

Existing verification paradigms overlook this structural difference. *Consensus methods* (MV, self-consistency, CISC) count votes within a single output layer, making them vulnerable to within-layer error correlation. *Learned verifiers* (ORM, PRM, VisualPRM) train an external model to score candidates, which requires domain-specific training data and adds inference cost. Neither paradigm exploits the compositional structure that is already present in the candidates. We propose a third approach: **compositional verification**, which derives verification signal from cross-pathway agreement within the candidates themselves.

The cross-channel verification principle. We formalize the following principle. Consider two verification channels C_1 (claim) and C_2 (exec), each providing noisy evidence about the correct answer z^*. Let ρ_1, ρ_2 denote the pairwise error correlations within each channel.

Principle (Cross-Channel Verification). *When within-channel error correlations are high ($\rho_2 \gg 0$), a single instance of cross-channel agreement—one candidate where C_1 and C_2 independently converge to the same answer—provides stronger evidence for correctness than k instances of within-channel consensus, for any k bounded by the effective sample size $K/(1 + (K-1)\rho_2)$.*

Within-channel consensus can be inflated by shared errors (all candidates misread the same angle), but cross-channel agreement requires two structurally different noise processes to simultaneously produce the same answer. The probability of this occurring by chance is governed by the cross-channel error coupling, which we empirically measure at $P(\text{exec correct} \mid \text{claim correct}) \approx 0.225$—far lower than the within-channel consensus rates, confirming that the two pathways are only weakly coupled.

Contributions. This paper turns the internal structure of neuro-symbolic candidates into a test-time verification signal. We introduce the SKETCH format, which decomposes geometry reasoning into VGF, typed DSL, deterministic execution, and a neural claim while maintaining >99.9% format compliance with a 9B VLM. Building on this structure, we propose CCV, a training-free verifier that gates scoring and output routing through claim–execution agreement, improving over MV by $+10.41$ pp across four benchmarks with no additional inference. The same fixed protocol transfers to Gemma4-E4B, yielding $+7.84$ pp over Claim MV, and a failure taxonomy shows why: κ-gating recovers 88.5% of the dominant failure subtype where symbolic consensus fails but neural intuition holds.

2 The SKETCH Format

Visual grounding facts (VGF). For cross-candidate verification to work, visual observations must be comparable across candidates in a structured way. Free-form natural-language descriptions of a diagram are not reliably alignable; two candidates may describe the same geometric relationship with different wording. We therefore represent visual grounding as a list of atomic facts drawn from a closed vocabulary of relations:

$$f = (\texttt{relation}, \texttt{entities}), \quad \texttt{relation} \in \{\texttt{parallel}, \texttt{perpendicular}, \texttt{collinear}, \ldots\} \tag{2}$$

The closed vocabulary ensures parseability and enables direct cross-candidate comparison of perceived geometric structure.

Typed DSL. The DSL is a restricted Python subset that derives the answer from VGF-grounded premises using geometry helper functions and standard mathematical operations ($\sqrt{\cdot}$, trigonometric functions, π, etc.). Restricting the subset—no imports, no I/O, no loops—ensures termination and deterministic execution, which is essential for the symbolic pathway to produce a reliable verification signal. Every program terminates with an explicit `answer = ...` assignment, so the execution result can be extracted automatically without answer parsing.

Closed-loop structure. The key property of the SKETCH format is that each candidate carries an intrinsic verification signal: whether its neural claim agrees with its symbolic execution. This signal exists because the format closes the loop: VGF provides premises $\rightarrow$ DSL reasons from premises $\rightarrow$ exec produces a deterministic result $\rightarrow$ claim states the model's answer. When claim $\approx$ exec (compositional consistency, κ=1), the neural and symbolic pathways have independently converged, providing evidence that the answer is correct without any external reference.

Training. We fine-tune Qwen3.5-9B with LoRA (r=8, α=16) on 2,012 geometry examples derived from the Geometry3K Lu et al. [2021] training split. We use the geometry3k subset of NVIDIA Nemotron-Image-Training-v3 NVIDIA [2024], which provides 2,078 CoT annotations generated by Qwen3-VL-235B. Each CoT trace is reformatted into VGF+DSL structure by DeepSeek V4 Pro. The resulting model achieves format compliance >99.9%, VGF parse success >98.7%, and DSL execution success >94.5% on test data.

3 Compositional Consensus Verification

3.1 Verification Signal Taxonomy

Given K candidates $\{c_1, \ldots, c_K\}$, each decomposed as $c_i = (\text{VGF}_i, \text{DSL}_i, \text{exec}_i, \text{claim}_i)$, we define a hierarchy of verification signals ordered by the structural diversity they require:

Level 1: Within-layer consensus. Signals computed within a single output layer, aggregated across candidates:

$$S_{\text{claim}}(z) = |\{i : \text{claim}_i = z\}| \qquad \text{(surface consensus)} \tag{3}$$

$$S_{\text{exec}}(z) = |\{i : \text{exec}_i = z,\ \text{exec}_i \neq \perp\}| \qquad \text{(execution consensus)} \tag{4}$$

Traditional MV selects $\arg\max_z S_{\text{claim}}(z)$. Execution MV selects $\arg\max_z S_{\text{exec}}(z)$.

Level 2: Cross-layer agreement. Signals that compare outputs across structurally different layers. The core signal is compositional consistency:

$$\kappa_i = \mathbf{1}[\text{claim}_i \approx \text{exec}_i \wedge \text{exec}_i \neq \perp], \tag{5}$$

which checks whether a single candidate's neural and symbolic pathways agree. Additional cross-layer features (e.g., cross-candidate cross-layer agreement μ_i) appear in the learned ablation (Section 4.5) but are not part of the hand-designed algorithm.

Level 3: Agreement-gated consensus. Cross-layer agreement gates within-layer consensus:

$$G_\kappa(z) = \sum_i \mathbf{1}[\text{exec}_i = z] \cdot \kappa_i \tag{6}$$

Only execution votes from self-consistent candidates count. This is the signal that CCV's scoring function is built on.

3.2 The Cross-Channel Verification Advantage

For notational simplicity, this subsection writes claim–exec agreement as equality; in implementation, κ_i uses approximate numeric matching and excludes failed executions.

Theorem 1 (Cross-channel agreement as a precision filter)**.** *Let X_i be the claim answer and Y_i the executed answer for candidate i, and let z^* be the correct answer. Define $\kappa_i = \mathbf{1}[X_i = Y_i]$, $t_\kappa = P(X_i = Y_i = z^*)$, and $f_\kappa = P(X_i = Y_i \neq z^*)$. Then the accuracy of self-consistent candidates satisfies the identity*

$$p_\kappa \triangleq P(Y_i = z^* \mid \kappa_i = 1) = \frac{t_\kappa}{t_\kappa + f_\kappa}. \tag{7}$$

Under an idealized shared-perception model where the exec pathway depends on a latent visual state V, the claim pathway is conditionally independent of exec, and false agreement is dispersed across $M-1$ wrong answers, $t_\kappa = p_c p_e$ and $p_\kappa > p_e$ whenever $p_c > 1/M$.

The theorem isolates the central mechanism: κ-gating is primarily a *precision filter*. It does not require repeated votes in the same channel; it requires two structurally different pathways to converge to the same answer. When the answer space is large, as in numerical geometry, false self-consistency f_κ is rare, so a retained vote has much higher precision than a raw execution vote.

Theorem 2 (One-vs-rest SNR approximation)**.** *In a one-vs-rest binary correctness approximation, majority reliability depends on per-vote accuracy p, pool size n, and pairwise correctness correlation ρ through*

$$\text{SNR}(p, n, \rho) = \frac{p - \frac{1}{2}}{\sqrt{p(1-p)(1 + (n-1)\rho)/n}}. \tag{8}$$

The κ-filtered pool improves over raw exec voting whenever the precision gain from filtering outweighs the combined penalty of smaller pool size and higher correlation (full condition in Appendix I).

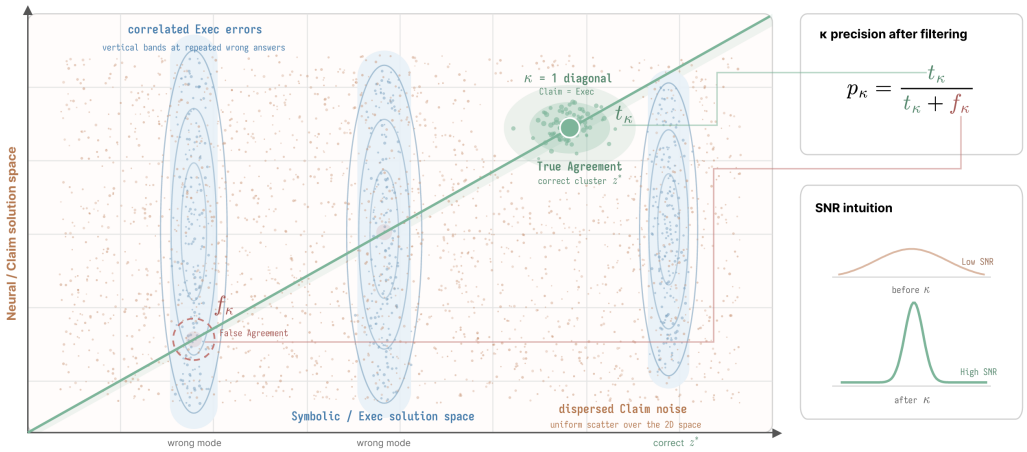


Figure 2: **Cross-channel precision filtering.** Left: κ-gating keeps candidates where claim and execution agree. True agreement occupies the claim-correct/exec-correct quadrant, while false agreement is dispersed across many wrong answers. Right: empirically, the κ-filtered pool is more correlated than raw execution votes, but its much higher precision yields a $4.1\times$ SNR improvement.

This yields a testable, counterintuitive prediction: κ-gating need not reduce correlation to improve majority reliability. Precision filtering can dominate the correlation penalty. This complements the negative findings of Nitarach et al. [2026] on diverse prompting: when errors arise from shared perception, decorrelating samples is the wrong lever—filtering for cross-channel agreement targets precision directly.

Empirical support. We directly measure within-question correctness correlations on the full dataset (1,709 questions $\times$ 16 candidates). Raw exec votes have pairwise correlation $\rho_e = 0.526$; κ-filtered votes have higher correlation $\rho_\kappa = 0.646$. Yet per-candidate accuracy jumps from 61.7% to 87.1%, and the one-vs-rest SNR proxy improves by $4.1\times$ (0.32 to 1.33). Figure 2 visualizes this precision-filtering regime. Thus the retained pool is more correlated, but substantially more reliable—directly validating the counterintuitive prediction of Theorem 2: precision filtering dominates even when it increases correlation. This confirms that the dominant mechanism is precision filtering, not decorrelation: the $\kappa_i \cdot |\text{exec_cluster}_i|$ term in Algorithm 1 counts consensus only after it has survived cross-channel agreement.

3.3 κ-gated Dual-Pathway CCV

Algorithm 1 summarizes CCV. It uses claim-execution agreement as a precision gate, conceptually related to program-based consistency filtering Prove Contributors [2024], but differs by combining agreement-gated consensus with output-pathway routing. The algorithm applies cross-channel agreement as a gate at two levels:

Candidate scoring (Lines 2–3). The term $\kappa_i \cdot |\text{exec_cluster}_i|$ realizes agreement-gated consensus: execution consensus is trusted only when accompanied by cross-layer agreement. The term $0.5 \cdot |\text{claim_cluster}|$ provides a baseline surface signal. Raw execution cluster size receives zero weight—our learned ablation in Section 4.5 confirms this design choice.

Output pathway routing (Lines 6–12). When self-consistent candidates exist ($\mathcal{C}_\kappa$ is non-empty), the algorithm outputs the neural claim. When cross-layer agreement collapses globally, it falls back to symbolic execution consensus, but only if the execution cluster is sufficiently large ($\geq \tau_{\text{exec}}$). This routing treats the *absence* of cross-channel agreement as diagnostic: it signals that the neural pathway is unreliable, making the deterministic symbolic pathway more trustworthy.

Complexity. $O(K)$ time, zero additional model calls, one tunable parameter (τ_{exec}).

Algorithm 1 κ-gated Dual-Pathway CCV

Require: Candidates $\{c_1, \ldots, c_K\}$, threshold τ_{exec}

for each candidate c_i **do**
  $\kappa_i \leftarrow \mathbf{1}[\text{claim}_i \approx \text{exec}_i \wedge \text{exec}_i \neq \perp]$
  $\text{score}_i \leftarrow 0.5 \cdot |\text{claim_cluster}_i| + \kappa_i \cdot (1 + |\text{exec_cluster}_i|)$
end for
$\mathcal{C}_\kappa \leftarrow \{c_i : \kappa_i = 1\}$ ▷ self-consistent candidate pool
if $\mathcal{C}_\kappa \neq \emptyset$ **then**
  return $\text{claim}(\arg\max_{c_i \in \mathcal{C}_\kappa} \text{score}_i)$ ▷ *Level 1: output neural claim*
else
  $z_{\text{exec}} \leftarrow \text{mode}(\{\text{exec}_i : \text{exec}_i \neq \perp\})$
  if $|\{i : \text{exec}_i = z_{\text{exec}}\}| \geq \tau_{\text{exec}}$ **then**
    return z_{exec} ▷ *Level 2: fall back to symbolic execution*
  else
    return $\text{mode}(\{\text{claim}_i\})$ ▷ *Level 3: fall back to claim majority*
  end if
end if

4 Experiments

4.1 Setup

Models and training. Our primary generator is Qwen3.5-9B, fine-tuned with LoRA (r=8, α=16) on 2,012 executor-validated Geometry3K training examples. The training data was constructed by reformatting Qwen3-VL CoT traces into the SKETCH format using DeepSeek V4 Pro. We also evaluate Gemma4-E4B to test cross-model generalization. Training was conducted using LLaMA-Factory with bf16 on 8 NVIDIA 4090 GPUs.

Table 1: Test benchmark suite. We evaluate on one in-distribution benchmark and three held-out/OOD settings.

Benchmark	Lang.	N	Role
Geometry3K test Lu et al. [2021]	EN	601	In-distribution
GeoQA test Chen et al. [2021]	ZH	754	Cross-lingual OOD
MathVista-GPS clean Lu et al. [2024]	EN	146	Cross-domain OOD
MathVista-GPS Lu et al. [2024]	EN	208	Reference

Evaluation protocol. Table 1 summarizes our evaluation suite. We use a frozen-rollout protocol with K=16 candidates, temperature 0.8, and top-p 0.95. All verification methods operate on the same rollout pool. The single hyperparameter τ_{exec}=9 was selected on a 300-question development split of Geometry3K and held fixed across all benchmarks and models.

4.2 Main Results

Figure 3 visualizes the same evidence ladder and K-scaling trend, while Table 2 reports the full benchmark breakdown. The four surface and confidence-based selectors—Claim MV, logprob-weighted MV, CISC, and URSA-RM weighted MV—all lie in a narrow 70.57–71.39% band, despite spanning self-confidence weighting and an external learned PRM. The learned ablation in Section 4.5 confirms this ceiling extends to logprob-based best-of-N and learned surface+execution feature selectors. Even URSA-RM, the strongest external scorer, achieves only $+0.76$ pp over Claim MV when used for weighted voting. Execution-only methods improve to 74–76%, but the large jump appears only when cross-layer agreement is used as a compositional signal: a PROVE-style κ filter reaches 79.52%, and CCV reaches 80.98%, a $+10.41$ pp improvement over Claim MV and $+4.80$ pp over EAV. On the disjoint heldout/OOD split (excluding dev 300), CCV reaches 81.93%. A sweep over the only tunable parameter, τ_{exec}, shows that CCV is robust rather than finely tuned: across $\tau_{\text{exec}} = 5 \ldots 14$, dev accuracy varies by 1.00 pp and heldout/OOD accuracy by 1.06 pp (Ap-

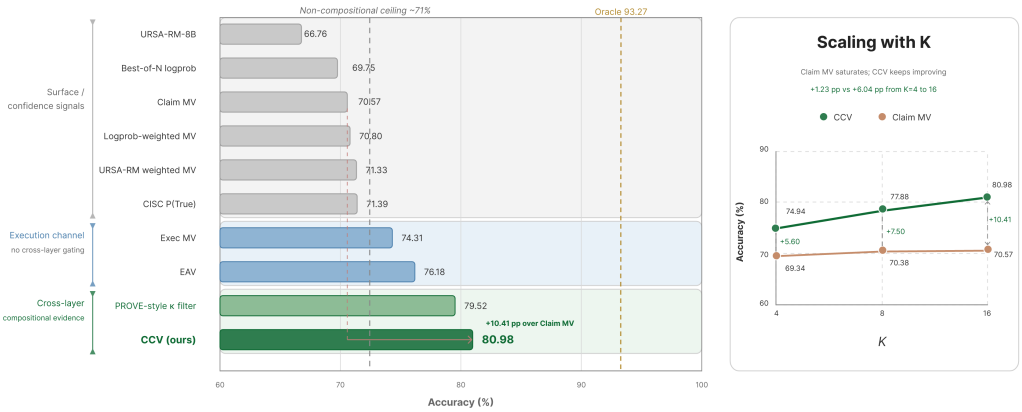


Figure 3: **Evidence ladder and K scaling.** Surface and confidence-based selectors cluster near 70–71%, execution-only methods improve moderately, and cross-layer compositional verification produces the main jump to 79–81%. As K increases, the CCV gain over Claim MV grows, indicating that compositional verification unlocks additional rollout diversity.

Table 2: Evidence ladder across verification signal types (K=16). Surface/confidence methods, including learned PRM scores and self-judged confidence, cluster near 70–71%. Execution-only signals improve moderately. Cross-layer compositional verification produces the large jump to 79–81%.

Method	Type	G3K	GeoQA	GPS-c	GPS	All
Surface / confidence signals						
Claim MV	consensus	66.72	73.61	72.60	69.23	70.57
Logprob-weighted MV	weighted consensus	66.56	73.87	72.60	70.67	70.80
CISC P(True)-weighted	confidence consensus	68.05	74.27	72.60	69.71	71.39
URSA-RM weighted MV	learned verifier	62.73	75.60	79.45	75.00	71.33
Execution channel without cross-layer gating						
Exec MV	exec consensus	72.71	75.60	76.71	72.60	74.31
EAV	exec-first priority	74.04	77.72	77.40	75.96	76.18
Cross-layer compositional signals						
PROVE-style κ filter	binary agreement	76.54	82.10	81.51	77.40	79.52
CCV (ours)	gated + routing	**78.54**	**81.83**	**86.30**	**81.25**	**80.98**
Oracle	upper bound	93.51	93.50	91.78	92.79	93.27

pendix C). The κ matching threshold itself is also stable: varying the candidate-level relative tolerance around the default leaves CCV accuracy unchanged on the full s240 pool (Appendix G).

4.3 Cross-Model Generalization

To test whether CCV's gains depend on the specific base model, we repeat the full evaluation protocol with Gemma4-E4B, a 4B-parameter multimodal model with substantially weaker geometry reasoning capacity. The Gemma4 model achieves comparable SKETCH format compliance to the Qwen model, so this experiment is a confirmation of the verification mechanism rather than a new generator contribution.

Table D.1 reports the cross-model evidence ladder using the same τ_{exec}=9 for both models. First, the absolute accuracy gap is large: Claim MV drops from 70.57% on Qwen3.5-9B to 44.94% on Gemma4-E4B, consistent with the capacity difference. Second, the CCV gain pattern is preserved: CCV improves over Claim MV by $+10.41$ pp on Qwen and $+7.84$ pp on Gemma4. The Gemma4 result is especially diagnostic because its execution pathway alone is worse than the claim pathway (Exec MV 41.08% vs Claim MV 44.94%), making EAV ineffective (44.88%). Yet CCV still reaches

52.78%, showing that it exploits structural cross-channel agreement rather than the raw accuracy advantage of execution votes.

Table 3: Cross-model diagnostic for the precision-filtering mechanism. The κ-filtered pool is more correlated than the raw execution pool, but its much higher per-candidate precision improves the effective verification signal.

Model	p_e (%)	p_κ (%)	Δp (pp)	ρ_e	ρ_κ	mean K_κ	SNR raw$\rightarrow\kappa$
Qwen3.5-9B	61.70	87.10	+25.40	0.526	0.646	9.09	0.32$\rightarrow$1.33
Gemma4-E4B	33.43	59.81	+26.38	0.504	0.630	5.77	$-$0.48$\rightarrow$0.24

Table 3 shows that the mechanism predicted by Theorem 1 replicates quantitatively: κ-filtering yields nearly identical precision gains across models (+25.40 pp vs +26.38 pp), and the counter-intuitive correlation pattern also repeats ($\rho_\kappa > \rho_e$ while SNR improves). The negative raw SNR for Gemma4 reflects that its per-candidate execution accuracy (33.4%) is below chance in the one-vs-rest approximation, yet κ-filtering still lifts it above the decision boundary. This supports the interpretation that cross-channel precision filtering is model-agnostic. The CCV advantage also scales with K on Gemma4 (Appendix E).

4.4 K Scaling Analysis

Table 4: Performance across K (four benchmarks total).

K	Claim MV	Exec MV	CCV	Oracle	CCV $-$ Claim MV
4	69.34	68.98	74.94	84.74	+5.60
8	70.38	72.43	77.88	89.89	+7.50
16	70.57	74.31	80.98	93.27	+10.41

Table 4 shows that the CCV advantage scales with K: the gain over Claim MV grows from +5.60 pp at K=4 to +10.41 pp at K=16. Surface consensus saturates quickly (Claim MV gains only +1.23 pp from K=4 to 16), while compositional verification continues extracting signal from larger candidate pools.

As a negative control, VGF consensus—another within-layer signal—not only fails to help but *hurts* performance when added (from 80.05% to 79.93%). This reinforces the central finding: within-layer consensus—whether the layer is claim, execution, or VGF—is vulnerable to correlated perception errors. Only cross-layer gating provides robust verification signal.

4.5 Learned Feature Ablation

To validate that the compositional features carry the transferable verification signal—not just that our specific CCV rule is effective—we train candidate-level logistic regression classifiers on Geometry3K dev (300 questions) and evaluate on disjoint OOD benchmarks.

Table 5 reports the feature ablation. Three findings emerge:

(1) Compositional features are the sole source of transferable signal. Standard logprob-based selectors and learned surface/exec features are essentially equivalent to Claim MV: Best-of-N is worse (71.11% OOD), LogReg S-only gives only +0.08 pp, and adding execution features without compositional agreement does not help (71.86$\rightarrow$71.69). Adding compositional features produces a +8 pp jump (71.69$\rightarrow$79.85), and using *only* compositional features matches full-feature performance.

(2) The learned model independently discovers the gating principle. Standardized logistic coefficients reveal that exec_cluster_size has a *negative* coefficient ($-$2.40), while $\kappa \times$ exec_cluster has a strongly *positive* coefficient (+1.96). The data confirms what our theory predicts: raw execution consensus is noise; gated execution consensus is signal.

(3) The hand-designed rule is near-optimal. A PROVE-style binary κ filter already reaches 81.02% OOD accuracy, showing that cross-layer agreement alone is a strong verifier. Dual-output

Table 5: Compositional feature ablation. "S" = standard features (logprob, claim cluster), "E" = execution features, "C" = compositional cross-layer features (κ, $\kappa \times$ exec_cluster, μ, $\kappa \times \mu$, sc_rate). The last column reports OOD gain over Claim MV.

Method / Features	Dev@300	OOD	All	Δ OOD vs Claim MV
Claim MV (reference)	66.67	71.77	70.57	0.00
Best-of-N (logprob)	66.00	71.11	69.75	-0.67
LogReg S-only	67.00	71.86	70.74	$+0.08$
LogReg S+E	66.33	71.69	70.63	-0.08
LogReg S+E+C	74.67	79.85	78.47	$+8.08$
LogReg C-only	75.33	81.02	79.64	$+9.24$
PROVE-style κ filter (rule)	75.00	81.02	79.52	$+9.24$
Dual-output CCV (ours, rule)	77.00	81.93	80.98	$+10.16$

CCV (80.98% all, 81.93% OOD) further improves over this filter by using agreement-gated consensus and output-pathway routing. More expressive models (MLP) overfit to dev without OOD gains. This confirms that the compositional structure does the heavy lifting—the specific scorer matters less than the features it operates on.

4.6 Error Taxonomy and Recovery Analysis

We analyze 355 cases where the baseline (EAV) fails but oracle succeeds; Figure 4 visualizes the resulting error flow and CCV's dynamic routing.

Failure classification. Wrong execution consensus accounts for 305/355 = 86% of failures, which split into three subtypes:

- **Exec✗ Claim✓** (exec majority wrong, claim majority correct): 139 cases (45.6%)
- **Exec✗ Claim✗** (both majorities wrong): 132 cases (43.3%)
- **Exec✗ Claim?** (exec majority wrong, claim dispersed): 34 cases (11.1%)

The remaining 50 cases (14%) involve correct execution with other error patterns.

Recovery by CCV. κ-gating recovers 123/139 = **88.5%** of Exec✗Claim✓ cases—precisely the subtype where the neural pathway is correct but the symbolic pathway is corrupted by shared perception error. This is the failure mode that the cross-channel principle predicts should be recoverable: when exec consensus is unreliable, κ-gating down-weights it in favor of claim-exec agreement.

Exec✗Claim✗ (both pathways wrong) lies outside the reach of selection-only verification in most cases (8.3% recovered), since both pathways support the same incorrect answer. Improving this regime calls for independent premise verification—generating *new* evidence, not only selecting among existing candidates.

κ reliability stratification. Among self-consistent (κ=1) candidates, accuracy varies sharply with execution cluster size: 19% for cluster size 1, rising to 93% for cluster size 8+. This confirms that κ alone is not sufficient—it must be combined with within-layer consensus (the $\kappa \times$ exec_cluster term) to be reliable, exactly as the CCV scoring formula prescribes.

5 Related Work

Multimodal geometry reasoning. Recent work has developed specialized VLMs for geometry, including G-LLaVA Gao et al. [2023], GeoX GeoX Contributors [2024], and MAVIS Zhang et al. [2025]. AlphaGeometry Trinh et al. [2024, 2025] combines a symbolic geometry engine with a neural proposer. FormalGeo FormalGeo Contributors [2023] develops a complete formal geometry solver. Key benchmarks include Geometry3K Lu et al. [2021] and GeoQA Chen et al. [2021]. These works focus on improving the *generator*; our work improves post-hoc *verification* of generated candidates and is complementary to stronger generators.

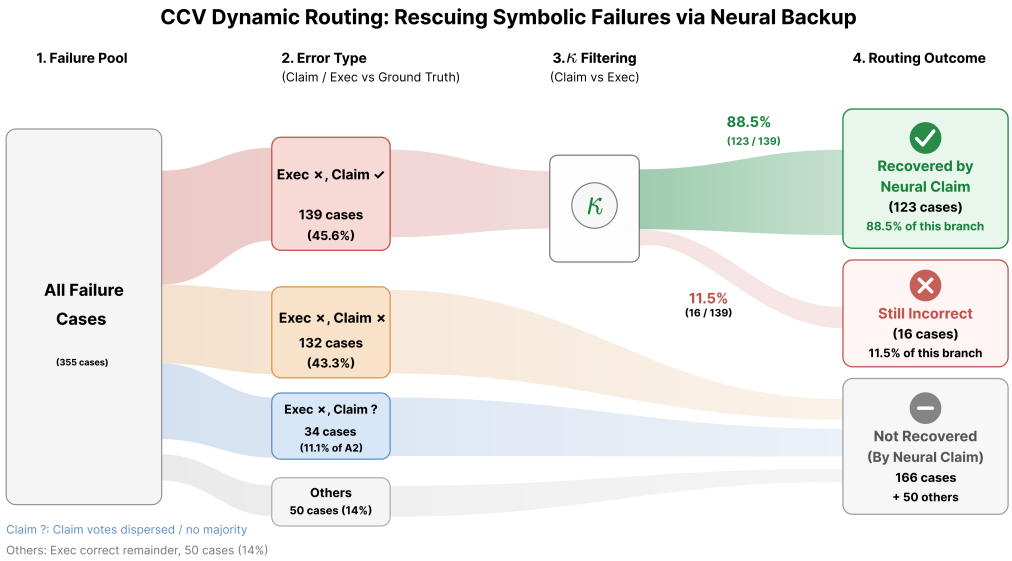


Figure 4: **Error flow and dynamic routing.** Among 355 EAV failures with an oracle-correct candidate, wrong execution consensus dominates (86%) and splits into three subtypes: Exec✗ Claim✓, Exec✗ Claim✗, and Exec✗ Claim?. In the recoverable Exec✗ Claim✓ stream, the claim majority is correct while the execution majority is wrong; CCV's κ filter routes 123/139 cases (88.5%) to the correct neural-claim output, illustrating how output-pathway routing rescues samples when the symbolic channel collapses.

Test-time consensus methods. Self-consistency Wang et al. [2023b] established majority voting as the standard for test-time verification. Universal self-consistency Chen et al. [2023] extends this to open-ended generation. CISC Taubenfeld et al. [2025] uses model confidence to weight votes, reducing sample requirements. These methods treat candidates as opaque votes; CCV exploits their internal compositional structure.

Learned verification. Outcome reward models (ORM; Cobbe et al. [2021], Uesato et al. [2022]) and process reward models (PRM; Lightman et al. [2023], Wang et al. [2023a]) train external scorers. GenRM Zhang et al. [2024] frames verification as generative next-token prediction. URSA-RM URSA-MATH Contributors [2025] and VisualPRM VisualPRM Contributors [2025] extend PRMs to multimodal math. Our work differs in that it derives verification signal from the candidate's internal structure rather than from an external scorer, requiring no additional training data or inference cost.

Program-aided verification. PROVE Prove Contributors [2024] filters candidates by checking whether a translated Python program's output matches the natural language answer—a binary consistency check analogous to our κ. Our framework generalizes this: κ is one signal within a multi-level hierarchy that includes μ (cross-candidate cross-layer), agreement-gated consensus, and output pathway routing. Moreover, SKETCH's typed DSL and VGF provide richer structure for geometry specifically, while PROVE's approach is more general-purpose.

Neuro-symbolic structure. Our SKETCH format is a neuro-symbolic decomposition—neural claim paired with symbolic execution. The broader neuro-symbolic reasoning literature Trinh et al. [2024], FormalGeo Contributors [2023] uses symbolic pathways for proof or derivation; our contribution is not the neuro-symbolic format itself, but the insight that its compositional structure can serve as a verification resource through cross-channel agreement.

Correlated errors in LLM voting. Nitarach et al. [2026] empirically demonstrates that correlated errors limit effective sample size in LLM majority voting, finding that diverse prompts do not help because high-temperature sampling already provides sufficient decorrelation. Our work identifies

a different solution: rather than attempting to decorrelate votes, we *gate* consensus through cross-channel agreement. Empirically, our retained κ-filtered pool is more correlated than the raw exec pool, yet achieves higher SNR because the individual retained votes are much more precise.

6 Discussion

Output format as verification design. Our results suggest a broader principle: *the output format is a verification design choice*. By designing reasoning outputs to contain compositional, cross-validatable pathways, we convert format design into verification capability. Future validation beyond geometry would further test the breadth of this principle; nevertheless, the underlying mechanism—cross-channel agreement between structurally independent pathways—does not depend on geometric properties per se. Any domain where reasoning can be decomposed into perception, logic, computation, and conclusion could benefit from compositional verification. The core insight is that structural diversity in outputs creates structural diversity in errors, which creates verification opportunity.

Scope and future work. Our study focuses on open-weight multimodal models in geometry reasoning, where shared visual perception creates correlated symbolic errors. Extending the validation to proprietary frontier models and other neuro-symbolic domains is an important next step. CCV is a selection method over an existing candidate pool, so shared incorrect perceptual premises point to a complementary direction: compositional recombination and independent premise verification that can introduce new evidence before selection.

7 Conclusion

We have shown that neuro-symbolic reasoning candidates carry an underutilized verification resource: their compositional structure. By formalizing cross-channel agreement as a verification principle, we derive a training-free algorithm that substantially outperforms both standard consensus methods and learned verifiers. The key insight—that agreement between structurally diverse pathways provides stronger evidence than repetition within any single pathway—is grounded in the error correlation structure of shared-perception reasoning, validated by systematic error taxonomy, and confirmed by a full evidence ladder: non-compositional confidence, consensus, and learned-score methods saturate around 70–71%, while κ-based compositional methods reach 79–81%. Our results demonstrate that output format design is not merely a usability choice, but a first-class verification decision.

References

Jiaqi Chen, Jianheng Tang, Jinghui Qin, Xiaodan Liang, Lingbo Liu, Eric Xing, and Liang Lin. GeoQA: A geometric question answering benchmark towards multimodal numerical reasoning. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 513–523, 2021.

Xinyun Chen, Maxwell Zhou, Nathanael Sch"arli, and Denny Zhou. Universal self-consistency for large language model generation, 2023.

Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.

FormalGeo Contributors. Formalgeo: An extensible formalized framework for olympiad geometry. Preprint, 2023.

Jiahui Gao, Renjie Pi, Jipeng Zhang, Jiacheng Ye, Wanjun Zhong, Yufei Wang, Lanqing Hong, Jianhua Han, Hang Xu, Zhenguo Li, and Lingpeng Kong. G-llava: Solving geometric problem with multi-modal large language model, 2023.

GeoX Contributors. Geox: Geometric problem solving through unified formalized vision-language pre-training, 2024.

Krishna K. Ladha. The condorcet jury theorem, free speech, and correlated votes. *American Journal of Political Science*, 36(3):617–634, 1992.

Hunter Lightman, Vineet Kosaraju, Yura Burda, Harrison Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let's verify step by step, 2023.

Pan Lu, Ran Gong, Shibiao Jiang, Liang Qiu, Siyuan Huang, Xiaodan Liang, and Song-Chun Zhu. Inter-GPS: Interpretable geometry problem solving with formal language and symbolic reasoning. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics (ACL)*, pages 6774–6786, 2021.

Pan Lu, Hritik Bansal, Tony Xia, Jiacheng Liu, Chunyuan Li, Hannaneh Hajishirzi, Hao Cheng, Kai-Wei Chang, Michel Galley, and Jianfeng Gao. MathVista: Evaluating mathematical reasoning of foundation models in visual contexts. In *International Conference on Learning Representations (ICLR)*, 2024.

Thanathorn Nitarach, Jiahao Zhang, Alexander Rietzler, Sebastian Gehrmann, and Jacob Steinhardt. Model capability dominates: Inference-time optimization for mathematical reasoning in large language models, 2026.

NVIDIA. NVIDIA nemotron 3: Efficient and open intelligence. *arXiv preprint arXiv:2512.20856*, 2024.

Prove Contributors. Not all votes count! programs as verifiers improve self-consistency for language model reasoning, 2024.

Amir Taubenfeld, Ravid Shwartz-Ziv, Jonathan Herzig, and Roi Reichart. Confidence improves self-consistency in llms, 2025.

Trieu H. Trinh, Yuhuai Wu, Quoc V. Le, He He, and Thang Luong. Solving olympiad geometry without human demonstrations. *Nature*, 625:476–482, 2024.

Trieu H. Trinh, Yinyu Li, Qing Zhang, Quoc V. Le, He He, and Thang Luong. Alphageometry2: A geometry problem solver for olympiad-level problems. Preprint, 2025.

Jonathan Uesato, Nate Kushman, Ramana Kumar, Francis Song, Noah Siegel, Lisa Wang, Antonia Creswell, Geoffrey Irving, and Irina Higgins. Solving math word problems with process- and outcome-based feedback, 2022.

URSA-MATH Contributors. Ursa-math: Understanding and verifying chain-of-thought reasoning in multimodal mathematics. Preprint, 2025.

VisualPRM Contributors. Visualprm: An effective process reward model for multimodal reasoning. Preprint, 2025.

Peiyi Wang, Lei Li, Zhihong Shao, R. X. Xu, Damai Dai, Yifei Li, Deli Chen, Yu Wu, and Zhifang Sui. Math-shepherd: Verify and reinforce llms step-by-step without human annotations, 2023a.

Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc Le, Ed Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. Self-consistency improves chain of thought reasoning in language models. In *International Conference on Learning Representations*, 2023b.

Dan Zhang, Jiatong Li, Xiaoshui Huang, Dongzhan Zhou, Yuqiang Li, and Wanli Ouyang. Generative verifiers: Reward modeling as next-token prediction, 2024.

Renrui Zhang, Dongzhi Jiang, Yichi Zhang, Haokun Lin, Ziyu Guo, Pengshuo Qiu, Aojun Zhou, Pan Lu, Kai-Wei Chang, Peng Gao, and Hongsheng Li. Mavis: Mathematical visual instruction tuning. International Conference on Learning Representations, 2025.

A Training Data Construction

Table A.1 summarizes the full construction pipeline for the 2,012-example SFT set. We start from the official Geometry3K Lu et al. [2021] training split, use the geometry3k subset of Nemotron-Image-Training-v3 NVIDIA [2024] as the Qwen3-VL-235B-A22B-Thinking CoT source, reformat each matched trace into the SKETCH VGF+DSL+answer format with DeepSeek V4 Pro, and retain only examples whose DSL executes and matches the official answer. The reformatting stage is text-only: the expensive visual reasoning is supplied by the Qwen3-VL CoT trace, while the official gold answer is used as the final target for machine-checkable reformatting.

Table A.1: Training data construction and filtering. Percentages are relative to the 2,078 matched CoT rows unless otherwise noted.

Stage	Count	Rate
Official Geometry3K train rows	2,101	–
Matched Qwen3-VL CoT traces	2,078	98.91% of official
Qwen3-VL boxed-answer correct	2,065	99.37%
DeepSeek V4 Pro reformat attempts	2,078	100.00%
Strict validator pass	1,963	94.47%
Recovered by tolerant VGF normalization	49	2.36%
Final executor-validated SFT rows	2,012	96.82%
Filtered: execution-answer mismatch	61	2.94%
Filtered: DSL execution/safety error	5	0.24%

The final 66 filtered examples consist of 61 execution-answer mismatches and five DSL execution/safety failures: one undefined `UB`, one undefined `z`, one undefined `m`, and two blocked-token errors. The tolerant VGF pass clears unsupported or over-arity visual facts only when the DSL and answer remain executor-valid; a final post-processing pass keeps 2,012 rows, with 41 DSL snippets changed by the sanitizer and 6 VGF lists cleared.

B Data Construction Prompts

Stage 1: stored source prompt for frontier CoT traces. We did not rerun Qwen3-VL-235B-A22B-Thinking for this paper. We use an existing CoT source whose stored user messages follow the problem image plus the following prompt pattern:

```
Solve this geometry problem. Study the diagram and select
the correct answer.

{problem_text}
{choices}

Do not explain your answer but write only the answer label
(A, B, ...) in this format:
Answer: \boxed{...}.
```

Stage 2: VGF+DSL reformatting. DeepSeek V4 Pro receives no image input. It reformats the official problem, choices, official answer, and Qwen3-VL CoT into the target SKETCH format using the following template:

```
Convert the provided Qwen3-VL-235B natural-language geometry
chain-of-thought into the target VGF+DSL format.
Do not solve from scratch. Use the teacher CoT as the visual
and reasoning evidence, and use the official gold answer as
the final target.
Return exactly three sections in this order and no extra sections:
[VGF]
[DSL]
```

```
[Final Answer]

[VGF] rules:
Output a raw JSON list only. Do not use markdown fences.
Each item must be {"relation": <relation>,
"entities": [<tokens>]} with exact relation arity.
Allowed relations: {allowed_vgf_relations}.
Relation arities: {relation_arities}.
For unary shape relations, put the whole object in one entity
token, e.g.
{"relation":"parallelogram","entities":["MNPQ"]}.
Use at most 4 facts to stay safely under the validator limit
of 5 facts.
Use [] if no reliable visual fact is needed.

[DSL] rules:
Output executable Python assignment statements only.
Do not use markdown fences.
Do not include comments or prose.
Never write import statements, including 'from math import ...'.
Math functions are already available by name.
Every variable must be assigned before it is used.
Do not write placeholder equations with unknown symbols.
The final assignment must define a variable named answer.
The value of answer must evaluate to the official gold option
value; use the teacher CoT equations to derive that value.
Allowed math names: sqrt, pi, sin, cos, tan, radians, degrees,
asin, acos, atan, abs, min, max, round.
Do not read files, import modules, call external tools, or use
input/output functions.
[Final Answer] must be exactly the official gold option letter:
{gold}.
In [DSL], set answer to the numeric or symbolic value of
option {gold}:
{gold_value}.

Official problem:
{problem_text}
{choices}

Official gold answer: {gold}
Official gold option value: {gold_value}
Teacher boxed answer: {qwen_boxed_answer}

Teacher NL CoT:
{qwen_cot}
```

C τ_{exec} Sensitivity

The only tunable hyperparameter in CCV is the execution-majority threshold τ_{exec}, used only when the κ-pool is empty. We sweep $\tau_{\text{exec}} = 1 \ldots 16$ on the main Qwen3.5-9B s240 K=16 rollout pool, using the same split protocol as the main paper: Geometry3K qid$<$ 300 for dev, and Geometry3K qid$\geq$ 300 plus GeoQA, MathVista-GPS clean, and MathVista-GPS for heldout/OOD evaluation. Figure C.1 plots the full sweep, and Table C.1 reports selected points. We use the resulting τ_{exec}=9 for both Qwen3.5-9B and Gemma4-E4B.

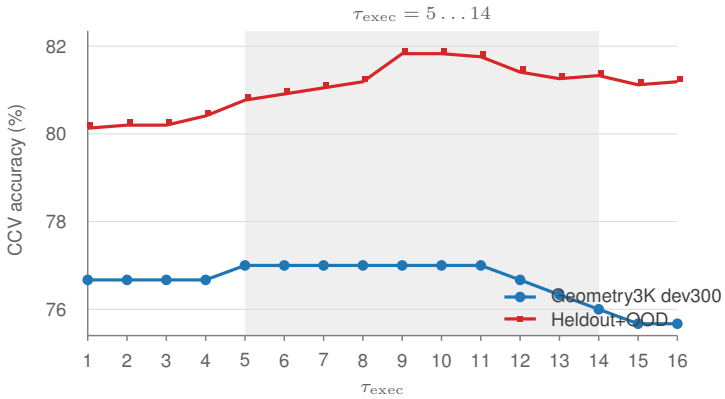


Figure C.1: **Sensitivity to τ_{exec}.** CCV is stable over a broad range of execution thresholds. In the plateau $\tau_{\text{exec}} = 5 \ldots 14$, dev accuracy varies from 76.00% to 77.00%, and heldout/OOD accuracy varies from 80.77% to 81.83%.

Table C.1: Selected points from the τ_{exec} sweep (full curve in the figure above). The dev-selected threshold is $\tau_{\text{exec}} = 9$.

τ_{exec}	Dev@300	Heldout/OOD	All
1 (no threshold)	76.67	80.13	79.52
9 (selected)	**77.00**	**81.83**	**80.98**
16 (maximum)	75.67	81.19	80.22

D Cross-Model Validation

Table D.1 evaluates the same verification protocol on a lower-capacity Gemma4-E4B generator, using the same τ_{exec}=9 as Qwen3.5-9B. The Gemma4 pool uses the same frozen K=16 four-benchmark setting as the main Qwen3.5-9B experiments: Geometry3K test (601), GeoQA test (754), MathVista-GPS clean (146), and MathVista-GPS (208), for N=1709 questions and 27,344 candidates. The evaluation uses the benchmark files in `clean/assets`; it does not use the deprecated 400-question checkpoint-selection set.

Table D.1: Cross-model validation on the same frozen K=16 four-benchmark protocol (N=1709), using τ_{exec}=9 for both models. Absolute accuracy differs because Qwen3.5-9B has higher model capacity than Gemma4-E4B, but the gain pattern is consistent: cross-layer κ filtering and CCV improve over surface consensus for both models without additional inference.

Method	Qwen3.5-9B	Gemma4-E4B
Claim MV	70.57	44.94
Exec MV	74.31	41.08
EAV	76.18	44.88
PROVE-style κ filter	79.52	51.90
CCV (ours)	**80.98**	**52.78**
CCV − Claim MV	+10.41	+7.84
CCV − EAV	+4.80	+7.90
Oracle	93.27	91.75

The notable difference is that Gemma4 reverses the raw pathway ordering: Exec MV is below Claim MV (41.08% vs 44.94%), whereas Qwen's execution pathway is stronger than its claim pathway. Consequently, EAV, an execution-first priority rule, is ineffective on Gemma4 (44.88% vs 44.94% Claim MV). This pattern is expected for a smaller model with weaker visual grounding: within-layer execution consensus is more easily dominated by correlated perception errors. The result therefore strengthens rather than weakens the verification story. CCV does not trust the raw execution vote; it uses claim–execution agreement as a precision filter. Even when the execution pathway is worse in

aggregate, candidates where claim and execution agree remain informative, yielding $+7.84$ pp over Claim MV and $+7.90$ pp over EAV on Gemma4.

E Gemma4 K Scaling

Table E.1 repeats the K-scaling analysis on the frozen Gemma4-E4B $K{=}16$ pool by subsampling candidates; $K{<}16$ rows are averaged over four random subsamples. We keep $\tau_{\text{exec}}{=}9$ fixed to match the cross-model comparison in the main text.

Table E.1: Gemma4-E4B K scaling from the frozen $K{=}16$ pool. Entries for $K{=}4, 8$ are mean$\pm$std over four subsamples.

K	Claim MV	Exec MV	EAV	PROVE-style κ	CCV	Oracle	CCV $-$ Claim MV
4	42.41±0.81	37.60±0.42	46.94±0.46	46.65±0.74	47.28±0.60	72.24±0.60	+4.87
8	44.00±0.48	39.86±0.24	48.82±0.79	50.04±0.62	50.85±0.58	83.84±0.32	+6.85
16	44.94	41.08	44.88	51.90	52.78	91.75	+7.84

The Gemma4 gain increases with candidate budget, from $+4.87$ pp at $K{=}4$ to $+7.84$ pp at $K{=}16$, matching the qualitative scaling trend observed for Qwen.

F Gemma4 Implementation Details

The Gemma4-E4B experiment uses the frozen checkpoint-720 LoRA adapter and the frozen rollout pool described in Appendix D; no additional model calls are made for the verification comparisons. The adapter uses LoRA rank 8 and $\alpha = 16$. On a 400-example format audit, the model reaches 96.0% complete-section rate, 99.0% VGF parse success, 96.0% DSL syntax success, and 94.25% DSL execution success, comparable to the format reliability of the Qwen model.

G κ Matching Threshold Sensitivity

The relation $X_i \approx Y_i$ is implemented by normalizing the claimed final answer and executed DSL answer, then applying numeric tolerance. Floating-point answers, fractions, square roots, and π expressions are parsed to real values; degree symbols are treated as unit suffixes and removed before numeric comparison. For multiple-choice questions, numeric answers are first mapped to option letters using the fixed choice tolerance 0.02. Table G.1 reports an ablation that keeps the numeric absolute tolerance fixed at 10^{-3} and sweeps only the candidate-level relative tolerance used for κ.

Table G.1: Sensitivity to the candidate-level relative tolerance in $X_i \approx Y_i$ on the frozen Qwen3.5-9B s240 $K{=}16$, $T{=}0.8$ pool.

Setting	Candidate relative tolerance	CCV accuracy	κ candidates / precision
10^{-6}	0.000001	80.98	15,535 / 87.07
10^{-4}	0.0001	80.98	15,535 / 87.07
10^{-3}	0.001	80.98	15,535 / 87.07
default (10^{-2})	0.01	80.98	15,535 / 87.07
$5{\times}10^{-2}$	0.05	80.98	15,535 / 87.07

All threshold settings yield identical results because geometry answers are effectively discrete: integers, simple fractions, radicals, angles, or multiple-choice letters. In this domain, claim–execution agreement is almost always binary: pairs either match exactly, or differ by margins much larger than even the loosest tolerance. The matching tolerance is therefore not a meaningful hyperparameter for these benchmarks, and the measured CCV gain is not an artifact of finely tuned numeric equality.

H Qualitative Case Studies

We present four representative cases from the frozen Qwen3.5-9B s240 $K{=}16$, $T{=}0.8$ pool, selected to illustrate the four behavioral modes of CCV: (1) successful rescue when execution consensus is

wrong but claim is correct, (2) hard cases where both pathways agree on a wrong answer, (3) correlated perception errors that produce incorrect agreement, and (4) fallback routing when no self-consistent candidate exists. Each case reports method outputs and the key DSL of the CCV-selected candidate.

H.1 CCV Rescue (Exec✗ Claim✓)

`geometry3k_test` qid 325. Expected: B (16). Choices: A=12, B=16, C=51, D=65.

Method outputs. Claim MV: B; Exec MV: C; EAV: C; CCV: **B**.

CCV-selected DSL ($\kappa = 1$, claim cluster 9, exec cluster 6):

```
angle_X = angle_L
x = angle_X / 4
answer = x          # 16.25 -> B
```

CCV selects a κ-consistent candidate whose claim and execution agree on B, while EAV follows a wrong execution majority (C). This is the canonical recoverable failure: the neural pathway is correct but the symbolic pathway is corrupted by shared perception error.

H.2 Hard Case: Exec✗ Claim✗

`geometry3k_test` qid 72. Expected: A (3). Choices: A=3, B=4, C=6, D=7.

Method outputs. Claim MV: B; Exec MV: B; EAV: B; CCV: B.

CCV-selected DSL ($\kappa = 1$, claim cluster 15, exec cluster 15):

```
x = 4
answer = x          # 4.0 -> B
```

All methods agree on the wrong answer. This case sits outside selection-only verification because the cross-channel agreement is itself wrong—both pathways share the same perceptual error.

H.3 Correlated Perception Error

`geometry3k_test` qid 35. Expected: D (155). Choices: A=20, B=25, C=30, D=155.

Method outputs. Claim MV: B; Exec MV: B; EAV: B; CCV: B.

CCV-selected DSL ($\kappa = 1$, claim cluster 16, exec cluster 16):

```
arc_BC = 30
arc_AD = 20
angle_2 = (arc_BC + arc_AD) / 2
answer = angle_2    # 25.0 -> B
```

This is a boundary case for CCV: a correlated visual error makes both channels self-consistent around the wrong answer. With 16/16 candidates in both clusters, selection alone has no alternative evidence to break the incorrect consensus.

H.4 Empty κ-Pool with Execution Fallback

`geometry3k_test` qid 56. Expected: C (70). Choices: A=66, B=68, C=70, D=72.

Method outputs. Claim MV: D; Exec MV: C; EAV: C; CCV: **C**.

CCV-selected DSL ($\kappa = 0$, claim cluster 10, exec cluster 16):

```
leg1 = 24
hypotenuse = 74
```

```
x = sqrt(hypotenuse**2 - leg1**2)
answer = x          # 70.0 -> C
```

The κ-pool is empty (no candidate's claim matches its execution), so CCV falls back to the execution-majority pathway. The large exec cluster (16/16) exceeds τ_{exec}, providing the correct answer. This illustrates dual-pathway routing: when cross-channel agreement is absent, the deterministic symbolic path remains available as a fallback.

I Proofs for the Cross-Channel Verification Analysis

I.1 Latent shared-perception model

We formalize the verification problem using answer-valued random variables. Let X_i denote the claim answer and Y_i the executed answer for candidate i, both taking values in an answer space $\mathcal{Z}$ with correct answer z^*. A latent visual state V is shared across candidates. Conditional on V, the executed answers Y_i are i.i.d. from $P_e(\cdot \mid V)$; the claim answers X_i are i.i.d. from $P_c(\cdot)$, independent of V; and X_i and Y_i are conditionally independent given V. This is an idealized model: empirically, we only require false self-consistency to be sufficiently rare, not perfect independence.

Define $p_e = P(Y_i = z^*) = \mathbb{E}_V[P_e(z^* \mid V)]$ and $p_c = P(X_i = z^*) = P_c(z^*)$. For execution correctness indicators $E_i = \mathbf{1}[Y_i = z^*]$, the within-channel execution correlation is

$$\rho_e = \mathrm{Corr}(E_i, E_j) = \frac{\mathrm{Var}_V[P_e(z^* \mid V)]}{p_e(1-p_e)}. \tag{I.1}$$

By the law of total covariance applied to $E_i = \mathbf{1}[Y_i = z^*]$ for $i \neq j$, $\mathrm{Cov}(E_i, E_j) = \mathrm{Var}_V[P_e(z^* \mid V)]$, so shared perception creates positive correlation whenever execution accuracy varies with the visual state.

I.2 Proof of Theorem 1

Let $\kappa_i = \mathbf{1}[X_i = Y_i]$. Decompose self-consistency into true and false agreement:

$$t_\kappa = P(X_i = Y_i = z^*), \tag{I.2}$$

$$f_\kappa = P(X_i = Y_i \neq z^*) = \sum_{z \neq z^*} P(X_i = z, Y_i = z). \tag{I.3}$$

Then $P(\kappa_i = 1) = t_\kappa + f_\kappa$, and by Bayes rule:

$$P(Y_i = z^* \mid \kappa_i = 1) = \frac{t_\kappa}{t_\kappa + f_\kappa}. \tag{I.4}$$

This identity does not require independence; it simply states that self-consistent candidates are correct when agreement is true rather than false.

Under the latent shared-perception model, conditional independence of X_i and Y_i given V yields $t_\kappa = P_c(z^*)\,\mathbb{E}_V[P_e(z^* \mid V)] = p_c p_e$. If wrong answers are approximately dispersed uniformly over $M-1$ alternatives, then

$$f_\kappa \approx \frac{(1-p_c)(1-p_e)}{M-1}. \tag{I.5}$$

The condition $p_\kappa > p_e$ reduces to $p_c(1-p_e) > f_\kappa$. Substituting the uniform-dispersion approximation gives $p_c > (1-p_c)/(M-1)$, i.e., $p_c > 1/M$ for $p_e < 1$. Thus cross-channel agreement improves per-candidate precision whenever the claim pathway is better than random over the effective answer space.

I.3 Proof of Theorem 2

For n exchangeable binary correctness variables with $P(B_i = 1) = p$ and pairwise correlation ρ, the variance of the sample mean is $p(1-p)[1 + (n-1)\rho]/n$. Applying the SNR definition from the main text to raw exec voting (p_e, K, ρ_e) and to the retained κ-filtered pool $(p_\kappa, K_\kappa, \rho_\kappa)$ gives $\mathrm{SNR}_\kappa > \mathrm{SNR}_{\text{raw}}$ iff

$$\frac{p_\kappa - \frac{1}{2}}{p_e - \frac{1}{2}} > \sqrt{\frac{p_\kappa(1-p_\kappa)}{p_e(1-p_e)} \cdot \frac{K(1 + (K_\kappa - 1)\rho_\kappa)}{K_\kappa(1 + (K-1)\rho_e)}}. \tag{I.6}$$

Corollary 1 (Answer dispersion amplifies cross-channel advantage)**.** *Under the uniform-dispersion approximation, as the effective answer space M grows, $f_\kappa \to 0$ and hence $p_\kappa \to 1$. If the retained pool remains nonempty and the correlation factor remains bounded, then $\mathrm{SNR}_\kappa \to \infty$ while raw exec SNR is unchanged.*

I.4 Numerical illustration

We instantiate the SNR proxy using measured post-hoc statistics from the full dataset. Failed executions are counted as incorrect; correlations are Pearson correlations over ordered within-question candidate pairs. Raw exec voting uses $K = 16$, $p_e = 0.617$, and $\rho_e = 0.526$. The retained pool has mean size $K_\kappa = 9.09$, $p_\kappa = 0.871$, and $\rho_\kappa = 0.646$. Table I.1 summarizes the resulting SNR proxy values.

Table I.1: Measured statistics for the one-vs-rest SNR proxy.

Method	n	p	ρ	SNR
Raw exec MV	16	0.617	0.526	0.32
κ-filtered MV	9.09	0.871	0.646	1.33

The retained pool is therefore 23% more correlated, but the SNR proxy improves by $4.1\times$. This empirical regime is exactly the counterintuitive case captured by Theorem 2: precision filtering dominates the correlation penalty. The observed false self-consistency rate is 12.9%, so most $\kappa{=}1$ candidates correspond to true rather than accidental agreement.