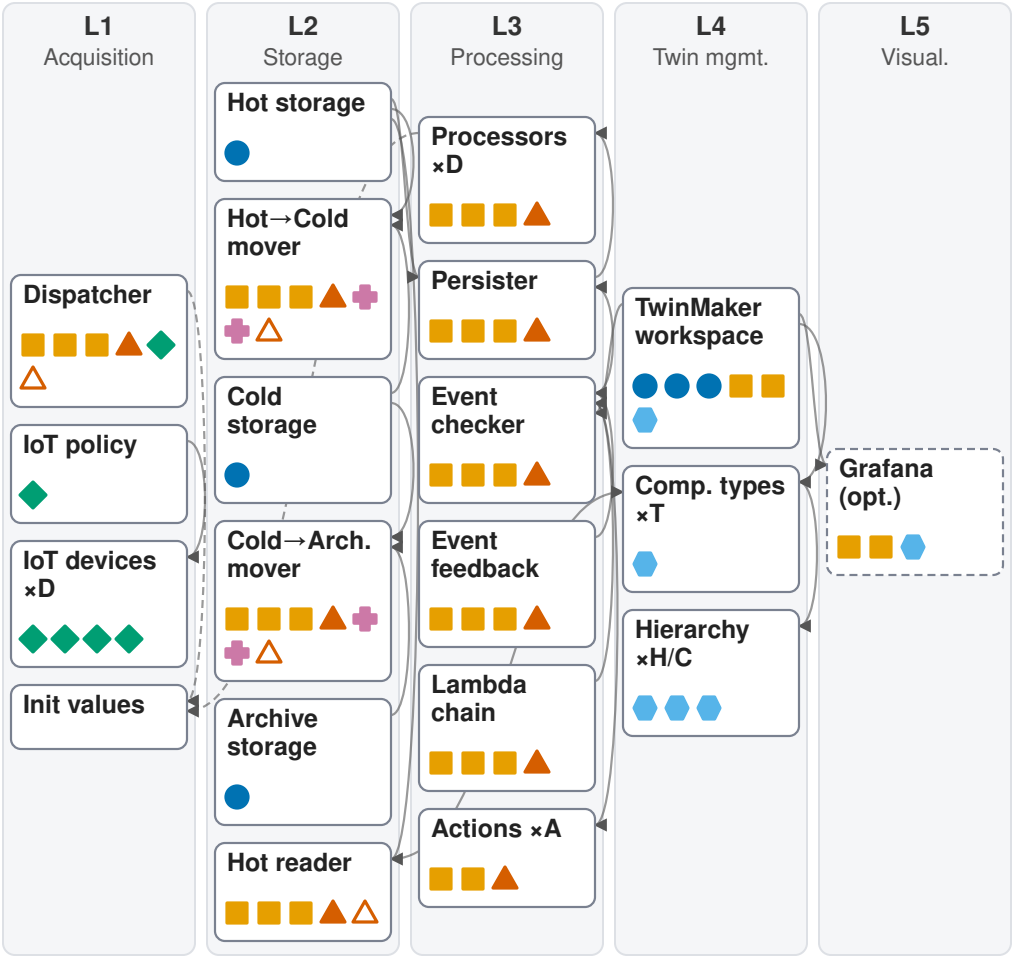

One marker per resource. A → B: B refers to A (dashed: runtime path).