


项目参与手册

1. 访问lo研社git仓库

https://github.com/qianhexing/open_LoYanShe

2. fork仓库

 open_LoYanShe Public

Watch 1

Fork 1


Star 0

master 2 Branches 0 Tags

Go to file

Add file

Code

 qianhexing Merge pull request #1 from crabapples-h/dev_crabapples e855fc2 · 9 minutes ago 4 Commits

.github/workflows	尝试开源的第一个版本	2 hours ago
api	尝试开源的第一个版本	2 hours ago
assets	尝试开源的第一个版本	2 hours ago
components	尝试开源的第一个版本	2 hours ago
config	尝试开源的第一个版本	2 hours ago
layouts	尝试开源的第一个版本	2 hours ago
pages	添加部分注释	1 hour ago
plugins	尝试开源的第一个版本	2 hours ago
static	尝试开源的第一个版本	2 hours ago
store	尝试开源的第一个版本	2 hours ago
test	尝试开源的第一个版本	2 hours ago
utils	尝试开源的第一个版本	2 hours ago
.babelrc	尝试开源的第一个版本	2 hours ago
.editorconfig	尝试开源的第一个版本	2 hours ago
.eslintrc.js	尝试开源的第一个版本	2 hours ago
.gitignore	尝试开源的第一个版本	2 hours ago
README.md	尝试开源的第一个版本	2 hours ago
Test.txt	test:测试代码推送	30 minutes ago
jest.config.js	尝试开源的第一个版本	2 hours ago
jsconfig.json	尝试开源的第一个版本	2 hours ago

About

No description, website, or topics provided.

Readme

Activity

0 stars

1 watching

1 fork

Report repository


Releases


No releases published

Packages

No packages published

Contributors 2

 qianhexing QianHeXing

 crabapples-h

Languages

Vue 90.7%

JavaScript 8.6%

Other 0.7%

1

Create a new fork

A *fork* is a copy of a repository. Forking a repository allows you to freely experiment with changes without affecting the original project. [View existing forks.](#)

Required fields are marked with an asterisk (*).

Owner *

Choose an owner

Repository name *

/ open_LoYanShe

By default, forks are named the same as their upstream repository. You can customize the name to distinguish it further.

Description (optional)

☒ Copy the `master` branch only

Contribute back to qianhexing/open_LoYanShe by adding your own branch. [Learn more.](#)


Create fork

3. 将代码拉取到本地


The screenshot shows the GitHub interface for a repository named 'open_LoYanShe' by user 'qianhexing'. The repository is public and forked from 'qianhexing/open_LoYanShe'. The main content area shows a file tree with folders like '.github/workflows', 'api', 'assets', 'components', 'config', 'layouts', 'pages', 'plugins', and 'static'. The 'Code' button is highlighted in a red box, and a dropdown menu is open showing options to clone the repository using HTTPS, SSH, or GitHub CLI, or to open it with GitHub Desktop or download a ZIP file. The right sidebar shows repository statistics and links to README, Activity, Stars, Watching, and Forks.

4. 新建一个分支

a. **jetbrains** 系列

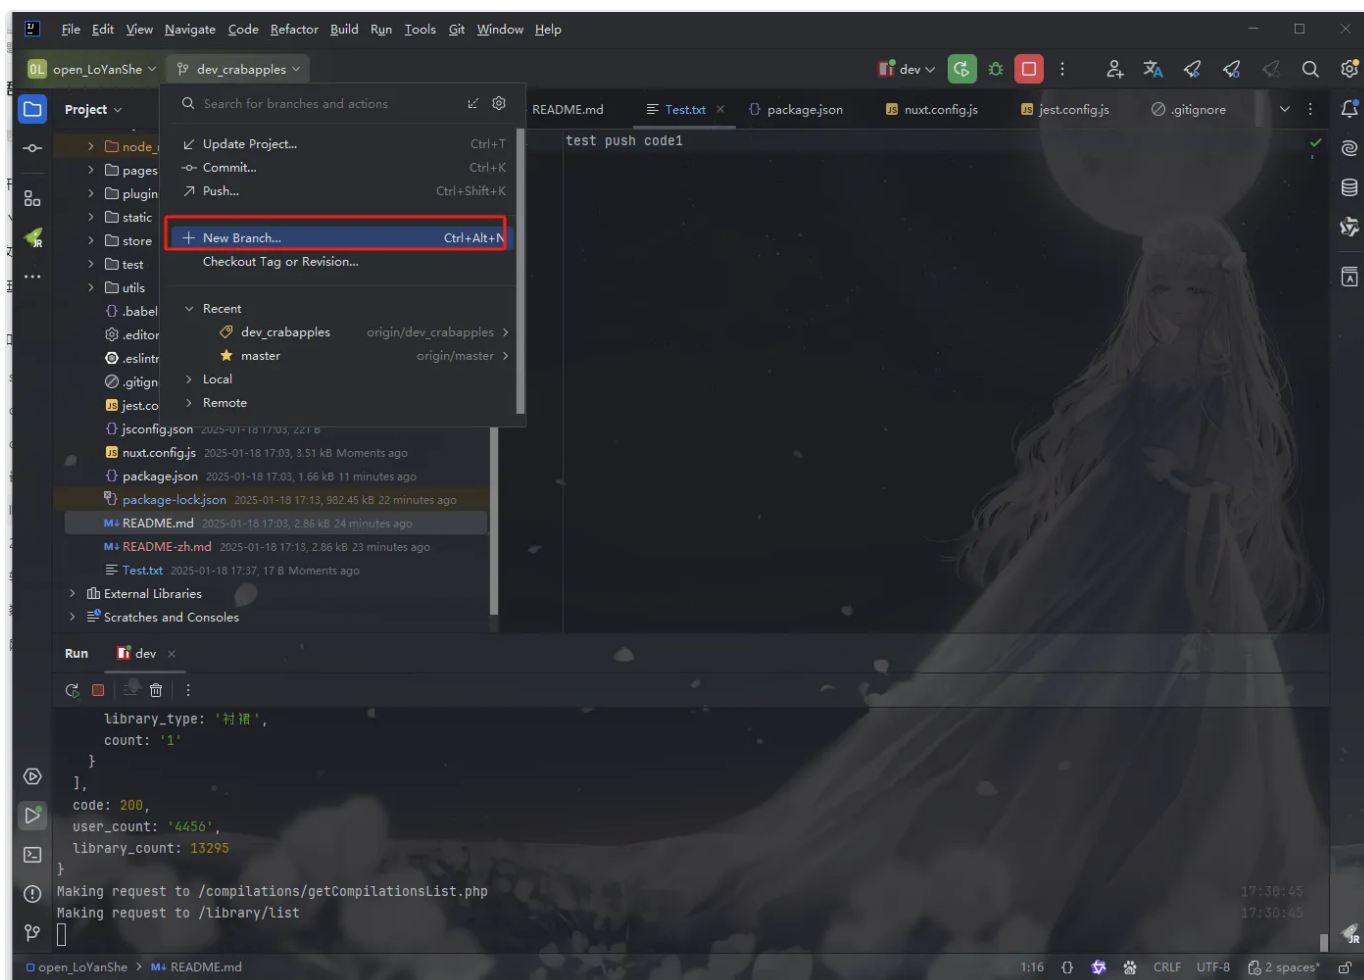

b. **vscode**

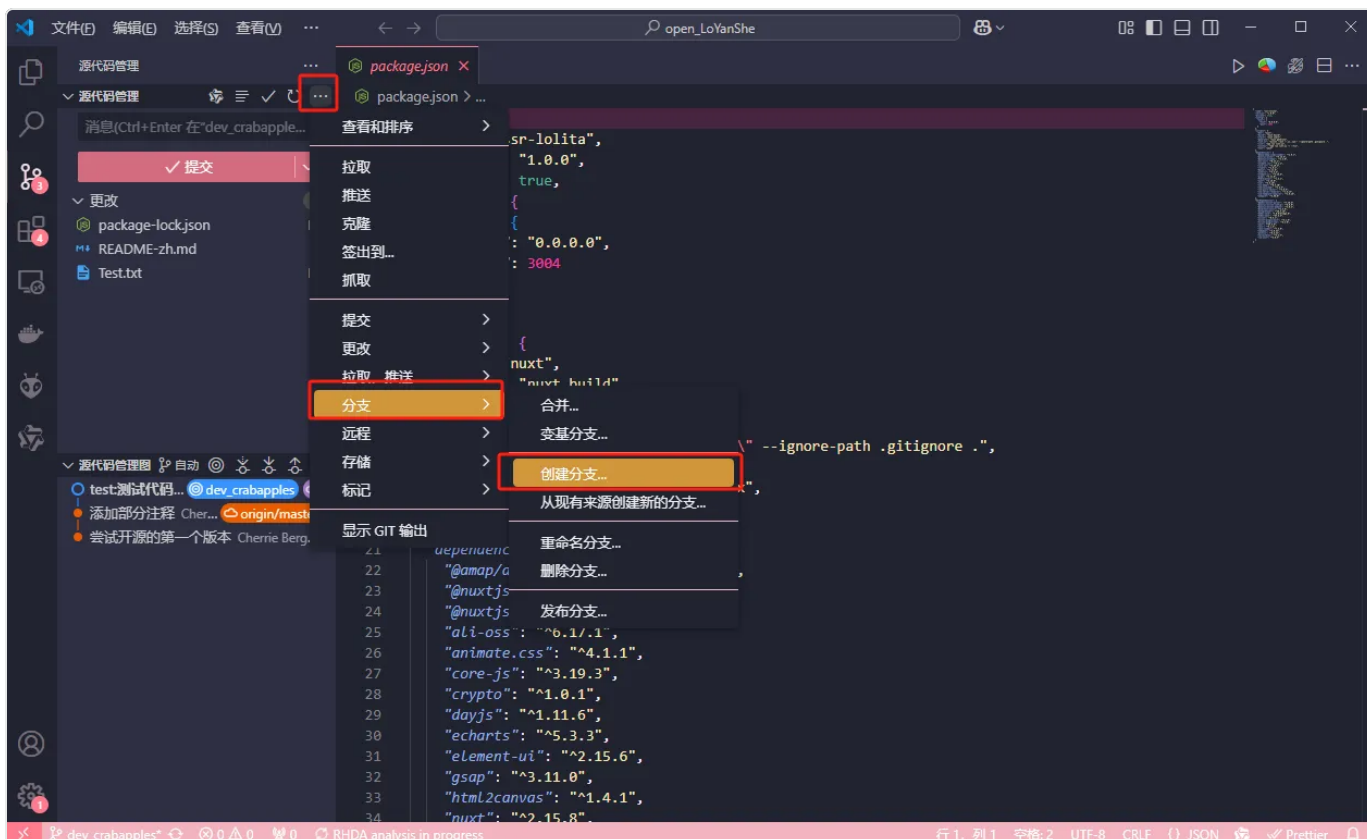

c. 命令行



```
git branch <branch_name>
```

```
git checkout <branch_name>
```

5. 提交代码

开发者应该都会的吧，就不多赘述啦~

6. 创建pr(pull request)

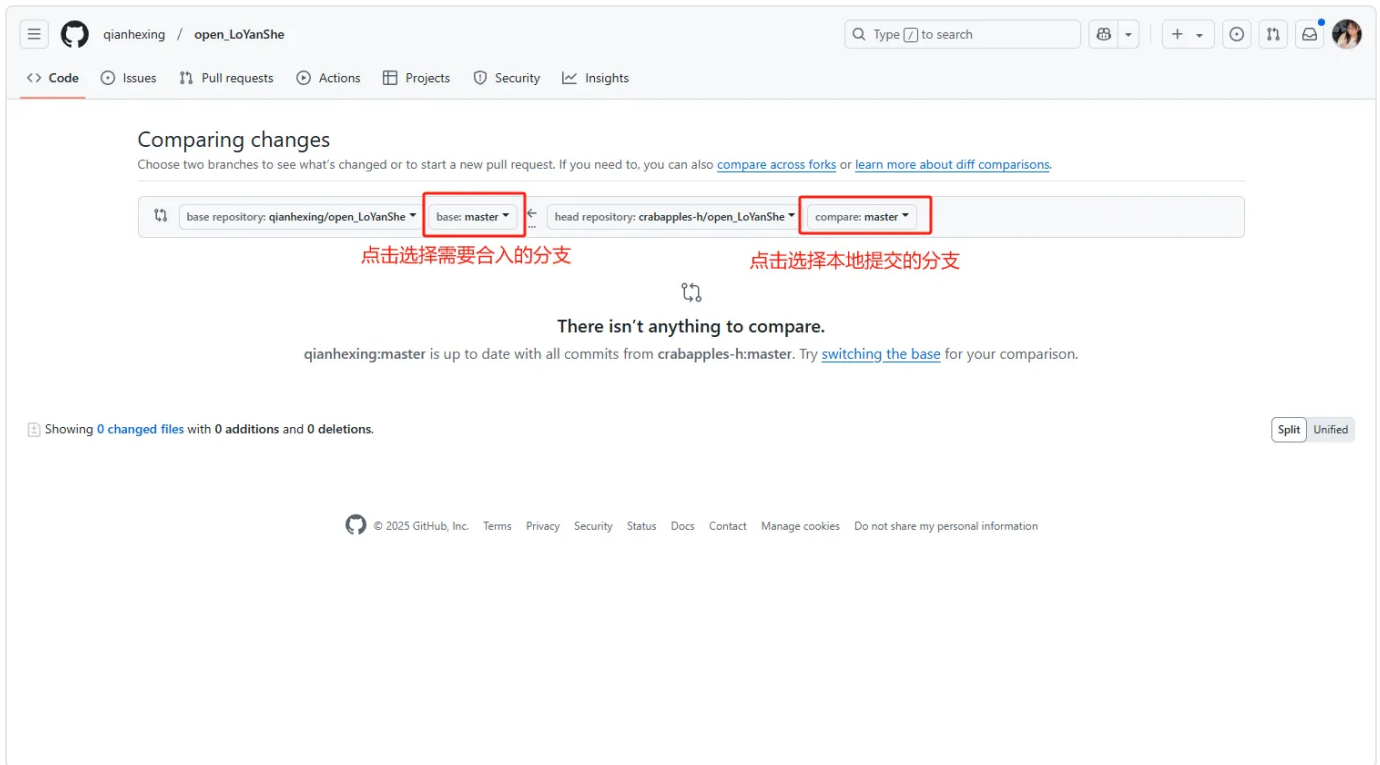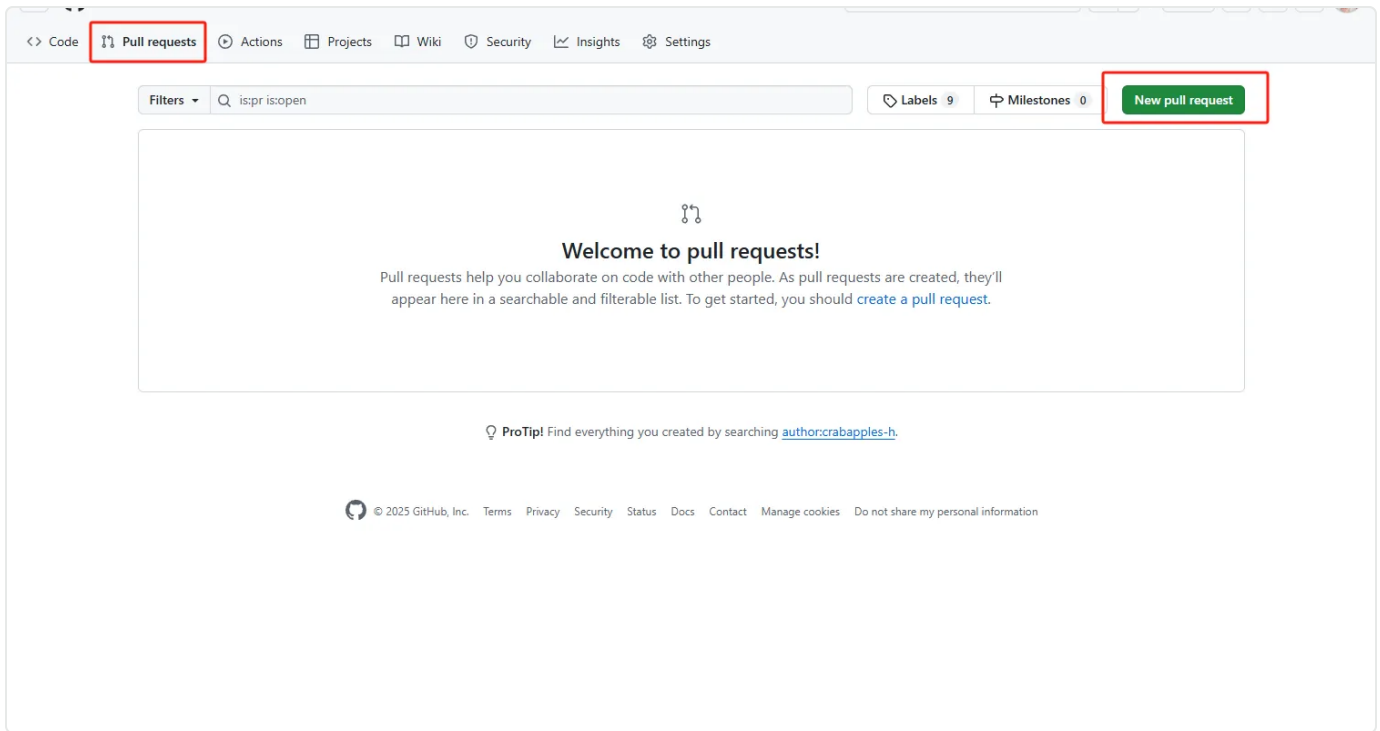

7. 最后一步

耐心等待就行啦~