



VALVE DATA MANUAL



AVO LTD
AVOCET HOUSE

92-96 VAUXHALL BRIDGE ROAD
LONDON, S.W.1 ENGLAND

**PLEASE RETURN THIS POSTCARD AS SOON AS YOU
RECEIVE THIS PUBLICATION**

IMPORTANT

New Data is continually becoming available. In order that your information may be kept fully up-to-date, please complete and return this post card. You will then be advised when a new edition of this Manual is published.

**AVO LTD., Avocet House,
92-96, Vauxhall Bridge Road, London, S.W.1
VICtoria 3404 (12 lines)**

Please inform me/us immediately a further edition of this Manual becomes available.

Name.....
(Please be brief)

For the Attention of.....

Address

Please state the serial number of your instrument which appears on either the scale plate or an identification label.

"AVO" Valve Tester Serial No.....

"AVO" Valve Characteristic Meter Serial No.....

"AVO" Valve Tester Type 160 Serial No.....

"AVO" Valve Data Manual

Keeping a manual of this type fully corrected and up-to-date is, as you will appreciate, a complex and exacting task.

If you have any suggestions to make regarding this publication or wish to contribute data or observations which may be to our mutual benefit, we will be very pleased to receive your remarks set out on the postcard below.

NAME AND
ADDRESS
OF SENDER

We owe a debt of gratitude to many people who have helped us with the compilation of this book, and wish in particular to thank the following for the suggestions and data they have put at our disposal.

Messrs. F. & S. RUTH LTD.,
579, High Road,
Ilford, ESSEX.

ILIDIO GONCALVES DE LIMA,
Trav. do Forte, 28 r/c Dto,
Lisbon, PORTUGAL.

THE LEEDS LABORATORIES,
69, Allerton Grange Way,
Leeds, 17.

THE AVO VALVE DATA MANUAL

THIRTEENTH EDITION 1959

AUTHOR: C. E. BULL

EDITOR: R. E. HILL



Compiled and Published by


AVO LTD.

"AVOCET HOUSE," 92-96 VAUXHALL BRIDGE ROAD, LONDON, S.W.1

Telephone : VICTORIA 3404 (12 lines)



THE AVO VALVE CHARACTERISTIC METER MK. III

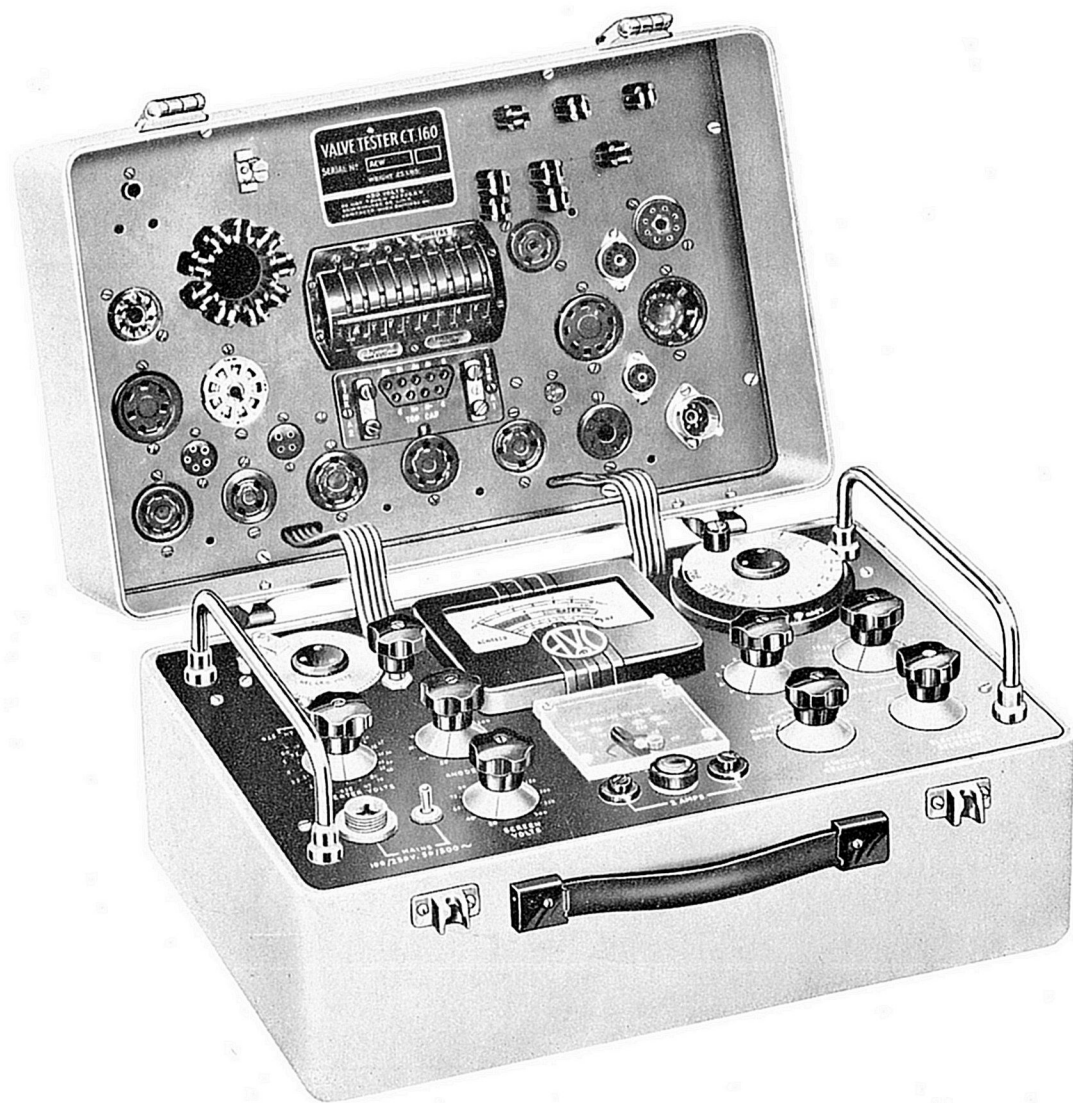

THE AVO VALVE TESTER TYPE 160

FOREWORD

This data manual is primarily intended for use with the "AVO" Valve Characteristic Meter, the "AVO" Valve Tester Type 160, and "AVO" Valve Tester, but once the Selector Switch code is understood, the manual also forms a quick and convenient guide for general use.

The Instruction Book which accompanies the instrument should be thoroughly studied before the data contained in this manual is used, but as a convenient guide to the user who is already familiar with the full instruction book, abbreviated working instructions are given.

It is our intention to issue revised copies of this manual from time to time and dates of publication will be given in our advertisements in the Trade Press.

The return of the enclosed postcard will enable us to inform you when new issues become available.

WATCH OUR ADVERTISEMENTS FOR FURTHER ANNOUNCEMENTS.

Contents

Foreword	3
Abbreviated Working Instructions for the "AVO" Valve Characteristic Meter, Mks. I & II	5
Abbreviated Working Instructions for the "AVO" Valve Characteristic Meter, Mk. III	7
Abbreviated Working Instructions for the "AVO" Valve Tester Type 160 ..	9
Abbreviated Working Instructions for the "AVO" Valve Tester	13
Diagram of Standard Pin Connections	16
Diagram of Special Valve Holders fitted to Valve Tester Type 160 only	17
Commercial Valve Index and Cross Reference to Service Types	1
Service Valve Index and Cross Reference to Commercial Types	72
American Army V.T. Series Index and Cross Reference to British Service Types ..	92
British Post Office V.T. Series Index and Cross Reference to British Service Types	94
B.V.A. Utility Equivalents	95
Test Data for Receiving and Small Transmitting Valves	1-131
Data for Tuning Indicators (Magic Eyes)	Appendix I
Test Data for High Voltage Rectifiers	Appendix II
Test Data for use with "AVO" Valve Tester Type 160 only	Appendix III

Accessories.

If the valve base required does not appear on the Valve Holder Panel it is necessary to use an adaptor which plugs into an existing valve holder. These are supplied as follows:

No. 1. B7G and B8A.	No. 7. B9A.
No. 2. B9G.	No. 8. Continental 8 pin (F8).
No. 3. B8B.	No. 9. B7A.
No. 4. B3G. Hivac D.A.4 and 5 pin.	No. 9/1 B7A for use with Valve Tester Type 160.
No. 5. Blank.	No. 10 5AA & 7AA (Acorn Valves).
No. 6. Sm7 (6A7 Base).	No. 11 B5A.

Whilst every care has been taken in the preparation of this manual to ensure that the data given is correct, the Company cannot accept any responsibility for damage caused to a valve under test, or the instrument, due to the inclusion of incorrect information.

ABBREVIATED WORKING INSTRUCTIONS FOR THE "AVO" VALVE CHARACTERISTIC METER Mks. I & II.

The brief notes which follow are intended to act as a guide to the operator who has already studied, and is familiar with, the contents of the Instruction Manual issued with the instrument.

Procedure for finding Test Data.

1. Note commercial or "service" reference on valve and consult the index to ascertain whether it is listed. If the valve is a service type, the cross-reference section will give the commercial equivalent and also the page on which test data is listed.
2. Check mains adjustment tap and connect mains lead to the supply, red and black leads are line and neutral, green or yellow, the Earth connection.
3. Set "CIRCUIT SELECTOR" to "CHECK (C)".
4. Set "METER SELECTOR" to 100 on outer scale.
5. Turn "SET ZERO" Control fully clockwise.
6. Set "FILAMENT VOLTAGE" switches to value indicated in Valve Data. The figure in parenthesis should be ignored.
7. Set "ANODE VOLTS", "SCREEN VOLTS", and "GRID VOLTS" to values indicated in Valve Data.
8. Set "ROLLER SELECTOR" switch as indicated in Valve Data.
9. Switch "ON", press "RESET" button, release, and with "ELECTRODE LEAKAGE" switch at "~" adjust movement pointer to position "~" by means of "SET ~" switch.

ALL VALVES.

1. Insert Valve.
2. Fully rotate "ELECTRODE LEAKAGE" switch, check heater continuity at "H" and insulation on all other positions.
3. Set "CIRCUIT SELECTOR" at "CHECK (H)" to measure leakage from Heater/Cathode to all other electrodes strapped, with valve hot.
4. Turn "CIRCUIT SELECTOR" to "C/H ins." to measure leakage between heater and cathode with valve hot (if valve is indirectly heated).

TRIODES, DOUBLE TRIODES, DIODE TRIODES, PENTODES, DOUBLE PENTODES, DIODE PENTODES AND TETRODES IN SIMILAR COMBINATION.

ANODE CURRENT. Turn "ANODE SELECTOR" to "A₁". "CIRCUIT SELECTOR" to "TEST". Meter should then indicate "ANODE CURRENT". Reduce "METER SELECTOR" switch setting if required. If the meter lamps go out do not press "RESET" button until you have checked for faulty settings on "ROLLER SELECTOR" switch. If these are in order, the valve is probably "soft" and the test should proceed no further.

MUTUAL CONDUCTANCE. Reduce Meter reading to "ZERO" by means of the "SET ZERO" control. Press "mA/V" Button. Meter reading in milli-amps represents "MUTUAL CONDUCTANCE" in "mA/V". To test on "GOOD/BAD" scale, reduce meter readings to "ZERO" as before, turn "METER SELECTOR" switch to "mA/V" position. Adjust "SET mA/V" control to figure given in the Valve Data. Press "mA/V" Button. A good valve should read within the green band on the meter.

For double valves, check data for difference in electrode voltages and repeat above operation at A₂.

GAS TEST. To measure Grid current, proceed as for mutual conductance, using "GOOD/BAD" scale. Reduce meter reading to "ZERO" by means of the "SET ZERO" control, press "mA/V" button, adjust meter reading to full scale by means of "SET mA/V" control. Release "mA/V" button, press "GAS" button. Full scale deflection will now represent 10 μ A Grid Current. For currents over 10 μ A use method given in full instruction book

DIODES. To measure "DIODES" set the "METER SELECTOR" switch to 1 on inner ring of figures and "ANODE SELECTOR" switch to "A₁", turn "CIRCUIT SELECTOR" switch to "DIODE". Check double diodes at "A₁" and "A₂".

TRIPLE DIODES. For test procedure please see Instruction Manual.

RECTIFIERS. Proceed as above to test for electrode leakage, heater/cathode leakage, etc. Using inner ring of figures, set "METER SELECTOR" switch to load shown in Valve Data, turn "CIRCUIT SELECTOR" switch to "REC". Good valves will read in green band on meter scale. Load reading is per anode.

NOTE. When using a recently produced instrument to check valves having a cathode top cap connection, the flying lead cathode socket will be found in the base of the "P" Type Valveholder (8SC, see page 16).

This socket is not fitted to earlier instruments and the following procedure should therefore be observed. Locate an unconnected pin (not internally connected to an electrode within the valve) upon the valve to be tested, set the appropriate roller to $\frac{1}{c}$, connect flying lead to valve top cap and insert plug in any valve holder pin corresponding to the roller set to $\frac{1}{c}$. These instruments can be modified as follows:

Fit a small clip type socket in the centre of the 'P' base, locate the cathode lead running from the main panel. The simplest way of doing this is to set roller No. 1 to 1, then with an ohmmeter check for continuity between pin No. 1 on any valve holder and the cableform from the main instrument panel. The socket should then be connected to this lead.

For a small charge the company can provide a suitable socket, also a 'Top cap cathode' ring.

TUNING INDICATORS (MAGIC EYES). For testing data see Appendix I.

Abbreviations used in this Manual.

For detailed information, refer to the working instructions for the Valve Characteristic Meter.

D, DD, DDD. - Diodes.

DT, DDT, DP, DDP. - Valve with another electrode assembly in addition to the diode.

H. - Heptode or Hexode.

N. - Nonode.

O. - Octode.

P. - Pentode. PP. - Double pentode.

T. - Triode. TT. - Double triode. TH. - Triode Heptode, or Triode Hexode.

TP. - Triode pentode.

R. - Rectifier. RR. - Full wave rectifier.

. - Denotes internally connected pin. For Valve Characteristic Meter Mk. I see procedure at top of page 11. For Valve Characteristic Meter Mk. II read "0" in place of "" in selector switch number.

†. - Third diode in triple diode.

ABBREVIATED WORKING INSTRUCTIONS FOR THE "AVO" VALVE CHARACTERISTIC METER MARK III.

Before switching "ON" the full Instruction Book should be read and always used for reference when testing unusual types of valves.

Procedure for finding Test Data.

1. Note commercial or "service" reference on valve and consult the index to ascertain whether it is listed. If the valve is a service type, the cross-reference section will give the commercial equivalent and also the page on which test data is listed.
2. Check mains adjustment tap and connect mains lead to the supply, red and black leads are line and neutral, green or yellow being the earth connection.
3. Set "CIRCUIT SELECTOR" to "CHECK C" and "ELECTRODE SELECTOR" to "A₁".
4. Set "METER SWITCH" to 100 on the Ia scale.
5. Turn "BACKING OFF" controls fully anticlockwise.
6. Set "HEATER VOLTS" switches to value indicated in Valve Data. The figure in parenthesis should be ignored.
7. Set "ANODE VOLTS", "SCREEN VOLTS" and "GRID VOLTS" to values indicated in Valve Data.
8. Rotate the "SET mA/V" control to figure given in Valve Data using (where possible) the inner scale and appropriate setting of associated switch.
9. Set "ROLLER SELECTOR" switch as indicated in Valve Data and ensure that A₁ and A₂ links are tight. (For "*" in data read "0").
10. With leakage switch at "~", switch on, and allow instrument to warm up. Adjust pointer to position "~" by means of "SET ~" switch.

ALL VALVES.

1. Insert valve, and make any top cap connections if required.
2. Fully rotate "LEAKAGE" switch, check heater continuity at "H" and insulation on all other positions.
3. Set "CIRCUIT SELECTOR" to "CHECK H" to measure leakage from Heater/Cathode to all other electrodes strapped together with valve hot.
4. Turn "CIRCUIT SELECTOR" to "C/H" to measure leakage between heater and cathode with valve hot (if valve is indirectly heated).

TRIODES, DOUBLE TRIODES, DIODE TRIODES PENTODES, DOUBLE PENTODES, DIODE PENTODES AND TETRODES IN SIMILAR COMBINATION.

ANODE CURRENT. With "ELECTRODE SELECTOR" at "A₁" set "CIRCUIT SELECTOR" to "TEST". Meter should then indicate anode current. Reduce METER SWITCH setting if required. *If protective relay operates, switch off and check for incorrect setting of "ROLLER SELECTOR" switch or panel controls. If all controls are correct and relay continues to operate when instrument is switched on again, the valve is probably soft and the test should be discontinued.*

MUTUAL CONDUCTANCE. Reduce meter reading to zero by means of "BACKING OFF" controls. Set "METER SWITCH" to "2.5" position and readjust zero if necessary. Turn "METER SWITCH" to "mA/V" position, when a good valve will give an indication in the green band on the meter scale. To obtain actual mA/V reading, adjust "SET mA/V" control until needle reads on calibration point marked 1mA/V, in centre of green band. The "SET mA/V" control will now indicate the mutual conductance of the valve under test. To obtain a reading for valves with mutual conductance below 3mA/V, use outer scale setting on "SET mA/V" control and follow the procedure outlined above. See the Instruction Manual for more detailed information on the use of the "SET mA/V" control, the testing of valves with "slope" less than 1mA/V.

For double valves, check data for difference in electrode voltages and repeat above operations with the "ELECTRODE SELECTOR" set to "A₂".

GAS TEST. To measure grid current set "CIRCUIT SELECTOR" to position "GAS" and the "METER SWITCH" to its 100mA position. Meter will now indicate gas current, full-scale indication being 100μA.

DIODES. To check diodes turn "ELECTRODE SELECTOR" to "D₁" and "METER SWITCH" to "1mA" on D/R scale (unless otherwise indicated in Valve Data). Turn "CIRCUIT SELECTOR" to "TEST". The condition of the valve will now be given on the "REPLACE/GOOD" scale. Check double diodes at D₁ and D₂ position of the "ELECTRODE SELECTOR".

TRIPLE DIODES. For test procedure please see Instruction Manual.

RECTIFIERS. To check rectifiers, set "ELECTRODE SELECTOR" to "D₁" and set anode loading given in Valve Data, on D/R scale of "METER SWITCH". Turn "CIRCUIT SELECTOR" to "TEST". The condition of the valve will now be indicated on "REPLACE/GOOD" scale. Load reading is per anode. Check full-wave rectifiers at positions "D₁" and "D₂" of "ELECTRODE SELECTOR" switch.

On completion of tests return controls to their fully anti-clockwise position.

TESTING WIRE ENDED (FLYING LEAD) VALVES. Wire-ended (flying lead) valves may be tested by inserting individual wires into appropriate electrode connections of a suitable valve holder in correct sequence.

When using the AVO V.C.M. Mk. III, the setting of the selector switch may be ignored, the leads being inserted into appropriate sockets of the top cap connector panel.

NOTE† Alternative test figures are given for use when valve shows signs of back emission from anode to G3. This phenomenon can be recognised by the anode current apparently decreasing as the valve heats up.

When using AVO Characteristic Meter Marks I and II, to check valves requiring a bias of less than 1 volt, erroneous readings may be obtained due to the valve drawing grid current, which has the effect of reducing the grid bias voltage thus producing low mutual conductance readings. Users of this instrument are therefore advised to use the alternative data which has been supplied wherever possible. Valves with alternative data are marked thus §

ABBREVIATED WORKING INSTRUCTIONS FOR

THE "AVO" VALVE TESTER TYPE 160

The brief notes which follow are intended to act as a guide to the operator who has already studied, and is familiar with, the full operating instructions given in Working Instructions for the "AVO" Valve Tester type 160.

The "AVO Valve Data Manual" can in general be used as a source of test data for the AVO Valve Tester type 160, but some valves which demand a reasonably heavy heater current, must have their normal heater voltage uprated to compensate for the voltage drop in the wiring and transformer (see note below).

Procedure for finding Test Data.

I. Note commercial or "service" reference on valve and consult the index to ascertain whether it is listed. If the valve is a service type, the cross-reference section will give the commercial equivalent and also the page on which test data is listed.

Note.

Test Data for the AVO Valve Characteristic Meter and AVO Valve Tester type 160 is identical and will be found under the heading "Valve Characteristic Meter Data". Valves which draw a heavy heater current have an alternative heater voltage shown in parenthesis, e.g. 5U4 which has a normal heater voltage of 5 has been uprated to 5.7 to compensate for voltage drop in wiring and transformer. The figure in parenthesis should always be used when employing the AVO Valve Tester Type 160.

(1) SETTING OF INSTRUMENT.

- (a) Check coarse mains voltage setting of MAINS VOLTAGE SELECTOR panel and if necessary, re-set for supply voltage.
- (b) Set CIRCUIT SELECTOR to SET ~.
- (c) Set ELECTRODE SELECTOR to A₁.
- (d) Set heater volts and associated toggle switch to value indicated in Valve Data.
- (e) Set ANODE VOLTS, SCREEN VOLTS, NEG GRID VOLTS, and ANODE CURRENT switches to value indicated in Valve Data.
- (f) Set ROLLER SELECTOR switch to Code Number given in the Valve Data and check that the links on the top panel are firmly connected.
- (g) Connect mains lead to instrument and supply.
- (h) Switch on, allow a few moments for instrument to warm up, and adjust rotary MAINS VOLTAGE SELECTOR until the meter needle lies in the black zone marked " ~ ".

(2) ALL VALVES.

- (a) Insert valve and if necessary, connect "Top Cap Lead" between valve and appropriate socket in TOP CAP CONNECTOR PANEL.
- (b) Set CIRCUIT SELECTOR to H/CONT to check heater continuity.
- (c) Set CIRCUIT SELECTOR to A/R and using successive settings of ELECTRODE SELECTOR at A₁, A₂, D₁, D₂, check electrode insulation with the valve cold between anodes and the remaining electrodes strapped together.

- (d) Set CIRCUIT SELECTOR to S/R and set ELECTRODE SELECTOR switch to A_1 to check insulation with the valve cold between screen and all other electrodes (except diodes) strapped together.
- (e) Set CIRCUIT SELECTOR to CH/R and ELECTRODE SELECTOR to A_1 or D_1 and D_2 to check with valve hot, insulation between heater/cathode and all other electrodes strapped together.
- (f) Set CIRCUIT SELECTOR and ELECTRODE SELECTOR to C/H to check with valve hot, insulation between heater and cathode (for indirectly heated valves).

(3) TRIODES, DOUBLE TRIODES, DIODE TRIODES, PENTODES, DOUBLE PENTODES, DIODE PENTODES AND TETRODES, IN SIMILAR COMBINATION.

Set CIRCUIT SELECTOR to TEST and ELECTRODE SELECTOR to A_1 .

NOTE:

Should protective relay operate, switch off and check for incorrect setting of ROLLER SWITCH, or electrode voltages. If these are correct and relay continues to "buzz" when instrument is switched on, the valve is probably "soft" (gassy) and the test should proceed no further.

(3.1) To check relative goodness of valve in conjunction with coloured comparison scale.

(a) Using recommended anode current.

- (i) Do not alter ANODE CURRENT controls, but adjust NEG GRID VOLTS control until meter reads zero.
- (ii) *Slowly* rotate SET mA/V control to SET ZERO position and make any final adjustment to zero, using fine ANODE CURRENT control.
- (iii) Continue rotation of SET mA/V control to expected value of mA/V (meter needle should rise).
- (iv) Comparative "goodness" of valve will now be shown by position of needle on coloured scale.

(b) Using recommended negative grid voltage.

- (i) Do not alter NEG GRID VOLTS control, but adjust ANODE CURRENT controls until meter reads zero.
- (ii) *Slowly* rotate SET mA/V control to SET ZERO position and make any final adjustment to zero, using fine ANODE CURRENT control.
- (iii) Continue rotation of SET mA/V control to expected value of mA/V (meter needle should rise).
- (iv) Comparative "goodness" of valve will now be shown by position of needle on coloured scale.

(3.2) To check valve by direct reading of mutual conductance.

(a) Using recommended anode current.

- (i) Do not alter ANODE CURRENT controls, but adjust NEG GRID VOLTS control until meter reads zero.
- (ii) *Slowly* rotate SET mA/V control to SET ZERO position and make any final adjustment to zero, using fine ANODE CURRENT control.
- (iii) Continue rotation of SET mA/V control until meter needle reaches calibration line in centre of "good" zone.
- (iv) Read actual value of mutual conductance from SET mA/V dial. This figure can be compared with that given in Data Book.

(b) Using recommended negative grid volts.

- (i) Do not alter NEG GRID VOLTS control, but adjust ANODE CURRENT controls until meter reads zero.
- (ii) *Slowly* rotate SET mA/V control to SET ZERO position and make any final adjustment to zero, using fine ANODE CURRENT control.
- (iii) Continue rotation of SET mA/V control until meter needle reaches calibration line in centre of "good" zone.
- (iv) Read actual value of mutual conductance from SET mA/V dial. This figure can be compared with that given in the Data Book.

(3.3) To check valves having a mutual conductance less than 1 mA/V.

Since the SET mA/V dial is not calibrated below 1 mA/V, it is not possible to check on the coloured comparison scale, valves having an expected mutual conductance less than 1 mA/V. Such valves are checked by direct measurement of mutual conductance using the procedure as in Section 3.2 with the exception that the mA/V dial is rotated to the 1 mA/V position and the actual value for mutual conductance (being less than 1 mA/V) is read on the meter scale calibrated 0.1 — 1 mA/V.

For valves with more than one electrode assembly, having set up for any difference in electrode voltages, repeat appropriate test with ELECTRODE SELECTOR at A₂.

(3.4) Gas Test.



Set CIRCUIT SELECTOR to GAS, and ELECTRODE SELECTOR to A₁. Gas current will now be directly indicated in μ A.

(4) DIODES & RECTIFIERS.

Proceed as in Sections 1 and 2, then with the CIRCUIT SELECTOR at position TEST, ELECTRODE SELECTOR at D₁ and using inner ring of figures, set the right-hand ANODE CURRENT control to the load figure specified in Valve Data. The comparative "goodness" of a valve is shown by the position of the needle on coloured scale.

Load reading is per anode. Check full-wave rectifiers and double diodes with ELECTRODE SELECTOR at D₁ and D₂ respectively.

Check signal diodes at 1 mA loading unless otherwise specified in data.

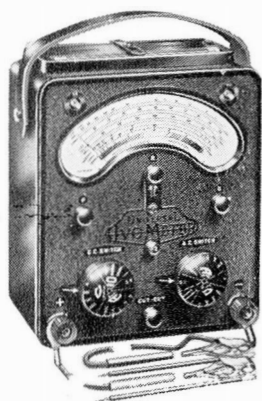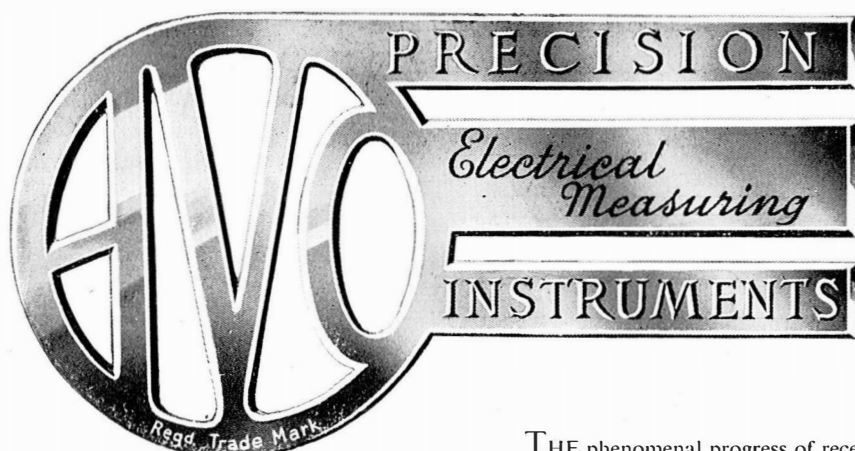

Model 7 Universal AVOMETER MK. II

A multi-range A.C./D.C. instrument providing 50 ranges of readings on a 5-in. hand calibrated scale. Range selection is by means of two rotary switches, for A.C. and D.C. respectively. A press button provides an additional range for each value of current and voltage shown on the switch knobs. Current consumption at full scale deflection is 1mA or 2mA, according to whether press button is used or not. Total resistance is 500,000 ohms. By means of an external accessory (the Universal AvoMeter Power Factor and Wattage Unit) power factor and power can be measured in A.C. circuits. An automatic cut-out provides protection against damage through overload.

Current: A.C. and D.C. 0 to 10A.
Voltage: A.C. and D.C. 0 to 1,000V.
Resistance: Up to 40 megohms.
Capacity: 0.01 to 20 mFds.
Audio-Frequency Power Output: 0-2W.
Decibels: -25db to +16db.
Size: 8 x 7½ x 4½ ins. **Weight:** 6½ lb.

Model 40 Universal AVOMETER MK. II

A similar instrument to the Model 7 AvoMeter described above, but providing 40 ranges of current voltage and resistance. Total resistance is 200,000 ohms.

Current: A.C. and D.C. 0 to 12 amps.
Voltage: A.C. and D.C. 0 to 1,200 volts.
Resistance: Up to 1 megohm.
Size: 8 x 7½ x 4½ ins. **Weight:** 6½ lb.

THE phenomenal progress of recent years in electrical engineering owes much to the contemporary advances in the design of electrical measuring instruments.

The equipment of a laboratory for making electrical measurements and tests can involve an expenditure of hundreds of pounds. Likewise the test gear essential to the work of the radio service engineer can also be a source of considerable expense.

This difficulty is largely surmounted, and other advantages are conferred, by the use of modern multi-range testing instruments, which afford maximum usefulness with a reasonable initial outlay.

"AVO" Instruments are scientifically designed on sound principles, being the outcome of many years of successful experience by the pioneers and leading manufacturers of multi-range instruments. Before leaving our factory, every "Avo" Instrument is tested and adjusted to give a high degree of accuracy and constancy of performance.

All AvoMeters conform where applicable, with the limits of accuracy laid down in Section 6 of the British Standard Specification 89/1954, for Industrial Portable Instruments.


Model 8 Universal AVOMETER

A recent version of the Universal AvoMeter having a sensitivity of 20,000 ohms per volt on all D.C. ranges, and 1,000 ohms per volt on A.C. ranges from 100V. upwards. In addition to the many well-known AvoMeter features, such as the automatic overload protection device, dual knob range selection, etc., it has a push button for reversing the polarity of the movement to obviate the inconvenience of changing over the leads when encountering opposite potentials in respect to a common reference point.

ACCURACY


A.C. Ranges and D.C. Current ranges to Section 6, BS 89/1954. D.C. Volts 2% of indication full to half scale; 1% full scale value below half scale.

Voltage: A.C. and D.C. 0 to 2,500 volts.
Current: A.C. and D.C. 0 to 10 amps.
Resistance: 0-20 megohms with internal batteries.
 0-200 megohms with external D.C. supply.
Decibels: -15db to +15db.
Size: 8½ x 7½ x 4½ ins. **Weight:** 6½ lb.

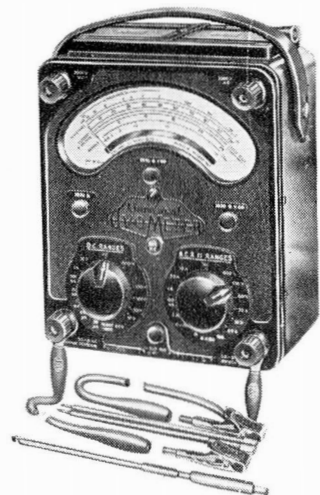



Electrical TESTING INSTRUMENTS

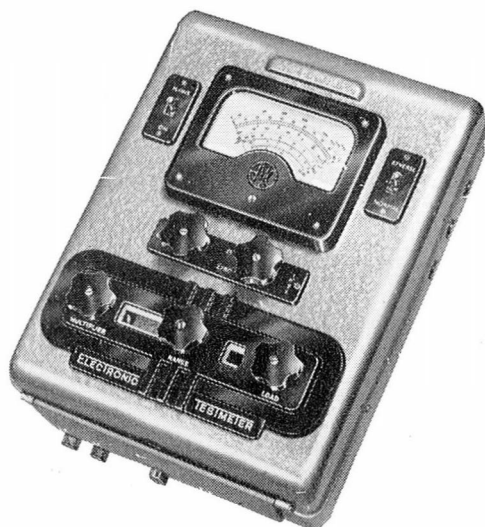

'Avo' ELECTRONIC TESTMETER

A highly stable thermionic D.C. Millivoltmeter with subsidiary circuit switching giving 56 ranges of readings as follows:—

D.C. Volts: 5.0mV. to 10,000V. Max Input Resistance 110 megohms.

D.C. Current: 0.5μA. to 1A. (250mV. drop on all ranges).

A.C. Volts: 0.1V. to 2,500V. R.M.S. up to 2 Mc/s. With diode probe external 0.1V. to 250V. R.M.S. usable to 200 Mc/s.

A.C. Output Power: 5mW. to 5 watts in 6 different load resistances from 5 to 5,000 ohms.

Decibels: -10db to +20db Zero level 50mW.

Capacity: 0.001μF to 50μF.

Resistance: 0.2 ohm to 10 megohms.

Insulation: 0.1 megohms to 1,000 megohms.

Power Supply: 100-130V. and 200-260V., 50-60 c/s. A.C.

Size: $12\frac{1}{2} \times 9 \times 5\frac{1}{2}$ ins. Weight: 12½ lb.


PANCLIMATIC AVOMETERS

The standard AvoMeters can be relied upon to give excellent service in any climate. However, where extremes of climatic conditions are experienced, special protection is desirable for certain components.

In affording this protection, advantage has been taken of the latest developments in panclimatic techniques—for example, the use of new moulding powders in the manufacture of the cases and the "potting" of certain components to render them completely impervious to extremes of humidity and resistant to fungus growth.

These special instruments are now available at a small additional charge and are known as:—

The Model 7X AvoMeter
The Model 8X AvoMeter
The Model 8(S)X AvoMeter

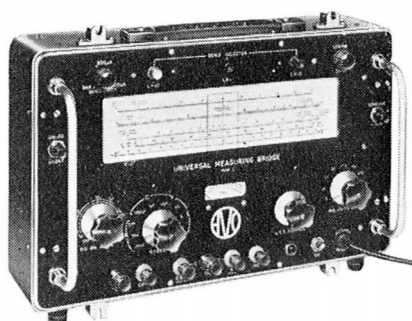

'Avo' UNIVERSAL MEASURING BRIDGE

Type I

A self-contained mains driven instrument, covering 24 calibrated ranges for the measurement of resistance capacity and inductance.


Resistance Ranges: 6 calibrated ranges covering 0.1Ω-1,000MΩ. (Accuracy ±1% at mid-scale).

Capacity: 6 calibrated ranges covering a nominal 1μF-1,000μF. (Accuracy ±1% at mid-scale).

Inductance: 6 calibrated ranges covering 1mH-1,000H. (Accuracy ±2% at mid-scale).

The instrument is fitted with a ±10% production comparator scale.

Size: $15\frac{1}{4} \times 10\frac{1}{2} \times 10$ ins. Weight: 16 lbs. approx.

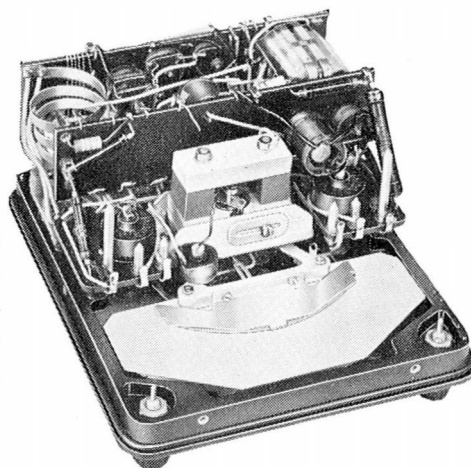

This shows the internal construction of a typical Panclimatic AvoMeter



Electrical TESTING INSTRUMENTS



'AVO' Wide Band A.M./F.M. SIGNAL GENERATOR
(Type T.F.M.)

Operating on Fundamentals and designed primarily for the television and F.M. Engineer, this instrument incorporates a number of additional refinements to enable it to deal satisfactorily with the very stringent requirements of the new bands.

A.M. Coverage: 5-220 Mc/s in 8 ranges, CW or 400 c/s sine/square wave modulation. Accuracy $\pm 1\%$. Provision for R.F. spot frequency calibration.

F.M. Coverage: 65-120 Mc/s. Accuracy $\pm 1\%$. Maximum deviation ± 150 kc/s.

Output: Minimum (about $2\mu\text{V}$) to 100mV. continuously variable with decade multiplier. Force output 250mV.

Output Impedance: 80Ω , 200Ω , balanced 80Ω and 300Ω .

L.F. signal is available for test purposes, and the instrument can be modulated from an external source (A.M. only). A double-ratio, slow-motion mechanism, together with interpolation dial, enables the instrument to be set with a high degree of accuracy. On the F.M. range an internal phasing control enables the modulation signal to be applied to the X-plates of an oscillograph to produce a picture of a discriminator response curve.

Size: $15\frac{1}{4} \times 10\frac{1}{2} \times 10$ ins., approx. Weight: 16 lb. approx.



HEAVY DUTY AVOMETER

An A.C./D.C. moving coil meter specially designed for use under conditions where an exceptionally robust and portable instrument is required; 18 ranges of direct readings on a $3\frac{1}{4}$ -in. scale.

Current: A.C. and D.C. 10mA., 100mA., 1A., 10A.

Voltage: A.C. and D.C. 10, 25, 250, 1,000V.

Resistance: 0-500 ohms. (Midscale 12.5 ohms).
0-50,000 ohms. (Midscale 1,250 ohms).

Sensitivity: D.C. voltage ranges, 1,000 ohms per volt.

A.C. voltage ranges except 10-volt range, 500 ohms per volt.

10-volt A.C. range, 200 ohms per volt.

Size: $7\frac{3}{8} \times 5\frac{3}{8} \times 4$ ins. Weight: $5\frac{1}{2}$ lb.



'AVO' SIGNAL GENERATOR
Type III

An inexpensive A.M. Signal Generator of entirely new design for the Radio Engineer. Operates on Fundamentals and provides six frequency bands covering 150 kc/s - 220 Mc/s. Accuracy $\pm 1\%$.

150 kc/s—500 kc/s	} Continuous wave or modulated at 1,000c/s. L.F. signal available for test purposes.
500 kc/s—1.6 Mc/s	
1.6 Mc/s—5.5 Mc/s	
5.5 Mc/s—18 Mc/s	
18 Mc/s—70 Mc/s	
70 Mc/s—220 Mc/s	

A new type of attenuator ensures close adherence of the output to the attenuator calibration. The instrument provides a force output of 250 mV., whilst the following outputs are available via the attenuator:—

Minimum to $100\mu\text{V}$., $\times 1$, $\times 10$, $\times 100$, $\times 1000$.
Output impedances— 80Ω , 200Ω and 400Ω

Size: $12 \times 8\frac{1}{2} \times 5\frac{1}{2}$ ins. approx.

Weight: $7\frac{1}{2}$ lb. approx.

Both Signal Generators operate on 100-120, 200-260V., 50-60 c/s. A.C. Mains. They are light and compact, and employ double screening to ensure minimum radiation.



Electrical TESTING INSTRUMENTS



MULTIMINOR MODEL 1

A compact and highly sensitive moving coil/rectifier instrument for the measurement of A.C. and D.C. voltage, current and resistance.

Ranges: A.C. and D.C. Voltage 0-1000V. D.C. Current 0-1A
Resistance: 0-20,000 Ω , 0-2 Megohms (using 1½V cell).

Accuracy: D.C. 3% A.C. 4%

To meet special requirements, instruments can be supplied to a higher degree of accuracy for a small additional charge.

Sensitivity: 10,000 Ω /V.D.C. 1,000 Ω /V.A.C.

Weight: 16 oz. (0.45kg.)

Size: 5½ × 3½ × 1½ ins. (14.3 cm. × 9.2 cm. × 3.5 cm.)

Supplied complete with leads, interchangeable crocodile clips and an instruction booklet.

MULTIMINOR MODEL 2 (Panclimatic Model). Identical in specification to the Model 1, but suitable for use under unfavourable climatic conditions.

Power, Power Factor and kVar can now be measured on the AvoMeter by means of the AVO Power Factor and Wattage Unit. Send for free illustrated leaflet.

The following **ACCESSORIES** are available for 'Avo' Testing Instruments.

AvoMeter Voltage Multipliers.

AvoMeter Transformers for A.C. Current Measurements.

AvoMeter Resistance Range Extension Units.

25kV. D.C. Voltage multipliers can be supplied for the 'AVO' Electronic Testmeter, the 'AVO' Electronic Multiplier and the Model 8, 8X and 8(S)X AvoMeters.

AvoMeter Shunts for D.C. Current.


AvoMinor Voltage Multipliers.

AvoMinor Resistance Range Extension Units.

AvoMinor Shunts.

Leather Cases are available for most Instruments.

● A Comprehensive Guide to the complete range of 'Avo' Instruments is available upon request.

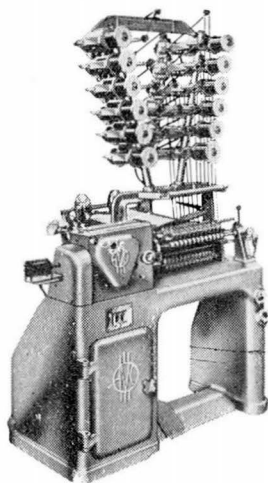

DOUGLAS and MACADIE COIL WINDERS

The Machine illustrated is the "Douglas" Fully Automatic Multi-Winder, for the high-speed production of large quantities of coils with or without paper interleaving. It will produce round, square or rectangular coils up to 6 in. each in length, and up to 4½ in. diameter. As many as 12 smaller coils can be wound simultaneously within the total available winding length of 15 inches, at headstock speeds of between 600 and 2,000 r.p.m.

Our complete catalogue illustrates twenty-seven different machines, ranging from a simple Hand-Winder to the large Multi-Winder capable of producing 12 coils simultaneously, also Taping Machines and a Cotton Inserter Attachment.

AVO LTD.

LONDON, S.W.1., ENGLAND.

Telephone Victoria 3404 (12 lines).

Telegrams Avocet, Sowest, London.

ABBREVIATIONS USED IN THIS MANUAL.

D, DD, DDD - Diodes.

DT, DDT, DP, DDP - Valve with another electrode assembly in addition to the diode.

H - Heptode or Hexode.

N - Nonode.

O - Octode.

P - Pentode or Tetrode, PP - Double Pentode or Double Tetrode.

T - Triode, TT - Double Triode, TH - Triode Heptode, or Triode Hexode.

TP - Triode Pentode.

R - Rectifier, RR - Full-wave Rectifier.

TI - Tuning Indicator (magic eye).

CCR - Cold Cathode Rectifier.

† - Appearing among ROLLER SELECTOR switch numbers, refers to third diodes in triple diodes. Refer to Working Instructions, Chapter 3, Section headed "Instructions for Testing Specific Valve Types" for full test procedure.

() - Where brackets appear around stated heater voltage thus (5) it indicates that heater voltage given in Data columns has been uprated to allow for voltage drop at valve base, due to high heater current taken by the particular valve.

NOTES REFERRED TO IN VALVE DATA REMARKS COLUMN.

- A The heater/cathode lead identified with red marking should be connected to Pin No. 1.
- B The grid top cap is situated over Pins No. 7 and 8.
- C This valve does not fit special valve holders supplied, and roller selector Data will depend on connections made to valve electrodes.
- D Pin No. 1 on the flat pinch type of base is the lead adjacent to the coloured blob the remaining pins being directly numbered across the base from Pin No. 1.
- E Alternative test figures are given for use when valve shows signs of back emission from anode to G_3 . This phenomenon can be recognised by the anode current apparently decreasing as the valve heats.
- G Valves on the B8D base when leads are cut, should be tested either by insertion in a B8D Adaptor, or leads lengthened and tested in the same way as those with flexible leads, by using the special 9 clip valve holder.
- H Tests on tuning indicators should not be made until the resistor value (R_a), indicated in the remarks column, has been inserted across the link(s) on valve panel.
- J Use special 9 clip valve holder.
- K The grid top cap is situated over Pins No. 4 and 5.
- L A_1 is situated above pins 2 & 3.
 A_2 is situated above pins 7 & 8.
- M A_1 is situated above pins 2 & 3.
 A_2 is situated above pins 5 & 6.
- N Use special B7A adaptor (Adaptor 9/1).

ABBREVIATED WORKING INSTRUCTIONS FOR THE "AVO" VALVE TESTER.

Although the "AVO" Valve Tester has been out of production for some years, the following operational notes will be of assistance to the user not entirely familiar with the instrument, and its employment in conjunction with this data manual.

The data in the following pages gives sufficient information for the checking of the valves with the "AVO" VALVE TESTER.

The data is presented in the following form:—

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		

By ignoring the data shown in the columns specifically marked Data for Valve Characteristic Meter and Valve Tester Type 160, the data applicable to the "AVO" Valve Tester, is obvious.

Procedure for finding Test Data.

1. Note commercial or "service" reference on valve and consult the index to ascertain whether it is listed. If the valve is a service type, the cross-reference section will give the commercial equivalent and also the page on which test data is listed.
2. The voltage selector panel associated with the internal transformer in the meter unit should be set to match the voltage of the A.C. mains supply.
3. Before switching on, locate in this manual the line of data applicable to the valve to be tested and set the ANODE, SCREEN and HEATER switches to the voltages indicated. The SELECT ANODE switch should be set to "NORMAL", "A2", "D₁" or "D₂" according to the test to be undertaken, the SET ZERO control turned fully clockwise, the SET mA/V control set at 100, and the ROLLER SELECTOR SWITCH set up in accordance with the code number appearing in the data.
4. Switch on, noting that the neon indicator lights up indicating that the mains switch is on, and insert test lead plugs into the sockets in Meter Unit Panel. The neon lamp will now have been extinguished. If the Crocodile Clips at the remote ends of the leads are now connected to the valve pins in turn, shorts between the valve electrodes will be indicated by the neon lamp glowing. The test should not proceed further if shorts between electrodes (other than heater pins) are indicated.
5. Insert valve in correct socket upon valve panel and observe test procedure outlined below.

NOTE: The heater voltages in parenthesis should be ignored.

P. & T. (Pentodes and Triodes).

As the valve warms up the initial anode current will be registered upon the meter and should be backed off to zero by means of the SET ZERO control. The SET mA/V control should now be set to "mA/V" and any adjustment required to return the needle to zero, made upon the SET ZERO control.

The toggle key is now depressed in the direction marked mA/V thus indicating the slope of the valve upon the "mA/V" scale. This reading should compare favourably with the figure given in the data.

The toggle key is now depressed in the direction marked C. INS. (for indirectly heated valves only) thus indicating cathode/heater insulation which should, for a good valve, be of the order of 5—10M Ω (in the case of pentodes, for this test the SCREEN switch should be set at 60 or damage to the instrument and valve may result).

DT, DDT, DP, DDP (Valves with another electrode assembly in addition to diode).

The mutual conductance of the triode or pentode section is checked with anode selector at "Normal". Emission figures for each diode are then obtained as below.

"†" See information given under the heading "Diodes" below.

TT and PP (Double Electrode Assemblies).

The mutual conductance of each half of such a valve is obtained with the anode selector at "Normal" and A₂.

Where no mutual conductance figure is given, each half of valve should be checked for matching of mutual conductance.

R (Rectifiers).

To test rectifying valves for emission, set mA/V control at 100 and anode volts switch at "Rec". Emission of each anode (in case of full-wave) will be obtained by setting anode selector at "D₁" and "D₂" respectively. The two emissions should match within small limits and can be compared with the figures given in the mA/V column which indicates the order of emission to be expected.

D, DD and DDD (Diodes).

These are tested for emission for each diode with anode volts switch at "D" and anode selector at "D₁" and "D₂". Set "mA/V" control at "mA/V" when reading should be greater than 0.5 for a good diode. Readings will generally be between 2 and 5. Where the symbol "†" occurs amongst the selector switch set up figures, set to A₂ and test for emission of third diode with Anode Selector at A₂.

Where D₁ or D₂ appears under the heading "Top Cap" these should be connected to top cap "A" and tested with the anode selector at "Normal".

		<i>Selector</i>			<i>Anode</i>		
		<i>Switch</i>	<i>T.C.</i>	<i>Vf</i>	<i>Volts</i>	<i>Base</i>	<i>Type</i>
E.g.	EA50	123 000 000	D ₁	6	D	B3G	D

Connect to Anode Top Cap (A) and check for emission of Diode with Anode Selector at "Normal".

TH, TP, O (Frequency Changers).

To test frequency changers two sets of figures are given, first check the triode (Oscillator) section with the anode selector at "Normal" and then the pentode (mixer) section with the selector at A₂.

SPECIAL NOTES.

Due to the vast improvements in valve technique, the A.V.T. has limitations to its use. Notably the tendency to parasitic oscillations has greatly increased, and this should be borne in mind when high slope, short grid base valves of the all-glass base construction are under test.

INTERNAL CONNECTION (*).

When the symbol * appears among the Selector Switch set up figures, it indicates that an unknown electrode may be connected to this pin internally. To obtain the complete Selector Switch coding, test with an ohmmeter between pin marked * and all others. (The ohmmeter should be on a sufficiently low range to discriminate between a dead short and filament resistance.) Dependent upon the electrode to which this pin is internally connected the correct code can be set up and normal test procedure followed.

Where the pin marked * is O.C. to all others	Set Roller to	..	..	0.
„ „ „ „ „ „ connected to Cathode	Set Roller to	..	1.	
„ „ „ „ „ „ „ „ Heater —	„ „ „	..	2.	
„ „ „ „ „ „ „ „ Heater +	„ „ „	..	3.	
„ „ „ „ „ „ „ „ Grid	„ „ „	..	4.	
„ „ „ „ „ „ „ „ Screen	„ „ „	..	5.	
„ „ „ „ „ „ „ „ Anode	„ „ „	..	6.	
„ „ „ „ „ „ „ „ Anode 2	„ „ „	..	7.	
„ „ „ „ „ „ „ „ Diode Anode 1	Set Roller to	8.		
„ „ „ „ „ „ „ „ Diode Anode 2	„ „ „	9.		

1.4 Volt Dry Battery Valves.

To obtain the filament supply for the 1.4V series, set the filament voltage switch to 10 volts and the toggle switch on the valve holder panel to $\div 7$ position. The toggle switch must always be returned to "Normal" after such tests. Where the Filament Voltage Extension Unit is used, 1.4 volts can be obtained direct by setting to 1.4V, but in these circumstances the $\div 7$ toggle switch must be left at "Normal".

Special Note re Use of Valve Base Adaptor No. 2.

When using this data in conjunction with the B9G base, Pin 1 must be connected to 3^H_+ , and Pin 8 connected to 2^H_- . In these circumstances most types will give heater/cathode short which can be ignored. Apart from the filament connections referred to all other set up figures will remain as printed, but pin 9 should be connected to 6^H_- Eg. EF50. Using Valve Base Adaptor No. 2, Selector Switch Number will read 356 101 420.


Old Type Panels.

Note that the foregoing information does not apply to the now obsolete English and American panels without roller switch.




'AVO' Valve Tester


DIAGRAM OF STANDARD PIN CONNECTIONS (viewed from underside of base)




BRITISH NINE PIN (B9)




BRITISH SEVEN PIN (B7)




B9G




'P'-TYPE BASE (8SC)




INTERNATIONAL OCTAL (AO8)




AMERICAN SIX PIN (UX6)




BRITISH 4/5 PIN (B5&B4)




AMERICAN FIVE PIN (UX5)




MAZDA OCTAL (MO8)




B7A




AMERICAN SMALL SEVEN PIN (SM7)



AMERICAN FOUR PIN (UX4)




AMERICAN OCTAL (B8B or B8G)



SUB MINIATURE 8 PIN (B8D)



HIVAC FOUR PIN (SM4)




HIVAC FIVE PIN (SM5)




AMERICAN SEVEN PIN (UX7)





B7G



B9A




B3G

5AA & 7AA
(ACORN VALVES)

B8A




B5B



B5A

DIAGRAM OF SPECIAL VALVE HOLDERS FITTED TO
THE AVO VALVE TESTER TYPE 160
(bases are viewed from top of valve panel)

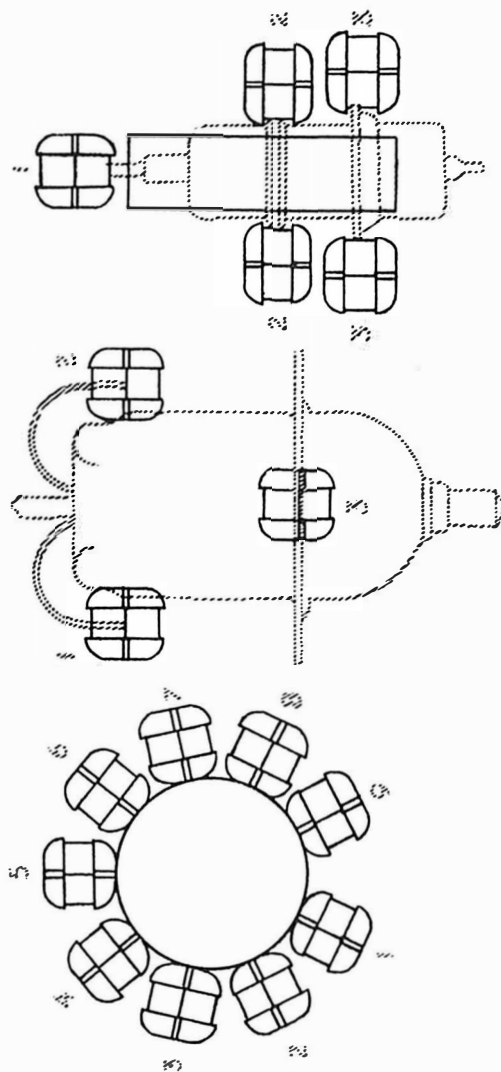

Commercial Valve Index and Cross Reference to British Service Types

NOTE.—Many of the commercial equivalents listed in the following pages will have different CV. numbers, this is due to special service requirements which do not affect the radio engineer, e.g. interelectrode capacitance, bulb size, life test, etc. It should also be noted that test data given in this manual may differ between equivalent valves, due to different sets of potentials having been selected for the test.

ABBREVIATIONS USED FOR MANUFACTURERS' NAMES

CODE LETTER	MANUFACTURER	CODE LETTER	MANUFACTURER
A. ...	Brimar	HH. ...	Kuth Electron Products
B. ...	B.T.H.	II. ...	Bell Telephone Labs.
C. ...	A. C. Cossor	JJ. ...	Bomac.
D. ...	Siemens-Ediswan	KK. ...	Amperex
E. ...	E. M. I. (Emitron)	LL. ...	Westinghouse
F. ...	Electronic Tubes	MM. ...	Victoreen Instrument Corp.
G. ...	English Electric	NN. ...	Compagnei De Lampes (Mazda)
H. ...	Ferranti	OO. ...	A. B. Svenska Elektronon
I. ...	General Electric (U.S.A.)	PP. ...	Amalgamated Wireless Valve Co.
J. ...	General Electric Co.	QQ. ...	Philco
K. ...	Marconi Osram Valve Co.	RR. ...	Hivac
L. ...	Marconi Wireless Telegraph Co.	SS. ...	Arctarius
M. ...	Mullard	TT. ...	Industro
N. ...	Phillips	UU. ...	R. F. T.
O. ...	Pinnacle Electronic Products	VV. ...	General Electrics
P. ...	Radio Corp. of America	WW. ...	Electronic Enterprises
Q. ...	Raytheon	XX. ...	Cintel
R. ...	Standard Telephones & Cables	YY. ...	Eimac
S. ...	Sylvania	ZZ. ...	L. M. Ericsson
T. ...	Tung-Sol	AAA. ...	Amperex
U. ...	British Tungsram	BBB. ...	S.F.R.
V. ...	Western Electric (U.S.A.)	CCC. ...	Federal Union
W. ...	Western Electric (Great Britain)	DDD. ...	Bendix
X. ...	20th Century Electronics	EEE. ...	Dumont
Y. ...	Hytron	FFF. ...	Valvo
Z. ...	Electrons Inc.	GGG. ...	Heinz-Kaufman
AA. ...	National Union	HHH. ...	Taylor Tubes Corp.
BB. ...	Matchlett	III. ...	Marconi Italiana
CC. ...	Radio Valve Co. of Canada	JJJ. ...	Sperry
DD. ...	Lansdale Tube Co.	KKK. ...	Ever Ready
EE. ...	Canadian Radio Valve Manufacturing Corp.	LLL. ...	Triotron
FF. ...	Chatham	MMM. ...	R.F.T.
GG. ...	Rogers Majestic	NNN. ...	Marconi Wireless Telegraph Co.
		OOO. ...	Dario

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
O0	—	— ...	91	IAX2	Q.I.S.T.P.	— ...	1
O0A	P.I.QQ.S.T.	— ...	91	IB3/8106	—	CV541, U41	1
O1A	P.	— ...	91	IB3GT	—	CV1830, U41	1 & Appendix 1
O1A	R.	CV750	1				
O1AA	T.	— ...	91	IB4P	—	CV758	1
O1B	T.	— ...	1	IB4T	—	— ...	1
O2DF	M.	(CV2260)	—	IB5/25S	—	CV759	1
O9	C.	CV2725	—	IB6	—	— ...	1
O9D	C.	(CV1596)	—	IB7GT	—	CV760	1
O9J	C.	(CV1518)	—	IB8	I.Q.S.T.	— ...	1
O84	—	— ...	91	IB21A	—	CV3586	—
OA2WA	G.	CV4020	—	IB22	—	CV761	—
OA2	—	CV1832, STVI50/30	—	IB23	—	CV539	—
OA3	—	(CV3798), VR75/30	—	IB24	—	CV725	—
OA4	—	CV752, Z300T	—	IB24A	—	CV3548	—
OA8I	M.	{(CV488) ... (CV1353) ...}	—	IB26	—	CV576	—
		CV1354	—	IB27	—	CV713	—
OA85	M.	CV1833, STVI108/30	—	IB32/532A	—	CV2648	—
OB2	—	CV4028, M8224	—	IB32	—	CV2648	—
OB2WA	G.	CV3799	—	IB35	—	CV369	—
OB3	—	(CV686), VRI05/30	—	IB35A	—	CV3628	—
OC3	—	(CV216), VRI50/30	—	IB36	—	CV577	—
OD3	—	(CV449), STV85/10	—	IB38	—	CV3549	—
OG3	M.	CV692	1	IB40	—	CV2914	—
OZ4	R.	CV517	—	IB41	—	CV3550	—
OZ4A	—	— ...	1	IB49	—	CV508	—
I	—	— ...	1	IB56	—	CV3877	—
IA3	RR.	CV753, DA90...	1	IB58	—	CV3745	—
IA4E	C.B.QQ.	— ...	1	IB63A	—	CV2826	—
IA4P	—	CV754	1	IC	—	— ...	1
IA4T	I.Q.S.T.	— ...	1	IC1	D.	(CV782), X17, DK91	1
IA5G	R.U.	CV755	1	IC2	D.	DK92, X18	1
IA5GT	R.A.H.	CV756	1	IC3	Y.S.Q.	DK96	1
IA6	—	CV757	1	IC3	D.	— ...	126
IA7G	R.C.U.M.	CV1800, X14	1	IC4	—	— ...	1
IA7gt	B.	CV1802, DK32	1	IC5G	C.H.A.	CV1803, DL35, N14	1
IA8	—	— ...	130				
IA85	I.Q.S.T.	— ...	1	IC5GT	A.H.	CV1805, 40SUA	1
IA86	T.Y.QQ.	DK32, IC3	1	IC6	S.I.A.SS.N.	— ...	1
IA85	P.T.S.	— ...	1		Q.M.T.P.		
IA86	B.U.H.Y.Q.	DK92, X18, IC2	1	IC7	S.I.P.	— ...	2
IA87	—	(CV2237), DF62	1		PP.T.M.		
IA88	P.T.S.	— ...	1	IC8	T.I.Q.	— ...	2
IA89	T.Y.Q.S.	— ...	1		S.		
IA90	—	— ...	122	IC21	—	CV762	—
IA91	T.Y.S.	— ...	1	ICP1	F.	(CV2302), DH3-91	—
IA92	T.Y.S.	— ...	1	ID3	S.	— ...	2
IA93	S.	— ...	126	ID4	—	— ...	2
IA94	S.	— ...	126	ID5	A.	CV764, U4024	2
IA95	—	— ...	122	ID5eg	—	— ...	2
IA96	H.Y.U.	DAF96, IFDI	1	ID5GP	P.	CV705	2
IA97	H.Y.U.Q.	DF96, IFI	1	ID5GT	P.	CV1806	2
IA98	S.	— ...	126	ID6	A.	— ...	2
IA99	S.	— ...	126	ID7	P.	CV765	2
IA100	—	DF97	1	ID8GT	P.	CV1811	2
IA101	—	— ...	1				

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
ID13	D.	(CV753), DA90, IA3	2	ILC6	P.	CV778	...
IDN5	P.	— ...	122	ILD5	P.	CV779	...
IE3	Y.	— ...	2	ILE3	I.P.T.Y.	— ...	3
IE4	I.Q.S.T.	— ...	2	ILF3	I.Q.	— ...	3
IE5	I.SS.S.T.	— ...	2	ILG5	Q.I.P.T.Y.S.	— ...	3
IE5GP	P.	CV766	2	ILH4	P.	CV780	...
IE5GT	P.	CV766	2	ILN5	P.A.	CV781	...
IE7	P.	CV1812	2	ILN5E	A.	CV781	...
IE8	P.T.S.	— ...	2	IMI	D.	— ...	Appendix I
IF1	D.	DF96	2	IM3	D.	— ...	Appendix I
IF2	D.	(CV1758), DF92	2	IM5g	PP.	— ...	3
IF3	D.	(CV785), DF91, WI7	2	IN5G	A.C.U.	CV1821, Z14	...
IF4	P.	CV767	2	IN5GT	A.H.	CV1823, DF33	3
IF5	P.	CV768	2	IN6	S.P.I.T.Q.	— ...	3
IF6	P.	CV769	2	IN21	—	CV727	...
IF7GV	P.	CV770	2	IN21B	—	CV367	...
IFD1	D.	DAF96	2	IN21C	—	CV3525	...
IFD9	D.	(CV784), DAF91, IS5	2	IN23A	—	CV749	...
IG3	P.	— ...	122	IN23B	—	CV2856	...
IG4	P.	CV1817	2	IN23BM	—	CV2857	...
IG5	P.	CV771	2	IN25	—	CV2916	...
IG6G	P.	CV772	2	IN26	—	CV1785	...
IG6GT	P.	CV773	2	IN28	—	CV2918	...
IH2	I.	— ...	130	IN31	—	CV3509	...
IH4G	P.	CV774	2	IN34	—	CV2829	...
IH5G	A.C.U.	CV1818, DAC32, HD14	2	IN34	—	(CV1354)	...
IH5GT	A.	CV1820, DAC32	2	IN38	—	CV3551	...
IH6	I.P.T.M.	— ...	2	IN38A	M.	CV2962	...
IJ3	I.	— ...	122	IN43	—	CV2919	...
IJ5	I.P.SS.Q. S.T.	— ...	2	IN47	—	CV3729	...
IJ6GX	I.	— ...	2	IN54	—	(CV1354), OA85	...
IK3	—	— ...	126	IN54A	—	CV2961	...
IK4	—	— ...	2	IN58	—	(CV1354)	...
IK5	PP.	— ...	2	IN69	—	CV2923	...
IK5B	—	— ...	2	IN70	M.	CV2924	...
IK6	—	— ...	2	IN72	—	CV2974	...
IK7	PP.	— ...	2	IN81	—	CV2928	...
IL4	A.G.	(CV1758), DF92, IF2	2	IN88	—	{(CV448), OA61 (CV1353)	...
IL5	PP.	— ...	2	IP1	D.	(CV820), DL96	3
IL6	I.P.T.Y.	— ...	3	IP5	P.	CV728	...
IL60	—	— ...	3	IP10	D.	DL92, 3S4	3
ILA4	I.P.T.NN. Y.S	— ...	3	IP11	D.	DL92, 3V4	3
ILA4E	A.	— ...	3	IP21	—	(CV337)	...
ILA6E	A.Y.	— ...	3	IP23	—	(CV2680)	...
ILA6	P.	CV775	3	IP30	—	(CV1764)	...
ILB4	P.	CV776	3	IP31	—	CV3812	...
ILB6	T.I.Q.S.	— ...	3	IP32	—	(CV405)	...
ILC5	P.	CV777	3	IQ5G	A.U.	CV1824	...
				IQ5GT	A.H.	CV1826	...
				IQ5GT/G	H.	CV1826	...
				IQ6	I.S.T.	— ...	3
				IQ22	—	CV3555	...
				IR	—	— ...	3
				IR4/I294	—	CV2709	...
				IR5	H.F.A.U.	(CV782), DK91, ICI	3

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
IS2A	—	— ...	3	2C22	P.	CV792 ...	4
IS4	H.C.A.U.	(CV783), DL9I	3	2C23	TT.	— ...	4
IS5	H.F.A.U.	(CV784), DAF9I, ZDI7, IFD9	3	2C25	—	— ...	4
IS6	T.	— ...	3	2C26	—	CV802 ...	4
ISA6	I.Q.S.T.	— ...	3	2C26A	—	(CVI759) ...	—
ISB6	I.Q.S.T.	— ...	3	2C33	—	CV793 ...	—
IT	—	— ...	3	2C34	—	(CVI8) ...	—
IT2	—	RI6, U37 ...	3	2C39	—	CV579 ...	—
IT4	RR.H.U.F.	(CV785), DF9I IF3	3	2C39A	—	CV2516, TDI-100A	—
IT5GT	P.	CVI829 ...	3	2C40	—	CV2643 ...	—
IT6	P.T.S.	— ...	3	2C42	—	CV2932, TD3-12	—
IU4	—	CV2507, DF904	3	2C43	—	CV688, TD3.5-12	—
IU5	M.	CV3912 ...	3	2C45	—	CV596 ...	—
IU6	A.T.Y.Q.S.	— ...	3	2C46	—	CV2933, TD05-12	—
IV	P.	CV1999 ...	3	2C48	—	— ...	4
IV2	H.P.T.Y.S.	— ...	4	2C50	T.	— ...	126
IV4	—	— ...	4	2C51	—	CV2831 ...	4
IV5	T.I.S.	— ...	4	2C51W	—	CV2866 ...	—
IW4	Y.T.Q.S.	— ...	4	2C52	I.S.	— ...	4
IW5	T.I.Q.S.	— ...	4	2C53	—	CV3559 ...	—
IW50	—	— ...	4	2CY5	P.	— ...	4
IX2	S.I.P.T.Y.Q.	— ...	4	2D1	—	— ...	4
IY2	T.I.S.TT.	— ...	4	2D2	M.	CV794 ...	4
IZ1	UU.	— ...	4	2D4	M.	— ...	4
IZ2	—	CV2510 ...	4 & Appendix II	2D4A	M.	CV795, D4I, D400	4
2	—	— ...	4	2D4B	M.	— ...	4
2/25A	—	— ...	4	2D13A	M.	— ...	5
2-50A	—	— ...	4	2D13C	M.	CV796, I0DI	5
2-150D	—	CV3878 ...	—	2D2I	A.M.RR.	(CV797), EN9I	5
2-150D/ 152RA	—	CV3878 ...	—	2D2IW	M.	CV2876 ...	—
2A3H	—	— ...	4	2DPI	—	CV1813 ...	—
2A3	A.	CVI831 ...	4	2E5	—	— ...	Appendix I
2A5	A.U.	CVI834 ...	4	2E22	—	CV798 ...	5
2A6	U	CVI769 ...	4	2E24	T.Y.P.TT. VV.	— ...	5
2A7	U.	CV787 ...	4	2E25	Y.	— ...	5
2AF4	T.Y.P.I.	— ...	4	2E26	M.T.Y.P.S.VV.	— ...	5
2API	—	CV790 ...	—	2E30	—	CV2517 ...	5
2APIA	—	CV790 ...	—	2E31	I.Q.	— ...	5
2BPI	—	CV3678 ...	—	2E32	I.Q.	— ...	5
2B3	I.Y.T.	— ...	4	2E35	I.Q.	— ...	5
2B4	—	CV648 ...	—	2E36	I.Q.	— ...	5
2B5	T.	— ...	4	2E41	I.Q.	— ...	5
2B7	U.	CVI837 ...	4	2E42	I.Q.	— ...	5
2B7S	I.Q.S.	— ...	4	2E50	—	— ...	5
2B21	—	CV597 ...	4	2F7	—	— ...	5
2B22	—	CV2931 ...	4	2G	D.	CVI842 ...	—
2B25	T.Y.	— ...	4	2G5	—	— ...	Appendix I
2B26	—	— ...	4	2G/402A	A.	CVI835 ...	—
2B35	—	— ...	4	2G/472B	A.	CV2518 ...	—
2B36	—	(CVI078) ...	4	2G/473C	A.	CV2399 ...	—
2BN4	P.I.Y.	— ...	4	2HMD	—	— ...	5
2C2I	—	CV875 ...	4	2K2	—	— ...	5
				2J2I	—	— ...	—
				2J2IA	—	CV719 ...	—
				2J22	—	CV800 ...	—

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
2J26	—	CVI760 ...	—	3API	—	CV602 ...	—
2J31	—	CVI807 ...	—	3A2	P.T.I.Y.	— ...	5
2J32	—	CVI808 ...	—	3A3	P.T.I.Y.	— ...	5
2J33	—	CVI809 ...	—	3A4	A.C.	(CV807), DL93	5
2J34	—	CVI810 ...	—	3A5	—	(CV808), DCC90	5
2J36	—	CV514 ...	—	3A8	P.T.I.Q.S.	— ...	5
2J42	M.	CV3676, JP9-7	—	3A/105-B	R.	CV809 ...	—
2J48	—	CVI822 ...	—	3A/107A	R.	(CV249) ...	5
2J49	—	CV3687 ...	—	3A/107B	R.	(CVI655) ...	5
2J50	—	CV2793 ...	—	3A/108A	R.	(CVI653) ...	5
2J51	—	CV3560 ...	—	3A/108B	R.	(CVI657) ...	6
2J54	—	CV801 ...	—	3A/109A	R.	(CVI671) ...	6
2J56	M.	CV2852 ...	—	3A/109B	R.	— ...	6
2J58	Q.	CV997 ...	—	3A/109B	R.	(CVI663) ...	—
2K25	—	CV2792, KS9-20A	—	3A/110B	R.	(CVI659) ...	—
2K28	—	CVI892 ...	—	3A/135A	R.	CV2598 ...	—
2K33	Q.	CVI786 ...	—	3A/141A	R.	(CVI639) ...	—
2K41	—	CV3904 ...	—	3A/142A	R.	(CVI641) ...	—
2K48	—	CV3669 ...	—	3A/144A	R.	(CVI694) ...	—
2P	C.	PI20 ...	5	3A/154J	R.	(CVI6) ...	—
2S	I.Q.S.T.	— ...	5	3A/146J	R.	(CV53) ...	—
2S/141G	R.	CV4504 ...	—	3A/147J	R.	(CV82) ...	—
2S/140G	R.	(CV469) ...	—	3A/148J	R.	(CV88) ...	—
2T4	Y.T.	— ...	5	3A/154M	R.	— ...	6
2T/270K	R.	(CV261), HR2, R10	5	3A/167M	R.	— ...	122
2T/450E	R.	(CV3587) ...	—	3AF4A	P.I.	— ...	6
2U14	—	— ...	5	3AL5	T.P.I.Y.	— ...	6
2U15	—	— ...	5	3AU6	T.P.I.Y.	— ...	6
2V2	I.T.	— ...	5	3AV6	T.P.I.Y.	— ...	6
2V3	P.	CV803 ...	5 & Appendix II	3AY6	—	— ...	6
2V3G	P.	CV804 ...	5 & Appendix II	3AZ4	—	— ...	122
2V/400A	R.	(CV32) ...	—	3B2	P.I.T.	— ...	6
2V/401C	R.	CVI446 ...	—	3B4	—	(CV2240), DL98	6
2V/470C	R.	(CVI355) ...	—	3B5	I.Q.S.T.	— ...	6
2V/471A	R.	(CVI449) ...	—	3B7/129I	—	CV811 ...	6
2V/500C	R.	(CV5) ...	—	3B21	—	CV2959 ...	6
2V/531E	R.	CVI420 ...	—	3B22	—	CV3815 ...	6
2W3	T.I.Q.S.	— ...	5	3B23	TT.	— ...	6
2W/540E	R.	(CVI601) ...	—	3B24	—	CV812 ...	6 & Appendix II
2X2	—	CV3748 ...	5 & Appendix II	3B24W	—	CV2858 ...	6 & Appendix II
2X2/897	—	CV3748 ...	5	3B24WA	—	CV4021 ...	6 & Appendix II
2X2A	—	CV597 ...	5				
2X3	—	— ...	5	3B25	P.I.TT.	— ...	6
2X/105G	R.	(CV448) ...	—	3B26	—	CV3575 ...	6
2X/106G	R.	(CV425) ...	—	3B27	WW.	— ...	6
2XP	C.	PA20 ...	5	3B28	M.G.	CVI835, RR3-250	—
2Y2	P.	CV597 ...	5 & Appendix II	3B29	—	CV3689 ...	—
2Z2	T.S.	— ...	5	3B/100-B	R.	(CVI689) ...	—
3	—	— ...	5	3B/102-B	R.	(CV84) ...	—
3A	V.	CV3812 ...	—	3B/151A	R.	(CVI648) ...	—
3AE	W.	CV3812 ...	—	3B/200-B	R.	(CVI047) ...	—
3API/906PI	—	CV602 ...	—	3B/240M	R.	(CV2214) ...	6
				3B/241M	R.	— ...	6

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
3B/252B	R.	{ (CV1688) ... (CV1220) ... (CV1148) ...	6 6 —	3G/501A	R.	CV2215 ...	—
3B/351A	R.	CV1452 ...	—	3GPI	—	CV516 ...	—
3B/400A	R.	(CV127) ...	—	3GRK	J.	(CV442) ...	—
3B/401J	R.	(CV49) ...	—	3H/151J	R.	CV2516 ...	—
3B/501A	R.	(CV1288) ...	—	3J/121E	R.	CV28 ...	—
3B/504B	R.	(CV25) ...	—	3JPI	—	CV2945 ...	—
3B/850A	R.	(CV1620) ...	—	3JP7	—	CV2869 ...	—
3B/851A	R.	— ...	6	3JPI2	—	CV2816 ...	—
3BA6	T.I.Y.	— ...	6	3J31	—	CV1788 ...	—
3BC5	T.P.I.Y.	— ...	6	3J/160E	R.	(CV2245) ...	—
3BE6	T.I.Y.	— ...	6	3J/170E	R.	CV2905 ...	—
3BN4	I.T.	— ...	6	3J/260E	R.	CV2908 ...	—
3BN6	T.P.I.Y.	— ...	6	3KPI	—	CV3733 ...	—
3BPI	—	CV814 ...	—	3LE4	T.I.Q.S.	— ...	7
3BPIA	—	CV2934 ...	—	3LF4	P.S.T.I.Y.Q.	— ...	7
3BU8	T.P.	— ...	6	3P/270B	R.	CV2950 ...	—
3BY6	T.P.I.Y.	— ...	6	3Q4	A.	CV818, N18, DL95	7
3BZ6	T.P.I.Y.	— ...	6	3Q5GT	A.H.	CV819, DL33, N16	7
3C2	I.T.	— ...	6	3Q/120G	R.	(CV1605) ...	—
3C4	U.Y.Q.	DL96, IPI	6	3Q/150E	R.	CV1450 ...	—
3C5	I.Q.S.T.	— ...	6	3Q/180E	R.	(CV1603) ...	—
3C6	T.I.Q.S.	— ...	6	3Q/181E	R.	(CV1600) ...	—
3C22	—	CV999 ...	—	3Q/191E	R.	(CV570) ...	—
3C24	—	CV789 ...	—	3Q/195E	R.	(CV570) ...	—
3C31/C1B	—	CV1765 ...	—	3Q/211E	R.	(CV1604) ...	—
3C34	—	CV941 ...	—	3Q/212E	R.	(CV1797) ...	—
3C36	—	— ...	6	3Q/213E	R.	(CV1734) ...	—
3C45	—	(CV372), XH3-045	—	3Q/260E	R.	(CV446) ...	—
3C/250A	R.	(CV1034) ...	—	3Q/293E	R.	(CV1447) ...	—
3C/270A	R.	{ (CV1252) ... (CV1619) ...	— —	3Q/310E	R.	CV3873 ...	—
3C/350E	R.	(CV30) ...	—	3RPI	—	CV3941 ...	—
3C/351H	R.	(CV27) ...	—	3S4	A.F.	(CV820), DL92, IPI0	7
3CB6	T.Q.I.Y.	— ...	6	3SB6	—	— ...	130
3CE5	T.S.	— ...	126	3V4	U.	IPI1, DL94, N19	7
3CF6	P.I.Y.T.	— ...	6		P.		
3CS6	P.I.Y.T.	— ...	6		T.		
3CY5	S.	— ...	126		I.		
3D6/1299	A.	CV815 ...	6		Y.		
3D21A	A.	CV2659 ...	—		Q.		
3D22	R.G.	CV2851 ...	—		S.		
3D/100A	R.	CV1422 ...	—		A.		
3D/150G	R.	CV2735 ...	—	3V/290B	R.	CV5028 ...	—
3DK6	S.	— ...	126	3V/420B	R.	(CV2126) ...	—
3DT6	Q.I.Y.T.	— ...	6	3V/530E	R.	(CV477) ...	—
3DPI	—	CV816 ...	—	3V/531E	R.	CV447 ...	—
3E5	T.Y.Q.S.	— ...	6	3WP1	—	CV3946, DG7-36	—
3E6	T.I.Q.S.	— ...	6	4	—	— ...	7
3EGI	XX.	(CV1526) ...	—	4/100BU	C.	FW4-500, U18	7
3EPI	—	CV817 ...	—	4-65A	—	CV1905, QY3-65	—
3EPI/1806PI	—	CV817 ...	—	4/125A	YY.	(CV2963), QY3-125	—
3E29	—	CV3599 ...	—	4-125A	O.	(CV2130) ...	—
3FP7	—	CV1761 ...	—	4-240A	O.	{ (CV2131) ... (CV2964) ...	— —
3GI0	—	— ...	6	4/250A	YY.	(CV2964), QY4-250	—
3GI30	—	— ...	6	4-400A	—	CV3879 ...	—
				4-1000A	—	CV3880 ...	—

Commercial					Commercial				
Valve	Manufacturer	Equivalent (or nearest in brackets)		Page	Valve	Manufacturer	Equivalent (or nearest in brackets)		Page
4A1	—	CV821	...	—	4DK6	S.	— ...	...	126
4A6G	T.I.Q.S.	— ...	...	7	4DT6	I.	— ...	...	122
4A07	—	— ...	...	7	4E27	—	CV824	...	—
4A08	—	— ...	...	7	4G30	—	— ...	...	7
4A10	—	— ...	...	7	4G105	—	— ...	...	7
4A15	—	— ...	...	7	4G200	—	— ...	...	7
4A80	—	— ...	...	7	4G/280K	R.	(CV797)	...	—
4A90	—	— ...	...	7	4H07	—	— ...	...	8
4A120	—	— ...	...	7	4H08	—	— ...	...	8
4A/137B	R.	(CV243)	...	—	4H80	—	— ...	...	8
4AU6	P.	— ...	...	7	4H/135M	R.	CV2519	...	—
4BA6	I.	— ...	...	7	4H/180E	R.	CV1883	...	—
4B22	—	CV2936	...	—	4J26	—	CV3779	...	—
4B24	—	CV822	...	—	4J27	—	CV3780	...	—
4B26	—	CV1836	...	—	4J28	—	CV3781	...	—
4B28	—	CV2777	...	—	4J29	—	CV3782	...	—
4B30	—	CV924	...	—	4J30	—	CV3783	...	—
4B31	—	CV3510	...	—	4J31	—	CV1914	...	—
4B32	M.	CV2518, RR3-1250	...	—	4J33	—	CV1916	...	—
4B35	—	CV926	...	—	4J34	—	CV1897	...	—
4B36	—	(CV2779)	...	—	4J35	—	CV1898	...	—
4BC5	I.T.	— ...	...	7	4J50	—	(CV2284), JP9-250	...	—
4BC8	P.I.Y.T.	— ...	...	7	4J52	—	CV3569, JP9-80	...	—
4BE6	I.	— ...	...	7	4J53	—	CV513	...	—
4BN4	—	— ...	...	130	4J54	—	CV3947	...	—
4BN6	I.P.	— ...	...	7	4J55	—	CV3948	...	—
4BQ7A	T.P.I.Y.	— ...	...	7	4J56	—	CV3949	...	—
4BS8	P.I.Y.T.	— ...	...	7	4J57	—	CV3950	...	—
4BU8	I.T.	— ...	...	7	4J58	—	CV3951	...	—
4BX8	T.	— ...	...	7	4J78	—	CV3953, JP9-250A	...	—
4BZ6	—	— ...	...	130	4K30	—	— ...	...	8
4BZ7	T.P.I.Y.	— ...	...	7	4K32	—	— ...	...	8
4BZ8	Y.T.	— ...	...	7	4K50	—	— ...	...	8
4CI	—	— ...	...	7	4K61	—	— ...	...	8
4CI A	—	— ...	...	7	4K100	—	— ...	...	8
4C2	—	— ...	...	7	4LI1	—	— ...	...	8
4C3	—	— ...	...	7	4LI2	—	— ...	...	8
4C4	—	— ...	...	7	4LI3	—	— ...	...	8
4C5	—	— ...	...	7	4LI3A	—	— ...	...	8
4C21	P.	CV2576	...	—	4LI4	—	— ...	...	8
4C22	—	CV2987	...	—	4LI5	—	— ...	...	8
4C27	—	(CV92)	...	—	4LI6	—	— ...	...	8
4C30	—	CV933	...	—	4L20	—	— ...	...	8
4C35	M.	CV1787, XH8-100	...	—	4L28	—	— ...	...	8
4C/100A	R.	CV2756	...	—	4LMBT	—	— ...	...	8
4CI02	—	— ...	...	7	4N08	—	— ...	...	8
4CI03	—	— ...	...	7	4NI00	—	— ...	...	8
4CB6	P.I.T.	— ...	...	7	4NI10	—	— ...	...	8
4CE5	I.T.	— ...	...	7	4NG	—	— ...	...	8
4CSUA	C.	(CV1267)	...	—	4P25	—	— ...	...	8
4CX7	Y.T.	— ...	...	7	4PR60A	—	CV2752, QV20-PI8	...	—
4CY5	I.	— ...	...	7	4S	—	— ...	...	8
4DI	A.	(CV1109)	...	7	4S09	—	— ...	...	8
4D21	—	(CV2963)	...	—	4S120	—	— ...	...	8
4D32	—	CV3543	...	—	4S121	—	— ...	...	8
4D80	—	— ...	...	7	4S126	—	— ...	...	8

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
4SH	C.	(CV1126) ...	—	5B8	I.Y.T.	— ...	9
4SHA	C.	CV825 ...	—	5B/100A	R.	(CV1369) ...	—
4TP	—	— ...	8	5B/110M	R.	— ...	9
4TSA	C.	— ...	8	5B/151A	R.	(CV1080) ...	—
4THA	C.	CV826 ...	8	5B/152D	R.	CV2659 ...	—
4TPB(clear)	C.	CV828 ...	8	5B/250A	R.	(CV124), QV05-25	9
4TPB(met)	C.	CV829 ...	8	5B/251M	R.	(CV428) ...	9
4TSP	C.	CV830 ...	8	5B/252M	R.	(CV391) ...	9
4W03	—	— ...	8	5B/253M	R.	(CV499) ...	9
4W03N	—	— ...	8	5B/254M	R.	(CV428) ...	9
4W08	—	— ...	8	5B/255M	R.	(CV391) ...	9
4W100	—	— ...	8	5B/256M	R.	(CV499) ...	9
4W120	—	— ...	8	5B/257M	R.	(CV2220) ...	9
4W200	—	— ...	8	5B/258M	R.	(CV2347) ...	122
4XP	C.	(CV1168), ACO44	8	5B/300B	R.	CV834 ...	—
4X150A	—	CV2519, QVI-150A	—	5B/502A	R.	(CV1096) ...	—
4X150D	R.M.	CV3991 ...	—	5B/600A	R.	(CV1081) ...	—
4X150G	M.	CV3893 ...	—	5B/700A	R.	(CV631) ...	—
5A6	—	(CV2360) ...	8	5BE8	I.Y.T.	— ...	9
5API	—	CV832 ...	—	5BK7A	I.P.Y.T.	— ...	9
5API/1805PI	—	CV832 ...	—	5BP1	—	CV601 ...	—
5A/102A	R.	CV3784 ...	—	5BP4/1802P4	P.	CV836 ...	—
5A/102D	R.	(CV1724) ...	8	5BQ7A	I.P.T.	— ...	9
5A/105	R.	(CV1726) ...	—	5BR8	I.Y.T.P.	— ...	9
5A/128B	R.	(CV244) ...	—	5BT8	Y.T.P.	— ...	9
5A/136A	R.	CV2619 ...	—	5BW8	I.	— ...	130
5A/136D	R.	(CV245) ...	9	5BZ7	I.T.	— ...	9
5A/137D	R.	— ...	9	5C22	M.	(CV2520), XHI6-200	—
5A/150A	R.	QV05-25, 807	9	5C/100A	R.	(CV26) ...	—
5A/152M	R.	— ...	9	5C/101A	R.	(CV1372) ...	—
5A/155M	R.	— ...	9	5C/450A	R.	{ (CV1506) ...	—
5A/156M	R.	— ...	9			(CV1630) ...	—
5A/157D	R.	(CV358) ...	9	5CG8	I.P.T.	— ...	10
5A/159N	R.	(CV2000) ...	—	5CL8	I.T.	— ...	10
5A/163K	R.	CV1635 ...	9	5CM8	T.	— ...	10
5A/164K	R.	CV3536 ...	—	5CPI	—	CV600 ...	—
5A/170K	R.	— ...	9	5CPIA	—	(CV2191), DGI3-2	—
5A/171G	R.	— ...	9	5CP7	—	CV838 ...	—
5A/172G	R.	CV4501 ...	—	5CQ8	P.	— ...	126
5A/173G	R.	CV4502 ...	—	5CR8	—	— ...	126
5A/174G	R.	CV4503 ...	—	5CZ5	P.	— ...	10
5A/175G	R.	CV4506 ...	—	5D21	—	(CV2814) ...	—
5ADPI	M.	CV5035, DGI3-34	—	5D22	—	(CV2964) ...	—
5AM8	I.P.Y.T.	— ...	—	5D/100A	—	(CV1627) ...	—
5AN8	I.P.Y.T.	— ...	9	5DH8	I.S.	— ...	10
5AQ5	I.P.Y.T.	— ...	9	5E255	—	— ...	10
5AR4	—	GZ34 ...	9	5E415	—	— ...	10
5AS4	I.P.Y.	— ...	9	5EA8	—	— ...	126
5AS8	I.P.Y.T.	— ...	9	5EH8	—	— ...	126
5AT8	I.P.Y.T.	— ...	9	5FP7(spec.)	—	CV1789 ...	—
5AU4	I.T.	— ...	9	5FP7	—	CV718 ...	—
5AV8	I.P.Y.T.	— ...	9	5FP7A	—	CV3959, MFI3-I	—
5AW4	I.Q.Y.T.	— ...	9	5FPI4	M.	CV1789 ...	—
5AX4	Q.S.T.	— ...	9	5GPI	—	CV839 ...	—
5AZ4	Q.I.P.Y.T.	— ...	9	5HPI	—	CV3583 ...	—
5BI	A.	(CV1018), Z2I	9	5HPIA	—	CV3583 ...	—

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
5H4	—	CV840 ...	—		T.QQ.		
5J6	I.P.T.	— ...	10	6A6	A.H.	CV1867 ...	11
5JP1	—	CV1791 ...	—	6A7	A.U.	CV1870 ...	11
5J23	—	CV542 ...	—	6A7E	A.C.	— ...	11
5J26	—	CV3602 ...	—	6A7S	P.I.Q.	— ...	11
5J29	—	CV3642 ...	—		S.		
5J30	—	CV3843 ...	—	6A8	—	CV579 ...	11
5J31	—	CV5844 ...	—	6A8G	A.H.	CV578, X63 ...	11
5J59	—	CV3952 ...	—	6A8GT	A.H.U.M.	CV580 ...	11
5J/180E	R.	(CV445) ...	—	6AB4	P.I.Q.S.	EC92 ...	11
5JP2A	—	CV3918 ...	—		T.Y.NN.		
5L/444	J.	CV311 ...	—	6AB5/6N5	—	CV843	Appendix I
5LP1	—	CV741 ...	—	6AB6	—	— ...	122
5MK9	—	— ...	10	6AB7	H.C.	CV1873 ...	11
5MPI	—	CV740 ...	—	6AB7/1853	—	CV1873 ...	11
5P29	—	— ...	10	6AB8	F.N.H.	ECL80 ...	11
5PT4A	—	— ...	10		C.U.		
5Q5	—	— ...	10	6AC5G	P.	CV844 ...	11
5R4	S.I.T.A.Q.U.	— ...	10	6AC5GT	P.	CV845 ...	11
5R4GY	—	(CV717) ...	10	6AC6	—	— ...	122
5R4WGY	—	CV2835 ...	10	6AC7	H.	CV660 ...	11
5TO1A	XX.	CV1868 ...	—	6AC7/1852	P.	CV660 ...	11
5T4	P.	CV1846 ...	10	6AD4	Q.S.T.	— ...	11
5T8	I.P.Y.T.	— ...	10	6AD5	SS.Q.	— ...	11
5U4G	A.C.	(CV575), U52	10		S.T.		
5U4G	U.M.	(CV1071), U52	10	6AD7	P.M.N.	CV1878 ...	11
5U4GT	P.	(CV841) ...	10	6AD8	Y.Q.	EBF81 ...	11
5U8	I.P.Y.T.	— ...	10	6AE5	P.S.SS.	— ...	11
5UP7	—	CV2840 ...	—		I.Q.T.		
5V3	T.	— ...	10	6AE6	I.Q.	— ...	11
5V4	A.H.M.	CV729, GZ32...	10		P.T.		
5V6	I.T.	— ...	10	6AE7	P.I.Q.	— ...	11
5W4	P.	CV1849 ...	10		S.T.		
5W4G	P.	CV842 ...	10	6AE8	Y.	X79 ...	11
5W4GT	P.	CV503 ...	10	6AF4A	I.P.A.S.Q.Y.	— ...	11
5X3	SS.Q.S.T.	— ...	10	6AF4	—	CV5036 ...	11
5X4	—	CV1852 ...	10	6AF5	I.Q.S.T.	— ...	11
5X4G	A.U.	CV1851 ...	10	6AF6G	P.	CV847	Appendix I
5X8	I.P.Y.T.	— ...	10	6AG5	—	CV848 ...	11
5Y3G	A.C.H.M.	CV1854, U50	10	6AG6	A.	(CV1438), EL33, 6M6	11
5Y3GB	NN.	— ...	10	6AG7	P.	CV1882 ...	11
5Y3GR	—	— ...	10	6AH4	T.I.P.Q.S.	— ...	11
5Y3GT	A.U.M.	CV1856, U50	10	6AH5	Q.S.T.	— ...	11
5Y3GTA	—	CV4027 ...	10	6AH6	—	CV2521 ...	11
5Y4G	A.	CV1857 ...	10	6AH7	I.Q.S.T.	— ...	11
5Y4SG	—	— ...	10	6AH7gt	I.Q.S.T.	— ...	11
5Z3	A.U.	CV1861 ...	10	6AJ4	T.I.Y.Q.S.	— ...	11
5Z4	A.H.	CV1864, GZ30	10	6AJ5	—	CV995 ...	11
5Z4G	U.A.C.M.	(CV1863) ...	10	6AJ7/6AC7	—	CV849 ...	11
5Z4GT	C.M.	(CV2748), GZ30	10	6AJ7	—	CV849 ...	11
6/30L2	D.	— ...	10	6AJ8	M.N.	(CV2128), ECH81,	11
6A3	A.	CV730 ...	10			6CI2	
6A4	SS.T.	— ...	10	6AK4	S.	— ...	11
	I.QQ.			6AK5	H.	(CV850) EF95	11
	Q.S.			6AK5W	—	CV2877, M8100	11
6A5	SS.I.	— ...	10	6AK6	A	CV1762 ...	11

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
6AK7	M.	CV1784 ...	11	6AX8	Y.T.	— ...	13
6AK8	C.N.H.	EABC80, 6LD12	11	6AY5	—	— ...	13
	Y.Q.U.			6AY8	—	— ...	13
6AL5	M.A.F.U.H.	{ (CV283), EB91 (CV140), 6D2	11	6AZ5	Q.	— ...	13
6AL5W	—	CV2882, M.8212	11	6AZ6	—	— ...	122
6AL6	I.Q.S.T.	— ...	11	6AZ8	I.Y.T.P.	— ...	13
6AL7G	—	CV3707 ...	122	6B3	S.	— ...	126
6AM4	I.A.Y.Q.	— ...	12	6B4G	A.	CV851 ...	13
	T.S.			6B5	A.	CV1885 ...	122
6AM5	F.A.	(CV136), EL91, 7D9	12	6B6G	A.	CV1887 ...	13
6AM6	A.F.	(CV138), EF91, 6F12	12	6B7	A.U.H.	(CV1891) ...	13
6AM8	I.P.Y.Q.S.T.	— ...	12	6B8	H.	CV1894 ...	13
6AN4	P.Y.Q.S.	— ...	12	6B8G	H.A.	CV1893 ...	13
6AN5	—	CV2854 ...	12	6B7E	A.C.	— ...	13
6AN6	I.Y.Q.S.T.	— ...	12	6B7S	P.I.Q.S.	— ...	13
6AN7	Y.S.	ECH80 ...	12	6B8SG	A.	— ...	13
6AN8	I.P.T.Y.	— ...	12	6BA5	S.T.	— ...	13
6AQ4	M.	CV417, EC91	12	6BA6W	M.	CV5037 ...	13
6AQ5	A.	CV1862, EL90	12	6BA6	A.	(CV454), EF93	13
6AQ5W	—	CV2883, M.8245	12	6BA7	—	CV2527 ...	13
6AQ6	—	CV2937 ...	12	6BA8	I.P.Y.T.	— ...	13
6AQ7	S.I.P.T.Y.Q.	— ...	12	6BC4	M.	CV5038 ...	13
6AQ8	I.N.H.C.	ECC85 ...	12	6BC5	G.Y.Q.S.	— ...	13
	UY..	6L12		6BC7	I.P.Y.Q.S.T.	— ...	13
6AR5	S.I.P.Y.Q.T.	— ...	12	6BC8	P.I.T.Y.	— ...	13
6AR6	—	CV3613 ...	13	6BD5	Q.S.T.	— ...	13
6AR7gt	Q.	— ...	12	6BD6	I.P.Q.S.	— ...	13
6AS4	Q.	— ...	12	6BD7	Y.Q.	EBC80 ...	13
6AS5	I.P.Y.Q.S.T.	— ...	12	6BE6	—	(CV453), EK90	13
6AS6	M.	CV2522 ...	12	6BE7	N.Y.	EQ80 ...	13
6AS6W	—	CV2884, M8196	12	6BE8	Y.T.	— ...	13
6AS7G	—	CV2523, A1834	12	6BF5	I.P.Y.Q.S.	— ...	13
6AS8	I.P.Y.T.	— ...	12	6BF6	I.P.Y.T.Q.S.	— ...	13
6AT6	U.A.	(CV452), EBC90	12	6BF7	A.	CV3984 ...	13
6AT7n	SS.	— ...	12	6BG6	I.P.U.Y.Q.S.T.	— ...	13
6AT8	I.P.Y.T.	— ...	12	6BG7	S.T.	— ...	13
6AU4	I.P.Y.Q.T.	— ...	12	6BH5	Y.Q.	— ...	13
6AU5	I.P.S.T.Y.Q.	— ...	12	6BH6	A.	CV3908 ...	13
6AU6	A.M.	CV2524, EF94	12	6BH8	I.P.Y.T.	— ...	14
6AU6WA	—	CV4023 ...	12	6BJ5	Y.Q.S.	N78 ...	14
6AU7	T.	— ...	12	6BJ6	A.	CV3909 ...	14
6AU8	I.P.Y.T.	— ...	12	6BJ7	I.Y.Q.T.	— ...	14
6AV4	Y.Q.	— ...	12	6BJ8	Y.T.	— ...	14
6AV5	S.I.P.Y.Q.T.	— ...	12	6BK5	I.P.Y.T.Q.S.	— ...	14
6AV6	—	CV2526, EBC91	12	6BK6	Y.T.Q.S.	— ...	14
6AW4	—	— ...	12	6BK7	Y.I.P.Q.S.	— ...	14
6AW5	—	— ...	12	6BK7a	I.Y.Q.S.T.	— ...	14
6AW6	Y.	— ...	12	6BK8	Y.	— ...	14
6AW7	Q.S.T.	— ...	12	6BL4	P.T.	— ...	14
6AW8	I.P.Y.T.	— ...	13	6BL6	—	CV3614 ...	—
6AX2	SS.	— ...	13	6BL7	M.	CV5039 ...	14
6AX4	I.P.Y.Q.S.T.	— ...	13	6BL8	—	ECF80 ...	14
6AX5	I.P.Y.Q.S.T.	— ...	13	6BM5	Q.NN.Y.	— ...	14
6AX6	Q.S.T.	— ...	13	6BM6A	M.	CV3939 ...	—
6AX7	T.Y.	— ...	13	6BM6	—	CV3615 ...	—
				6BM8	—	ECL82 ...	14

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
6BN4	I.P.Y.T.	— ...	14	6CA7	N.Q.	EL34 ...	15
6BN5	Y.	EL85 ...	14	6CB5	I.P.	— ...	15
6BN6	M.	CV3616 ...	14	6CB6	I.T.N.Y.Q.P.	— ...	15
6BN7	Y.Q.S.T.	— ...	14		NN.S.		
6BN8	Y.T.P.	— ...	14	6CD6	I.T.S.A.Y.Q.	— ...	15
6BQ5	M.	CV2975, EL84, 6PI5	14	6CE5	I.Y.T.	— ...	15
6BQ6	M.	CV5040 ...	14	6CF6	I.P.Y.Q.S.T.	— ...	15
6BQ7	I.Y.P.S.T.	— ...	14	6CF8	NN.	— ...	15
6BQ7A	Q.P.I.T.N.S.	— ...	14	6CG6	Y.Q.S.T.	— ...	15
	Y.NN.M.			6CG7	T.I.P.Y.	— ...	15
6BR7	A.	(CV2135), 8D5	14	6CG8	I.P.Y.T.	— ...	15
6BR8	I.Y.T.P.	— ...	14	6CH6	A.N.	(CV2127), EL82I	15
6BS4	—	— ...	14	6CH7	I.Y.T.	— ...	15
6BS5	Y.	— ...	14	6CH8	P.T.	— ...	15
6BS7	A.Y.	— ...	14	6CJ5	U.H.	EF4I ...	15
6BS8	I.P.Y.T.	— ...	14	6CJ6	M.	(CV272I), EL8I	15
6BT4	U.H.	EZ40 ...	14	6CK4	I.	— ...	130
6BT6	Y.Q.S.T.	— ...	14	6CK5	U.H.	EL4I ...	16
6BT8	Y.T.	— ...	14	6CK6	M.	CV2726, EL803	16
6BU6	Y.Q.S.T.	— ...	14	6CL5	T.	— ...	16
6BU8	I.Y.T.P.	— ...	14	6CL6	M.	CV504I ...	16
6BV7	Y.Q.	— ...	14	6CL8	Y.T.	— ...	16
6BV8	I.T.	— ...	14	6CM5	—	EL36 ...	16
6BW4	Y.T.	EZ8I ...	14	6CM6	I.Y.Q.S.T.	— ...	16
6BW6	A.	(CV2136) ...	14	6CM7	I.P.Y.S.T.	— ...	16
6BW7	A.Y.	8D6 ...	14	6CM8	T.	— ...	16
6BW8	I.	— ...	15	6CN6	N.	EL38 ...	16
6BX4	Y.	— ...	15	6CN7	I.P.Y.T.	— ...	16
	NN.			6CQ6	—	CV2937, EF92	16
6BX6	Q.F.N.H.U.Y.	EF80, Z719 ...	15	6CQ8	P.	— ...	16
6BX7	I.P.Y.Q.S.	— ...	15	6CR5	T.S.	— ...	126
6BX8	T.	— ...	15	6CR6	I.Y.T.	— ...	16
6BY5	P.Y.Q.S.T.	— ...	15	6CR8	T.S.	— ...	126
6BY6	I.P.Y.T.	— ...	15	6CS5	T.	— ...	16
6BY7	N.H.NN.	EF85 ...	15	6CS6	I.P.Y.Q.S.T.	EH90 ...	16
	Q.C.U.	6FI9		6CS7	Y.T.	— ...	16
6BY8	T.	— ...	15	6CS8	T.S.	— ...	126
6BZ6	I.P.Y.T.	— ...	15	6CT7	U.H.	EAF42 ...	16
6BZ7	I.P.Y.T.Q.S.	— ...	15	6CU5	P.T.	— ...	16
6BZ8	I.T.Y.	— ...	15	6CU6	I.Y.T.	— ...	16
6C4	A.RR.U.	(CV133), EC90, L77	15	6CU7	U.H.	ECH42 ...	16
6C4W	—	CV2842 ...	15	6CU8	P.	— ...	122
6C5	H.C.	CV582, L63 ...	15	6CV7	U.H.	EBC4I ...	16
6C5G	H.A.U.M.	CV58I ...	15	6CW5	—	EL86 ...	16
6C5GT	H.C.M.	CV583 ...	15	6CW7	—	ECC84 ...	16
6C6	A.U.H.C.	CV585 ...	15	6CX7	Y.T.	— ...	16
6C7	—	CV584 ...	15	6CX8	I.	— ...	16
6C8G	—	CV1896 ...	15	6CY5	S.	— ...	126
6C9	D.	— ...	15	6CY7	I.	— ...	122
6C10	D.	CV3888, ECH42	15	6CZ5	P.	— ...	16
6C11	—	— ...	15				
6C12	D.	ECH8I ...	15	6DI	D.	{ (CV375) ...	16
6C2I	—	CV855 ...	—			{ (CV1092), EA50	16
6C3I	D.	— ...	15	6D2	D.	{ (CV140), EB9I	16
6CA4	—	EZ8I ...	15			{ (CV383) ...	16
6CA5	I.Y.T.	— ...	15	6D3	D.	— ...	16
				6D4	—	CV1949, EN93	—

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
6D5	TT.	— ...	16	6F16	—	— ...	17
6D6	A.U.H.C.	CV1900	16	6F17	D.	(CV416)	17
6D7	P.	CV1776	16	6F18	D.	— ...	17
6D8	P.	CV1902	16	6F19	—	EF85	17
6DA4	I.	— ...	122	6F20	D.	— ...	126
6DA6	N.H.	EF89	16	6F21	D.	— ...	130
6DA7	T.S.	— ...	126	6F32	D.	(CV1116)	17
6DB5	T.S.	— ...	126	6F33	D.	(CV329)	17
6DB6	Y.T.	— ...	16	6F33(spec.)	D.	CV2209	17
6DC6	P.Y.T.	— ...	16	6FH6	S.	— ...	126
6DC8	NN.	EBF89	126	6FX4	—	— ...	17
6DE6	I.P.Y.T.	— ...	16	6G6G	H.	CV1926	17
6DG6	I.P.T.	— ...	17	6G7	—	— ...	17
6DG7	NN.	— ...	122	6G8G	P.	CV856	17
6DK6	S.	— ...	126	6GG6	—	— ...	17
6DN6	Y.T.	— ...	17	6H1	D.	CV132	130
6DN7	I.	— ...	126	6H4	I.Q.S.T.	— ...	17
6DQ5	P.	— ...	122	6H5	—	— ...	Appendix I
6DQ6	I.NN.P.T.	— ...	17	6H6	C.H.	CV1930, D63	17
6DR4	—	— ...	17	6H6G	H.A.U.	CV1929	17
6DR6	NN.	— ...	17	6H6GT	H.A.	CV1931	17
6DR7	S.	— ...	130	6H8g	NN.	— ...	18
6DS5	P.	— ...	122	6H8MG	—	— ...	18
6DT6	I.	— ...	122	6J4	—	CV1763	18
6DT8	P.	— ...	126	6J5	H.C.	CV1933, L63	18
6E5	—	CV1906	Appendix I	6J5G	C.A.M.	(CV1932), L63	18
6E6	P.S.S.Q.T.S.I.	— ...	17	6J5GT	H.C.A.M.	(CV1934)	18
6E7	TT.I.T.	— ...	17	6J6	—	(CV858), ECC91	18
	Q.P.S.	— ...		6J6W	—	CV2843	18
6E8	U.	X61	17	6J7	H.C.	CV1936, Z63	18
6EA8	—	— ...	126	6J7G	H.C.A.U.M.	(CV1935)	18
6EH5	P.	— ...	130	6J7GT	H.A.U.M.	(CV1937)	18
6EH6	—	— ...	17	6J8G	U.	CV859	18
6EH8	S.	— ...	126	6K4	—	CV2855	—
6EM5	P.	— ...	130	6K5G	A.	CV860	18
6EW6	I.	— ...	130	6K5GT	—	CV861	18
6EX4	—	— ...	17	6K6G	H.A.	CV1938	18
6F1	D.	CV3841	17	6K6GT	H.	CV1940	18
6F4	D.	CV2939	—	6K7	H.C.	CV1942, W63	18
6F5	P.A.	CV1909, H63	17	6K7G	U.C.M.	(CV1941)	18
6F5G	—	CV1908	17	6K7GT	H.A.C.M.	(CV1943)	18
6F5GT	P.	CV1910	17	6K8	H.C.	CV1945, X61	18
6F6	H.	CV1912	17	6K8G	H.A.U.	(CV1944)	18
6F6G	A.C.H.U.M.	(CV1911), KT63	17	6K8GT	H.A.U.M.	CV1946	18
6F6GT	—	CV731	17	6K25	D.	(CV2217)	18
6F7	A.	CV1915	17	6L1	D.	— ...	18
6F7B	A.C.N.	— ...	17	6L5G	P.	CV862	18
6F7E	N.	— ...	17	6L6	H.C.	CV1948, KT66	18
6F7M	—	— ...	17	6L6G	M.A.U.H.C.	(CV1947)	18
6F8	C.H.	CV1819	17	6L6GA	U.M.	CV2817	18
6F8G	H.C.	CV1917	17	6L6WGA	—	CV3618	18
6F11	D.	CV1901	17	6L6WGB	—	CV2796	18
6F12	D.	(CV138), EF91, 8D3	17	6L7	—	CV1951	18
6F13	D.	CV1829	17	6L6G	A.U.	CV1950	18
6F14	D.	CV1919	17	6L12	—	ECC85	18
6F15	D.	EF41	17	6L13	D.	CV492	130

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
6L18	D.	CVI899 ...	18	6RV	—	— ...	19
6L19	D.	CVI850 ...	18	6S2	—	CV2966, EY86	19
6L34	D.	{(CV417), EC91 (CV319) ...	18	6S4	I.P.T.Y.Q.S.	— ...	19
6LD3	D.	(CV3882), EBC41	18	6S6	Q.	— ...	19
6LD12	D.	EABC80 ...	18	6S7	—	CV1975 ...	19
6LD13	D.	— ...	130	6S7G	—	CV1974 ...	19
6LD20	D.	CVI920 ...	18	6S8	I.P.T.Y.Q.S.	— ...	19
6M1	D.	{(CV2747)6U5 (CVI103) ...	Appendix I	6SA7	A.H.C.	CVI966 ...	19
6M2	D.	— ...	Appendix I	6SA7GT	—	CVI967 ...	19
6M3	T.	— ...	18	6SB7Y	I.P.T.Y.Q.S.	— ...	19
6M5	Y.Q.S.	— ...	18	6SC5	—	— ...	19
6M6	—	EL33, 6AG6 ...	18	6SC7	—	CVI969 ...	19
6M7	—	— ...	18	6SC7GT	—	CVI970 ...	19
6M7MG	—	— ...	18	6SD7GT	—	CV865 ...	19
6M8	Q.	— ...	18	6SE7	I.Q.S.T.	— ...	19
6N3	—	— ...	18	6SF5	—	CVI972 ...	19
6N4	I.Y.Q.S.T.	— ...	18	6SF5GT	—	CVI973 ...	19
6N5	—	CV843 ...	Appendix I	6SF7	I.P.Y.Q.S.T.	— ...	19
6N6	—	CVI954 ...	—	6SG7	H.A.	CVI879 ...	19
6N6G	A.	CVI953 ...	—	6SH7	H.A.C.	CV594 ...	19
6N7	H.	CVI957 ...	18	6SH7GT	H.	CV595 ...	19
6N7G	A.	CVI956 ...	18	6SH7L	—	(CV5167) ...	19
6N7GT	H.A.	CVI958 ...	18	6SJ7	H.A.C.	CV591 ...	19
6N8	N.H.U.Y.Q.S.	EBF80 ...	18	6SJ7G	—	CV590 ...	19
6NK7	—	— ...	18	6SJ7GT	H.U.M.	CV592 ...	19
6P1	D.	— ...	18	6SJ7WGT	—	CV3619 ...	19
6P5GT/G	P.	CVI819 ...	18	6SJ7Y	P.	CV866 ...	19
6P6	—	— ...	18	6SJ8G	—	— ...	122
6P7GT/G	P.	CV864 ...	18	6SJ8EG	—	— ...	122
6P8	A.	OM10 ...	18	6SK7	H.	CVI981 ...	19
6P9	—	— ...	18	6SK7GT	H.U.C.	CVI982 ...	19
6P15	—	EL84 ...	19	6SL7GT	H.A.C.	CVI985 ...	19
6P17	D.	CVI36 ...	130	6SN7	M.	CV278, B65 ...	19
6P25	D.	CVI853, KT61	19	6SN7GT	H.A.U.M.	(CVI988), B65	19
6P26	D.	— ...	19	6SN7WGT	—	CV3627 ...	19
6P28	D.	— ...	19	6SQ7	H.A.C.	CVI990 ...	19
6PX6	—	— ...	19	6SQ7GT	H.U.	CVI991 ...	19
6PZ8	—	— ...	19	6SR7	—	CV867 ...	19
6Q4	M.N.	CVI886 ...	19	6SS7	H.C.	CVI993 ...	19
6Q5	—	CVI815 ...	—	6ST7	—	CVI996 ...	19
6Q6	—	— ...	19	6ST7G	—	CVI995 ...	19
6QL6	—	— ...	19	6SU7	I.T.S.	— ...	19
6Q7	—	CV588 ...	19		TT.Q.	— ...	19
6Q7G	C.N.U.H.	(CV587), DH63	19	6SV7	I.T.Y.Q.	— ...	19
6Q7GT	H.A.U.C.M.	(CV589) ...	19		S.	— ...	19
6QL6	—	— ...	19	6SZ7	P.T.I.Q.S.	— ...	19
6R	—	— ...	19	6T	—	— ...	19
6R3	N.	EY51 ...	19	6T4	—	CV3808 ...	20
6R4	M.	CVI865, EC81	19	6T5	—	— ...	Appendix I
6R6G	—	CVI960 ...	19	6T6	—	— ...	20
6R7	—	CVI963, DL63	19	6T7G	—	CV500 ...	20
6R7G	A.H.U.	CVI962 ...	19	6T8	I.T.P.Y.Q.S.	EABC80 ...	20
6R7GT	—	CVI964 ...	19	6TE8	—	— ...	20
6R8	Y.Q.S.T.	— ...	19	6TE9	—	— ...	20
				6TH8	U.	— ...	20
				6TP	—	— ...	20

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
6U3	Y.Q.	— ...	20	7A7LM	—	CV877 ...	21
6U4	I.Q.S.T.	— ...	20	7A8	A.	CV878 ...	21
6U5/6G5	A.U.	CV504, 6MI	Appendix I	7AB7	I.Q.S.T.	— ...	21
6U5G	A.U.	(CV2747), Y61, Y63	- Appendix I	7AC7	—	— ...	21
6U6	I.P.S.T.	— ...	20	7AD7	I.P.Y.S.T.	— ...	21
6U7G	A.U.H.	CV706, W63	20	7AF7	I.P.Y.Q.S.T.	— ...	21
6U8	M.	CV5065, ECF82	20	7AG7	I.P.Y.Q.S.T.	— ...	21
6V3	T.I.P.S.Y.Q.	— ...	20	7AH7	I.P.Y.Q.S.T.	— ...	21
6V4	H.A.C.U.Q.	EZ80	20	7AHPI	M.	CV2352, DGI6-22	—
6V5	Q.S.T.	— ...	20	7AJ7	I.Q.S.T.	— ...	21
6V6	C.H.	CV510	20	7AK7	I.Q.S.T.	— ...	21
6V6G	U.C.H.A.	(CV509)	20	7AN7	N.H.C.U.Y.T.	PCC84, 30LI	21
6V6GT	U.C.H.A.	(CV511)	20	7AU7	I.P.Y.T.	— ...	21
6V7G	—	CV870	20	7B	—	CV824	—
6V8	Y.Q.S.A.	— ...	20	7B4	—	CV884	21
6W2	F.C.H.	EY51, R12	20 & Appendix II	7B5	A.	CV880	21
6W3	—	— ...	20	7B5E	A.	(CV880)	21
6W4gt	—	— ...	20	7B5LT	P.	CV881	21
6W5	SS.I.T.S.Q.	— ...	20	7B6	A.H.	CV882, DH81	21
6W7G	—	CV512	20	7B6LM	—	CV882	21
6W6	I.P.T.Y.Q.S.	— ...	20	7B7	A.F.	CV522	21
6WCS	—	— ...	20	7B8	A.	CV883	21
6X2	M.N.	(CV426), EY51, U43	20	7B8LM	—	CV883	21
6X3	—	— ...	20	7BP7	—	CV884	—
6X4	A.	(CV493), EZ90	20	7BP7A	—	CV3637	—
6X4W	—	CV2844	20	7C4/1203A	P.	CV2706	21
6X5	P.	CV573, U70	20	7C5	H.A.F.	CV885	21
6X5G	M.U.A.H.C.	(CV572)	20	7C5LT	P.	CV886	21
6X5GT	A.H.C.	(CV574), U70, EZ35	20	7C6	A.F.H.	CV887	21
6X5WGT	—	CV3734	20	7C7	A.	CV1777	21
6X6	—	— ...	Appendix I	7D3	A.	— ...	21
6X8	I.P.Y.Q.S.T.	— ...	20	7D5	A.	CV1425	21
6Y3	—	CV1816	20	7D6	A.	(CV1672)	21
6Y5	P.SS.Q.S.T.	— ...	20	7D7	T.	— ...	21
6Y6G	H.C.	CV515	20	7D8	A.	CV889	21
6Y7	I.P.SS.Q.S.T.	— ...	20	7D8S	A.	(CV1328)	21
6Z3	—	— ...	20	7D9	A.	(CV136), EL91	21
6Z4	—	CV619	20	7D10	A.	(CV2127), EL821	21
6Z5	—	CV871	20	7E5	—	CV2704	21
6Z6	—	— ...	20	7E5/1201	—	CV2704	21
6ZDH3A	—	— ...	21	7E6	—	CV891	21
6ZPI	—	— ...	21	7E7	—	CV892	21
6ZY5G	A.	CV873	21	7EY6	I.	— ...	131
6Z7G	—	CV872	21	7F7	A.	CV893	21
7	—	CV874	—	7F8	—	CV2968	21
7A	—	CV823	—	7FI6	—	— ...	22
7A2	A.	(CV1174) Pen. 4VA	21	7G7	—	CV894	22
7A3	A.	(CV1181) Pen. A4	21	7G8	I.Q.S.T.	— ...	22
7A4	—	CV1770	21	7H6	—	— ...	22
7AS	—	— ...	21	7H7	A.H.F.	CV895, WI48	22
7A6	—	CV876	21	7J7	A.	CV897	22
7A7	A.H.	CV877	21	7K7	A.H.	CV896	22
				7L7	I.Y.Q.	— ...	22
					P.S.T.		
				7MB1A	XX.	(CV1880)	—
				7N7	C.A.	CV898	22

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
7Q7	H.C.	CV899 ...	22	9D7	A.	— ...	23
7R1	—	— ...	22	9HP7	—	CV905 ...	—
7R7	H.A.	CV900 ...	22	9J6	—	— ...	23
7S7	P.A.I.F.H. C.Q.S.T.	X81 ...	22	9JP1	—	CV1783 ...	—
7T7	I.Q.S.T.	— ...	22	9LO1A	XX.	(CV464) ...	—
7UP7	—	CV3639 ...	—	9LP7	—	CV2789 ...	—
7V7	I.P.T.Y.Q.S.	— ...	22	9MD6	XX.	(CV262) ...	—
7W7	—	CV902 ...	22	9MO6A	XX.	(CV2108) ...	—
7X6	S.T.	— ...	22	9MW5AX	XX.	(CV2127) ...	—
7X7	I.P.T.Y.Q.S.	— ...	22	9P9	—	— ...	23
7Y4	H.A.F.	CV901, U82, UI49	22	9PK5	F.	(CV109) ...	—
7Z4	H.A.C.	CV1790 ...	22	9U8	U.Y.T.I.H.C.	PCF82 ...	23
8A1	A.	(CV1124), SP4	22	10	P.U.	CV603 ...	23
8A2	—	— ...	22	10 (Special)	P.	CV906 ...	—
8A3	V.	CV3813 ...	—	10C1	D.	X145 ...	23
8A8	N.C.	30C1, PCF80 ...	22	10C2	D.	— ...	23
8AU8	I.T.	— ...	22	10C14	D.	UCH81 ...	127
8AW8	I.T.P.	— ...	22	10D1	A.	(CV1300), DD620	23
8BA8	I.T.	— ...	22	10D2	D.	— ...	131
8BH8	T.S.	— ...	126	10DE7	P.	— ...	127
8BN8	T.	— ...	126	10DA7	T.S.	— ...	127
8BQ5	KK.	— ...	126	10FI	D.	— ...	131
8BQ7A	Y.NN.	— ...	22	10F3	D.	— ...	131
8CG7	I.P.T.	— ...	22	10F9	D.	— ...	23
8CM7	I.P.T.	— ...	22	10FI8	D.	— ...	23
8CN7	I.T.	— ...	22	10FD12	D.	— ...	131
8CS7	T.S.	— ...	126	10KP7	—	CV3693 ...	—
8CX8	I.	— ...	22	10L1	D.	— ...	23
8CY7	I.	— ...	122	10L14	D.	UCC85 ...	127
8D2	A.	(CV1108), SPI3C	22	10LD3	D.	UBC41 ...	23
8D3	A.	(CV138), EF91	22	10LD11	D.	— ...	23
8D4	—	— ...	22	10LD12	D.	— ...	131
8D5	A.	(CV2135) ...	23	10LD13	D.	UBC81 ...	127
8D6	—	— ...	23	10M1	D.	— ...	Appendix I
8D7	—	— ...	23	10M2	D.	— ...	Appendix I
8D8	A.	— ...	131	10P13	D.	— ...	23
8EB8	S.	— ...	127	10P14	D.	— ...	23
8EM5	P.	— ...	131	10P18	D.	UL84 ...	127
8GI40	—	— ...	23	10Y	—	(CV603) ...	—
8SN7	T.	— ...	127	11	P.	— ...	23
9-3	—	(CV368) ...	—	11A2	A.	(CV2813), AC/HL/DD	23
9A1	A.	(CV1172), VMP4G	23	11A6	—	— ...	122
9A3	—	— ...	23	11A8	—	— ...	123
9A8	H.U.	PCF80 ...	23	11C5	—	— ...	123
9AB4	—	— ...	23	11D3	A.	CV1419 ...	23
9AK8	N.H.Y.	PABC80 ...	23	11D5	A.	— ...	23
9AQ8	N.H.Y.	PCC85 ...	23	11E1	D.	— ...	24
9AU7	I.T.	— ...	23	11E2	D.	(CV276) ...	24
9BQ7A	—	— ...	23	11E3	D.	(CV73) ...	—
9BM5	Q.	— ...	23	11E8	—	— ...	24
9BW6	Y.Q.	— ...	23	11F6	—	— ...	123
9CL8	I.	— ...	122	11J7	—	— ...	123
9D2	A.	(CV1106), VPI322,	23	11K7	—	— ...	123
9D5	A.	(CV1053) ...	—	11L6	—	— ...	123
9D6	A.	(CV131), EF92	23	11N7	—	— ...	123

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
11X5	—	— ...	24	12BT6	Y.Q.S.T.	— ...	25
12	P.	— ...	24	12BU6	Y.Q.S.T.	— ...	25
12A4	I.Y.Q.S.T.	— ...	24	12BV7	I.P.Y.T.	— ...	25
12A/112A	P.	CV1174	24	12BW4	Y.T.	— ...	25
12A5	P.	CV908	24	12BY7	I.P.Y.Q.A.	— ...	25
12A6	H.A.	CV525	24	12BZ7	I.P.Y.Q.T.	— ...	25
12A6GT	P.	CV526	24	12C5	I.Y.	— ...	25
12A7	A.	CV909	24	12C8	H.	CV531	25
12A8GT	P.	CV910	24	12C8 (Special)	—	CV837	—
12AB5	I.P.Y.T.	— ...	24	12C8GT	A.	CV3827	25
12AC5	U.	UF41	24	12CA5	I.P.Y.T.	— ...	25
12AD7	Y.T.	— ...	24	12CM6	Y.Q.T.	— ...	25
12AEP6	—	CV429	—	12CR5	T.S.	— ...	127
12AH7GT	H.	CV529	24	12CR6	I.P.Y.T.	— ...	25
12AH8	Y.Q.	— ...	24	12CS5	T.S.	— ...	127
12AK7	T.	— ...	24	12CS6	Y.T.	— ...	25
12AJ7	Y.	— ...	24	12CT8	I.T.	— ...	25
12AL5	I.P.Y.T.Q.S.	— ...	24	12CU5	P.T.	— ...	25
12AQ5	I.P.Y.Q.T.	— ...	24	12CU6	I.Y.T.	— ...	25
12AS5	Q.	— ...	24	12D4	I.T.	— ...	25
12AT6	N.NN.I.	HBC90	24	12DA6	—	— ...	25
	P.Q.Y.U.			12DB5	T.S.	— ...	127
	T.S.			12DP7	—	CV913	—
12AT7	F.A.	(CV455), ECC81	24	12DP8	—	CV914	—
12AT7WA	—	(CV4024), M8162	24	12DQ6	I.P.Y.T.	— ...	25
12AU4	—	— ...	24	12DQ7	I.	— ...	131
12AU6	U.A.	CV1961	24	12DT8	P.	— ...	127
12AU7	A.RR.	(CV491), ECC82	24	12E1	D.	(CV345)	25
12AV5	I.T.	— ...	24	12E5	I.P.Y.T.	— ...	25
12AV6	N.NN.I.	—HBC91	24	12E8	—	— ...	25
	P.U.S.Y.Q.T.			12E12	D.	CV398	—
12AV7	I.P.Y.Q.S.T.	— ...	24	12ED5	S.	— ...	127
12AW6	I.P.Y.Q.S.T.	— ...	24	12EH5	P.	— ...	131
12AW7	—	— ...	24	12F	—	— ...	25
12AX4	I.T.P.Y.Q.S.	— ...	24	12F5	I.T.SS.	— ...	25
12AX7	A.	(CV492), ECC83	24		S.Q.		
12AY7	—	CV3650	24	12FP7	—	CV915	—
12AZ7	I.T.P.Y.Q.S.	— ...	24	12G7	—	— ...	25
12B3	S.	— ...	127	12G8	I.T.	— ...	25
12B4	I.P.Y.Q.S.	— ...	24	12H4	Y.S.T.	— ...	25
12B6	—	— ...	24	12G4	Q.S.T.	— ...	25
12B7	S.T.	— ...	24	12H6	P.	CV916	25
12B8GT	P.	CV911	24	12J5	P.	CV534	25
12BA6	—	(CV1928), HF93	25	12J5GT	C.H.U.M.	CV535	25
12BA7	T.I.P.Y.Q.S.	— ...	25	12J7GT	A.H.U.M.	CV917	25
12BD6	I.P.Y.Q.	— ...	25	12J8GT/G	—	CV917	—
	S.T.			12K7GT	H.A.U.	CV918, W76	25
12BE6	T.N.NN.	HK90	25	12K8	H.	CV703, X76	25
	I.P.S.U.			12K8GT	H.A.	CV3927	25
12BF6	I.P.Y.Q.S.T.	— ...	25	12LO1A	XX.	(CV2162)	—
12BH7	A.	CV504	25	12L6	I.Y.	— ...	26
12BK5	I.Y.T.	— ...	25	12L8	P.T.TT.	— ...	26
12BK6	Y.Q.S.T.	— ...	25		Q.S.		
12BN6	I.Y.Q.S.T.	— ...	25	12M7	—	— ...	26
12BQ6	I.P.T.	— ...	25	12NK7	—	— ...	26
12BR7	I.P.Y.T.	— ...	25	12Q7	A.	CV547	26

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
I2R5	T.S.	— ...	127	I3VPA	C.	(CV1106), 9D2	27
I2S7	U.	UAF42	26	I3V1	—	— ...	27
I2S8	—	— ...	26	I4	QQ.	— ...	27
I2SA7	C.	CV537	26	I4A4	I.P.Y.Q.S.T.	— ...	27
I2SA7GT	U.	CV538	26	I4A5	P.I.S.Q.T.	— ...	27
I2SC7	H.	CV540	26	I4A7	H.	CV3935	27
I2SF5	P.	CV919	26	I4AF4	—	— ...	27
I2SF5GT	P.	CV920	26	I4AF7	I.P.	— ...	27
I2SF7	P.	CV921	26		Y.T.S.		
I2SG7	C.H.	CV694	26	I4B6	I.P.Y.Q.S.	— ...	27
I2SH7	H.	CV992	26	I4B8	P.I.Q.S.T.	— ...	27
I2SH7GT	H.	CV3651	26	I4C5	P.I.Q.S.T.	— ...	27
I2SJ7	H.A.	CV697	26	I4C7	I.Y.Q.S.T.	— ...	27
I2SJ7GT	H.U.	CV698	26	I4E6	I.Q.P.S.T.	— ...	27
I2SK7	H.A.	CV543	26	I4E7	P.I.Y.S.T.	— ...	27
I2SK7GT	H.U.	CV544	26	I4F6	U.	— ...	27
I2SK7GT/G	—	CV544	26	I4F7	—	CV930	27
I2SL7GT	P.	CV924	26	I4F8	I.P.Y.Q.S.T.	— ...	27
I2SN7GT	A.H.	CV925, B36	26	I4H7	F.I.P.Y.Q.S.T.	— ...	27
I2SQ7	H.A.	CV546, DH76	26	I4J7	I.P.Q.S.T.	— ...	27
I2SQ7GT	H.U.	CV547	26	I4J8	— ...	— ...	123
I2SQ7GT/G	—	CV547	26	I4K7	U.	UCH42	27
I2SP7	—	CV3655	—	I4L	C.	(CV1087)	—
I2SR7	—	CV700	26	I4L7	—	UBC41	27
I2SS7	T.	— ...	26	I4N7	I.P.Y.Q.S.	— ...	27
I2SW7	—	CV3666	26	I4Q7	I.T.P.Q.Y.S.	— ...	27
I2SX7	—	CV3697	26	I4R7	A.	CV3937	27
I2SY7	—	CV3668	26	I4S7	A.F.H.	CV39 6	27
I2TOIA	XX.	CV1869	—	I4V7	Q.T.	— ...	27
I2TE8	—	— ...	26	I4W7	I.Q.S.T.	— ...	27
I2TE9	—	— ...	26	I4X7	I.Q.S.T.	— ...	27
I2U5	A.	— ...	Appendix I	I4Y4	I.Q.S.T.	— ...	27
I2V6	I.T.Y.Q.S.	— ...	26	I4Z3	—	— ...	27
I2W6	I.P.Y.T.	— ...	26	I5	P.A.C.	CV931	27
I2WC5	—	— ...	26	I5A	D.	(CV986)	—
I2X3	—	— ...	26	I5A2	A.	(CV3576), MX40	27
I2X4	I.T.P.Y.Q.S.	— ...	26	I5A6	N.H.U.T.Y.Q.	PL83	28
I2Y4	—	CV523	26	I5A8	T.	— ...	28
I2Z3	P.A.M.	CV927	26	I5B	D.	(CV326)	—
I2Z5	—	— ...	26	I5D1	A.	(CV2956)	28
I2ZDH3A	—	— ...	26	I5D2	A.	(CV1107)	28
I2ZPIA	—	— ...	26	I5E	—	CV933	—
I3	—	— ...	26	I5LOIA	XX.	CV1744	—
I3BCIU	—	— ...	26	I5R	—	CV934	—
I3BF2U	—	— ...	26	I5X6	—	— ...	28
I3D1	A.	(CV423)	26	I6	—	— ...	28
I3D2	A.	— ...	26	I6A5	F.N.H.	PL82, 30PI6	28
I3D3	A.	(CV2212)	27		C.Y.Q.		
I3DHA	C.	I1D3	27	I6A8	U.H.	PCL82	28
I3DR7	S.	— ...	131	I6CN8	—	— ...	28
I3EI	D.	CV2377	127	I6D1	—	— ...	28
I3F9U	—	— ...	27	I7	R.R.	— ...	28
I3HI	—	— ...	27	I7AV5	I.T.	— ...	28
I3H2	—	— ...	27	I7AX4	I.P.T.	— ...	28
I3PGA	C.	I5D1	27	I7BQ6	P.	— ...	28
I3SPA	C.	CV929, 8D2	27	I7C5	I.T.	— ...	28

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
17C8	—	UBF80	28	20D3	—	12AH8	29
17CA5	S.	— ...	127	20D4	I.	— ...	123
17CU5	T.	— ...	127	20F2	—	— ...	29
17D1	—	— ...	28	20J8	—	— ...	29
17D4	I.	— ...	123	20K	C.	{ (CV954) (CV1379)	—
17H3	T.S.	— ...	127	20LI	D.	— ...	29
17DQ6	I.P.T.S.	— ...	28	20P1	D.	— ...	29
17L6	S.	— ...	127	20P2	—	— ...	29
17N8	—	— ...	28	20P3	D.	— ...	29
17R5	S.	— ...	28	20P4	D.	— ...	29
17Z3	F.	PY81	127	20P5	D.	— ...	29
18	N.H.Q.Y.C.U. A.U.S.S.U. Q.Q.S.	— ...	28	21/2	—	CV3584	—
18A5	I.T.	— ...	28	21A6	Q.F.Q.Q.H. C.U.Y.	N359, PL81, NI52	29
18AK5	ZZ.	— ...	28	21A7	—	— ...	29
18AQ5	ZZ.	— ...	28	21B6	NN.	— ...	29
18C51	ZZ.	— ...	28	21TH8	—	— ...	29
18J6	ZZ.	— ...	28	22	SS. T.P.I.Q.Q. S.Q.	— ...	29
19	SS.T. Q.Q.S.Q.P. A.C.U.I.	— ...	28	22/11BXA	J.	(CV439)	—
19AJ8	—	— ...	28	22AC	—	— ...	29
19AQ5	Y.Q.S.	— ...	28	22S/200A	R.	CV1451	—
19AU4	I.P.Y.T.	— ...	28	23D	C.	{ (CV1588) (CV1382)	—
19BD	—	— ...	28	24	A.T.	— ...	29
19BG6	I.P.U.Y.Q.S.T.	— ...	28	24A	A.	CV936	29
19BY7	—	— ...	28	24B1	D.	CV6008	—
19C8	Y.Q.S.T.	— ...	28	24B2	D.	(CV339)	—
19D3	D.	UCH81	127	24C3	D.	CV125	—
19D8	N.	UCH81	28	24E	A.C.Q.Q.	— ...	29
19E2	D.	(CV265)	—	24NG	—	— ...	29
19G3	D.	(CV277)	28	24S	Q.S.T.	— ...	29
19G6	D.	(CV371)	28	25	—	— ...	29
19H1	D.	(CV121)	28	25A6	A.C.M.	CV549	29
19H4	D.	(CV2180)	28	25A6	—	CV550	29
19H5	D.	(CV490)	—	25A7GT/G	—	CV937	29
19J6	I.P.T.Y.Q.	— ...	29	25ACID	—	— ...	29
19SU	—	— ...	29	25AC5GT/G	—	CV938	123
19T8	I.P.T.Y.Q.S.	— ...	29	25AV5GA	T.Y.Q.S.	— ...	30
19U3	—	— ...	29	25AX4	I.	— ...	30
19V8	Y.Q.S.T.	— ...	29	25B5	—	— ...	123
19W3	—	— ...	29	25B6	—	CV939	30
19X3	F.N.Q.Y.	U309, PY80	29	25B8	A.	CV940	30
19X8	P.Y.Q.S.	— ...	29	25BG6	—	— ...	30
19Y3	F.U.N.H. C.Q.Y.	PY82	29	25BK5	I.Y.Q.S.T.	— ...	30
20	P.I.Q.Q. Q.T.S.	— ...	29	25BQ6	NN.I.P.Y. Q.S.T.	— ...	30
20A1	A.	CV1424, TH4B	29	25C5	I.Y.Q.T.	— ...	30
20A2	D.	CV1848	—	25C6	I.T.Y.Q.	— ...	30
20A3	D.	(CV797), 2D2I	—	25CA5	Y.T.	— ...	30
20A3	A.	— ...	127	25CD6	I.P.Y.T.	— ...	30
20CV	M.	CV5120	—	25CR5	T.S.	— ...	127
20D1	M.	— ...	29	25CU6	I.P.Y.T.	— ...	30
20D2	A.	— ...	29				

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
25D8	SS.I.Q.S.T.	— ...	30	26Z5W	T.Q.	— ...	31
25DN6	I.Y.T.P.	— ...	30	26Z6	T.	— ...	31
25DQ6	Y.T.	— ...	30	27	A.C.U.	CV944	31
25E5	H.	PL26	30	27M1	D.	(CV337)	—
25EC6	I.	— ...	30	27SU	F.C.	— ...	31
25EH5	P.	— ...	131	27S	I.Q.S.T.	— ...	31
25FID	—	— ...	30	27SV	—	— ...	31
25F5	T.	— ...	30	28AK8	—	— ...	31
25L6	—	CV552	30	28AX8	—	— ...	31
25L6G	H.U.	CV551	30	28D7	—	CV945	31
25L6GT	A.U.	CV553, KT32	30	28D7GT/G	—	CV946	31
25L6GT/G	—	CV553	30	28Z5	I.Q.S.T.	— ...	31
25MK15	—	— ...	30	29	—	— ...	31
25RE	C.	— ...	30	29CI	D.	(CV430)	31
	QQ.	— ...		29D	C.	CV2728	—
25S	QQ.S.	— ...	30	30	C.A.	CV604	31
25SN7GT	A.	(CV423)	30	30TWIN	YY.	CV1780	—
25T	YY.	CV941	—	30A5	—	— ...	31
25T3G	—	— ...	30	30CI	D.	PCF80	31
25TG	YY.	CV789	—	30CA	D.	(CV987)	—
25U4	Q.	— ...	30	30CI2PI	D.	CV1746	—
25V5	—	— ...	30	30CI3	D.	— ...	123
25W4	I.P.Y.	— ...	30	30D5	D.	CV1860	—
	Q.T.S.	— ...		30E7/PI	D.	CV400	—
25W6	I.Q.S.T.	— ...	30	30E8PI	D.	(CV2216)	—
25W9	—	— ...	30	30F5	D.	— ...	31
25X4	—	— ...	30	30FLI	D.	— ...	31
25X5	—	— ...	30	30GP9	—	— ...	31
25X6	SS.I.	— ...	30	30HM/HD	—	(CV1140)	—
	Q.S.T.	— ...		30LI	D.	PCC84, B319	31
25Y4	—	— ...	131	30LI5	D.	— ...	131
25Y5	A.M.	CV942	30	30P4	D.	— ...	31
25Y5G	A.U.P.	— ...	30	30PI2	D.	— ...	31
	SS.T.Q.	— ...		30PI4	D.	— ...	31
	S.I.	— ...		30PI6	D.	PL82	31
25Y6	—	— ...	30	30PLI	—	— ...	31
25Z3	—	— ...	30	30X	—	— ...	31
25Z4	I.Q.S.T.	U.31	30	31	P.	CV947	—
25Z5	A.C.U.	CV555	30	31A3	U.	UY41, UI42	31
25Z6	—	CV558	30	31C2	D.	CV2965	—
25Z6GT	U.	CV559	30	32	A.	CV711	31
25Z6GT/G	—	CV559	30	32	C.	(CV711)	31
26	—	CV943	30	32A	C.	(CV951)	—
26A6	P.I.Q.Y.S.T.	— ...	30	32E	C.A.	{ (CV957)	31
26A7GT	—	CV3577	31			{ (CV711)	—
26AQ8	—	— ...	31	32G	C.	(CV953)	—
26B6	—	— ...	31	32J	C.	(CV958)	—
26BK6	Y.Q.S.T.	— ...	31	32L7GT	A.	CV948	31
26EQ6	—	— ...	31	33	U.	CV949	31
26C6	P.I.T.Y.S.	— ...	31	33A/100A	R.	CV1750	32
26CG6	Y.Q.S.	— ...	31	33A/138A	R.	(CV18)	32
26D	C.	CV2727	—	33A/158M	R.	(CV1884)	32
26D6	P.I.Y.Q.T.	— ...	31	33B/152M	R.	CV1540	32
26E6	T.	— ...	31	34	—	CV1751	32
26NG	—	— ...	31	34E	A.	(CV1751)	32
26J	C.	CV2786	—	35	M.U.C.	CV1752	32

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
35ASLT	—	CV1753 ...	32	41MTS	—	— ...	33
35B5	I.P.Y.Q.S.T.	— ...	32	41MVSG	—	SP4 ...	33
35C5	I.P.Y.S.T.	— ...	32	41MXP	C.	(CV1122), PAI	33
35CD6	T.	— ...	127	41STH	C.	(CV2508), AC/THI	33
35D5	III.	— ...	127	42	H.A.C.	{ (CV609) ...	33
35L6	U.	CV561 ...	32			{ (CV1712) ...	33
35L6GT	H.A.	CV562 ...	32	42E	C.A.	CV609 ...	33
35L6GT/G	C.A.	CV562 ...	32	42MP/Pen	C.	(CV1181) Pen A4	33
35QL6	—	— ...	32	42MPT	C.	(CV1325) ...	33
35RE	A.C.QQ.	— ...	32	420T	C.	CV2511, Pen A4	33
35S	I.Q.	— ...	32	420TDD	C.	CV2512, AC2	33
35T	YY.K.	CV668 ...	—			Pen DD	
35TG	YY.	CV1754 ...	—	42PTB	—	— ...	33
35W4	T.U.Y.Q.S.	HY90 ...	32	42SPT	C.	CV1444 ...	33
	NN.I.P.A.			43	A.U.	CV2514 ...	33
35X4	T.	— ...	32	43E	C.A.	CV2514 ...	33
35Y4	I.P.T.Y.Q.S.	— ...	32	43MG	—	— ...	33
35Y5	—	— ...	32	43IU	C.	(CV1039), R2, UU5	33
35Z3	A.H.	CV564 ...	32	44	C.I.P.	— ...	33
35Z3	—	CV565 ...	32		QQ.		
35Z3LT	—	CV726 ...	32	44A/160M	A.	(CV415) ...	33
35Z4GT	U.H.A.	CV2500, U76	32	44IU	C.	(CV1039), IW4-500	33
35Z5	—	CV567 ...	32	44SU	—	— ...	33
35Z5GT	U.	CV568 ...	32	45	P.C.S.U.	CV610 ...	33
35Z5GT/G	—	CV568 ...	32	45A	—	— ...	33
35Z6	I.Q.S.T.	— ...	32	45A5	U.	UL41 ...	33
35/51	—	CV1752 ...	32	45B5	GG.	UL84 ...	33
36	C.M.A.	CV1775 ...	32	45DS	C.	CV2528 ...	—
37	A.C.M.	CV606 ...	32	45IU	C.	CV2529 ...	33
38	C.	(CV712) ...	32	45LIU	—	— ...	33
38A	C.	CV712 ...	32	45SP	P.	CV596 ...	—
39/44	A.	CV1771 ...	32	45Z3	I.P.Y.Q.S.T.	— ...	33
40	—	CV2501 ...	32	45Z5GT	P.	CV2530 ...	33
40PPA	C.	7D3 ...	32	46	P.	CV2531 ...	33
40SUA	C.	(CV1276) ID5	32	47	A.U.	CV1772 ...	33
40Z5	—	CV2530 ...	32	48	P.SS.Q.	— ...	33
40Z5GT	—	CV2530 ...	32		QQ.S.T.		
41	A.	CV608 ...	32	49	P.	CV2532 ...	33
41DS	A.	(CV1131) ...	—	50	U.	CV2533 ...	33
41E	A.C.QQ.	— ...	32	50A5	I.T.P.Y.S.	— ...	33
41FP	C.	CV2502, ML4 ...	32	50AX6	Q.T.	— ...	33
41M	—	— ...	32	50B5	T.S.Q.U.	— ...	33
41MDG	C.	— ...	32		NN.P.I.Y.	— ...	
41ME	—	— ...	Appendix I	50CID	—	— ...	33
41MH	C.	(CV2503), MH41	32	50BK5	Y.T.	— ...	33
41MHF	C.	(CV1037), 354V	32	50C5	—	(CV1959), HL92	33
41MHL	C.	CV2504, 354V	32	50C6	I.P.Q.S.T.	— ...	34
41MLF	C.	(CV1038) ...	32	50CD6	Q.	— ...	34
41MP	C.	(CV1458), ML4	32	50F2	—	— ...	34
41MPG	C.	CV2505, FC4 ...	32	50LID	—	— ...	34
41MPT	C.	CV2506 ...	32	50L6G	H.	CV2534, KT71	34
41MRC	C.	AC2HL ...	32	50L6GT	A.U.	CV571 ...	34
41MSG	C.	MS4B ...	33	50X6	I.P.S.T.Y.Q.	— ...	34
41MTA	—	— ...	33	50YIU	—	— ...	34
41MTB	—	— ...	33	50Y6GT	—	CV805 ...	34
41MTL	C.	(CV1117), 354V	33	50Y7	I.P.Y.Q.S.T.	— ...	34

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
50Z6	I.Q.S.	— ...	34	70BI	M.	(CV470)	—
50Z7	P.I.Q.S.T.	— ...	34	71	—	— ...	35
51	F.	(CV487)	34	71A	—	CV2541	35
52	Q.S.	— ...	34	71A3	—	(CV1764)	—
52CD6	—	— ...	34	71B	—	— ...	35
52CG	M.	CV2986	—	72	—	CV709	35
52KU	C.	(CV1863)	34	72R	Q.	CV709	—
53	—	CV2535	34	73	—	CV2543	35
53A	—	CV2536	—	73R	Q.	CV2543	—
53KU	F.	(CV378), U54	34	75	P.U.C.A.	CV614	35
54KU	C.	(CV729), GZ32	34	76	U.A.	CV615	35
54NCPII	—	CV2885	—	77	A.H.U.	CV616	35
55A/I65M	R.	— ...	34	77E	C.QQ.	— ...	35
55	—	CV2537	34	78	A.H.U.	CV2544	35
56	U.	CV611	34	78DS	A.	(CV1328)	—
56AS	I.S.Q.	— ...	34	78E	A.C.QQ.	— ...	35
57	A.U.	CV612	34	79	P.C.A.	CV2545	35
57AS	I.Q.S.	— ...	34	80	C.	CV617	35
58	U.	CV613	34	80A	A.U.H.	— ...	123
58AS	I.Q.S.	— ...	34	80M	—	— ...	35
59	—	CV2538	34	80S	A.C.	— ...	—
59A3	—	(CV2692)	—	81	P.	CV2546	35
59A4	—	(CV2692)	—	81M	—	— ...	35
59B	—	— ...	34	82	U.	CV1773	35
60/250	—	— ...	34	82V	—	— ...	35
61BT	C.	CV1979	34	83	P.A.	CV618	35
61P	C.	CV2539	—	83V	P.	CV2547	35
61SPT	C.	— ...	34	84	P.C.	(CV2548)	35
62BT	F.	CV1745	34	84/6Z4	P.A.	CV619	35 & 20
62DDT	C.	EBC41, 6LD3	34	85	P.C.A.	CV2549	35
62TH	C.	ECH42, 6C10	34	85A1	M.	(CV431)	—
62VP	C.	EF41	34	85A2	M.	(CV449), QS83/3	—
63	—	— ...	34	85AS	I.P.S.	— ...	35
63D	C.	CV2540	—	85S	—	— ...	35
63ME	—	CV2747, 6MI	—	88	—	— ...	35
Appendix I				88D	C.	(CV2185)	—
63DS	C.	CV2731	—	89	—	CV833	35
63SPT	C.	(CV1091), EF50	34	89D	C.	(CV2193)	—
63TI	—	— ...	34	89J	C.	CV2750	—
63TP	—	— ...	34	89Y	—	CV833	—
64	—	— ...	34	90	—	— ...	35
64ME	C.	— ...	Appendix I	90AC	—	— ...	35
64SPT	—	— ...	34	90AG	M.	(CV2270)	—
64SU	C.	(CV135)	—	90AV	M.	(CV2132)	—
65	—	— ...	35	90CG	M.	(CV2133)	—
65ME	C.	— ...	Appendix I	90CV	M.	(CV2134)	—
66KU	C.	EZ40	35	90EG4	XX.	(CV1587)	—
67	—	— ...	35	92	—	— ...	35
67PT	C.	EL41	35	95	—	— ...	35
68	—	— ...	35	96	—	— ...	35
68A	—	— ...	35	98	—	— ...	35
69	Y.	— ...	35	99V	SS.T.	— ...	35
70	—	— ...	35	99X	SS.T.	— ...	36
70A7	SS.T.I.	— ...	35	100AC	—	— ...	36
70L7	Q.S.	— ...	35	100BI	M.	(CV1199)	—
	I.P.SS.Y.Q.T.	— ...	35	100R	—	CV2967	—

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
I00TH	YY.	CV2552 ...	—	203THA	C.	— ...	36
I01D	—	CVI778 ...	—	204A	—	CV2563 ...	—
I01F	—	CV2553 ...	—	205D	—	CVI749 ...	36
I02D	—	CVI779 ...	—	205E	V.	CV2566 ...	36
I04V	M.	(CVI161) ...	36	205F	V.	CV2567 ...	36
I08CI	M.	(CVI833) ...	—	210DET	—	CV2569, HL2	37
I11A	—	CV2554 ...	—	210DDT	C.	CVI044, TDD2A	37
I12A	—	CVI774 ...	36	210HF	C.	CV2570, PM2HL	37
I14	—	— ...	36	210HL	C.	CV2571, PM2HL	37
I14B	TT.	— ...	36	210HPT	—	KT2, Pen 220	37
I16Pen	C.	(CVI337) ...	36	210LF	C.	(CVI021) ...	37
I17L7GT	—	CV2556 ...	36	210PG	C.	(CVI043), FC2	37
I17M7	I.P.	— ...	36	210RC	C.	CV2977, HL2	37
I17N7GT	P.A.	CV2557 ...	—	210SPG	C.	FC2, X22 ...	37
I17Z3	P.T.Y.S.T.	— ...	36	210SPT	C.	(CVI049), Z22	37
	NN.	— ...	—	210T	S.	— ...	37
I17Z4	I.P.Q.S.T.	— ...	36	210VPA	C.	CV2574, W21 (7 Pin)	37
I17Z6GT	P.	CV2558 ...	36	210VPT	—	—	—
I17Z6GT/G	—	CV2558 ...	36	(7 pin)	C.	(CVI083), W21 (7 pin)	37
I20	—	— ...	36	210VPT	(4 pin)	—	—
I21A	—	CV2560 ...	—	211	P.	CVI71 ...	—
I21VP	—	UF41 ...	36	211 (Special)	P.	CV620 ...	—
I22A	—	CV2561 ...	—	212E	V.	CV2576 ...	—
I24AC	—	— ...	36	213	—	CV2577 ...	—
I29B	CCC.	CV2950 ...	—	213Pen	—	— ...	37
I41DDT	—	UBC41, I0LD3,	36	215P	C.	(CVI019) ...	37
I41TH	C.	UCH42 ...	36	215SG	C.	(CVI018), PM12M	37
I42BT	C.	— ...	36	217A	—	— ...	37
I43D	—	CV597 ...	—	218	P.	CV2579 ...	—
I44V	—	— ...	36	220B	C.	(CVI032), B21	37
I50B2	M.	(CV2225) ...	—	220C	CCC.	CV2580 ...	—
I50C2	M.	(CVI832) ...	—	220DD	C.	— ...	37
I52RA	—	CV3878 ...	—	220HPT	C.	(CVI118), PM22A	37
I54V	M.	(CVI037), MHL4	36	220IPT	C.	(CVI333) ...	37
I61	J.	CV708 ...	—	220LF	C.	(CVI313) ...	—
I63Pen	—	— ...	36	220LPT	C.	(CVI195) ...	—
I64V	M.	CV2562, MHL4	36	220/OT	C.	(CVI118), PM22A	37
I71DDP	C.	UBF80 ...	36	220P	C.	(CVI020), PL2	37
I81	—	— ...	36	220PA	C.	(CVI022), LP2	37
I82A	—	— ...	36	220PT	C.	(CVI051) ...	37
I82B	I.Q.Q.	— ...	36	220RC	C.	(CVI312) ...	—
	Q.S.	— ...	—	220SG	C.	(CVI018), Z21	37
I83	P.T.I.Q.Q.	— ...	36	220TH	C.	(CVI082), X24	37
	S.Q.	— ...	—	220VS	C.	CV2582, PM12M	37
I85BT	C.	CVI980 ...	36	220VSG	C.	(CVI028), PM12M	37
I85BTA	—	— ...	36	225DU	C.	CVI454 ...	37
200	—	CV2988 ...	—				
200A	TT.	— ...	36				Appendix II
202	J.	(CVI200) ...	—	228A	V.	CV734 ...	—
202DDT	C.	— ...	36	230	TT.	— ...	37
202MPG	C.	— ...	36	230PT	C.	— ...	37
202SPB	—	— ...	36	230XP	C.	(CVI023), P2	37
202STH	C.	TH2321 ...	36	231D	V.	CV2584 ...	37
202VP	C.	— ...	36	239	—	CVI771 ...	—
202VPB	C.	— ...	36	240B	C.	CV2586 ...	37
203B	—	CV2986 ...	—	240QP	C.	(CVI035), QP230	37

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
242C	V.	CV2587 ...	—	314A	V.	CV2616 ...	—
244	—	— ...	37	316A	V.	CV683 ...	—
244A	V.	CV2588 ...	—	322A	V.	CV623 ...	—
244V	M.	(CV1038), 354V	37	323A	V.	CV2617 ...	—
245A	—	— ...	37	324A	—	— ...	38
247A	—	— ...	37	327A	—	CV2618 ...	—
249B	TT.	— ...	38	327A	V.	CV926 ...	—
250TH	YY.	CV2589 ...	—	328A	V.	CV2619 ...	38
256B	V.	CV2592 ...	—	329A	V.	CV2620 ...	38
252A	—	— ...	38	329L	—	— ...	38
255	—	— ...	38	330B	V.	CV2621 ...	—
257	—	— ...	38	331A	V.	CV2622 ...	—
257A	V.	CV2593 ...	—	332A	V.	CV2623 ...	—
258B	HHH.	CV2594 ...	—	332 Pen.	C.	(CV1401), CL33	38
259A	V.	CV2595 ...	38	336A	—	— ...	38
259B	—	— ...	38	337A	V.	CV2624 ...	38
262A	V.	CV2597 ...	38	338A	V.	CV2625 ...	—
262B	V.	CV2597 ...	38	340A	V.	CV1782 ...	—
264	—	— ...	38	345A	—	— ...	38
264A	V.	CV2598 ...	38	346A	V.	CV2626 ...	—
264C	V.	CV2599 ...	38	347A	—	— ...	38
264E	—	— ...	38	348A	TT.	— ...	38
264L	—	— ...	38	349A	V.	CV2726 ...	38
267B	V.	CV2600 ...	—	349B	V.	CV2628 ...	—
270A	V.	(CV30) ...	—	350A	V.	CV2629 ...	—
271A	V.	CV2601 ...	38	350B	V.	CV621 ...	39
272A	V.	CV2602 ...	38	351A	V.	CV2630 ...	39
274A	V.	CV2602 ...	38	351B	—	CV1630 ...	—
274B	V.	CV684 ...	38	352A	V.	CV2631 ...	39
275A	V.	CV2604 ...	38	354A	V.	CV2632 ...	—
279A	V.	CV669 ...	—	354V	M.	(CV1173), 244V, A30D, AC/HL	39
281A	—	— ...	38	357A	V.	CV691 ...	—
282A	V.	CV2065 ...	—	361A	—	— ...	39
283A	—	— ...	38	362A	V.	CV2633 ...	39
285	—	— ...	38	367	M.	CV2634 ...	39
286A	TT.	— ...	38	367A	—	— ...	39
290A	—	— ...	38	368A	V.	CV710 ...	—
291A	—	— ...	38	371B	—	CV3511 ...	—
292A	—	— ...	38	373A	TT.	— ...	39
293A	V.	CV3829 ...	38	374A	TT.	— ...	39
300A	V.	CV2608 ...	—	375A	—	CV2636 ...	—
300B	V.	CV2609 ...	—	383A	—	— ...	39
302THA	—	TH2321 ...	38	385A	—	— ...	39
303	J.	CV2610 ...	—	387A	—	— ...	39
303A	—	CV2986 ...	38	388A	—	CV2637 ...	—
304	J.	(CV1202) ...	—	393A	H.	CV2638 ...	—
304AC	—	— ...	38	394A	—	CV2639 ...	—
304TH	—	CV2611 ...	—	400TDD	—	CV2512 ...	—
30 4TL	—	CV3580 ...	—	401A	—	— ...	39
307A	V.	CV2612 ...	—	401CAHA	J.	(CV389) ...	—
309A	—	— ...	38	402OT	C.	— ...	39
310A	V.	CV2613 ...	38	402P	C.	— ...	39
310B	V.	CV1781 ...	38	402Pen.A	C.	— ...	39
311A	V.	CV2614 ...	38	402Pen.	C.	CV1672 ...	39
311SU	C.	UY41 ...	38	403A	TT.	— ...	39
313C	V.	CV2615 ...	—				

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
405BU	C.	CV2640	39 & Appendix II	542A	—	— ...	40
406	—	— ...	39	543A	—	— ...	40
407A	ZZ.TT.	— ...	39	544A	—	— ...	40
408BU	—	DW2	39	546A	—	— ...	40
408CHA	J.	(CV2211)	—	547A	—	— ...	40
410LF	C.	(CV1152)	—	548A	—	— ...	40
410HF	—	— ...	39	549A	—	— ...	40
410P	—	— ...	39	550A	—	— ...	40
410PT	C.	(CV1167)	123	559	TT.P.	— ...	40
410RC	—	— ...	39	560BU	—	CV2645	—
410SG	—	— ...	39	576	—	CV3749	—
412BU	—	— ...	39	578	—	CV2967	—
412SU	—	— ...	39	605	—	— ...	40
415PT	—	— ...	39	610XP	C.	(CV1154)	—
415SP	—	— ...	39	612BU	—	— ...	40
415XP	C.	(CV1154)	—	615	—	CV3506	40
417A	LL.	CV2642	—	620T	—	— ...	40
420T	—	CV2511	39	625P	C.	(CV1208)	—
420XP	C.	(CV1040)	—	631PI	—	(CV220)	—
425PT	—	— ...	39	635GTX	—	— ...	40
425XP	C.	(CV1655)	—	645	GGG.	CV670	—
428T	—	CV812	—	648PI	—	CV746	—
435A	—	— ...	39	653B	—	CV666	—
437A	—	— ...	39	660	—	— ...	40
441U	C.	R3	39	660T	—	— ...	123
442BU	C.	(CV1796), DW4-350	39	680XP	—	— ...	40
446	—	CV3725	—	700A	V.	CV689	—
446A	—	CV932	39	700B	V.	CV695	—
446B	—	CV687	39	700C	V.	CV696	—
450	—	— ...	39	700D	V.	CV699	—
450AC	—	— ...	39	701A	V.	CV677	—
450TH	—	CV2572	—	702A	V.	CV678	—
451	—	— ...	123	703A	V.	CV679	—
451PT	C.	UL41	39	705A	V.R.	CV3587	—
451U	—	UL41	40	706A	V.	CV3588	—
460BU	C.	CV2644, DW4-500	40	707A	V.	CV3589	—
464A	—	CV688	—	707B	V.	CV1768	—
471A	—	CV3586	—	708A	V.	CV3590	—
482A	—	— ...	40	709A	V.	CV2652	—
482B	Q.S.	— ...	40	710A	V.	(CV62)	—
483	P.Q.S.	— ...	40	713A	V.	CV3593	40
484V	M.	(CV1678)	40	714AY	V.	CV2653	—
485	I.QQ.	— ...	40	715A	—	CV2654	—
	Q.S.T.	— ...	40	715B	—	CV2655	—
486	—	— ...	40	715C	—	CV598	—
500	—	— ...	40	717A	V.	CV3594	40
506	N.	— ...	40	719A	—	CV3956	—
506BU	C.	CV2645, DW2, UI0	40	720C	V.	CV3907	—
506K	—	— ...	40	721A	V.	CV3595	—
509	—	— ...	40	722A	V.	CV3596	—
511D	—	— ...	40	723A	V.	CV720	—
522	—	CV999	—	723A/B	V.	CV1795, KS9-20	—
532	LL.	CV2647	—	724A	V.	CV2656	—
532A	LL.	CV2648	—	724B	V.	CV1793	—
538A	—	— ...	40	725A	V.	CV722	—
				726A	V.	CV676	—

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
726B	V.	CV3597 ...	—	860	P.	CV640 ...	—
726C	V.	CV3644 ...	—	861	P.	CV641 ...	—
729A	—	(CV539) ...	—	863	P.	CV2674 ...	—
731A	V.	(CV850) ...	40	864	P.	CV2675 ...	41
732A	V.	CV812	Appendix II	865	P.	CV2676 ...	—
800	U.P.C.S.R.	CV2657 ...	—	866	P.	(CV32) ...	—
801	—	CV621 ...	—	866A	P.	(CV32), RG3-250A	—
801A	—	CV621 ...	—	866JR	P.	CV2679 ...	—
802	P.	CV622 ...	40	868	—	CV2680 ...	—
803	P.	CV623 ...	—	868/PJ23	—	(CV2680) ...	—
804	P.	CV624 ...	—	869B	—	CV2723 ...	—
805	P.U.	CV625 ...	40	871	—	— ...	41
806	P.	CV2658 ...	—	872	—	CV642 ...	—
807	C.U.R.	(CV124), QV05-25	40	872A	M.	CV642 ...	—
		(CV1060) ...	—	874	—	CV643 ...	—
		(CV1572) ...	—	875A	HHH.	CV644 ...	—
		(CV1374) ...	—	876	—	CV645 ...	—
807W	—	CV3809 ...	40	878	—	CV2683 ...	—
808	P.U.	CV626 ...	—	878A	—	CV2683 ...	—
809	P.	CV2660 ...	—	879	—	CV597 ...	41
810	P.	CV627 ...	—	880	—	CV2685 ...	—
811	P.	CV628 ...	—	884	—	CV647 ...	41
812	P.	CV2661 ...	—	885	—	CV648 ...	41
813	R.C.	(CV26), QY2-100	—	889	—	CV2686 ...	—
814	P.	CV629 ...	—	889R	—	(CV2687) ...	—
815	P.	CV2663 ...	—	889RA	—	(CV2687) ...	—
816	P.	CV724 ...	40	891	—	CV2688 ...	—
822	—	CV2664 ...	—	892R	—	CV904 ...	—
825	P.	CV2665 ...	40	893R	—	CV2689 ...	—
825BU	—	— ...	40	902	—	CV3600 ...	—
826	P.	CV630 ...	—	902PI	—	CV3600 ...	—
828	P.A.	CV631 ...	—	904V	M.	CV2690, MH4I	41
829	—	CV2666 ...	122	905	P.	CV736 ...	—
829A	—	CV3599 ...	—	906	P.	CV737 ...	—
829B	—	(CV2666), QV07-40	123	906PI	P.	CV602 ...	—
830B	—	CV702 ...	—	913	P.	CV2691 ...	—
832	P.	(CV1088) ...	123	918	—	CV2692 ...	—
832A	P.	CV788, QV04-15	123	927	P.	(CV405), 55CG	—
833	P.	CV635 ...	—	929	P.	CV2693 ...	—
833A	P.	CV635, TY4-350	—	930	P.	CV2694 ...	—
836	—	CV636 ...	40	930B	—	CV702 ...	—
837	—	CV637 ...	—	931	P.	CV2695 ...	—
838	P.	CV638 ...	—	931A	P.	CV2696 ...	—
840	—	— ...	40	935	P.	CV2697 ...	—
841	—	CV906 ...	127	951	—	— ...	41
842	P.I.	— ...	41	953	P.	CV738 ...	—
843	P.	CV639 ...	41	954	—	(CV1095) ...	—
845	P.	CV735 ...	—	956	U.	CV649 ...	—
845W	—	CV3646 ...	—	957	—	CV2700 ...	—
846	P.	CV2668 ...	—	958	—	CV650 ...	—
849	P.	CV2669	Appendix II	958A	—	CV2601 ...	—
849H	P.	CV2670 ...	—	959	—	CV1794 ...	—
851	P.	CV2671 ...	—	972	—	(CV642) ...	—
852	P.	CV2672 ...	—	985	—	— ...	41
857B	P.	CV2673 ...	—	986	—	— ...	41
859	—	CV2779 ...	—	991	P.	CV651 ...	—

Commercial	Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial	Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
994V	M.	—	...	41	1619	P.	CV723	...	42
1002	—	—	...	41	1620	P.	CV657	...	42
1005	—	CV2874	...	—	1621	P.	—	...	42
1007	—	—	...	41	1622	P.	CV658	...	42
1012	—	—	...	41	1624	I.J.TT.	—	...	42
1028	—	—	...	41	1625	P.A.	CV659	...	42
1043	D.	(CV1097)	...	—	1626	P.Y.	CV1755	...	42
1103	—	—	...	41	1629	P.A.	CV1756	Appendix I	—
1130	—	—	...	41	1630	P.	CV2715	...	—
1201	P.	CV2704	...	41	1631	P.	—	...	42
1201A	P.	CV2704	...	—	1632	P.TT.	—	...	42
1203	P.	CV2705	...	41	1633	P.TT.	—	...	42
1203A	TT.S.	—	...	41	1634	P.	—	...	42
1204	S.	—	...	41	1635	P.	—	...	42
1206	S.	—	...	41	1637	P.	(CV1052)	...	42
1221	S.	—	...	41	1638	—	—	...	42
1222	S.	—	...	41 & 127	1639	—	—	...	42
1223	S.	—	...	41	1641	J.TT.	—	...	42
1229	—	(CV711)	...	127	1641/RK60	J.TT.	—	...	42
1230	S.	—	...	41	1642	—	CV875	...	42
1231	—	CV2707	...	41	1644	P.	—	...	42
1232	S.	—	...	41	1649	—	—	...	42
1236A	S.	—	...	127	1654	P.Y.T.TT.	—	...	42
1238	S.	—	...	127	1655	—	CV2716	...	42
1247	S.	—	...	41	1659	—	—	...	42
1267	M.	CV1992, Z300T	—	—	1662	—	—	...	42
1273	S.	—	...	41	1664	—	—	...	42
1274	S.	—	...	41	1701	FFF.	—	...	42
1275	S.	—	...	41	1729	M.	CV2717	...	—
1276	S.	—	...	41	1754	—	CV2518	...	—
1280	S.	—	...	41	1801	N.	—	...	42
1282	—	CV902	...	41	1805	N.FFF.	—	...	42
1284	S.	—	...	41	1805PI	P.	CV832	...	—
1288	—	—	...	41	1806PI	—	CV817	...	—
1291	TT.S.	—	...	41	1807	—	—	...	42
1292	—	—	...	41	1809PI	P.	CV1783	...	—
1293	S.	—	...	41	1810	—	—	...	42
1294	—	CV2709	...	41	1813P7	—	CV884	...	—
1299	P.	CV815	...	42	1814PI	N.	CV790	...	—
1378X	—	CV761	...	—	1815	N.	—	...	43
1500T	YY.	CV2711	...	—	1817	N.	—	...	43
1547	—	(CV2789)	...	—	1821	N.	(CV1443), DW2	...	43
1560	—	—	...	42	1823	—	—	...	43
1561	N.	(CV1064), DW4-500	...	42	1831	N.	—	...	43
1562	—	—	...	42	1832	N.P.	—	...	43
1601ABC	K.J.	(CV440)	...	—	—	FFF.	—	...	—
1602	P.	—	...	42	1851	P.	CV599	...	43
1603	P.	CV652	...	42	1852	P.	CV660	...	43
1608	J.	—	...	42	1852/6AC7	P.	CV660	...	43
1609	P.	CV2712	...	42	1853	P.	CV1873	...	43
1610	P.	CV2713	...	42	1853/6AB7	P.	CV1873	...	43
1611	P.	CV653	...	42	1861	N.	(CV1039), IW4-500	...	43
1612	P.	CV654	...	42	1867	—	IW4-350	...	43
1613	P.	CV655	...	42	1875	N.FFF.	—	...	43
1614	P.	CV2714	...	42	1876	N.	CV2718	...	43
1616	—	CV656	...	42					

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
			Appendix II				
1877	FFF.	HVR2	... 43 &	4018G	R.	(CVI733)	... —
			Appendix I	4019A	R.	(CV249)	... 43
1882	—	— ...	43	4019B	R.	(CVI655)	... 43
1883	—	— ...	43	4020A	R.	(CVI653)	... 43
1907	—	CV3521, XH25-500	—	4020B	R.	(CVI657)	... 43
1909A	N.	(CV2291)	... —	4021A	R.	(CVI671)	... 43
1924	—	CV2719	... —	4021B	R.	(CVI663)	... 43
1960	—	CVI792	... —	4022AR	R.	(CVI664)	... 43
2000T	—	CV998	... —	4022B	R.	(CVI659)	... —
2050	LL.	CV2565, EN32	—	4030A	R.	CVI447	... —
2051	LL.	CVI798	... 43	4030D	R.	CVI447	... —
2101	A.C.N.	— ...	43	4033A	R.	(CVI220)	... 43
2102	A.C.N.	— ...	43	4033AF	R.	CV2743	... 43
2103	A.C.QQ.	— ...	43	4033I	R.	(CVI688)	... 43
2151	A.C.QQ.	— ...	43	4037A	—	— ...	... 43
2211BRA	J.	(CV439)	... —	4043C	R.	(CVI448)	... —
2218BRA	J.	(CV439)	... —	4045A	R.	(CV243)	... —
2318	—	— ...	43	4046A	R.	(CV244)	... —
2506	—	— ...	43	4047B	R.	(CVI600)	... —
2501A3	EEE.	CV602	... —	4049C	R.	(CVI355)	... —
2505A5	EEE.	CV740	... —	4049D	R.	(CV5)	... —
2511A5	EEE.	CV741	... —	4050AG	R.	CV2745	... —
2529A5	EEE.	CVI791	... —	4052A	R.	(CVI081)	... —
3006	—	— ...	43	4053	K.	(CV950)	... —
3025	—	CV2722	... —	4053A	J.	(CV967)	... —
3071	—	CV2723	... —	4056A	R.	(CVI025)	... —
3074A	—	— ...	43	4059A	R.	(CVI611)	... —
3075A	—	— ...	43	4060A	R.	(CVI030)	... —
3209	C.	CV2725	... —	4061A	R.	(CVI369)	... 44
3220K	C.	(CV954)	... —	4062A	R.	(CVI568)	... —
3226D	C.	CV2727	... —	4064A	R.	CV2746	... —
3226J	C.	CV2786	... —	4064B	R.	CVI449	... —
3229D	C.	CV2728	... —	4066A	R.	(CVI181)	... —
3263D5	C.	CV2731	... —	4069A	R.	(CVI372)	... —
3329A	—	— ...	43	4074A	R.	(CVI8)	... 44
3481	—	— ...	43	4074B	R.	(CVI573)	... 44
3530	N.	(CV405)	... —	4077A	R.	(CV33)	... 44
3720	—	— ...	43	4078A	R.	CVI420	... —
3871	—	— ...	43	4078GA	R.	(CV447)	... —
3872	—	— ...	43	408I	R.	CV2749	... —
3873	—	— ...	43	4081A	R.	CVI797	... —
3921	—	— ...	43	4094A	R.	(CVI620)	... —
3924	—	— ...	43	4096AB	R.	CV2751	... —
3951	—	CV2733	... —	4100BU	C.	(CVI264)	... —
3982	—	(CV2680)	... —	410I	J.	(CVI588)	... —
4003A	R.	CV2743	... —	4101D	R.	(CV2845)	... —
4004B	R.	(CV2329)	... —	4101E	R.	(CVI639)	... —
4006A	R.	(CVI600)	... —	4102D	R.	(CVI640)	... —
4008B	R.	(CVI601)	... —	4102E	R.	(CVI641)	... —
4011A	R.	CVI415	... —	4104D	R.	(CVI694)	... —
4012A	R.	CVI445	... —	4120AA	R.	(CV536)	... —
4013C	R.	(CVI605)	... —	420I	J.	(CVI097)	... —
4014A	R.	(CVI603)	... —	4203	J.	(CVI587)	... —
4015A	R.	CV2735	... —	4205E	R.	(CVI648)	... —
4017B	R.	CVI446	... —	4212D	R.	(CVI619)	... —
				4212E	R.	(CVI619)	... —

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
4212E	R.	(CV1252)	...	4684	N.	— ...	44
4222B	R.	(CV1601)	...	4687	M.	CV2766	...
4228A	R.	CV1450	...	4688	N.FFF.	— ...	44
4242A	R.	(CV25)	...	4690	—	CV2767	...
4251AX	R.	CV2755	...	4694	N.FFF.	— ...	44
4260A	R.	CV2756	...	4699	N.FF.	— ...	44
4264A	R.	CV2598	...	4701A	—	CV677	...
4270A	R.	(CV30)	...	4702A	—	CV678	...
4274A	R.	CV1451, 5Z3	44	4703A	—	CV679	...
4279A	R.	(CV1250)	...	4705A	—	CV3587	...
4282BZ	R.	(CV1365)	...	4706	—	CV3588	...
4300A	R.	CV1452	44	4707A	—	CV3589	...
4304	R.	CV2759	...	4708A	—	CV3590	...
4304B	R.	CV2760	...	4713A	—	CV3593	...
4304BB	R.	CV2761	...	4717A	—	CV3594	...
4304CB	R.	(CV1288)	...	4721A	—	CV3595	...
4307A	R.	(CV1080)	...	4722A	—	CV3596	...
4307AF	R.	(CV1080)	...	4726A	—	CV676	...
4310A	R.	— ...	44	5215A	D.	(CV1081)	...
4313C	R.	(CV75)	...	5516	Y.	— ...	44
4316A	R.	CV683	...	5517	—	CV2609	...
4317	M.	(CV1201)	...	5517/CK1013	—	CV2609	...
4328A	R.	CV2619	44	5544	—	(CV2210), XRI-3200	...
4328D	R.	(CV245)	44	5545	—	(CV2215), XRI-6400	...
4357A	M.	(CV27)	...	5556	—	CV2640	44
4378	N.	CV1453	...	5557	—	CV2957, XG5-500	...
4407	J.	(CV1084)	...	5586	—	CV3611	...
4409	J.	(CV955)	...	5590	I.Y.S.	— ...	44
4410	J.	(CV1087)	...	5591	ZZ.I.Y.S.	— ...	44
4502	J.	(CV1086)	...	5603	TT.	— ...	44
4602	J.	(CV956)	...	5608	I.S.T.	— ...	44
4605	J.	(CV1085)	...	5610	I.TT.	— ...	44
4606	—	CV2764	...	5618	P.Y.J.	— ...	44
4607	J.	(CV690)	...	5626	—	(CV298)	...
4608	J.	(CV1511)	44	5628	—	CV2952	...
4610	—	— ...	44	5629	—	CV2662	...
4613	—	— ...	44	5635	S.	— ...	44
4614	—	— ...	44	5636	I.P.S.	CV3928	44
4618	—	— ...	44		BBB.		
4619	—	— ...	44	5637	I.S.	— ...	44
4631	N.FFF.	— ...	44	5639	S.T.BBB.	— ...	44
4636	N.FFF.	— ...	44	5640	I.S.	— ...	45
4650	—	— ...	44	5641	—	(CV473)	45
4652	FFF.	— ...	44	5642	—	(CV2241)	...
4654	N.FFF.	— ...	44	5643	—	(CV474)	...
4654K	—	— ...	44	5644	M.	CV3987	...
4655	—	— ...	44	5645	S.	— ...	127
4657	N.FFF.	— ...	44	5646	S.	— ...	127
4670	FFF.	— ...	44	5647	—	CV3916	45
4671	M.	(CV1059)	...	5651	—	CV2573	...
4672	M.	(CV4695)	...	5651	—	CV449	...
4673	M.	CV2765	44	5651WA	G.	CV4048	...
4678	—	— ...	Appendix I	5654	N.	CV4010	45
4679	—	— ...	44	5656	—	CV2970	45
4682	N.FFF.	— ...	44	5657	—	CV3958	...
4683	N.FFF.	— ...	44	5659	—	— ...	45

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
5660	—	— ...	45	5838	DDD.S.T.	— ...	45
5661	—	— ...	45	5839	DDD.TT.	— ...	45
5663	—	CV3610	—		S.T.		
5664	—	CV1765	—	5840	M.	CV3939	45
5667	—	(CV2687)	—	5842	—	CV3789	45
5670	—	CV4013	45	5844	I.Y.	— ...	45
5670WA	—	CV4013	45	5845	Y.S.	— ...	45
5672	—	(CV2238), DL620	45	5846	—	CV2859	—
5675	—	CV2971	—	5847	—	CV3905	45
5676	—	(CV2239)	45	5851	S.T.	— ...	46
5678	—	CV2753, DF60	45	5852	—	CV3943	46
5679	I.S.	— ...	45	5861	M.N.	(CV273), TD03-10	—
5683	—	CV2574	—	5871	S.	— ...	127
5684	—	CV2753	—	5873	—	— ...	46
5684/C3J/A	—	CV2753	—	5876	—	CV2972	—
5685/C3J	—	CV2574	—	5879	P.Y.S.	— ...	46
5686	—	CV3612	45	5881	I.P.Y.S.T.	— ...	46
5687	—	CV2578	45	5886	—	(CV495)	—
5690	P.T.	— ...	45	5894	M.N.	(CV424), QQV06-40A	46
5691	—	CV3705	45	5894A	M.N.	CV2797	46
5692	—	CV3942	45	5896	—	CV2698	46
5693	—	CV3699	45	5897	S.T.	— ...	46
5694	S.	— ...	45	5898	S.T.	— ...	46
5696	—	CV3512, EN92	—	5899	—	(CV475)	46
5702	—	CV3895	127	5900	S.T.	— ...	46
5703	S.	— ...	127	5901	S.T.	— ...	46
5704	—	CV2874	127	5902	—	CV4029	46
5718	N.	CV3930	45	5903	S.T.	— ...	46
5719	—	CV4008	45	5904	—	— ...	123
5721	—	— ...	45	5905	S.T.	— ...	46
5722	Y.S.	— ...	45	5906	S.T.	— ...	46
5725	—	CV4011, M8196	45	5907	S.T.	— ...	46
5726	A.N.	CV4007, EAA901S	45	5908	S.T.	— ...	46
5727	—	CV4018	—	5910	Y.S.	— ...	46
5732	—	— ...	45	5915	I.P.Y.S.	EH900	46
5744	S.	— ...	45	5916	S.T.	— ...	46
5749	A.	(CV4009)	45	5920	Y.	E90CC	46
5750	A.	(CV4012)	45	5930	S.T.	— ...	46
5751	—	CV4017	45	5931	S.T.	— ...	46
5755	—	CV3755	45	5932	—	CV3899	46
5763	A.	(CV2129), QV03-12	45	5933	—	CV3517	46
5783	—	CV3933	—	5939	—	CV3545	—
5784	—	CV3986	127	5947	DDD.	— ...	46
5785	S.	— ...	127	5948/1754	—	CV3518	—
5787	—	CV3897	—	5949	—	CV3521	—
5796	—	CV3706, XRI-1600	—	5961	—	— ...	46
5797	I.T.	— ...	45	5962	G.	CV2383	—
5798	—	— ...	123	5963	—	CV3900	46
5799	—	CV2678	—	5964	P.Y.TT.S.	— ...	44
5800	—	(CV2730)	—	5965	I.P.A.Y.	— ...	46
5812	Y.	— ...	45	5967	—	— ...	46
5814	—	CV4016	45	5968	—	— ...	46
5814WA	—	CV4032	—	5969	—	— ...	46
5824	I.S.	— ...	45	5977	S.T.	— ...	46
5825	P.J.	— ...	45	5987	S.T.	— ...	46
5829	—	CV3998	—				

Commercial				Commercial			
Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
5992	TT.T.DDD.	— ...	46	6101	—	(CV4031), 6J6WA	47
5993	Y.TT.T.	— ...	46	6106	—	CV2992	47
	DDD.	— ...		6110	S.T.	— ...	47
5998	T.FF.	— ...	46	6111	P.	CV3961	47
6002	—	CV3902	—	6112	I.S.T.	— ...	47
6004	Y.S.	— ...	46	6113	—	— ...	47
6005	—	CV4019, M8245	46	6117	—	CV3906	—
6006	—	— ...	46	6118	—	— ...	47
6007	N.	DL67	46	6125	—	— ...	48
6008	N.	DF67	46	6130	—	CV3629	—
6021	I.T.TT.M.	CV3986	47	6131	—	CV3632	—
	S.BBB.	— ...		6132	A.	CV4055	48
6024	—	CV3539	—	6134	I.	— ...	48
6026	P.	— ...	47	6135	—	CV4022	48
6027	G.	CV3997, JP9-15	—	6136	P.	CV2990	48
6028	ZZ.	— ...	47	6137	I.T.	— ...	48
	Y.BBB.	— ...	47	6145	—	— ...	48
6030	—	— ...	47	6146	—	CV3523, AV06-20	48
6038	—	CV3628	—	6147	T.	— ...	48
6042	A.	— ...	47	6153T	M.	— ...	48
6045	Y.	— ...	47	6155	—	(CV2130), QY3-125	—
6046	I.S.	— ...	47	6156	—	(CV2131), QY4-250	48
6049	S.	— ...	00	6157	A.Y.	— ...	48
6052	S.T.	— ...	47	6158	A.	CV4068	48
6053	S.	— ...	47	6159	P.	— ...	48
	T.	— ...		6169	—	— ...	123
6057	A.	(CV4004)	47	6161	—	CV3901	—
6058	A.	(CV4025)	47	6180	A.	— ...	48
6059	A.	(CV4006)	47	6186	P.T.	— ...	48
6060	A.	(CV4024), M8162	47	6187	—	(CV4011), M8196	48
6061	A.	CV4043	47	6188	T.	— ...	48
6062	A.	CV4039	47	6189	NN.P.T.	— ...	48
6063	A.	(CV4005)	47	6197	P.Y.	— ...	48
6064	A.	(CV4014)	47	6201	N.	CV3508, ECC801S	48
6065	A.	(CV4015)	47	6202	I.Y.	— ...	48
6066	A.Y.	— ...	47	6203	I.Y.	— ...	48
6067	A.	(CV4003), M8136	47	6205	I.S.M.	CV2432	48
6072	I.Y.T.	— ...	47		BBB.T.	— ...	
6073	—	CV2903	—	6206	S.P.	— ...	127
6074	—	(CV4028)	—	6211	—	— ...	48
6079	—	CV3522, QY5-500	—	6215	—	— ...	48
6080	M.	CV2984	47	6216	Y.	— ...	48
6082	P.	— ...	47	6227	N.	E80L	48
6084	N.C.	E80F...	47	6247	—	— ...	48
6085	N.Y.	E80CC	47	6252	—	CV2799, QQV03-20A/148	—
6086	Y.	— ...	47	6265	I.Y.	— ...	28
6087	I.	— ...	47	6267	N.U.Y.	EF86, Z729	48
6088	—	CV2699	—	6287	Y.	— ...	48
6094	Y.TT.T.	— ...	47	6293	P.	— ...	48
	DDD.	— ...		6302	—	— ...	48
6095	—	(CV4019)	47	6305	Y.	— ...	48
6096	—	(CV4010)	47	6325	—	— ...	48
6097	—	(CV4007)	47	6327	—	— ...	48
6098	T.	— ...	47	6336	—	— ...	48
6099	Y.T.TT.	— ...	47	6350	Y.	— ...	48
6100	A.	CV4022	47	6352	S.	— ...	148

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
6360	—	QQV03-10 ...	128	7054	P.	— ...	130
6374	Y.	EY84 ...	28	7055	P.	— ...	130
6375	—	DC70 ...	48	7056	P.	— ...	130
6385	DDD.Y.	— ...	48	7057	P.	— ...	130
	TT.	— ...	48	7058	P.	— ...	130
6386	I.Y.	— ...	48	7059	P.	— ...	130
6394	FF.	— ...	48	7060	P.	— ...	130
6397	—	— ...	49	7061	P.	— ...	131
6410	—	CV3903 ...	—	7184	—	— ...	49
6414	Y.P.	— ...	49	7193	—	CV3601 ...	49
6443	A.Y.N.	— ...	49	7227	R.	— ...	128
6463	I.Y.	— ...	49	7244	S.	— ...	131
6485	—	— ...	49	7475	M.	(CV1070) ...	—
6488	—	EF73 ...	49	7700	—	— ...	49
6489	—	EA76 ...	49	7752	—	— ...	49
6516	A.	CV4064 ...	48	7755	—	— ...	49
6520	FF.	— ...	49	7756	—	— ...	49
6524	P.	— ...	49	8001	—	CV824 ...	—
6550	T.	KT88, EL34 ...	49	8003	P.	CV2768 ...	—
6660	I.Y.	— ...	49	8011	P.	(CV62) ...	—
6661	I.Y.	— ...	49	8012	P.	CV662 ...	—
6662	I.Y.	— ...	49	8013A	P.	CV716 ...	50
6663	I.Y.	— ...	49	8016	—	CV541 ...	50 &
6669	I.Y.	— ...	49			Appendix II	
6677	I.Y.	— ...	49	8020	P.	CV2967, RY12-100 ...	50
6679	I.Y.	— ...	49	8021	P.	CV3587 ...	—
6680	I.Y.	— ...	49	8022	P.	CV944 ...	—
6681	I.	— ...	49	8023	P.	CV933 ...	—
6686	—	E81L ...	49	8025	P.	CV663 ...	—
6687	—	E91H ...	49	8025A	P.	(CV3915) ...	—
6688	—	E180F ...	49	8026	P.	(CV92) ...	—
6689	—	E83F ...	94	9001	P.	CV1757 ...	50
6690	S.	— ...	128	9002	P.	CV664 ...	50
6697	—	— ...	49	9003	P.	CV665 ...	50
6760	Y.ZZ.	— ...	49	9004	P.	CV666 ...	—
	—	— ...	—	9005	P.	CV667 ...	—
6761	ZZ.Y.	— ...	49	9006	P.	CV2769 ...	50
6779	—	CV2434, Z803U ...	—	9072	—	— ...	50
6788	S.	— ...	128	10813	—	— ...	50
6814	S.	— ...	128	13077	—	CV2770 ...	—
6829	I.	— ...	49	18014	—	— ...	50
6850	P.	— ...	49	18015	—	— ...	50
6870	A.	— ...	49	18016	—	— ...	50
6883	P.	— ...	49	18040	N.	— ...	50
6887	P.	— ...	130	18042	N.FFF.	— ...	50
6893	P.	— ...	49	18043	—	— ...	50
6913	S.	— ...	128	18045	N.	— ...	50
6919	I.	— ...	130	18046	N.FFF.	— ...	50
6927	—	— ...	49	23042	—	CV2772 ...	—
6928	—	— ...	49	68503	D.	CV2773 ...	—
6955	Y.	— ...	49	(modified)			
6973	P.	— ...	128	68504	D.	CV2774 ...	—
7000	—	— ...	49	68506	D.	CV2775 ...	—
7025	P.	— ...	128	68510	D.	CV2776 ...	—
7027	P.	— ...	128	68530/U600	D.	CV3756 ...	—
7032	—	— ...	123	189048	—	CV2777 ...	—

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
824476	JJJ.	— ...	123	A409	N.	— ...	52
859483	LL.	CV2779 ...	—	A410	—	— ...	52
A11A	KKK.	— ...	51	A410N	—	— ...	52
A11B	—	IW4-350 ...	51	A411	FFF.	— ...	52
A11C	—	IW4-500 ...	51	A414K	—	— ...	52
A11D	KKK.	IW4-350 ...	51	A415	—	— ...	52
A20B	KKK.	2D4A ...	51	A416	—	— ...	52
A23A	KKK.	TDD4 ...	51	A402	—	— ...	52
A26	—	— ...	51	A425	—	— ...	52
A27D	KKK.	Pen4DD ...	51	A430	—	— ...	52
A28	—	— ...	51	A430N	354V	— ...	52
A30	—	— ...	51	A445	—	— ...	52
A30B	KKK.	— ...	51	A440N	—	— ...	52
A30D	KKK.	354V ...	51	A442	—	— ...	52
A32	KKK.	— ...	51	A557	—	— ...	52
A36A	KKK.	— ...	51	A600	—	— ...	52
A36B	—	TH4B ...	51	A609	—	— ...	52
A36C	—	TH4B ...	51	A615	—	— ...	52
A40	D.	CV2800 ...	51	A630	—	— ...	52
A40/N3	M.	CV2801 ...	—	A635	—	— ...	52
A40M	—	— ...	51	A642	—	— ...	52
A41	D.	(CV1175) ...	—	A800	K.	(CV412) ...	—
A48	—	— ...	51	A802	—	— ...	52
A50A	KKK.	SP4 ...	51	A819	K.	(CV1698) ...	53
A50B	KKK.	SP4B ...	51	A863	—	— ...	53
A50M	KKK.	— ...	51	A901	K.	(CV1722) ...	53
A50N	KKK.	— ...	51	A915	K.	CV1462 ...	—
A50P	KKK.	VP4B ...	51	A915met	K.	CV2803 ...	—
A70B	KKK.	Pen4VA ...	51	A915Amet	K.	CV2804 ...	—
A70C	—	PenA4 ...	51	A924	K.	CV2805 ...	—
A70D	KKK.	PenA4 ...	51	A1065M.	K.	(CV1343) ...	—
A70E	KKK.	PenB4 ...	51	A1320	K.	CV51 ...	—
A70P	—	— ...	51	A1685	—	— ...	53
A80A	KKK.	FC4 ...	51	A1685	—	— ...	53
A104	—	— ...	51	A1714	K.	(CV408) ...	53
A106	—	— ...	51	A1820	K.	(CV409) ...	53
A109	—	— ...	52	A1834	K.	(CV2523) ...	53
A110	—	— ...	52	A2040N	LLL.	— ...	28
A125	—	— ...	52	A2087	K.	(CV2171) ...	53
A203	—	— ...	52	A2030N	—	— ...	123
A205	—	— ...	52	A2040N	—	— ...	123
A206	—	— ...	52	A2118	FFF.	— ...	53
A209	—	— ...	52	A2134	J.	CV2179 ...	53
A210	—	— ...	52	A2272	J.	— ...	53
A211	—	— ...	52	A2293	—	— ...	123
A214	LLL.	— ...	123	A2674	J.	— ...	—
A225	—	— ...	52	A2688	J.	— ...	—
A235	—	— ...	52	A4090	—	— ...	53
A241	—	— ...	52	A4110	FFF.	— ...	53
A242	—	— ...	52	A4229	—	CV824 ...	—
A303	—	— ...	52	AAB1	—	— ...	53
A306	—	— ...	52	AA61	—	— ...	53
A373	K.	(CV1184) ...	—	AB1	N.FFF.	— ...	53
A404	—	— ...	52	AB2	N.FFF.	— ...	53
A406	—	— ...	52	ABC1	N.MMM.FFF.	— ...	53
A408	FFF.	— ...	52	ABC9I	—	— ...	53

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
ABLI	N.FFF.	— ...	53	ACPX4A	—	— ...	54
AC/042	M.	— ...	53	AC/Q	RR.	(CVI326)	54
ACO44	M.	(CVI168), PI2/250	53	ACQA	—	— ...	54
ACO54	M.	— ...	53	ACIS	—	CV2819	—
ACO64	M.	— ...	53	AC/S2	D.	(CVI677), SP4	54
AC084	M.	— ...	53	AC/S2Pen	D.	(CVI282), HP4101/7	54
AC084N	M.	— ...	53	AC/SG	D.	CV2822	54
AC2	N.FFF.	— ...	53	AC/SG	D.	(CVI190)	54
AC2DD	—	— ...	53	AC/SGVM	P.	(CVI165), AS5124	54
AC2/HL	D.	CV2806	53	AC/SH	RR.	(CVI677)	54
AC2/HLmet	D.	CV2807	53	AC/SL	—	SP4	54
AC2/Pen	D.	{ (CV2808)PenA4 (CVI181) }	53	AC/SPen	—	CV2824	—
AC2PenDD	D.	(CV519)	53	AC/SP1	D.	CV2820	54
AC3Pen	—	— ...	53	AC/SP3	D.	CV2923	54
AC/4Pen	D.	(CVI326)Pen4B	53	AC/SP3RH	D.	CVI430	—
AC/5Pen	D.	CV2809	53	AC/SP3RH	D.	CV545	—
AC/5PenDD	D.	(CVI196)	53	(sel.)			
AC/6Pen	D.	(CVI189)	53	AC/SIVM	D.	(CVI165)	54
AC/7	RR.	(CVI683)	—	AC/TP	D.	(CVI718)	55
AC104	M.	(CVI161)	53	ACT6	K.	CV2825	—
AC70I	—	— ...	53	ACT9	K.	(CV28)	—
ACD	—	— ...	53	ACT10	K.	CV2827	—
AC/DD	D.RR.	(CVI170)(SD4A)	53	ACT16	K.	CVI431	—
AC/DDT	RR.	(CV2813), TDD4	53	ACT17	K.	(CV225)	—
AC/DX	—	— ...	53	ACT19	K.	(CV379)	—
AC/G	—	— ...	53	ACT22	K.	(CV257)	—
AC/HF	—	— ...	54	ACT23	K.	(CV288)	—
AC/HL	D.	CV2811	54	ACT24	K.	(CV240)	—
AC/HLmet	D.	{ CVI037, 354V CV2812 }	54	ACT25	K.	(CV436)	—
AC/HL/DDD	D.	CV2813	54	ACT27	K.	(CV2163)	—
AC/HL/DD	—	TDD4	54	AC/THI	D.	CV2830, TH4B	55
AC/HP	RR.	(CVI282), SP4	54	AC/THIA	—	— ...	55
ACHL4	—	— ...	54	ACVG	—	— ...	55
ACHL4DD	—	— ...	54	AC/VH	RR.	(CV3788)	55
ACHM4	—	— ...	54	AC/VP	RR.	(CV2269)	55
ACHVp	—	— ...	54	AC/VPB	RR.	(CV2823), VP4B	55
ACHI	N.	— ...	54	AC/VP1	D.	CV518, VP4A/5	55
ACH4	—	— ...	54	AC/VP2	D.	CV2832, VP4B	55
AC/L	RR.	(CVI732)	54	AC/VP4	—	— ...	55
ACL4	—	— ...	54	AC/VS	D.	(CVI165)	55
ACLP	—	— ...	54	AC/VS4	—	— ...	55
ACP	D.	CV2815	54	AC/Y	RR.	(CVI174)	55
AC/ME	—	— ...	Appendix I	AC/YC	—	— ...	55
ACME4	—	— ...	54	AC/YY	RR.	(CVI326)	55
AC/P	D.	{ (CVI179) (CVI629) }	54	AC/Z	RR.	(CVI181), PenA4	55
ACPI	D.	— ...	54	AC/ZDD	RR.	— ...	55
AC/Pen	D.	(CVI174)Pen4VA	54	ADI	N.	— ...	55
ACPN	—	— ...	54	ADI/350	FFF.	— ...	55
ACPNDH	—	— ...	54	ADG	—	— ...	55
AC/PP	—	— ...	54	ADHF	—	— ...	55
ACPT	K.	CV2818	54	ADHP	—	— ...	55
AC/P4	D.	(CV207)	—	ADL	—	— ...	55
ACPX4	—	— ...	54	ADPN	—	— ...	55
				AD/P4	D.	(CVI198)	—
				ADVHP	—	— ...	55
				AE	—	— ...	55

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
AF	—	— ...	55	AS4100	—	— ...	56
AF2	N.FFF.	— ...	55	AS4120	U.	SP4	56
AF3	M.	CV2833	55	AS4125	U.	— ...	56
AF7	FFF.N.MMM.	— ...	55	AR300	GG.	CV2839	—
AF8	—	— ...	55	AT4	M.	(CV1171)	—
AF350	C.	(CV1252)	—	AX	—	— ...	56
AFH202	G.	(CV12)	—	AXI	N.FFF.	— ...	56
AFX203	G.	(CV2868)	—	AX50	N.FFF.	— ...	56
AFX212	G.	CV1949	—	AZI	M.U.	CV2860	56
AFX234	G.	CV5023	—	AZ2	M.U.	CV2861	57
AG	—	— ...	55	AZ3	.M	— ...	57
AG495	—	— ...	55	AZ4	N.FFF.	— ...	57
AG4100	—	— ...	55	AZI I	N.MMM.U.	— ...	57
AH1	N.FFF.	— ...	55		FFF.		
AH100	—	— ...	55	AZI2	FFF.N.MMM.	— ...	57
AH200	G.	(CV2168)	—	AZ21	—	— ...	57
AH201	G.	(CV32)	—	AZ31	M.U.N.	CV2862, UI43	57
AH205	G.	(CV532)	—	AZ32	M.U.	(CV2861)	57
AH221	G.	(CV5)	—	AZ33	—	— ...	57
AH4105	—	— ...	55	AZ41	N.	CV3892	57
AK2	N.FFF.	— ...	55	AZ50	N.FFF.M.	— ...	57
AL1	—	(CV159)	56	BIC/IC	R.	CV2734	—
AL2	N.FFF.	— ...	56	BIC/IE	R.	(CV433)	—
AL2/375	FFF.	— ...	56	B2	—	— ...	57
AL3	—	— ...	56	B2A	—	CV2565	—
AL4	FFF.N.MMM.	— ...	56	B4B/IC	R.	(CV536)	—
AL4/375	—	— ...	56	B6	X.	(CV2140)	—
AL5	N.FFF.	— ...	56	B6E	X.	(CV2141)	—
AL5/375	FFF.	— ...	56	B7	—	— ...	57
AL60	M.	(CV9)	56	B11	—	— ...	57
AL495	—	— ...	56	B12	X.	(CV494)	—
AM1	—	— ...	Appendix I	B12E	X.	(CV2142)	—
AMOE	—	— ...	56	B21	K.	CV2864	57
AN1	M.	CV1128	—	B22	—	— ...	57
AN4092	FFF.	— ...	56	B23	—	— ...	57
AP4	M.	(CV175)	—	B24	X.	(CV2143)	57
AP495	—	— ...	56	B24E	X.	(CV2144)	—
APP4A	U.	(CV1683), Pen4VA	56	B30	K.	CV2865	57
APP4AS	U.	— ...	56	B36	K.	(CV925), 12SN7	57
APP4B	U.	(CV1181), PenA4	56	B63	K.	(CV278)	57
APP4BS	U.	— ...	56	B63	J.	— ...	57
APP4C	U.	(CV1684)	56	B65	J.	(CV278), 6SN7	57
APP4G	U.	CV2836	56	B105	—	— ...	57
APP4G	U.	(CV2837)	56	B109	J.	— ...	—
APP4D	—	— ...	56	B142	G.	CV1927	—
APP4E	U.	PenB4	—	B152	—	ECC81	57
APP495	—	— ...	56	B203	—	— ...	57
APP4100	—	— ...	56	B204	—	— ...	57
APP4120	—	— ...	56	B205	—	— ...	57
APV4	U.	(CV1039), IW4-350	56	B217	N.	(CV1021)	57
AR63	G.	CV3710	—	B228	N.	(CV1673), PM2HL	57
AR495	—	— ...	56	B230	RR.	(CV1032)	57
AR4100	—	— ...	56	B240	N.	(CV1032)	57
AR4101	—	— ...	56	B242	—	— ...	57
AS494	—	— ...	56	B255	—	— ...	57
AS495	—	— ...	56	B262	N.	(CV1018)	57

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
B309	J.	(CV455), ECC81	57	BLC/IC	R.	(CV433)	—
B319	J.	—PCC84 ...	57	BLP61	—	— ...	59
B329	J.	CV491, ECC82	57	BM968	—	— ...	59
B339	J.	CV492, ECC83	58	BK44	B.	CV1742	—
B342	—	— ...	58	BL63	J.	(CV1102)	59
B403	—	— ...	58	BOLO14	R.	CV984	—
B405	N.	— ...	58	MW	—	— ...	59
B406	N.	(CV3621)	58	BPMO4	—	— ...	59
B409	N.	— ...	58	BRI	—	CV692	—
B415	—	— ...	58	BRI29	G.	CV2687	—
B424	N.	— ...	58	BRI52	G.	CV28	—
B424S	—	— ...	58	BRI53	G.	(CV2159)	—
B425	N.	— ...	58	BRI61	G.	(CV2322)	—
B435N	—	— ...	123	BRI75	G.	CV904	—
B438	—	— ...	58	BRI79	G.	(CV2322/2323)	—
B438S	—	— ...	58	BRI91	G.	CV383	—
B442	N.	— ...	58	BS4	B.	(CV189)	—
B442M	—	— ...	58	BS4A	B.	CV1859	—
B442S	—	— ...	58	BS5	B.	(CV233)	—
B443	N.	— ...	58	BS48	B.	CV460	—
B443S	N.	— ...	58	BS52	B.	CV1841	—
B491	—	— ...	58	BS60	D.	(CV527)	—
B543	—	— ...	58	BS62	—	CV1858	—
B543S	—	— ...	58	BS64	B.	CV1743	—
B605	—	— ...	58	BS82	B.	(CV463)	—
B609	—	— ...	58	BS84	B.	(CV462)	—
B719	J.	ECC85	58	BS92	B.	(CV461)	—
B729	J.	— ...	—	BS100	D.	(CV1219)	—
B1109	G.	{ (CV789) (CV2736)	—	BT5	B.	(CV1147)	—
B2006	N.	— ...	58	BT9	B.	CV1145	—
B2038	N.	— ...	58	BT9A	B.	(CV1146)	—
B2041	—	— ...	58	BT9B	B.	(CV13)	—
B2042	—	— ...	58	BT19	B.	(CV1144)	—
B2043	—	— ...	58	BT35	B.	(CV1147)	—
B2044S	—	— ...	58	BT45	B.	(CV22)	—
B2045	N.	— ...	59	BT75	B.	(CV489)	—
B2046	N.	— ...	59	BT79	B.	(CV372)	—
B2047	N.	— ...	58	BT83	B.	(CV1120)	—
B2052T	N.	— ...	58	BTR32	H.	(CV458)	—
B2055	—	— ...	58	BTR34	H.	(CV459)	—
B2099	N.	— ...	58	BU100/6	D.	CV2867	—
BA2	—	— ...	58	BW	G.	CV1600	—
BA9-20	M.	CV2393	—	BW3	—	— ...	59
BB1	—	— ...	59	BW140	G.	(CV2871)	—
BBC12	—	— ...	59	BW153	G.	(CV2872)	—
BB220A	—	— ...	59	BW602	—	— ...	59
BB240	—	— ...	59	BW1304	—	— ...	59
BCHI	—	— ...	59	BX2	—	— ...	59
BD78	B.	(CV2125)	—	BX604	—	— ...	59
BFI	—	— ...	59	C1A	—	(CV2868)	—
BF61	—	— ...	59	C1B	—	CV1765	—
BF62	—	— ...	59	C1C	N.	CV1400	—
BF451	—	— ...	59	C1K	—	CV2790	—
BL2	—	— ...	59	C3G	—	— ...	59
BHP61	—	— ...	59	C3M	—	— ...	59
				C6A	—	CV714	—

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
C9	—	— ...	59	CBCI	FFF.N.MMM.	— ...	60
C10B	KKK.	URIC, V20	59	CBLI	M.N.U.FFF.	— ...	60
C10/SS/2G	R.	(CV2794)	—	CBL6	FFF.	— ...	60
C12B	R.	(CV2315)	—	CB215	U.	— ...	60
C12R	R.	(CV429)	—	CB215S	U.	— ...	60
C14HM	R.	CV3535	—	CB220	U.	— ...	60
C16GS/2G	R.	CV2745	—	CBL31	M.U.N.	CV1463	60
C20C	KKK.	— ...	59	CCI	N.	— ...	60
C23B	KKK.	— ...	59	CC2	FFF.	HLI3	60
C25	—	— ...	59	CC3D	RR.	CV2870	—
C30	—	— ...	59	CC3L	RR.	(CV2266)	—
C30B	KKK.	HLI3C	59	CCHI	—	— ...	60
C36A	KKK.	TH2IC	59	CCH2	—	— ...	60
C36B	—	— ...	59	CCH35	—	— ...	60
C50B	KKK.	SPI3C	59	CEIC	—	(CV2692)	—
C50N	KKK.	— ...	60	CEID	—	(CV2680)	—
C70D	KKK.	— ...	60	CEIE	—	(CV2680)	—
C80B	KKK.	FCI3C	60	CE2	—	CV1764	—
C109	—	— ...	60	CE20	—	CV1474	—
C125	—	— ...	60	CE25	—	(CV405)	—
C135	—	— ...	60	CE72	—	CV709	—
C142	—	— ...	60	CE230	—	CV812	60 &
C143	G.	(CV26)	—				Appendix II
C144	G.	(CV2666)	60	CFI	—	SPI3	60
C180	G.	(CV788)	60	CF2	—	VPI3A	60
C200	—	CV2988	—	CF3	—	— ...	60
C203A	—	CV2986	—	CF7	—	SPI3	60
C243	—	— ...	60	CF50	—	— ...	60
C243N	N.	(CV1118)	60	CF51	—	— ...	60
C405	—	— ...	60	CF61	—	— ...	61
C408	N.	— ...	60	CF141	—	— ...	61
C443	—	— ...	60	CGI-C	—	(CV425)	—
C443N	—	— ...	60	CGI-E	—	(CV425)	—
C443N/S	—	— ...	60	CGI4	—	(CV496)	—
C453	—	— ...	60	CHI	—	— ...	61
C508	—	— ...	60	CKI	—	FCI3	61
C509A	—	— ...	60	CK502AX	—	(CV385)	—
C543	—	— ...	123	CK505AX	—	(CV443)	—
C603	—	— ...	60	CK506AX	—	(CV387)	—
C606	—	— ...	60	CK546	—	— ...	61
C643	—	— ...	60	CK707	—	CV2848	—
CI108	G.	(CV2130)	—	CK1002	—	— ...	61
CI111	G.	CV427	—	CK1005	—	CV2874	61
CI112	G.	(CV2964)	—	CK1006	—	— ...	61
		(CV2131)	—	CK1007	—	— ...	61
CI123	G.	CV3543	—	CK1012	—	— ...	61
C750I	—	CV2869	—	CK1024	—	— ...	61
CAA322	—	CVI904	—	CK1028	—	— ...	61
CARI	K.	(CV1601)	—	CK1091	—	— ...	61
CAR4	K.	(CV1602)	—	CK5704	—	CV2847	—
CATI	K.	(CV1600)	—	CK5814	—	— ...	61
CAT2	K.	(CV1606)	—	CLI	—	— ...	61
CAT6	K.	(CV2871)	—	CL2	—	— ...	61
CAT9	K.	(CV2872)	—	CL3	—	— ...	61
CAT17	K.	CV533	—	CL4	—	GV2875	61
CAT20C	K.	(CV421)	—	CL6	N.U.M.	— ...	61

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
CL33	M.U.	CVI401 ...	61	DA30	J.	CV563 ...	62
CMG8	J.	(CVI432) ...	—	DA41	J.	(CVI076) ...	—
CMG22	J.	(CVI473) ...	—	DA42	J.	— ...	62
CMG25	J.	(CV242) ...	—	DA60	J.	CV527 ...	—
CMG25	J.	(CV250) ...	—	DA90	M.	(CV753) ...	62
(R.S.)				DA100	J.	(CVI219) ...	—
CMG25	J.	(CVI472) ...	—	DA101	—	— ...	62
short				DA406	—	— ...	62
CRT4/I	E.	CV2880 ...	—	DAC1	M.	CV2887 ...	62
CRT5/I	E.	(CV487) ...	—	DAC21	N.FFF.	— ...	62
CRI76	F.	(CV2324) ...	—	DAC22	—	— ...	62
CS2-A	B.	(CVI03) ...	—	DAC25	—	— ...	62
CS2-C	B.	CVI907 ...	—	DAC31	—	— ...	62
CS3-A	B.	(CV253) ...	—	DAC32	M.	(CV8120), 1H5G	62
CS3-B	B.	CVI844 ...	—	DAF11	—	— ...	62
CS4B	B.	(CV2258) ...	—	DAF40	N.FFF.	— ...	62
CWS24A	J.	CVI968 ...	—	DAF41	N.FFF.	— ...	62
CX25	—	CVI766 ...	—	DAF70	M.	(CV2104) ...	62
CXI113	G.	CV2851 ...	—	DAF91	M.	(CV784), 1FD9	63
CXTI	M.	CV2389 ...	—	DAF92	M.	— ...	63
CY1	M.N.U.FFF.	G2080 ...	—	DAF96	M.H.MMM.	1AH5 ...	63
CY1c	M.	URIc, V20 ...	61	DAF191	MMM.	— ...	63
CY21	—	— ...	61	DAG1	M.	CV2 ...	—
CY31	M.N.U.	CVI402 ...	—	DAS1	—	— ...	63
CY32	U.M.	— ...	61	DB	—	— ...	63
CZ30	—	— ...	61	DBC21	N.	— ...	63
CZ501D	—	— ...	61	DBC25	—	— ...	63
CZ504D	—	— ...	61	DBC31	—	— ...	63
D $\frac{1}{2}$	—	— ...	61	DC2/HLDD	—	— ...	63
D1	D.	(CVI078) ...	61	DC2/Pen	—	— ...	63
D2	—	CV2778 ...	61	DC2P	D.	(CVI735) ...	63
D2M9	—	— ...	61	DC2SG	—	— ...	63
D4	H.	(CVI037), 354V	61	DC2SGVM	—	— ...	63
D13U	—	— ...	61	DC3HL	—	— ...	63
D41	J.	(CVI187), 2D4A	62	DC11	—	— ...	63
D42	J.	CV557 ...	62	DC25	—	— ...	63
D43	J.	— ...	62	DC51	M.	(CVI) ...	—
D61	D.	(CVI092) ...	62	DC70	M.	(CV2275) ...	63
D63	D.	CV554, 6H6	62	DC80	FFF.	— ...	63
D77	D.	(CVI40), EB91	62	DC90	MMM.N.FFF.	— ...	63
D105	—	— ...	62	DC93	—	— ...	63
D110	—	— ...	62	DC96	FFF.	— ...	63
D121	—	— ...	62	DC193	—	— ...	63
D152	—	EB91 ...	62	DCC90	M.	CV808, 3A5 ...	63
D210	RR.	(CVI021) ...	62	DCH1	—	— ...	63
D243	—	— ...	62	DCH11	—	— ...	63
D400	U.	(CVI170), 2D4A	62	DCH21	—	— ...	63
D401	—	— ...	123	DCH22	—	— ...	63
D404	N.	— ...	62	DCH25	—	— ...	63
D410	—	— ...	62	DCH31	—	— ...	63
D418	U.	(CVI686) ...	62	DCH	—	— ...	63
D604	—	— ...	62	DCH25	—	— ...	63
DA	H.	(CVI109) ...	62	DCH31	—	— ...	63
DA1	—	— ...	62	DC/HL	—	— ...	63
DA2	—	— ...	62	DC/P	—	— ...	63
DA3	—	— ...	62	DC/SG	—	— ...	63

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
DDL	C.	(CV1691) ...	—	DET9	J.	CV2899 ...	—
DD4	C.U.	(CV1170), 2D4A	63	DET10	J.	CV2900 ...	—
DD4D	U.	— ...	63	DET12	J.	(CV1288) ...	—
DD6	C.H.	(CV140), EB91	63	DET16	J.	(CV1363) ...	—
DD6DS	—	— ...	63	DET18	J.	(CV419) ...	—
DD6G	U.	(CV140) ...	63	DET19	J.	(CV18) ...	64
DD13	U.	— ...	64	DET20	J.	(CV6) ...	64
DD41	D.	CV1403 ...	64	DET22	J.	(CV273) ...	—
DD101	D.	— ...	64	DET23	J.	(CV354) ...	—
DD207	D.	— ...	64	DET24	J.	(CV397) ...	—
DD465	U.	— ...	64	DET25	J.	(CV1025) ...	—
DD620	D.	CV2889 ...	64	DE5	J.	CV2891 ...	64
DD818	U.	— ...	64	DET5B	J.	CV2892 ...	—
DD960	MMM.	— ...	64	DF1	—	CV2907 ...	65
DDA1	—	2D4A ...	64	DF11	—	— ...	65
DDD11	—	— ...	64	DF21	N.FFF.	— ...	65
DDD25	—	— ...	64	DF22	N.FFF.	— ...	65
DDL4	—	CV1691, 2D4A	64	DF23	—	— ...	65
DDL13	C.	(CV1695) ...	—	DF25	—	— ...	65
DDP4B	—	— ...	64	DF26	—	— ...	65
DDPM	—	— ...	64	DF31	—	— ...	65
DD/Pen	—	— ...	64	DF32	—	— ...	65
DDPP4B	U.	— ...	64	DF33	M.	(CV1823), IN5GT	65
DDPP4BM	U.	(CV519) ...	—	DF60	M.	CV2254 ...	65
DDPP4BS	—	— ...	64	DF61	M.	CV2371 ...	65
DDPP4M	U.	Pen4DD ...	64	DF62	M.	CV2237 ...	65
DDPP6BS	—	EBLI ...	64	DF63	M.	CV2433 ...	128
DDPP39	U.	— ...	64	DF64	M.	CV2260 ...	65
DDPP39M	U.	— ...	64	DF65	N.FFF.	— ...	65
DDPP39S	U.	CBLI ...	64	DF66	M.	(CV2107) ...	65
DDR2	M.	(CV173) ...	64	DF70	M.	(443) ...	65
DDR3	—	— ...	64	DF72	M.	(CV2101) ...	56
DDR7	—	— ...	64	DF73	M.	(CV2103) ...	65
DDT	C.	CV2813 ...	64	DF91	M.	(CV785), 1T4	65
DDTmet	U.	CV2890 ...	64	DF92	M.	(CV1758), 1L4	65
DDT2	U.	TDD2A ...	64	DF96	MMM.N.	1AJ4 ...	65
DDT2B	U.	— ...	64		FFF.M.		
DDT2BS	U.	— ...	64	DF97	H.FFF.M.	— ...	65
DDT4(S)	U.	— ...	64	DF167	MMM.	— ...	65
DDT4	U.	(CV2813), TDD4	64	DF191	MMM.	— ...	65
DDT6	—	— ...	64	DF904	—	— ...	65
DDT6S	—	— ...	64	DF906	—	— ...	65
DDT13	U.	— ...	64	DFF50	N.	— ...	65
DDT13S	U.	— ...	64	DFF51	N.	— ...	65
DDT16	—	— ...	64	DFF101	—	— ...	65
DDT213	—	— ...	64	DGP	C.	(CV1141) ...	—
DDT215	—	— ...	64	DG7-5	M.	(CV2175) ...	—
DDT220	—	TDD2A ...	64	DG7-32	M.	CV2431 ...	—
DDX52	M.	(CV2232) ...	—	DG7-36	M.	CV3946 ...	—
DEI	—	— ...	64	DG13-2	M.	(CV2191) ...	—
DEQ	J.	(CV1156) ...	—	DG13-34	M.	CV5035 ...	—
DER	J.	(CV1642) ...	—	DG16-22	M.	CV2352 ...	—
DET1SW	J.	CV2895 ...	—	DG210	U.	— ...	65
DET3	J.	(CV1034) ...	—	DH	J.	(CV1665) ...	65
DET5	J.	(CV1223) ...	—	DH3-91	M.	CV2302 ...	—
DET6	J.	(CV1620) ...	—	DH30	J.	(CV1695) ...	65

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
DH42	J.	TDD4 ...	65	DL92	M.	(CV820), 3S4	66
DH63	J.	(CV587), 6Q7G	65	DL93	M.	(CV807), 3A4...	66
DH63M	J.	(CV587) ...	65	DL94	M.	CV2983, 3V4 ...	66
DH73M	J.	CV2909 ...	65	DL95	M.	(CV818), N18	66
DH74	J.	— ...	65	DL96	M.N.H.	3C4 ...	67
DH76	J.	I2Q7GT ...	65		MMM.FFF.		
DH77	J.	(CV452), EBC90	65	DL98	M.	CV2240 ...	67
DH81	J.	(CV882) ...	65	DL167	MMM.	— ...	67
DH101	J.	— ...	—	DL145	—	— ...	67
DH107	J.	— ...	—	DL192	MMM.	— ...	67
DH118	J.	— ...	128	DL193	MMM.	— ...	67
DH142	—	UBC41 ...	65	DL620	M.	CV2238 ...	67
DH147	—	EBC33 ...	66	DL651	—	— ...	67
DH149	—	— ...	66	DL907	—	— ...	67
DH150	—	EBC41 ...	66	DLL21	N.FFF.	— ...	67
DH718	J.	— ...	128	DLL25	—	— ...	67
DH719	J.	EABC80 ...	66	DLL31	—	— ...	67
DHD	—	— ...	66	DLL101	—	— ...	67
DHL	—	— ...	66	DLL102	—	— ...	67
DK1	M.	CV2910 ...	66	DLP51	—	— ...	67
DK21	N.FFF	— ...	66	DLS10	D.	(CV190) ...	—
DK31	—	— ...	123	DLS10	D.	{ (CV190) (CV979) ...	—
DK32	M.	(CV1802), 1A7gt	66	DLS19	D.	CV342 ...	—
DK40	N.FFF.M.	— ...	66	DM6	X.	(CV2146) ...	—
DK91	M.	(CV782), 1R5	66	DM21	M.	— ...	Appendix I
DK92	M.H.N.FFF.	IAC6 ...	66	DM70	M.	CV2980	Appendix I
DK96	M.H.MMM.N.	IAB6 ...	66	DM71	M.	— ...	Appendix I
DK192	MMM.	— ...	66	DMI60	N.	— ...	Appendix I
DL	J.	(CV1661) ...	66	DN41	J.	— ...	67
DL1	—	— ...	66	DNI43	—	EBL21 ...	67
DL2	M.	CV2911 ...	66	DO24	—	— ...	62
DL11	—	— ...	66	DO25	—	— ...	62
DL21	N.MMM.	— ...	66	DO26	M.	(CV1178) ...	67
DL22	—	— ...	66	DO30	M.	(CV1178) ...	67
DL25	—	— ...	66	DO42	—	Pen4DD ...	123
DL31	—	— ...	66	DO60	M.	(CV1206) ...	—
DL33	M.	(CV819), 3Q5	66	DP	—	— ...	67
DL35	M.	(CV1805), 1C5	66	DP5	—	— ...	67
DL36	—	— ...	66	DP7	—	— ...	67
DL41	N.FFF.	— ...	66	DP61	H.	EF95, 6AK5 ...	67
DL63	J.	CV2912, 6R7 ...	66	DP495/6	—	Pen4DD ...	67
DL64	M.	(CV2331) ...	66	DP4480	—	— ...	67
DL65	N.FFF.	— ...	66	DP/Pen	—	— ...	67
DL66	M.	(CV2106) ...	66	DPT	J.	— ...	67
DL67	N.FFF.	— ...	66	DQP	C.	(CV1121) ...	—
DL68	M.	(CV2105) ...	66	DS	H.	(CV2979) ...	67
DL69	M.	CV2105 ...	66	DS103	NNN.	(CV94) ...	—
DL69	M.	CV2361 ...	66	DSB	J.	— ...	67
DL70	M.	CV2105 ...	66	DSPen	—	— ...	67
DL71	M.	(CV385) ...	66	DT7	—	— ...	67
DL72	M.	(CV387) ...	66	DT70	—	CV798 ...	—
DL73	M.	(CV2299) ...	66	DT143	—	— ...	123
DL74	J.	— ...	66	DT215	LLL.	— ...	123 & 218
DL75	M.	(CV2102) ...	66	DT436	LLL.	TDD4	67 & 218
DL82	—	— ...	66	DT1366	—	— ...	67
DL91	M.	CV783 ...	66				

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
DTV1	—	— ...	123	E91H	N.	— ...	68
DU1	—	— ...	67	E92CC	N.FFF.	— ...	68
DU2	—	— ...	67	E132	J.	(CV1643)	—
DU3	—	— ...	67	E133	J.	(CV1645)	—
DU4	—	— ...	67	E180CC	—	— ...	68
DU5	—	— ...	67	E180F	M.	CV3998	68
DU10	—	— ...	67		N.FFF.		
DV32	R.	(CV88)	—	E181CC	N.	— ...	68
DV34	R.	(CV127)	—	E182CC	N.	— ...	—
DV40B	R.	(CV228)	—	E220B	LL.	— ...	124 & 128
DV55	R.	(CV230)	—	E235	—	PM202	68
DV56	R.	(CV234)	—	E405	—	— ...	69
DVSG	—	— ...	67	E406	—	— ...	69
DVSPen	—	— ...	67	E406N	N.	— ...	69
DWI	—	— ...	68	E408	—	— ...	69
DW2	M.	(CV1443), RV120/350	68	E408N	N.	— ...	69
DW2X	—	— ...	68	E409	N.	— ...	69
DW3	M.	DW4-350	68	E409N	—	— ...	69
DW4	M.	DW4-500	68	E410	—	— ...	69
DW4/350	M.	CV1796, RV120/350	68	E414	—	— ...	69
DW4/500	M.	(CV1064), RV120/500	68	E415	—	— ...	69
DW5	—	— ...	68	E420	—	— ...	69
DW5	—	— ...	68	E422	—	— ...	69
DW7X	—	— ...	68	E424	—	— ...	69
DW8	—	— ...	68	E424R	—	— ...	69
DW30	—	— ...	68	E424N	N.	— ...	69
DW802	—	— ...	68	E425	—	— ...	69
DWI508	—	— ...	68	E428	—	— ...	69
DW4011	—	— ...	68	E430	—	— ...	69
DW4023	—	— ...	68	E430N	—	— ...	69
DX2	—	— ...	68	E435	—	— ...	69
DY30	—	— ...	68	E438	N.	— ...	69
DY70	M.	(CV2241)	128	E441N	—	— ...	69
DY80	—	— ...	68	E442	N.	— ...	69
DY86	MMM.N.FFF.	— ...	68	E442S	N.	— ...	69
DY87	—	— ...	68	E443H	N.	— ...	69
DY604	—	— ...	68	E443N	N.	— ...	69
DZ2	—	— ...	68	E444	N.	— ...	69
E	—	— ...	68	E444N	N.	— ...	69
E1T	M.	CV5106	—	E444S	N.	— ...	69
E4	—	— ...	68	E445	N.	— ...	69
E4F	—	— ...	68	E446	N.	(CV1282), SP4	69
E4H	—	— ...	68	E447	N.	— ...	69
E4K	—	— ...	68	E448	N.	— ...	69
E4L	—	— ...	68	E449	N.	— ...	69
E20V	—	— ...	68	E451	N.	— ...	69
E80CC	N.FFF.	— ...	68	E452T	N.	— ...	69
E80CF	N.	— ...	—	E453	N.	— ...	69
E80F	N.	CV2729	68	E454	—	— ...	69
E80L	FFF.N.	— ...	68	E455	N.	— ...	69
E81L	N.FFF.	— ...	68	E462	—	— ...	69
E83F	N.FFF.	— ...	68	E463	N.	— ...	69
E87L	—	— ...	68	E499	N.	— ...	70
E88CC	N.	— ...	68	E501D	—	— ...	70
E90CC	N.FFF.	— ...	68	E501R	—	— ...	70
E90F	M.	— ...	123	E504D	—	— ...	70

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
E504P	—	— ...	70	E1373	J.	(CV99)	—
E543	—	— ...	70	E1379	J.	(CV79)	—
E646	—	— ...	70	E1380	J.	(CV89)	—
E703	—	— ...	70	E1411	J.	(CV153)	—
E851	—	— ...	70	E1413	—	— ...	70
E960	J.	(CV1058)	—	E1415	J.	(CV115)	—
E960T	J.	(CV1098)	—	E1416	J.	(CV281)	—
E1024	J.	(CV1184)	—	E1417	J.	(CV117)	—
E1046	J.	(CV1090)	—	E1419	J.	(CV154)	—
E1097	J.	(CV1111)	—	E1423	J.	CV406	—
E1132	J.	(CV1111)	—	E1429	J.	(CV79)	—
E1137	—	— ...	70	E1436	J.	(CV188)	—
E1143	J.	(CV1577)	—	E1453	J.	(CV1646)	—
E1148	J.	(CV6)	70	E1457	J.	(CV257)	—
E1155	J.	(CV44)	—	E1458	J.	(CV178)	—
E1161	J.	(CV1253)	—	E1459	J.	(CV174)	—
E1164	J.	(CV1091)	—	E1465	J.	(CV236)	—
E1180	J.	(CV1077)	—	E1468	J.	(CV172)	—
E1189	J.	(CV1255)	—	E1474	J.	(CV78)	—
E1190	J.	(CV55)	—	E1478	—	— ...	70
E1191	J.	(CV12)	—	E1481	J.	(CV192)	—
E1192	J.	(CV1501)	70	E1484	—	— ...	70
E1198	J.	(CV38)	—	E1485	J.	(CV807)	—
E1199	J.	CV1405	—	E1487	J.	(CV208)	—
E1209	J.	(CV7)	—	E1489	—	— ...	70
E1228	J.	CV3	—	E1494	J.	(CV191)	—
E1229	J.	CV4	—	E1495	J.	(CV259)	—
E1231	J.	(CV52)	—	E1496	J.	(CV240)	—
E1232	J.	(CV92)	—	E1497	J.	(CV215)	—
E1235	J.	(CV29)	—	E1511	J.	{ (CV355)	—
E1236	J.	(CV69)	—			{ (CV356)	—
E1242	J.	(CV1510)	70	E1516	J.	(CV221)	—
E1248	J.	(CV8)	—	E1517	—	— ...	70
E1255	J.	(CV40)	—	E1518	—	— ...	70
E1256	J.	(CV42)	—	E1524	J.	(CV338)	—
E1266	J.	(CV15)	—	E1527	J.	(CV290)	—
E1267	J.	(CV41)	—	E1531	J.	(CV214)	—
E1271	J.	(CV57)	—	E1532	J.	(CV1624)	—
E1273	J.	(CV58)	—	E1541	J.	(CV1716)	—
E1287	J.	(CV23)	—	E1563	J.	(CV1863)	—
E1289	J.	(CV1148)	—	E1591	J.	(CV181)	—
E1297	J.	(CV5)	—	E1599	J.	(CV273)	—
E1320	J.	(CV51)	Appendix I	E1606	J.	(CV278)	70
E1323	J.	(CV63)	70	E1624	—	— ...	70
E1325	J.	(CV56)	—	E1633	J.	(CV456)	—
E1326	J.	(CV69)	—	E1647	J.	(CV288)	—
E1331	J.	(CV1510)	—	E1648	J.	(CV135)	—
E1335	J.	(CV61)	—	E1654	—	— ...	70
E1337	J.	(CV78)	—	E1659	J.	(CV453)	—
E1342	J.	(CV64)	—	E1662	—	— ...	70
E1355	J.	(CV1433)	—	E1677	—	— ...	70
E1359	J.	(CV76)	—	E1678	—	— ...	70
E1362	J.	(CV126)	—	E1681	—	— ...	70
E1365	J.	(CV114)	—	E1682	—	— ...	70
E1368	J.	(CV90)	—	E1706	J.	(CV437)	70
E1371	J.	(CV105)	—	E1709	—	— ...	70

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
E1714	J.	(CV408)	...	E4205/C/7	J.	(CV1525)	...
E1733	—	— ...	70	E4412/B/9	J.	(CV1587)	...
E1736	—	— ...	70	E4412/C/9	J.	(CV2301)	...
E1740	—	— ...	70	E4412/E/9	J.	(CV1529)	...
E1751	—	— ...	70	E4412/M/9	J.	(CV1521)	...
E1769	J.	(CV397)	...	E4504/B/16	J.	(CV1385)	...
E1780	—	— ...	70	E4504/C/16	J.	{ (CV1517) (CV1592)	...
E1787C	—	— ...	70	E4504/E/16	J.	(CV1391)	...
E1794	—	— ...	70	E4504/M/16	J.	(CV966)	...
E1795	—	— ...	70	EA40	—	— ...	71
E1796	—	— ...	70	EA50	M.	(CV1092)	71
E1809	—	— ...	70	EA76	M.	(CV469)	71
E1813	—	— ...	70	EAI11	—	— ...	71
E1816	—	— ...	70	EAA11	—	— ...	71
E1835	—	— ...	70	EAA91	MMM.N.FF.	— ...	71
E1838	—	— ...	70	EAA90I	—	— ...	71
E1848	—	— ...	70	EAB1	M.N.U.FFF.	— ...	71
E1860	J.	(CV240)	...	EABC80	F.M.MMM.	6AK8	71
E1884	—	— ...	71		N.FFF.		
E1912	—	— ...	71	EAC91	M.	(CV137)	71
E1935	J.	(CV415)	...	EA421	—	— ...	71
E1938	J.	(CV493)	...	EA441	N.FFF.M.	— ...	71
E1954	J.	(CV25)	...	EA442	N.	CV3883, 6CT7	71
E1955	J.	(CV797)	...	EB4	N.U.FFF.M.	— ...	71
E1956	J.	(CV261)	...	EB11	N.FFF.	— ...	71
E1959	J.	(CV495)	...	EB34	M.U.	(CV1054), 6H6	71
E1969	—	— ...	71	EB40	—	— ...	71
E1976	—	— ...	71	EB41	N.	CV3881	71
E1984	—	— ...	71	EB91	M.	(CV140)	71
E1985	—	— ...	71	EBC1	—	— ...	71
E1987	—	— ...	71	EBC3	M.U.	CV1428	71
E1994	—	— ...	71	EBC11	N.FFF.	— ...	72
E1996	J.	(CV436)	...	EBC21	M.	(CV347)	72
E2004	J.	(CV2115)	...	EBC30	—	— ...	72
E2016	J.	(CV1758)	...	EBC33	M.U.	(CV1055)	72
E2018	J.	(CV454)	...	EBC41	N.	CV3882, 6CV7	72
E2020N	—	— ...	71	EBC51	N.	— ...	72
E2047	—	— ...	71	EBC80	—	— ...	72
E2095	J.	(CV471)	...	EBC81	N.M.	— ...	72
E2122	—	— ...	71	EBC90	M.N.	(CV452), 6AT6	72
E2128	—	— ...	71	EBC91	N.M.	6AV6	72
E2133	J.	(CV2276)	...	EBF1	—	— ...	72
E2134	J.	(CV2179)	...	EBF2	M.	CV2925	72
E2153	—	— ...	71	EBF11	U.N.MMM.	— ...	72
E2163	J.	(CV491)	...		FFF.		
E2164	J.	(CV492)	...	EBF15	—	— ...	72
E2178	—	— ...	71	EBF21	—	— ...	72
E2179	—	— ...	71	EBF32	M.	CV2925	72
E2185	—	— ...	71	EBF35	—	— ...	72
E2221	J.	(CV2277)	...	EBF80	N.H.MMM.	6N8	72
E2223	—	— ...	71		FFF.M.		
E2256	—	— ...	71	EBF81	—	— ...	72
E2382	—	— ...	71	EBF89	N.M.	— ...	72
E4103/B/4	J.	(CV1522)	...	EBF171	—	— ...	72
E4103/E/4	J.	(CV2205)	...				
E4205/B/7	J.	(CV1588)	...				

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
EBL1	KKK.N.U. FFF.M.	— ...	72	ECH11	N.MMM. U.FFF.	— ...	73
EBL21	N.FFF.M.	— ...	72	ECH21	N.FFF.M.	— ...	73
EBL31	KKK.U.M.	CV2926	72	ECH22	M.	(CV302)	—
EBL71	—	— ...	72	ECH33	M.	CV2930	73
EBL131	M.U.	CV2926	—	ECH35	M.U.	(CV1347)	73
EC2	—	— ...	72	ECH41	N.FFF.M.	— ...	73
EC21	—	— ...	72	ECH42	N.	CV3888, 6CU7	73
EC31	M.	CV1433	72	ECH43	FFF.	— ...	73
EC40	—	— ...	72	ECH71	—	— ...	73
EC41	—	— ...	72	ECH80	—	— ...	73
EC50	M.	CV2927	—	ECH81	N.M.	(CV2128), 6AJ8	73
EC52	M.	(CV1137)	72	ECL11	N.MMM. FFF.	— ...	74
EC53	M.	(CV1197)	72	ECL80	F.D.H.N. FFF.	6AB8	74
EC54	M.	(CV66)	72	ECL81	MMM.	— ...	74
EC55	M.N.	(CV273)	—	ECL82	N.	— ...	74
EC56	N.	— ...	—	ECL83	M.	— ...	74
EC57	N.	— ...	—	ECL113	—	— ...	74
EC70	M.	(CV468)	72	ECR30	M.	(CV1588)	—
EC71	M.	— ...	128	ECR57	M.	(CV1587)	—
EC80	N.	(CV1886)	72	ECR60	M.	(CV1097)	—
EC81	N.M.	(CV1865)	72	ECR75	M.	CV1587	74
EC90	M.	(CV133), 6C4...	72	EDI11	—	— ...	74
EC91	M.	(CV417)	72	EDD11	FFF.	— ...	74
EC92	MMM.N.FFF.	— ...	72	EDD111	—	— ...	74
EC93	—	— ...	72	EE50	N.M.	— ...	74
EC94	MMM.	— ...	72	EE8020	—	CV2967	—
ECC31	M.	(CV1285)	72	EEL71	—	— ...	74
ECC32	M.	(CV181)	72	EEL71	—	— ...	74
ECC33	M.	CV2821	72	EEL71	—	— ...	74
ECC34	M.	— ...	73	EEL71	—	— ...	74
ECC35	M.	(CV569)	73	EEL71	—	— ...	74
ECC40	N.	CV3884	73	EEL71	—	— ...	74
ECC70	M.	— ...	—	EEL71	—	— ...	74
ECC81	M.	(CV455), 12AU7	73	EEL71	—	— ...	74
ECC82	M.	(CV491)	73	EEL71	—	— ...	74
ECC83	M.	(CV492), 12AX7	73	EEL71	—	— ...	74
ECC84	M.N.U.H. MMM.	— ...	73	EEL71	—	— ...	74
ECC85	M.F.H. MMM.N.FFF.	— ...	73	EEL71	—	— ...	74
ECC88	M.	— ...	124	EEL71	—	— ...	74
ECC91	M.	(CV858), 6J6	73	EEL71	—	— ...	74
ECC230	N.	— ...	—	EEL71	—	— ...	74
ECCI80	—	— ...	73	EEL71	—	— ...	74
ECC801	—	— ...	73	EEL71	—	— ...	74
ECC802S	—	— ...	73	EEL71	—	— ...	74
ECF1	N.FFF.	— ...	73	EEL71	—	— ...	74
ECF12	—	— ...	73	EEL71	—	— ...	74
ECF80	N.M.	— ...	73	EEL71	—	— ...	74
ECF82	MMM.M.	— ...	73	EEL71	—	— ...	74
ECH2	U.M.	— ...	73	EEL71	—	— ...	74
ECH3	M.U.	(CV2929)	73	EEL71	—	— ...	74
ECH4	N.M.	— ...	73	EEL71	—	— ...	74
ECH4G	—	— ...	73	EEL71	—	— ...	74

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
EF40	N.	CV3885 ...	74	EG420	—	— ...	75
EF41	N.	CV3886, 6CJ5	74	EH1	—	— ...	76
EF42	N.	CV3887 ...	74	EH2	N.U.M.	— ...	76
EF43	N. FFF.	— ...	74	EH90	N.FFF.	— ...	76
EF44	—	— ...	74	EH900	—	— ...	76
EF50	M.	(CV1091) ...	—	EHA5000	D.	CV2687 ...	—
EF51	M.	(CV1035) ...	75	EHM2	J.	(CV2139) ...	—
EF52	M.	(CV327) ...	75	EHT1	J.	(CV19) ...	—
EF53	N.	— ...	75	EHW3000	D.	CV2686 ...	—
EF54	M.	(CV1136) ...	75	EK1	—	— ...	76
EF55	M.	(CV173) ...	75	EK3	N.U.M.	— ...	76
EF70	M.	(CV467) ...	75	EK2	U.M.	CV1426 ...	76
EF71	M.	CV475 ...	75	EK3	N.U.M.	— ...	76
EF72	M.	(CV465) ...	75	EK32	M.	(CV1057) ...	76
EF73	M.	(CV466) ...	75	EK90	N.M.	(CV453), 6BE6	76
EF74	M.	{ (CV476) ... (CV472) ...	75	EL1	—	— ...	76
EF80	F.H.MMM. M.N.FFF.	CVI376, 6BX6	75	EL2	M.U.	CV1429 ...	76
EF81	—	— ...	75	EL3C	—	CV822 ...	—
EF82	—	— ...	75	EL3N	N.	— ...	76
EF83	N.	— ...	75	EL3/375	FFF.	— ...	76
EF85	F.H.MMM. M.N.FFF.	CVI375, 6BY7	75	EL5	—	— ...	—
EF86	—	CV2901, 6267...	75	EL5/375	FFF.	— ...	76
EF87	—	— ...	75	EL5B	X.	CV2936 ...	—
EF88	—	— ...	75	EL6	M.N.U.FFF.	— ...	76
EF89F	NN.	— ...	124	EL6 Spec.	FFF.	— ...	76
EF91	M.	(CV138) ...	75	EL8	FFF.	— ...	76
EF92	M.	(CV131), 6CQ6	75	EL11	N.MMM. U.FFF.	— ...	76
EF93	M.	(CV454), 6BA6	75	EL11N	—	— ...	76
EF94	N.M.	CV2524 ...	75	EL12	N.MMM. FFF.U.	— ...	76
EF95	M.	(CV850), 6AK5	75	EL12 Spec.	MMM.	— ...	76
EF96	MMM.	— ...	75	EL12/325	FFF.	— ...	76
EF111	—	— ...	75	EL12/375	FFF.	— ...	76
EF112	—	— ...	75	EL13	—	— ...	76
EF172	—	— ...	75	EL20	—	— ...	76
EF174	—	— ...	75	EL22	M.	(CV304) ...	76
EF175	—	— ...	75	EL31	M.	CV2888 ...	76
EF190	—	— ...	75	EL32	M.	(CV1052) ...	76
EF410	—	— ...	75	EL33	M.U.	CV2938 ...	76
EF730	—	— ...	—	EL34	N.FFF. M.	CV1741 ...	76
EF731	FFF.	— ...	128	EL35	M.	(CV1286) ...	76
EF732	FFF.	— ...	128	EL36	M.U.	CV2940 ...	76
EF734	M.	— ...	—	EL37	M.	CV586, 6L6 ...	76
EF800	—	— ...	75	EL38	M.	(CV450) ...	76
EF802	—	— ...	75	EL39	—	— ...	76
EF804	—	— ...	75	EL41	N.	CV3889, 6CK5	76
EF804S	—	— ...	75	EL42	N.	CV3890 ...	76
EF805S	—	— ...	75	EL43	—	— ...	76
EFF50	N.FFF.	— ...	75	EL44	—	— ...	76
EFF51	N.FFF.	— ...	75	EL50	M.	CV2941 ...	76
EFMI	M.N.U.FFF.	— ...	75	EL51	N.FFF.	— ...	76
EF20	—	— ...	75	EL53	—	— ...	77
EF20	—	— ...	75	EL54	—	— ...	77
EF20	M.	CV5108 ...	—	EL60	N.FFF.	— ...	77

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
EL70	M.	(CV471)	77	ES253	D.	CV3851	—
EL71	—	— ...	—	ES357	D.	(CV27)	—
EL80	—	— ...	77	ES450	D.	(CV1207)	—
EL81	M.N.	(CV2721), 6CJ6	77	ES833	D.	(CV635)	—
EL81F	—	— ...	77	ESI 500	D.	(CV1614)	—
EL82	N.	— ...	77	ESI500A	D.	(CV1614)	—
EL83	M.N.	CV2726	77	ESA891	D.	CV2688	—
EL84	M.	CV2975, 6BQ5	77	ESA892	D.	CV701	—
EL85	M.	CV3526	77	ESA892C	D.	CV904	—
EL86	N.M.	CV5094	77	ESA5000	D.	(CV2687)	—
EL88	—	— ...	77	ESG250	D.	(CV1031)	—
EL89	—	— ...	77	ESP450	D.	(CV1506)	—
EL90	M.	(CV1862), 6AQ5	77	ESU74	D.	(CV74)	—
EL91	M.	(CV136), 6AM5	77	ESU75	D.	CV2943	—
EL95	N.M.	— ...	77	ESU76	D.	CV2945	—
EL150	—	— ...	77	ESU77	D.	(CV2160)	—
EL171	—	— ...	77	ESU150	D.	CV2946	—
EL172	—	— ...	77	ESU200	D.	(CV5)	—
EL180	—	— ...	77	ESU208	D.	(CV1260)	—
EL360	M.	— ...	128	ESU300	D.	CV2947	—
EL803	—	— ...	77	ESU450	D.	(CV1259)	—
EL804	—	— ...	77	ESU866	D.	(CV32)	—
EL820	M.	— ...	77	ESU872	D.	CV642	—
EL821	M.	CV2127	77	ESU1500	D.	CV2944	—
EL822	M.	CV2382	77	ESW501	D.	(CV1621)	—
ELLI	N.U.	— ...	77	ESW5000	D.	(CV2686)	—
ELP71	—	— ...	77	ET30	D.	(CV1030)	—
ELP72	—	— ...	77	EW2A	X.	CV2139	—
ELP73	—	— ...	77	EW60	—	— ...	77
EMI	M.	CV2942	Appendix I	EY51	M.	(CV426), 6X2	77 & Appendix II
EM3	M.N.	— ...	Appendix I	EY70	M.	(CV473)	77
EM4	M.U.	CV1434	Appendix I	EY80	N.	— ...	77
EMI I	M.N.	— ...	Appendix I	EY81	MMM.	— ...	77
EM31	M.	(CV1077)	Appendix I	EY82	N.	— ...	77
EM34	M.	(CV394)	Appendix I	EY83	—	— ...	77
		6CD7		EY84	M.	(CV2235)	77
EM35	M.	(CV1103)	Appendix I	EY86	H.MMM.	CV2966	77
EM80	M.	CV1352	Appendix I		FFF.M.		
EM81	M.	CV5055	Appendix I	EY87	N.	— ...	77
EM84	M.N.	— ...	Appendix I	EY91	M.	(CV135)	77
EM85	M.N.	— ...	Appendix I	EY92	—	— ...	77
EM840	M.N.	— ...	Appendix I	EYY13	MMM.	— ...	77
EN30	H.	(CV2349)	—	EZ1	M.	— ...	78
EN32	M.	(CV2253)	—	EZ2	N.U.FFF.	— ...	78
EN70	M.	(CV474)	—		M.		
EN92	M.	CV3512	—	EZ3	U.M.	— ...	78
EN93	M.	CV1949	—	EZ4	N.U.FFF.	— ...	78
EN707 ?	—	— ...	—	EZ11	MMM.FFF.	— ...	78
EM91	M.	(CV797)	—	EZ12	MMM.FFF.	— ...	78
EQ80	N.FFF.	— ...	77	EZ22	M.	(CV346)	78
ER4	—	— ...	77	EZ33	—	— ...	78
ESI 5	D.	CV3853	—	EZ35	M.U.	(CV574), 6X5	78
ES85	D.	(CV25)	—	EZ40	N.	CV3891, 6BT4	78
ES240A	D.	CV2563	—	EZ41	M.N.FFF.	— ...	78
ES207	D.	CV3850	—				
ES250M	D.	(CV1618)	—				

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
EZ80	M.F.H.MMM. N.FFF.	CV1535, 6V4 ...	78	FG27A	—	CV2958 ...	—
EZ81	N.M.	CV5072 ...	78	FG67	—	CV742 ...	—
EZ82	—	— ...	78	FH2118	—	— ...	79
EZ90	M.	(CV493), 6X4	78	FP54	—	CV2960 ...	—
EZ91	—	— ...	78	FT4	—	— ...	Appendix I
F2	D.	(CV2338) ...	—	FVD7	II.	(CV404) ...	—
F5	—	— ...	78	FW1	—	— ...	79
F10	—	— ...	78	FW3	—	— ...	79
F100	—	— ...	78	FW4/500	M.	(CV1264), RV200/600	79
F109	—	— ...	78	FW4/800	M.	(CV31) ...	79
F123A	—	CV2949 ...	—	FX215	G.	(CV2203) ...	—
F129B	—	CV2950 ...	—	FX129	G.	(CV2520) ...	—
F203	—	— ...	78	FX225	G.	CV1787 ...	—
F209A	—	— ...	78	FX227	G.	CV372 ...	—
F209	—	— ...	78	FX229	G.	CV3521 ...	—
F215	—	— ...	78	FX231	G.	CV2993 ...	—
F242	—	— ...	78	FY	—	PM24M ...	79
F238A	CCC.	CV734 ...	—	FZI	—	— ...	79
F353	CCC.	CV642 ...	—	G	—	— ...	79
F353A	CCC.	CV642 ...	—	G1/235G	R.	CV3524 ...	—
F366A	CCC.	(CV32) ...	—	G1/371K	R.	(CV2224) ...	—
F410	N.	— ...	78	G5H	X.	{ CV2247 ...	—
F443	—	— ...	78			(CV2233) ...	—
F443N	N.	— ...	78	G/6C4	A.	— ...	—
F460	—	— ...	78	G10H	X.	(CV2173) ...	—
F704	—	— ...	78	G10HE	X.	CV2287 ...	—
F707	N.	— ...	78	G10/241E	R.	(CV2223) ...	—
F708	—	— ...	78	G24	X.	CV411 ...	—
F869B	—	CV2723 ...	—	G24E	X.	(CV2148) ...	—
F872A	—	CV642 ...	—	G24H	X.	(CV2147) ...	—
F872B	—	CV642 ...	—	G/25L6	A.	— ...	79
F892R	CCC.	CV904 ...	—	G50/1G	A.	(CV2208) ...	—
F/2726	A.	CV4049 ...	—	G/50C5	A.	— ...	79
F/2750	A.	CV4037 ...	—	G60E	X.	(CV2149) ...	—
F/5654	A.	CV4050 ...	—	G75/2D	R.	(CV3798) ...	—
F/5750	A.	CV4037 ...	—	G75/3G	R.	CV4030 ...	—
F/6057	A.	CV4035 ...	—	G84	—	— ...	79
F/6060	A.	CV4033 ...	—	G105/1D	R.	(CV686) ...	—
F/6061	A.	CV4045 ...	—	G108/1K	R.	CV1833 ...	—
F/6063	A.	(CV4001) ...	—	G120/1D	R.	(CV438) ...	—
F/6064	A.	(CV4002) ...	—	G150/1A	R.	(CV75) ...	—
F/6067	A.	CV4034 ...	—	G150/2D	R.	(CV413) ...	—
F/6132	A.	CV4056 ...	—	G150/3D	R.	(CV216) ...	—
F/6158	A.	CV4051 ...	—	G150/4K	R.	CV1832 ...	—
F/7001	A.	— ...	124	G180/2G	R.	CV2029 ...	—
FA13	—	CV2952 ...	—	G180/2M	R.	(CV395) ...	—
FA14	—	CV2953 ...	—	G210/1C	R.	(CV212) ...	—
FA15	—	(CV298) ...	—	G240/2D	R.	(CV2174) ...	—
FC2	M.	(CV1043) ...	78	G240/2D	R.	(CV2174) ...	??
FC2A	M.	CV2954 ...	78	G400/1K	R.	(CV2194) ...	—
FC4	M.	V04 ...	—	G400/2G	R.	CV4047 ...	—
FC13	M.	— ...	78	G407	—	— ...	79
FC13C	M.	CV2956, V013	79	G409	—	— ...	79
FC141	—	— ...	79	G431	—	DW2 ...	79
FG17	—	CV2957 ...	—	G445B	—	(CV1651) ...	—
				G459	—	— ...	79

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
G460	—	— ...	79	GEX66	J.	CV2290	—
G470	—	DW2	79	GEX402	G.	CV2902	—
G504	FFF.	— ...	79	GGI	—	— ...	80
G660	—	— ...	79	GL203A	—	CV2986	—
G715	—	— ...	79	GL446	—	CV3725	—
G1054	—	— ...	79	GL446A	—	CV932	—
G1604	FFF.	— ...	79	GL446B	—	CV687	—
G1380	—	— ...	79	GL455	—	CV2789	—
G1404	FFF.	— ...	79	GL464	—	CV3604	—
G1503	FFF.	— ...	79	GL464A	—	CV688	—
G2004	FFF.	— ...	79	GL471A	—	CV3586	—
G2005	—	— ...	79	GL532	—	CV2647	—
G2080	LLL.	(CY1), (URIC) 79 &	128	GL592	—	CV1903	—
G2504	FFF.	— ...	79	GL806	—	CV2658	—
G3060	R.LLL.	— ...	124	GL868	—	(CV2680)	—
G4004	FFF.	— ...	79	GL889R	—	(CV2687)	—
G4100	—	— ...	79	GL889RA	—	(CV2687)	—
G4120	—	DW4-500	79	GL892R	—	(CV904)	—
G4120N	LLL.	IW4-500	128	GL918	—	(CV2692)	—
G4150	—	— ...	79	GL2050	—	CV2565	—
G4180	—	— ...	79	GL8020	—	CV2967	—
G4300	—	— ...	79	GL8023	—	CV933	—
G/5749	A.	— ...	79	GMI B	XX.	(CV2149)	—
G/5750	A.	— ...	79	GM4	J.	(CV2138)	—
G/6042	A.	— ...	79	GM5	XX.	(CV411)	—
G/6059	A.	— ...	79	GM5B	XX.	(CV2148)	—
G/6060	A.	— ...	79	GN24	—	DW2	80
G/6061	A.	— ...	79	GR4	—	— ...	80
G/6062	A.	— ...	79	GS10C	ZZ.	(CV2325)	—
G/6066	A.	— ...	80	GS16SO	—	—	—
G/6100	A.	— ...	80	(80-110)	XX.	(CV2694)	—
G/6132	A.	— ...	80	GS16 /160)	XX.	(CV248)	—
G/6157	A.	— ...	80	GS16	—	—	—
G/6158	A.	— ...	80	(80-110)	XX.	(CV1473)	—
G/6180	A.	— ...	80	GS18	XX.	(CV242)	—
G/6443	A.	— ...	80	GS26	XX.	(CV1432)	—
G/6516	A.	— ...	80	GS44X	XX.	CV1913	—
GA5A	—	CV2647	—	GS46	XX.	CV584	—
GC10A	ZZ.	(CV2199)	—	GS47X	XX.	(CV405)	—
GC10B/S	ZZ.	(CV2271)	—	GS118	XX.	CV1801	—
GC10/4B	ZZ.	CV1739	—	GS146	XX.	CV2692	—
GD86W/S	ZZ.	CV2321	—	GTI	J.	CV2969	—
GD100A/S	—	CV188	—	GTIA	J.	(CV1143)	—
GD100B/S	—	CV1070	—	GTIC	J.	(CV1128)	80
GD120A/S	ZZ.	CV1110	80	GTIE	J.	CV530	—
GD120A/S	—	CV45	—	GTII	—	(CV435)	—
GD150A	—	CV216	—	GTR95M/S	ZZ.	(CV286)	—
GD150M/S	—	CV1832	—	GTRI20A/S	ZZ.	CV45	—
GDT4B	C.	(CV1141)	—	GTRI50M/S	ZZ.	(CV287)	—
GD86W	ZZ.	(CV2321)	—	GUI	J.	(CV1262)	—
GET2	J.	CV743	—	GU5	J.	(CV1072)	—
GEX35	J.	(CV4r2)	—	GU7	J.	CV2973	—
GEX36	J.	(CV2279)	—	GU8	J.	(CV1628)	—
GEX45/I	J.	(CV425)	—	GUII	J.	CV532	—
GEX54	J.	CV448	—	GU20	J.	CV1435	—
GE64	J.	(CV2310)	—	GU21	J.	(CV5)	—

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
GU50	J.	(CV1072), RGI-240A	—	HF61	—	— ...	81
GX402	G.	(CV2902)	...	HF62	—	— ...	81
GY11	—	— ...	80	HF85	—	— ...	81
GZ30	M.	CV2748, 5Z4GT	80	HF93	M.	(CV1928), 12BA6	81
GZ31	M.	CV593	...	HF94	—	— ...	81
GZ32	M.	— ...	—	HF100	AAA.	CV2987	...
GZ33	M.	CV378	...	HF121	—	— ...	81
GZ34	M.N.FF.	CV1377	...	HF130	AAA.	CV638	...
GZ37	M.	CV378	...	HF200	AAA.	CV2988	...
GZ40	—	— ...	80	HF300	AAA.	CV693	...
GZ41	—	— ...	80	HK24	—	CV941	...
H2	J.D.	CV2977, PM2HL	80	HK24G	—	CV789	...
H2D	H.	(CV1044), TDD2A	—	HK54	—	CV707	...
H4	—	— ...	80	HK90	M.	12BE6	...
H4D	H.	— ...	80	HK257	—	CV824	...
HI2	J.	CV2978	...	HK354E	—	CV2989	...
HI3	—	— ...	80	HL2	D.J.H.	(CV1673), PM2HL	81
H20	—	— ...	80	HL2Met	NNN.	CV2991	...
H30	J.	CV2979	...	HL2K	J.	(CV1050), PM2HL	81
H42	J.	(CV1182), HL4G	80	HL3	—	— ...	81
H45	—	(CV372)	...	HL4	U.	(CV1173)	...
H63	J.	(CV1073), 6F5G	80	HL4G	U.	— ...	81
HI41D	—	— ...	80	HL4X	U.	(CV1037)	...
H210	J.RR.	(CV1673), PM2HL	80	HL4	U.	— ...	—
H406D	FFF.	— ...	80	HL13	U.M.	— ...	81
H407 Spec.	FFF.	— ...	80	HL13C	M.	(CV1109)	...
H410D	FFF.	— ...	80	HL13G	—	— ...	81
H410	J.	CV2981	...	HL13S	U.	— ...	81
H412	—	— ...	80	HL21	J.	(CV1303)	...
H607	—	— ...	80	HL21DD	D.	(CV1044), TDD2A	81
H610	J.	CV2982	...	HL22	D.H.	— ...	81
HI818D	FFF.	— ...	80	HL22DD	—	— ...	81
HI918D	FFF.	— ...	80	HL23	D.	(CV1130)	...
H2018D	FFF.	— ...	80	HL23DD	D.	CV2995	...
H2518D	FFF.	— ...	80	HL25	U.	— ...	81
H2618D	FFF.	— ...	80	HL41	D.	(CV24)	...
H4080D	FFF.	— ...	80	HL41DD	D.	CV2996	...
H4111D	FFF.	— ...	80	HL42DD	D.	— ...	81
H4115D	FFF.	— ...	80	HL84	—	— ...	82
H4125D	FFF.	— ...	80	HL90	—	— ...	82
H4128D	FFF.	— ...	81	HL92	M.	(CV1959), 50C5	82
H4129D	FFF.	— ...	81	HL94	—	— ...	82
HA1	J.	(CV1171)	...	HL133	D.	CV2998	...
HA2	J.	(CV1059)	...	HL133DD	D.	CV2999	...
HAA91	—	— ...	81	HL134DD	—	— ...	82
HABC80	—	— ...	81	HL135	—	— ...	82
HAD	H.	(CV1419)	...	HL210	D.J.	CV3500, PM2HL	82
HBC90	M.	12AT6	...	HL210A	J.	CV1303	...
HBC91	M.	12AV6	...	HL410	J.	— ...	82
HCH81	—	— ...	81	HL607	—	— ...	82
HD2	—	— ...	81	HL610	J.	CV3501	...
HD14	J.	(CV1818), 1H5G	81	HL1320	D.	CV3502, HL13C	82
HD21	J.	— ...	81	HLA1	—	— ...	82
HD22	J.	TDD2A	...	HLA2	A.	(CV1678), 354V	82
HD24	J.	CV2985, TDD2A	81	HLB1	A.	(CV1021)	...
HD203A	HHH.	CV2986	...	HLDD/I320	D.	CV3503, DDT13	82

Commercial				Equivalent			
Valve	Manufacturer	(or nearest in brackets)	Page	Valve	Manufacturer	(or nearest in brackets)	Page
HM20	—	— ...	82	HY115	—	— ...	83
HN309	—	— ...	82	HY125	—	— ...	83
HP2	H.	(CV1032)	82	HY615	Y.	CV3506	83
HP6	U.	(CV138)	82	HY866	—	— ...	83
HP13	U.	— ...	82	HZ50	—	— ...	83
HP13S	U.	VPI3A	82	IFW1	OOO.	(CV1039)	—
HP210C	—	— ...	82	IRV120/38	U.	— ...	83
HP210NC	U.	— ...	82	IW2	M.	— ...	83
HP210	U.	(CV1322)	82	IW3	M.	(CV1039), IW4-350	84
HP211	—	— ...	82	IW3-350	M.	CV1039, APV4	84
HP211C	U.	— ...	82	IW4/500	M.	(CV1039), APV4	84
HP215	RR.	(CV1322)	82	JP9-7	M.	(CV3676)	—
HP415	U.	(CV1169)	82	JP9-7A	M.	(CV370)	—
HP1018	U.	— ...	82	JP9-7D	M.	CV1866	—
HP1118	U.	— ...	82	JP9-15	—	CV3997	—
HP2018	U.	— ...	82	JP9-80	M.	CV3569	—
HP2118	U.	— ...	82	JP9-80A	M.	CV5018	—
HP4100	—	— ...	82	JP9-250	M.	CV2284	—
HP4101	U.	(CV1124)	82	JP9-250A	M.	CV3955	—
HP4101C	U.	(CV1282), SP4	83	JPT9-01	M.	CV2420	—
HP4105	U.	— ...	83	JPT9-02	M.	CV2421	—
HP4106	U.	(CV1169)	83	JPT9-60	M.	CV3560	—
HP4106C	U.	— ...	83	K3A	H.	(CV410)	—
HP4115	U.	(CV1169)	83	K4	—	— ...	84
HP4115C	U.	— ...	83	K7RF4	P.	CV1808	—
HR1	H.	— ...	83	K23A	—	— ...	84
HR2	H.	(CV261)	83	K238	KKK.	TDD2A	84
	U.	— ...	83	K24	—	— ...	84
HR2S	U.	— ...	83	K27	—	— ...	84
HR3	H.	— ...	83	K30A	—	PM2HL	84
HR4	H.	— ...	83	K30B	—	— ...	84
HR5	—	— ...	83	K30C	—	PM2HL	84
HR6	H.	— ...	83	K30D	—	PM2HL	84
HR7	H.	(CV404)	83	K30E	—	— ...	84
HR8	H.	— ...	83	K30G	KKK.	— ...	84
HR9	H.	— ...	83	K30K	KKK.	PM2HL	84
HR11	H.	— ...	83	K33A	KKK.	— ...	84
HR210	U.	(CV1673), PM2HL	83	K33B	—	— ...	84
HR406	—	— ...	83	K40B	—	— ...	84
HR410	—	— ...	83	K40N	KKK.	PM12M	84
HSD	H.	— ...	83	K50M	KKK.	— ...	84
HT415	—	CV3540	—	K50N	KKK.	VP2B	84
HV18	—	CV2988	—	K70B	KKK.	PM22A	84
HVRI	M.	— ...	83 & Appendix II	K77A	KKK.	— ...	84
				K77B	KKK.	QP22B	84
HVUI	—	— ...	83	K80A	KKK.	FC2 ...	84
HVR2	M.	(CV1134)	83 & Appendix II	K80B	KKK.	FC2A	84
				K301	G	CV2161	—
HY24	—	— ...	83	K302	G.	(CV2164)	—
HY51B	Y.	(CV702)	—	K305	G.	(CV2263)	—
HY61	Y.	(CV124)	83	K307	G.	(CV1871)	—
HY65	—	— ...	83	K308	G.	(CV2283)	—
HY75	Y.	CV751	—	K312	G.	CV2273	—
HY90	M.	35W4	83	K322	G.	(CV2791)	—
HY113	—	— ...	83	K324	G.	(CV2304)	—
HY114B	Y.	CV3505	—	K335	G.	CV2343	—

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
K435-10	—	ACO44 ...	84	KT2	J.	(CVI118), PM22A	85
K450-50	—	— ...	84	KT8	J.	(CVI079) ...	85
K1051	—	CV2849 ...	—	KT8C	J.	(CVI079) ...	85
K1105P2	—	CV3736 ...	—	KT16	—	— ...	85
K1658	MMM.	— ...	84	KT21	J.	— ...	85
K1668	MMM.	— ...	84	KT24	J.	(CVI334), PM22A	85
K1694	MMM.	— ...	84	KT30	J.	CV3519 ...	85
K814024	—	CV3514 ...	—	KT31	J.	CV3530 ...	85
KB2	M.	CV3515 ...	84	KT32	J.	(CVI287), 25L6	85
KBC1	N.FFF.	— ...	84	KT33	—	25A6G ...	85
KBC32	KKK.M.	— ...	84	KT33C	J.	(CVI503) ...	85
KCI	N.FFF.	— ...	84	KT35	J.	— ...	85
KC3	N.FFF.	— ...	84	KT36	J.	— ...	86
KC4	—	— ...	84	KT38	J.	(CVI576) ...	—
KC50	—	— ...	84	KT41	J.	(CVI181) ...	86
KC51	—	— ...	84	KT42	J.	(CVI175) Pen4VA	86
KCF30	M.	— ...	85	KT44	J.	(CVI577) ...	86
KCDI	—	— ...	85	KT44T	J.	(CVI576) ...	—
KDDI	N.FFF.	— ...	85	KT45	J.	CVI825 ...	86
KD50	—	— ...	85	KT55	J.	— ...	86
KE50	—	— ...	85	KT61	J.	CVI438, 6AG6	86
KFI	N.	— ...	85	KT63	J.	(CVI186), 6F6G	86
KF2	N.	— ...	85	KT66	J.	(CVI075), EL37	86
KF3	N.FFF.	— ...	85	KT67	J.	(CV437) ...	86
KF4	N.FFF.	— ...	85	KT71	J.	50L6gt ...	86
KF7	—	— ...	85	KT72	J.	— ...	86
KF8	—	— ...	85	KT73	J.	— ...	86
KF35	KKK.M.	— ...	85	KT74	J.	— ...	86
KHI	N.	— ...	85	KT76	J.	— ...	86
KK2G	N.FFF.	— ...	85	KT81	J.	(CV885) ...	86
KK2	N.	CV3516 ...	85	KT88	J.	— ...	86
KK32	KKK.M.	— ...	85	KT101	—	— ...	86
KLI	FFF.	— ...	85	KTW61	J.	(CVI100) ...	86
KL2	FFF.	— ...	85	KTW62	J.	(CVI100) ...	86
KL4	N.FFF.	— ...	85	KTW63	J.	(CVI195) ...	86
KL5	—	— ...	85	KTW73	J.	(CVI056) ...	86
KL35	KKK.	— ...	85	KTW73M	J.	CV3527 ...	86
	M.	— ...	85	KTW74M	J.	(CV918) ...	86
KLL3	—	— ...	85	KTZ41	J.	CV3529 ...	86
KLL32	KKK.M.	— ...	85	KTZ63	J.	(CVI074), 6J7	86
KR3	E.	{ (CV217) (CV218) ...	—	KTZ73M	J.	CV3530 ...	86
KR5	—	— ...	85	KU25	—	CV2993 ...	—
KR6/1	E.	(CVI16) ...	—	KU45	—	CV3875 ...	—
KR6/2	E.	(CV237) ...	—	KZ	—	— ...	86
KR6/3	E.	(CV238) ...	—	L2	D.H.	CV3531, PM2HL	86
KR6/4	E.	(CV272) ...	—	L2/B	—	PM2HL ...	86
KR20	—	— ...	85	L2D	—	— ...	86
KR22	—	— ...	85	L2/DD	D.	— ...	86
KR25	—	— ...	85	L4	H.	— ...	86
KR28	—	— ...	85	L9	D.	(CV328) ...	—
KR31	—	— ...	85	L11	—	— ...	86
KRN2	E.	(CV87) ...	—	L12	—	— ...	86
KRN3	E.	(CV217) ...	—	L21	J.	CV3532, PM2HL	86
KS9-20	M.	(CVI795) ...	—	L2IDD	D.	(CVI308), TDD2A	86
KS9-20A	M.	(CV2792) ...	—	L22DD	D.	CV3533 ...	86
				L30	J.	CV3534 ...	86

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
L63	J.	(CV1067), 6J5G	86	LS9A	J.	(CV1676)	87
L42MD	—	— ...	86	LS9B	J.	(CV1676)	87
L77	J.	(CV133), EC90	86	LS408A	R.	CV2536	—
L210	RR.J.D.	(CV1021), PM2HL	86	LS532	R.	CV3542	—
L408	—	— ...	86	LS650	R.	(CV391)	—
L410	J.	(CV1152)	86	LS731	R.	(CV273)	—
L412	—	— ...	86	LS826	R.	— ...	87
L413	FFF.	— ...	87	LU4A	—	— ...	87
L414	—	— ...	87	LZ319	J.	PCF80	88
L415	—	— ...	87	LZ329	J.	— ...	128
L416D	—	— ...	87	M2H	X.	(CV2886)	—
L427D	—	— ...	87	M6	X.	(CV2145)	—
L486D	—	— ...	87	M215H	C.	(CV177)	—
L419D	—	— ...	87	M500	G.	(CV353)	—
L495	—	— ...	87	M501	G.	(CV76)	—
L496D	FFF.	— ...	87	M501A	G.	CV3660	—
L497D	FFF.	— ...	87	M502	G.	(CV2166)	—
LS10D	FFF.	— ...	87	M502A	G.	CV2373	—
L600	—	CV3537	—	M503	G.	CV1866	—
L610	J.	CV3538	—	M505	G.	CV1747	—
L2318	FFF.	— ...	87	M506A	G.	CV3982	—
L4150D	FFF.	— ...	87	M507	G.	(CV69)	—
LA	—	— ...	87	M508	G.	(CV370)	—
LD210	U.	CV502	87	M509	G.	CV3976	—
LD410	—	— ...	87	M510	G.	CV1827	—
LG6	—	— ...	87	M512	G.	CV1828	—
LG6	—	— ...	87	M513	G.	CV3528	—
LG14	—	— ...	87			CV1914	—
LG210	U.	(CV1021)	—			CV1916	—
LK430	FFF.	— ...	87	M518A	G.	CV1997	—
LK460	FFF.	— ...	87			CV2744	—
LK4110	FFF.	— ...	87			CV1898	—
LK4112	FFF.	— ...	87	M519	G.	CV1484	—
LK4200	FFF.	— ...	87	M521	G.	CV2376	—
LL2S	U.	— ...	87	M523	G.	CV2412	—
LL2	U.	CV1732, PM2HL	87	M525	G.	CV2365	—
LL4	U.	— ...	87	M526	G.	CV3676	—
LL610	—	— ...	87	M528	G.	CV1497	—
LN152	J.	ECL80	87	M529	G.	CV2426	—
LN309	J.	PCL83	87	M537	G.	CV2281	—
LN319	J.	— ...	128	M539	G.	CV2425	—
LP2				M542	G.	CV3611	—
(Selected)	J.	CV1304	87	M548	G.	CV5031	—
LP2	J.	CV548	87	M549	G.	CV2424	—
LP2	H.	(CV1023), PM202	87	M551	G.	CV3569	—
LP4	H.	(CV1168), ACO44	87	M8079	M.	(CV4025)	88
	J.			M8080	M.	CV4058	128
LP25	H.	— ...	87	M8081	M.	(CV4031)	88
LP220	U.	(CV1166)	87	M8082	M.	CV4063	88
LS5	J.	(CV1637)	—	M8083	M.	(CV4014)	88
LS5A	J.	(CV1637)	—	M8091	M.	CV4044	—
LS5B	J.	(CV2846)	—	M8096	M.	CV4039	88
LS5X	J.	(CV1667)	—	M8097	M.	CV4059	88
LS6A	J.	(CV3541)	87	M8098	M.	CV4048	—
LS7	J.	(CV1660)	87	M8099	M.	CV4070	88
LS8	J.	(CV1656)	87	M8100	M.	(CV4010)	88

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
M8101	M.	— ...	88	MF31-55	M.	(CV429) ...	—
M8121	—	— ...	88	MF31-95	M.	CV2328 ...	—
M8122	—	— ...	88	MH4	J.	(CV1037), 354V	88
M8123	—	— ...	88	MH4met	J.	(CV399) ...	88
M8125	—	— ...	88	MH40	—	— ...	88
M8135	—	— ...	88	MH41	J.	(CV1505) ...	88
M8136	M.	CV4003 ...	128	MH206	—	— ...	88
M8137	M.	CV4004 ...	88	MH1118	U.	— ...	88
M8138	M.	— ...	88	MH4105	U.	— ...	88
M8140	M.	CV4002 ...	—	MHD4	J.	CV3546, DDT4	88
M8141	M.	CV4136 ...	—	MHL4	J.	(CV1038) ...	88
M8142	M.	CV4054 ...	—	MHLD6	J.	(CV1101) ...	88
M8144	M.	CV4033 ...	—	MHT4	—	(CV2955) ...	—
M8149	M.	CV4034 ...	—	MKT4	J.	(CV1683) Pen4VA	88
M8156	—	— ...	—	ML4	J.	(CV1732) ...	88
M8157	M.	CV483 ...	88	ML6	J.	(CV1105) ...	88
M8161	M.	CV4015 ...	88	ML40	—	— ...	88
M8162	M.	CV4024 ...	88	ML5667	BB.	(CV2687) ...	—
M8167	M.	CV4067 ...	—	MM4V	M.	(CV1165) ...	89
M8179	M.	CV4076 ...	—	MM20	—	— ...	89
M8180	M.	CV4050 ...	—	MO465	—	— ...	89
M8190	M.	CV4066 ...	—	MO495	—	— ...	89
M8195	—	— ...	88	MP2	—	— ...	89
M8196	M.	CV4011 ...	—	MP4	—	— ...	89
M8204	M.	CV4018 ...	—	MP/Pen	C.	(CV1683) Pen4VA	89
M8212	M.	CV4007 ...	—	MPT4	J.	(CV1174) Pen4VA	89
M8214	M.	CV4035 ...	—	MPT4K	J.	CV3552 ...	89
M8216	M.	CV3987 ...	—	MPT42	J.	CV2554 ...	—
M8223	M.	CV4020 ...	—	MRI	—	— ...	89
M8224	M.	CV4028 ...	—	MR4	J.	(CV1611) ...	89
M8232	M.	CV5029 ...	—	MR10	J.	(CV35) ...	—
M8234	M.	CV5082 ...	—	MR75	D.	(CV1142) ...	—
M8237	M.	CV4049 ...	—	MR300	D.	CV3557 ...	—
M8245	M.	CV4019 ...	128	MR300E	D.	CV3558 ...	—
MAZ41	—	— ...	88	MS4	J.	(CV1164) ...	89
MC1	—	— ...	88	MS4B	J.	CV3533, SP4 ...	89
ME2	—	— ...	88	MS4C	—	SP4 ...	89
ME4F	—	— ...	Appendix I	MSG/HA	—	SP4 ...	89
ME6F	—	— ...	Appendix I	MSG/LA	C.	(CV1677), SP4	89
ME25	—	— ...	88	MS/Pen	C.	CV3561, SP4	89
ME41	D.	CV3565	Appendix I	MS/Pen clear	C.	(CV1124) ...	89
ME91	M.N.	— ...	Appendix I	MS/Pen	(5 Pin) C.	(CV244) ...	89
ME920	M.N.	— ...	Appendix I	MS/PenB	C.	(CV1125) ...	89
ME1001	M.	(CV273) ...	—	MS/Pen/T	C.	(CV1129) ...	89
ME1005	M.	(CV354) ...	—	MSP4	J.	(CV1282), SP4	89
ME1100	M.	(CV1795) ...	—	MSP41	J.	CV3562 ...	89
ME1400	M.	(CV432) ...	—	MT4	J.	(CV1610) ...	—
ME1401	M.	(CV495) ...	—	MT9F	J.	CV1439 ...	—
ME1402	M.	CV2730 ...	—	MT9L	J.	CV1440 ...	—
ME1403	M.	CV2348 ...	—	MT11SW	J.	CV3563 ...	—
ME1500	M.	(CV474) ...	—	MT12	J.	CV3564 ...	—
ME1501	M.	(CV2253) ...	—	MT12A	J.	CV1441 ...	—
ME1502	M.	(CV1128) ...	—	MT13	J.	(CV1614) ...	—
ME1503	M.	(CV1787) ...	—	MT14	J.	CV1442 ...	—
MF13-1	M.	CV3959 ...	—	MT16	J.	(CV1030) ...	—
MF22-22	M.	CV3999 ...	—				

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
MT17	M.	(CV2957) ...	—	NI45	—	— ...	90
MT5544	M.	(CV2210) ...	—	NI47	—	EL33 ...	90
MT5545	M.	(CV2215) ...	—	NI48	—	— ...	90
MUI	—	CV3567 ...	89	NI50	—	EL41, 6CK5 ...	90
MU2	D.	CV1459 ...	89	NI51	—	EL42 ...	90
MUI2	J.	(CV1039), IW4-350	89	NI52	—	PL81, 21A6 ...	90
MUI2/14	J.	(CV1039), IW4-500	89	NI53	—	PL83, 15A6 ...	90
MU4250	C.	(CV1072) ...	89	NI54	—	PL82, 16A5 ...	90
MV6-5	N.	CV1976 ...	—	NI55	—	— ...	90
MVSG	C.	(CV1165) ...	89	N308	J.	— ...	128
MVSPen	C.	CV3571 ...	89	N309	J.	PL83 ...	90
MVSPen	C.	(CV1169) ...	89	N329	J.	PL82, 16A5 ...	90
MVSPenB	C.	CV3572 ...	89	N339	J.	— ...	90
MW6-2	M.	CV1737 ...	—	N349	—	— ...	90
MW22-22	M.	CV3999 ...	—	N359	—	— ...	90
MW100	C.	(CV25) ...	—	N709	J.	EL84 ...	90
MX1	E.	(CV1515) ...	—	N727	J.	(CV1862), EL90	90
MX2	E.	(CV418) ...	—	NDD40	—	— ...	90
MX40	J.	CV3576, VO4...	89	NE2	—	CV2976 ...	—
MX52	B.	(CV306) ...	—	NE16	—	CV651 ...	—
MX57	B.	(CV209) ...	—	NE17	D.	(CV359) ...	—
MX103	M.	(CV2150) ...	—	NE18	D.	(CV360) ...	—
MX105	M.	(CV2151) ...	—	NE19	D.	(CV263) ...	—
MX107	M.	(CV2152) ...	—	NEP51	—	— ...	90
MX108	M.	(CV2153) ...	—	NF2	—	— ...	90
MY3-275	M.	CV1252 ...	—	NF3	—	— ...	90
MZ05-20	M.	CV3573 ...	89	NG320	—	— ...	90
MZ05-60	M.	(CV1206) ...	—	NG3020	—	— ...	90
MZI-70	M.	(CV25) ...	—	NHPI	H.	(CV310) ...	—
MZI-75	M.	(CV444) ...	—	NHP51	—	— ...	90
MZI-76	M.	CV3574 ...	—	NIX2	—	— ...	90
MZI-1000	M.	(CV1219) ...	—	NLP61	—	— ...	90
MZ2-200	M.	(CV200) ...	—	NLP62	—	— ...	90
NI4	J.	(CV1803), DL35	89	NP90	—	CV3607 ...	—
NI5	—	— ...	89	NSPI	H.	(CV220) ...	—
NI6	J.	(CV819), DL33	89	NSP2	H.	(CV2269) ...	—
NI7	J.	(CV820), DL92	90	NSS42	—	— ...	90
NI8	J.	(CV818), DL95	90	NSS43	—	— ...	90
NI9	J.	DL94 ...	90	NSSI83	—	— ...	91
N25	J.	— ...	128	NT2	RR.	(CV2213) ...	—
N30	—	— ...	90	NT51	—	— ...	91
N31	—	— ...	90	NUI	—	(CV2680) ...	—
N37	J.	— ...	90	NU20	—	(CV1474) ...	—
N40	—	— ...	90	NU40T2	AA.	(CV1076) ...	—
N41	J.	(CV1181), PenA4	90	NU75H	—	CV751 ...	—
N42	J.	— ...	90	NUI14B	—	CV3505 ...	—
N43	J.	(CV1657) ...	90	NU200	—	CV2988 ...	—
N63	—	— ...	90	NU615	—	CV3506 ...	—
N66	—	EL37 ...	90	NVS4	—	— ...	91
N77	J.	(CV136), EL91	90	NW4	—	— ...	91
N78	J.	CV3711 ...	90	O0	—	— ...	91
NI08	J.	— ...	90	O0A	—	— ...	91
NI18	J.	— ...	128	O1A	—	— ...	91
NI19	J.	— ...	—	O1AA	—	— ...	91
NI42	—	UL41, 45A5 ...	90	O1B	—	— ...	91
NI44	—	EL91, 6AM5	90	O15/400	—	— ...	91

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
O84	—	— ...	91	P25/500	—	— ...	92
O202	LLL.	FC4 ...	128	P26/500	—	— ...	92
O406	LLL.	FC4 ...	128	P27/500	U.	(CV1040)	92
O1307	LLL.	FC13 ...	128	P30/500	—	— ...	92
OA2	—	CV1832 ...	—	P41	D.	CV1408	92
OA2WA	—	CV4020 ...	—	P43M	—	— ...	92
OA3	—	(CV3798) ...	—	P57	—	CV1466	—
OA4	—	CV752 ...	—	P61	D.	(CV1066)	92
OA73	M.	CV442 ...	—	P215	D.	(CV1019)	92
OA81	M.	CV425 ...	—		J.U.RR.		
		CV448 ...	—	P220	D.RR.	(CV3620)	92
		CV1353 ...	—	P220A	D.	(CV1023), PM202	92
OA85	M.	CV1354 ...	—	P222	—	— ...	92
OB2	—	CV3799 ...	—	P225	—	— ...	92
OB2WA	—	CV4028 ...	—	P226	—	— ...	124
OB3	—	CV3799 ...	—	P240	—	PM202	92
OBC3	—	— ...	91	P240A	—	— ...	92
OBF2	—	— ...	91	P410	J.	CV3621	92
OC2.5	M.	(CV1607) ...	—	P414	—	— ...	92
OC3	—	(CV686) ...	—	P415	J.	(CV1154)	92
OC45	M.	CV5105 ...	—	P420	—	— ...	92
OCH4	—	— ...	91	P421	LLL.	— ...	129
OD3	—	CV216 ...	—	P422	—	— ...	92
OFI	—	— ...	91	P425	LLL.	— ...	129
OF5	—	— ...	91	P425	D.	(CV1154)	92 & 129
OF9	—	— ...	91	P430	—	— ...	92
OM1	C.	(CV1402), CY31	91	P434	—	— ...	92
OM3	C.	(CV1054), EB34	91	P435	—	PM24M	92
OM4	C.	(CV1055), EBC33	91	P435/IE	A.	(CV398)	—
OM5	C.	(CV1056), EF36	91	P440	—	— ...	92
OM5C	C.	— ...	91	P440N	LLL.	Pen4VA	92 & 129
OM5B	C.	EF37A ...	128	P441N	—	Pen4VA	92
OM6	C.	(CV1063), EF39	91	P455	LLL.	— ...	92 & 129
OM7	—	EF39 ...	91	P460	—	— ...	92
OM9	C.	(CV1052), EL32	91	P469	—	— ...	92
OM10	C.	(CV1581) ...	91	P495	U.	(CV1181)PenA4	92
OP41	—	PenB4 ...	91	P496	—	— ...	92
OP42	—	PenA4 ...	91	P520	—	— ...	92
O56/300	—	— ...	91	P552/IE	A.	(CV427)	—
O518/600	—	— ...	91	P610	J.	CV3622	—
O5W3105	—	— ...	91	P625	J.	(CV1208)	—
O5W3106	—	— ...	91	P625B	—	— ...	92
O5W3107	—	— ...	91	P626	—	— ...	92
O5W3108	—	— ...	91	P628	—	— ...	92
O5W3111	—	— ...	91	P650	—	— ...	92
O5W3112	—	— ...	91	P861	—	— ...	92
OZ4	A.	CV517 ...	1	P1320	—	— ...	92
OZ4A	—	CV692 ...	1	P2018	U.	— ...	92
P2	J.	(CV1246), PM202	91	P2020N	LLL.	— ...	129
P4	—	— ...	91	P2060	—	— ...	92
P6MO	—	— ...	91	P2460	—	— ...	92
P12/250	U.	(CV1168), ACO44	91	P3580	—	— ...	92
P15/250	U.	— ...	91	P4100	—	— ...	93
P15/2505	U.	— ...	92	PA1	A.	(CV1689)	93
P24/450	—	— ...	92	PA20	D.	— ...	93
P25/400	—	— ...	92	PA40	D.	CV3623	93

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
PABC80	N.H.ZZZ. FFF.M.	— ...	93	Pen231	D.	CV3633, PM22D	94
PABI	—	— ...	93	Pen383	D.	CV1456	94
PBI	—	— ...	93	Pen384	D.	— ...	94
PE495	—	— ...	93	Pen425	—	— ...	94
PBF2	—	— ...	93	Pen428	M.	CV3634	94
PC05-15	N.	— ...	93	Pen435DD	—	— ...	94
PCC84	F.M.H.ZZZ. N.FFF.	7AN7	93	Pen453DD	—	— ...	—
PCC85	H.ZZZ. N.FFF.	— ...	93	Pen650	M.	— ...	94
PCC88	PPP.M.	— ...	93	Pen1340	D.	CV3635	94
PCC89	M.N.	— ...	—	Pen1346	—	CV3636	—
PCF80	F.M.N.	— ...	93	Pen2020	—	— ...	94
PCF82	D.H.ZZZ.	9U8	93	Pen3520	D.	— ...	94
PCL81	ZZZ. FFF.	— ...	93	Pen3820	D.	— ...	94
PCL82	H.N.M.	16A8	93	PenA4	M.	CV3638, APP4B	94
PCL83	H.U.M.	— ...	93	PenB1	A.	(CV1118), PM22A	94
PCL84	—	— ...	93	PenB4	M.	CV3624	94
PD22A	M.	(CV1163)	—	PenDD61	—	— ...	94
PD220	D.	(CV1032)	93	PenDD1360	D.	— ...	94
PD220A	D.	(CV1696)	93	PenDD2530	—	— ...	94
PDD2	—	— ...	93	PenDD4020	D.	DDPP39M	94
PE04-10	N.	— ...	93	PenDD4021	D.	— ...	94
PE05-15	N.	— ...	93	PF9	—	— ...	94
PE06-40P	N.	— ...	93	PF462	—	— ...	94
PEI-80	N.	— ...	93	PF472	—	— ...	94
PEI-100	N.	— ...	93	PJ8	—	CV3640	—
PE7	D.	CV3624	—	PJ23	—	(CV3680)	—
PE8	D.	CV3625	—	PK150	E.	(CV150)	—
Pen4DD	M.	CV519, DDPP4M	93	PL33	U.M.	— ...	94
Pen4VA	M.	(CV1174), APP4A	93	PL36	H.N.M.	— ...	94
Pen4V	M.	— ...	93	PL38	U.N.M.	— ...	94
Pen4VB	M.	Pen. A4	93	PL81	F.H.ZZZ. FFF.M.	CV5077, 21A6	94
Pen4VX	—	— ...	93	PL81F	—	— ...	94
Pen13A	—	— ...	93	PL82	M.F.H.N.FFF.	16A5	94
Pen13C	M.	(CV889)	93	PL83	H.ZZZ. N.FFF.M.	— ...	94
Pen20	—	— ...	93	PL84	ZZZ. PPP.	— ...	94
Pen24	D.	— ...	93	PL522	N.	(CV2520)	—
Pen25	D.	(CV65)	93	PL820	H.M.	— ...	94
Pen26	M.	— ...	93	PM04	—	— ...	94
Pen36A	—	(CV1672)	94	PM05	—	— ...	95
Pen36C	M.	(CV1672)	94	PM07	—	— ...	95
Pen40DD	M.	DDPP39M	94	PM1A	M.	CV2977, PM2HL	95
Pen44	D.	CV3630	94	PM1HF	M.	(CV1673), PM2HL	95
Pen45	D.	CV1407	94	PM1HL	M.	(CV3641)	95
Pen45DD	D.	CV3631	94	PM1LF	M.	CV3642	95
Pen45AN	—	— ...	—	PM2	M.	(CV1019)	95
Pen46	D.	(CV1127)	94	PM2A	M.	(CV3643)	95
Pen141	—	— ...	94	PM2B	M.	(CV1032)	95
Pen200	—	— ...	94	PM2BA	M.	(CV1163)	95
Pen220	D.	(CV1118), PM22A	124	PM2DL	M.	PM2HL	95
Pen220A	D.	(CV1051)	94	PM2DX	M.	(CV3645), PM2HL	95
Pen230	—	— ...	94	PM2HL	M.	(CV1050)	95
				PM3	M.	(CV1151)	95
				PM4DX	M.	(CV1152)	95

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
PM5	—	— ...	Appendix I	PP352I	D.	— ...	96
PM12	M.	(CV1018)	95	PP4100	—	— ...	96
PM12A	M.	(CV1018)	95	PP410I	—	— ...	96
PM12M	M.	(CV1041)	95	PP4118	U.	— ...	96
PM12V	M.	(CV319)	95	PT	—	— ...	96
PM14	M.	(CV1159)	95	PT2	J.	(CV1118), PM22A	96
PM22	M.	CV3649	95	PT2A	—	— ...	96
PM22A	M.	CV3647	95	PT2K	—	— ...	96
PM22C	—	— ...	95	PT4	J.H.	(CV1181)	96
PM22D	M.	CV3578	95	PT4D	—	— ...	131
PM24	M.	— ...	95	PT5	J.	CV3652	96
PM24A	M.	(CV1167)	95	PT5E	J.	CV3579	—
PM24B	M.	— ...	95	PT6	J.	CV3653	—
PM24C	M.	— ...	95	PT10	C.J.	— ...	96
PM24D	M.	(CV1237)	95	PT11	J.	CV3654	—
PM24DC	M.	— ...	95	PT12	—	— ...	97
PM24E	M.	CV3648	95	PT15	J.	(CV1104)	97
PM24M	M.	— ...	95	PT16	—	— ...	97
PM202	M.	(CV185)	95	PT25	J.	(CV1046)	97
PM252	M.	— ...	95	PT25H	J.	(CV1046)	97
PM254	M.	(CV1153)	95	PT4I	C.	PM24M	97
PM256	M.	(CV1208)	95	PT41B	—	— ...	97
PN2	—	— ...	95	PT225	—	— ...	97
PP2	U.	PM22A	95	PT240	—	— ...	97
PP25	U.	— ...	95	PT250	—	— ...	97
PP3/250	D.	(CV1168), ACO44	95	PT425	J.	CV3656	97
PP4	U.	PM24M	95	PT425X	J.	(CV1167)	—
PP45	U.	— ...	95	PTA	H.	(CV889)	97
PP5/400	D.	(CV1040), P27/500	96	PTAD	—	— ...	97
PP6A5	—	EL2	96	PT5	H.	— ...	97
PP6B	U.	— ...	96	PT5A	—	— ...	97
PP6BG	—	EL33	96	PT5D	H.	— ...	97
PP6B5	—	— ...	96	PTZ	H.	— ...	97
PP6C	—	— ...	96	PV05-15	M.	CV3657	—
PP6E	—	— ...	96	PV06-20	N.	— ...	97
PP13A	U.	— ...	96	PVI-35	M.	CV3658	97
PP24	U.	— ...	96	PV4	—	DW4-350	97
PP245	U.	— ...	96	PV25	U.	— ...	97
PP34	U.	— ...	96	PV29	U.	— ...	97
PP345	U.	— ...	96	PV30	U.	— ...	97
PP35	U.	— ...	96	PV30A	—	— ...	97
PP36	U.	CV1672	96	PV305	U.	— ...	97
PP37	U.	— ...	96	PV75/1000	—	— ...	97
PP60	U.	CV1075	96	PV100/2000	—	— ...	97
PP215	—	— ...	96	PV200/600	—	— ...	97
PP2155	U.	— ...	96	PV400	—	— ...	97
PP220	—	PM202	96	PV430	—	— ...	97
PP222	U.	(CV1118)	96	PV475	—	— ...	97
PP225	U.	— ...	96	PV480	—	— ...	97
PP2255	U.	— ...	96	PV495	U.	(CV1443), DW2	97
PP415	—	— ...	96	PV3018	U.	— ...	97
PP416	—	— ...	96	PV4100	—	— ...	97
PP430	—	— ...	96	PV4200	—	DW4-500	97
PP431	—	— ...	96	PV4201	—	— ...	97
PP2018	U.	— ...	96	PV4300	—	— ...	97
PP2101	U.	— ...	96	PVB6	U.	— ...	97

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
PX2	—	— ...	97	QP22B	M.	(CV1035) ...	98
PX4	J.	(CV1168), ACO44	97	QP25	D.	CV556 ...	98
PX5	R.R.	(CV1040) ...	98	QP230	D.	(CV1035), QP22B	99
PX25	J.	(CV1040), P27/500	98	QP240	D.	— ...	99
PX25A	—	— ...	98	QPT2	H.	(CV1035) ...	—
PX41	RR.	(CV1168), ACO44	98	QQC04-15	N.	— ...	99
PX320	—	PM202 ...	98	QQE03-12	N.	CV2798 ...	129
PX2305W	—	— ...	98	QQE03-20	N.	— ...	99
PX240	—	— ...	98	QQE04-20	N.	— ...	99
PX2100	—	— ...	98	QQE06-40	N.	(CV424) ...	99
PY3-600	M.	(CV1373) ...	—	QQV03-10	M.	(CV2798) ...	99
PY31	U.M.	— ...	98	QQV03-20	M.	(CV2799) ...	99
PY32	U.M.	— ...	98	QQV03-20A	M.	(CV2799) ...	129
PY71	—	— ...	98	QQV04-15	M.	CV788 ...	129
PY80	F.N.FFF.M.	19X3 ...	98	QQV04-20	M.	(CV2663) ...	99
PY81	F.H.ZZZ.	17Z3 ...	98	QQV06-40	M.	(CV424) ...	99
	N.FFF.M.			QQV06-40A	M.	(CV2797) ...	129
PY82	F.H.N.	19Y3 ...	98	QQV07-40	M.	(CV2666) ...	124
	FFF.M.			QQV5-P10	M.	{ (CV2295) ...	—
PY83	H.	— ...	98			(CV3599) ...	99
PY88	M.	— ...	—	QQZ04-15	M.	CV1838 ...	99
PZ	—	— ...	98	Q570/20	G.	(CV284) ...	—
PZ03-3	—	— ...	98	Q575/20	G.	(CV284) ...	—
PZ05-15	—	— ...	98	Q575/60	G.	(CV434) ...	—
PZI-35	M.	(CV1240) ...	—	Q583/3	G.	(CV449), 85A2	—
PZI-75	M.	(CV1221) ...	—	Q592/10	G.	(CV188) ...	—
PZ30	H.U.	— ...	98	Q595/10	G.	(CV286) ...	—
PZH	—	— ...	98	Q5105/45	G.	(CV422) ...	—
QA75/40	J.	CV1895 ...	—	Q5108/45	G.	(CV422) ...	—
QA2400	J.	(CV4015) ...	98	Q5150/15	G.	(CV287) ...	—
QA2401	J.	CV133 ...	98	Q5150/30	G.	(CV216) ...	—
QA2402	J.	CV136 ...	98	Q5150/40	G.	(CV216) ...	—
QA2403	J.	(CV4014) ...	98	Q5150/45	G.	(CV395) ...	—
QA2404	J.	(CV4025) ...	98	Q51200	G.	(CV2225) ...	—
QA2405	J.	CV415 ...	98	Q51202	J.	CV4052 ...	—
QA2406	J.	CV4024 ...	98	Q51203	G.	CV4053 ...	—
QA2407	J.	(CV4005) ...	98	Q51205	G.	(CV3798) ...	—
QA2408	J.	— ...	98	Q51206	G.	(CV686) ...	—
QB65	—	— ...	98	Q51207	G.	(CV1832) ...	—
QB309	—	— ...	98	Q51208	G.	(CV1833) ...	—
QD77	—	— ...	98	Q51209	J.	CV449 ...	—
QE04-10	N.	— ...	98	Q51210	J.	CV4020 ...	—
QE05-40	N.	— ...	98	Q51211	J.	CV4028 ...	—
QE06-50	N.	— ...	98	Q51212	J.	CV4048 ...	—
QFI96	—	(CV1078) ...	—	Q51213	J.	CV4054 ...	—
QK26	Q.	CV1768 ...	—	QV03-12	M.	(CV2129) ...	99
QK221	—	CV3902 ...	—	QV04-7	M.	(CV309) ...	99
QK283	—	CV3685 ...	—	QV04-12	—	— ...	99
QK284	—	CV3686 ...	—	QV04-20	—	— ...	99
QK338	—	CV3903 ...	—	QV04-7R	M.	CV483 ...	99
QK353	—	CV3737 ...	—	QV07-40	M.	— ...	122
QL77	—	— ...	98	QV05-25	M.	(CV124) ...	99
QMG159	—	(CV2874) ...	—	QV06-20	M.	(CV3523) ...	99
QN77	—	— ...	98	QV20-P18	M.	CV2752 ...	—
QP21	J.	(CV1035) ...	98	QVI-150A	M.	(CV2519) ...	—
QP22A	M.	— ...	98	QVI-150	M.	(CV2519) ...	—

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
QW77	—	— ...	99	RE122	—	— ...	124
QY2-100	M.	(CV26)	—	RE124	—	— ...	124
QY3-65	M.	CV1905	—	RE134	PPP.	— ...	100
QY3-125	M.	(CV2130)	—	RE144	PPP.	— ...	100
QY4-250	M.	(CV2131)	—	RE304	PPP.	— ...	100
QY5-500	M.	CV3522	—	RE404	PPP.	— ...	100
QY5-3000A	M.	(CV1098)	—	RE604	PPP.	— ...	100
QY550-P40	M.	CV313	—	REN704	PPP.	— ...	100
QZ77	—	— ...	99	REN904	PPP.	— ...	100
R1	P.	(CV1443), APV4	99	REN914	PPP.	— ...	100
R2	—	IW4-350	99	REN924	PPP.	— ...	100
R2/10	J.	(CV97)	—	REN1004	PPP.	— ...	100
R2/38	J.	(CV98)	—	REN1104	—	— ...	124
R3	A.	(CV1039), IW4-500	99	REN1814	PPP.	— ...	100
R3/10	J.	(CV95)	—	REN1817D	PPP.	— ...	100
R3/16	J.	CV96	—	REN1821	PPP.	— ...	100
R4	H.	CV1796, DW4-350	99	REN1822	—	— ...	124
R4A	H.	(CV1064), DW4-500	99	REN1826	PPP.	— ...	100
R4B	—	— ...	99	REN4004	—	— ...	122
R10	A.	(CV261)	99	REN51204	PPP.	— ...	100
R11	A.	(CV1111)	99	REN51214	PPP.	— ...	100
R12	A.	(CV426), EY51	99 &	REN51224	—	— ...	124
		Appendix II		REN51234	—	— ...	124
R13A	—	— ...	99	REN51264	PPP.	— ...	100
R14	—	PZ30	99	REN51264B1	PPP.	— ...	100
R16	—	— ...	99	REN51274	PPP.	— ...	100
R17	A.	(CV2218)	99	REN51284	PPP.	— ...	100
R018	J.	— ...	99	REN51294	PPP.	— ...	100
R18	A.	(CV2235)	99	REN51374D	PPP.	— ...	100
R19	A.	— ...	99	REN51384	—	— ...	124
R41	H.	DW4-500	99	REN51818	PPP.	— ...	100
R42	H.	IW4-350	99	REN51819	PPP.	— ...	100
R43	H.	— ...	99	REN51820	PPP.	— ...	100
R52	H.	(CV1863), 5Z4	99	REN51823D	PPP.	— ...	100
R80	—	— ...	99	REN51884	PPP.	— ...	100
R236	—	— ...	99	REN51894	PPP.	— ...	100
R612G	—	CV597	—	RE5094	PPP.	— ...	100
R4410	P.	CV521	—	RE5105	—	— ...	124
R5559	J.	— ...	129	RE5164	PPP.	— ...	100
R6010	E.	(CV2353)	—	RE5174D	PPP.	— ...	100
R6015	E.	(CV2354)	—	RE5212	—	— ...	124
RA	—	— ...	99	RE5364	PPP.	— ...	100
RAI	—	— ...	99	RE5374	PPP.	— ...	100
RB/350/80	—	— ...	99	RE5664D	—	— ...	124
RB500/120	—	— ...	99	RE5964	—	— ...	100
RB650/250	—	— ...	100	RFP8/14	—	— ...	100
RE034	PPP.	— ...	100	RG1-204A	M.	{ CV1072) CV1626)	—
RE052	—	— ...	124	RG250-1000	U.	— ...	100
RE054	—	— ...	124	RG250/3000	—	— ...	100
RE062	—	— ...	124	RFG5	PPP.	— ...	100
RE074	PPP.	— ...	100	RGN354	PPP.	— ...	101
RE074D	—	— ...	124	RGN504	PPP.	— ...	101
RE074N	PPP.	— ...	100	RGN564	PPP.	— ...	101
RE076	—	— ...	124	RGN1054	PPP.	— ...	101
RE084	PPP.	— ...	100	RGN1064	PPP.	— ...	101
RE114	PPP.	— ...	100				

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
RGN1074	PPP.	— ...	101	RO481	—	— ...	101
RGN1304	PPP.	— ...	101	RO534	—	— ...	101
RGN1404	—	— ...	124	RO771	—	— ...	101
RGN1503	PPP.	— ...	101	RR3-250	M.	(CV1835)	—
RGN2004	PPP.	— ...	101	RR3-1250	M.	(CV2518)	—
RGN2504	PPP.	— ...	101	RR3-1250A	M.	CV2399	—
RGI-125	M.	(CV1263)	—	RRAF	—	— ...	101
RGI-240	M.	(CV1626)	—	RRBF	—	— ...	101
RGI-250	M.	CV3667	—	RSAF	—	— ...	101
RG3-250	M.	(CV1625)	—	RS	—	— ...	101
RG3-250A	M.	(CV32)	—	RS1009	—	— ...	101
RG3-1250	M.	(CV1629)	—	RS1019	—	— ...	101
RG3-1250A	M.	(CV5)	—	RT1-2	—	— ...	101
RG4-1000	M.	CV3670	—	RT2	—	— ...	101
RG4-1250	M.	CV5	—	RT3	—	— ...	101
RG5-500	M.	(CV1349)	—	RTR4341	—	— ...	101
RH	—	— ...	101	RTR4342	—	— ...	101
RK10	—	— ...	101	RVI20/250	U.	(CV1064)	101
RK15	—	— ...	101	RVI20/350	U.	DW4-350	102
RK16	—	— ...	101	RVI20/350S	U.	— ...	102
RK19	—	— ...	101	RVI20/500	U.	DW4-500	102
RK20A	Q.	CV704	—	RVI20/500S	U.	— ...	102
RK21	—	— ...	101	RV200/600	U.	U18/20	102
RK24	—	— ...	101	RV210	—	— ...	102
RK28	Q.	(CV3672)	—	RX3-120	M.	(CV1261)	—
RK28A	Q.	CV3673	—	RX21	—	— ...	102
RK30	Q.	CV2657	—	RX215	—	— ...	102
RK31	Q.	CV3674	—	RX233	Q.	CV3688	—
RK33	Q.	CV875	—	RX233A	Q.	CV793	—
RK34	Q.	(CV18)	—	RX235	Q.	CV709	—
RK38	Q.	(CV2591)	—	RZ	H.	URIC	102
RK39	—	— ...	101	RZI-150	M.	CV3690	—
RK44	Q.	CV637	—	RZI-250	M.	(CV2853)	—
RK47	Q.	CV3677	—	S01	—	— ...	102
RK48A	Q.	CV690	—	S02	—	— ...	102
RK49	Q.	CV3679	—	S2	H.	(CV1018)	102
RK57	Q.	CV625	—	S2A	A.	(CV984)	—
RK58	Q.	CV638	—	S3A	A.	CV374	—
RK60	Q.	CV3680	101	S4V	M.	SP4, AS4120	102
RK62	Q.	CV3681	—	S4VA	M.	— ...	102
RK63	Q.	CV2589	—	S4VB	M.	(CV1677)	102
RK6112	E.	(CV2116)	—	S6F12	D.	CV4014	131
RKR47	—	CV3683	—	S6F17	D.	CV4040	131
RKR72	Q.	(CV709)	—	S11A	KKK.	DW2	102
RKR73	Q.	CV2543	—	S11D	KKK.	DW4-350	102
RL7	M.	(CV1136), EF54	101	S12	—	— ...	102
RL16	M.	(CV1137), EC52	101	S13A	C.	CV3694	—
RL18	M.	(CV1197), EC53	101	S11E2	D.	CV4060	—
RL37	M.	(CV66), EC54	101	S21	—	— ...	102
RO337	—	— ...	101	S22	—	— ...	102
RO423	—	— ...	101	S23	J.	CV3691	102
RO431	—	— ...	101	S23(met.)	J.	CV3692	102
RO443	—	— ...	101	S24	J.	(CV1018)	102
RO446	—	— ...	101	S25A	A.	(CV16)	—
RO452	—	— ...	101	S26A	A.	(CV53)	—
RO457	—	— ...	101	S27A	A.	(CV82)	—

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
S28A	A.	(CV88)	...	S4020A	—	— ...	103
S30C	KKK.	ACO44	...	S4020B	—	— ...	103
S30D	KKK.	— ...	102	S4021A	—	— ...	103
S30A	A.	(CV127)	...	S4021B	—	— ...	103
S130	C.J.	(CV1110)	...	S4022AR	—	— ...	103
S130P	C.	(CV45)	...	S4022B	—	— ...	103
S207	—	— ...	102	S4045A	—	— ...	103
S208	—	— ...	102	SIM2	J.	CV2134	...
S209	—	— ...	102	SIM5	J.	CV21SS	...
S210	—	— ...	102	SAL39	—	CV3876	...
S213	—	PM12M	...	SD	—	— ...	103
S215	J.	CV369S	...	SD2	—	PM2HL	...
S215A	D.	CV3696	...	SD6	C.	CV1989	...
S215B	D.	(CV1018)	...	SD61	C.	EA50	...
S215VM	D.	(CV1028), PM12M	102	SG21S	D.R.R.	CV3702	...
S217	—	— ...	102 & 129	SD917A	—	— ...	103
S218	—	SP2	...	SE211	—	— ...	103
S220	—	— ...	102	SE211C	U.	PM12M	...
S310A	—	— ...	102	SE2018	—	— ...	103
S311A	—	— ...	102	SE2118	—	— ...	103
S328A	—	— ...	102	SG2	—	— ...	103
S329A	—	— ...	102	SG21SA	—	PM12M	...
S329L	—	— ...	102	SG21SVM	—	— ...	103
S406/7	—	— ...	102	SG220SW	—	— ...	103
S408	—	— ...	102	SG220	RR.	(CV1018)	...
S410	J.	(CV1159)	...	SG250	M.	(CV1031)	...
S410N	—	— ...	124	SGA1	—	— ...	103
S412N	—	— ...	124	SM9S	C.	(CV286)	...
S415N	—	— ...	103	SM150	C.	(CV287)	...
S415N	—	— ...	124	SN947D	—	(CV471)	...
S420	—	VP4B	...	SN9S4	—	(CV473)	...
S423	—	— ...	122	SN9S6B	—	(CV2241)	...
S424	—	— ...	124	SN1039A	—	— ...	104
S430N	—	— ...	124	SP2	M.	(CV1320)	...
S431N	—	— ...	103	SP2B	U.	— ...	104
S432N	—	— ...	103	SP2B(S)	U.	— ...	104
S434N	—	— ...	124	SP2D	U.	— ...	104
S435N	—	SP4	103 & 129	SP2V	—	— ...	104
S440	—	— ...	103	SP4	M.U.	(CV1324)	...
S493	—	— ...	103	SP4A	—	— ...	104
S495	—	— ...	103	SP4B	M.U.	CV3703	...
S610	J.	CV3698	...	SP4C	M.	— ...	104
S617	—	— ...	103	SP4S	U.	— ...	104
S620	—	— ...	103	SP6	C.	(CV136), EF91	104
S625	J.	CV1317	...	SP6S	—	— ...	104
S629	—	— ...	103	SPI3	U.M.	— ...	104
S1323	—	— ...	103	SPI3B	U.	— ...	104
S1324	—	— ...	103	SPI3C	M.	CV3704	...
S1327	—	— ...	103	SPI3S	U.	— ...	104
S1328	—	SPI3	...	SP20	—	— ...	104
S2010N	—	— ...	124	SP22	D.	— ...	104
S2012N	LLL.	— ...	124	SP3S	—	— ...	104
S2018	U.	— ...	103	SP40 Pen	C.	(CV1104)	...
S2030N	—	— ...	124				
S2035N	—	— ...	103				
S2043	—	— ...	103				

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
5P41	D.	(CV1335) ... (CV1547) ... (CV1699) ... (CV1700) ... (CV1336) ... (CV1065) ...	104 104 104 104 104 104	5U3130	—	— ...	105
5P42	D.	— ...	104	5U4150A	C.	(CV1134) ...	—
5P61	D.	— ...	104	5V-0A2	A.	(CV1832) ...	—
5P62	—	— ...	104	5V-0B2	A.	CV1833	—
5P65	—	— ...	104	5V-2D2I	A.	CV797	—
5P141	—	— ...	104	5V-3B28	A.	CV1835	—
5P181	D.	— ...	104	5V-3D21A	A.	CV2659	—
5P210	D.	(CV1332), 5P2	104	5V-3D22	A.	CV2851	—
5P215	D.	(CV1320) ...	104	5V-4B32	A.	CV2518	—
5P220	U.	PM202 ...	104	5V-4X150D	A.	CV3991	—
5P1320	D.	5P13C ...	104	5V-57	A.	CV5027	—
5P2220	D.	— ...	104	5V-705A	A.	CV3587	—
5PTA	H.	— ...	104	5V-813	A.	CV26	—
5PT5	—	— ...	104	5V-828	A.	CV631	—
5PT2	H.	(CV1049) ...	104	5V-5545	A.	CV2215	—
5PT4A	H.	(CV1282) ...	104	5V-75/30	A.	CV3798	—
5R2	—	— ...	104	5V-VR150/30	A.	CV216	—
5R4	—	— ...	104	5V2C39A	A.	(CV2516) ...	—
5R54451	—	— ...	104	5V4X/150A	A.	(CV2519) ...	—
5522AF	A.	(CV39) ...	—	5V280/40	—	CV1068	—
55210	U.	— ...	104	5V280/80	—	(CV1069) ...	—
55210C	—	— ...	104	5V813	A.	(CV26) ...	—
55210DDT	—	— ...	105	5V828	A.	(CV631) ...	—
55210D	—	— ...	105	5W1	—	— ...	105
55210HF	—	— ...	105	5W5	C.	CV3715	—
55210HL	—	— ...	105	5W7	C.	CV3719	—
55220PA	—	— ...	105	5W7	M.	(CV1069) ...	—
55220P	—	— ...	105	SW35 Pen	C.	(CV1370) ...	—
552205P	—	— ...	105	5W10H	C.	(CV1076) ...	—
552405P	—	— ...	105	5WG2	—	— ...	105
551971	R.	(CV1604) ...	—	5W75 Pen	C.	(CV1371) ...	—
552018	U.	— ...	105	T2	—	— ...	124
ST11	J.	(CV188) ... (CV107) ... (CV284) ...	— — —	T2M05	—	— ...	105
STV70/20	G.	CV1895 ...	—	T4D	M.	CV3721	105
STV70/60	G.	CV3709 ...	—	T6D	M.	EA50	105
STV150/200	J.	(CV1068) ...	—	T13U	—	— ...	105
STV280/40	J.	(CV1069) ...	—	T20	—	CV3722	—
STV280/80	J.	CV3712 ...	—	T20G	—	(CV1047) ...	—
STV280/80A	J.	— ...	105	T21	D.	CV3679	—
5U25	C.F.	(CV1113) ...	—	T41	D.	CV3723	105
5U41	C.	— ...	128	T134	—	— ...	105
5U42	—	(CV261) ...	—	T136	—	— ...	105
5U44	C.	(CV371) ...	105	T151	—	— ...	105
5U45	C.	EY51, 6X2	105 & Appendix II	T200	—	CV3723	—
5U61	C.	(CV128) ...	—	T204	—	— ...	105
5U150	C.	— ...	105	T223	—	— ...	124
5U2130	—	— ...	105 & Appendix II	T250	J.	(CV1030) ...	—
5U2150	C.	(CV1290) ...	105 & Appendix II	T435	—	— ...	105
5U2150A	C.	— ...	105	T460	—	— ...	124
				T635	—	— ...	122
				T814	—	CV2658	—
				T1335	—	— ...	105
				T2000	—	(CV1121) ...	—
				TB13	—	— ...	105
				TB032	—	— ...	105
				TB052	—	— ...	105

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
TB062	—	— ...	105	TH22C	M.	TH29	106
TB102	—	— ...	105	TH29	U.	— ...	106
TB122	—	— ...	105	TH30	U.	— ...	107
TB172	—	— ...	105	TH30C	M.	— ...	107
TB282	—	— ...	105	TH31	—	— ...	107
TB402	—	— ...	105	TH41	D.	CV1411	107
TB452	—	— ...	105	TH62	M.	— ...	107
TB552	—	— ...	105	TH233	D.	— ...	107
TB622	—	— ...	105	TH401	—	— ...	129
TB9920	—	— ...	105	TH2312	D.	TH29	107
TBC14	—	— ...	105	TH2320	D.	— ...	107
TBC113	—	— ...	105	TH2620	—	— ...	124
TC05-25	N.	— ...	105	TK406	PPP.	— ...	Appendix I
TC432	—	— ...	105	TL54	—	— ...	107
TD2	—	— ...	124	TM05	—	— ...	107
TD1-100A	M.	CV2516	—	TM12	—	— ...	107
TD3-12	M.	CV2932	—	TMC15B	C.	CV3730	—
TD2.5-12	M.	CV688	—	TMC16B	C.	CV3731	—
TD4.4-10	M.	CV2201	—	TMC20B	C.	CV3732	—
TDD1C	—	— ...	106	TP4	—	— ...	107
TDD2	M.	— ...	106	TP22	D.	(CV1344)	107
TDD2A	M.	CV3726	106	TP23	D.	— ...	107
TDD4	M.	CV3727, DDT4	106	TP25	D.	(CV1345)	107
TDD13	—	— ...	124	TP26	D.	CV3735	107
TDD13C	M.	(CV1419), DDT13	106	TP230	—	— ...	107
TDD25	—	— ...	106	TP443	—	— ...	107
TD03-5	M.	(CV345)	—	TP1340	D.	— ...	107
TD03-10	M.	(CV273)	—	TP2620	D.	— ...	107
TD03-10F	M.	CV2204	—	TS49	—	— ...	107
TD04-20	M.	CV397	—	TS51	—	— ...	107
TD05-12	M.	CV2933	131	TS52	—	— ...	107
TD044	—	— ...	106	TS53	—	— ...	107
TE2	—	— ...	106	TS54	—	— ...	107
TE3	—	— ...	106	TS70	—	CV798	—
TE5	—	— ...	106	TSE4	M.	— ...	107
TE094	—	— ...	106	TSP4	M.	CV560	107
TE104	—	— ...	106	TSW05	C.	(CV1288)	—
TE244	—	— ...	106	TSW50A	C.	(CV1235)	—
TE384	—	— ...	106	TSY4-500	M.	CV1889	—
TE424	—	— ...	106	TT4	M.	(CV1179)	107
TE434	—	— ...	106	TT4A	M.	— ...	108
TE464	—	— ...	106	TT10	—	(CV26)	—
TE474	—	— ...	106	TT11	J.	(CV1501)	108
TE534	—	— ...	106	TT12	J.	(CV524)	108
TE564	—	— ...	106	TT14	J.	— ...	108
TE634	—	— ...	106	TT15	J.	(CV415)	108
TE994	—	— ...	106	TT16	J.	(CV2963)	—
TF64	—	— ...	106	TT18	J.	(CV2666)	—
TF104	—	— ...	106	TT19	J.	— ...	108
TH1	—	— ...	106	TT20	J.	— ...	108
TH2	M.	CV1410	106	TT210	—	— ...	124
TH4	M.	— ...	106	TTR31	H.	(CV221)	—
TH4A	M.U.	(CV1194)	106	TTR31MC	—	—	—
TH4B	M.U.	(CV1194)	106	(9375)	H.	CV1748	—
TH13C	M.	— ...	106	TTR31MR	—	—	—
TH21C	M.	— ...	106	(9100)	H.	CV3840	—

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
TTR31MR (9375)	H.	CVI923	...	U24	D.	CVI921	... 108 & Appendix II
TV03-10	M.	CVI573	...	U25	D.	— ...	108
TV03-10A	M.	CVI089	...	U26	D.	— ...	124
TV4	M.	CVI412	Appendix I	U27	J.	(CVI111)	...
TW1	—	— ...	...	U29	—	— ...	108
TW2	—	— ...	...	U30	J.	CV3752	...
TX3-200	M.	CV3739	...	U30/250	—	— ...	108
TX4	U.	(CVI194)	...	U31	J.	CV3753, 25Z4G	108
TX5-400	M.	CV3740	...	U33	—	— ...	109
TX21	U.	TH21	...	U35	—	— ...	109
TX41	—	TH4B	...	U37	J.	(CV2289)	...
TY1-50	M.	(CVI288)	...	U41	J.	(CV2115)	... 109 & Appendix II
TY2-125	M.	(CVI924)	...	U43	J.	CV426, EY51	... 109 & Appendix II
TY3-250	M.	CVI350	...	U45	J.	— ...	131
TY4-350	M.	CV635	...	U47	J.	— ...	131
TY4-500	M.	CVI351	...	U49	J.	— ...	129
TY6-5000A	M.	CV3926	...	U50	—	(CVI268), 5Y3	109
TY86F	M.	— ...	...	U51	—	— ...	109
TYS4-500	M.	CVI889	...	U52	J.	(CVI071), 5U4	109
TZ03-20	M.	(CVI047)	...	U521T	—	— ...	109
TZ2-250	M.	(CVI618)	...	U54	J.	— ...	109
TZ2-300	M.	CV3741	...	U60/500	—	— ...	109
TZ20	—	CV3742	...	U65/550	—	— ...	109
TZ40	—	(CVI076)	...	U70	J.	6X5GT	...
U4	J.	(CVI608)	...	U71	J.	— ...	109
UC4	—	— ...	...	U74	J.	35Z4	...
U4E	—	— ...	...	U76	J.	35Z4	...
U4F	—	— ...	...	U78	J.	(CV493), 6X4, EZ90	109
U5	J.	CV3743	...	U81	—	— ...	109
U6	J.	CV3744	...	U82	J.	CV3919	...
U8	J.	— ...	...	U84	—	— ...	109
U9	—	— ...	...	U101	—	— ...	109
U10	J.	CVI443, RV120/350	108	U107	J.	— ...	109
U12	J.	(CVI064)	...	U118	J.	— ...	109
U14	J.	(CVI064), DW4-500	108	U119	J.	— ...	131
U15	J.	CV3747	...	U120/500	—	— ...	109
U16	J.	(CVI290)	...	U134	J.	— ...	109
U17	J.	(CVI113)	...	U142	—	UY41, 31A3	109
U18	J.	(CVI264)	...	U143	—	(CV2862), AZ31	109
U18/20	J.	(CV31), RV200/600	108	U145	—	— ...	109
U19	J.	(CVI87)	...	U147	—	6X5	...
U19/23	J.	(CVI87)	...	U149	—	— ...	109
U20	J.	(CV31)	...	U150	—	EZ40, 6BT4	...
U21	D.	CV3751	...	U151	—	EY51, 6X2	... 109 & Appendix II
U22	D.	CV3750	...	U152	—	PY80, 19X3	...
U22FH	—	— ...	...	U153	—	PY81, 17Z3	...
U23	J.	CV235	...	U154	—	PY82, 19Y3	...
			...	U191	—	— ...	109
			...	U201	D.	CY31	...
			...	U251	D.	— ...	109
			...	U281	D.	CY31	...
			...	U282	D.	— ...	109

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
U301	D.	CY31	109	UCH11	N.MMM. FFF.	— ...	110
U309	D.	— ...	109	UCH21	N.FFF. M.	— ...	110
U319	D.	PY82, 19Y3	109	UCH41	N.FFF. M.	— ...	110
U329	D.	— ...	109	UCH42	D.H.N. FFF.M.	14K7	111
U339	J.	— ...	129	UCH43	FFF.	— ...	111
U381	D.	— ...	131	UCH71	—	— ...	111
U403	D.	— ...	109	UCH81	H.M. N.FFF. MMM.	— ...	111
U404	D.	31A3	109	UCH171	—	— ...	111
U415	—	— ...	110	UCL11	N.ZZZ. FFF.	— ...	111
U418	—	— ...	110	UCL81	—	— ...	111
U560	—	— ...	110	UCL82	—	— ...	111
U600	D.	CV3756	—	UCL83	M.	— ...	111
U709	F.	— ...	110	UD2	—	PM202	111
U718	J.	— ...	129	UDI43	RR.	(CV2293)	—
U801	D.	— ...	110	UDI66C	RR.	(CV2257)	—
U2140P	—	— ...	110	UDDL71	—	— ...	111
U4020	D.	(CV1267), V30	110	UDH	—	— ...	111
UAA11	—	— ...	110	UDPI2	—	— ...	111
UAA91	MMM.	— ...	110	UDPI3	—	— ...	111
UAA171	—	— ...	110	UDT1	—	— ...	111
UABC80	H.MMM. U.M.N. FFF.	— ...	110	UE1	—	— ...	111
UAF21	—	— ...	110	UE2	—	— ...	111
UAF41	N.FFF. M.	— ...	110	UE13	—	— ...	111
UAF42	H.N.FFF. M.	12S7...	110	UE100	—	— ...	111
UB41	M.N.FFF.	— ...	110	UE301	—	CV621	—
UB91	—	— ...	110	UE905	—	CV625	—
UBC1	—	— ...	110	UE938	—	CV638	—
UBC41	H.N.FFF. M.	14L7	110	UE945	—	(CV735)	—
UBC81	N.M.	— ...	110	UE792	—	CV642	—
UBF2	—	— ...	110	UEL11	—	— ...	111
UBF11	N.MMM. FFF.	— ...	110	UF5	FFF.	— ...	111
UBF15	—	— ...	110	UF6	FFF.	— ...	111
UBF80	H.MMM. M.U.N. FFF.	171DDP	110	UF8	—	— ...	111
UBF89	—	— ...	110	UF9	—	— ...	111
UBF171	—	— ...	110	UF10	—	— ...	111
UBL1	N.FFF.	— ...	110	UF11	N.FFF.	— ...	111
UBL3	FFF.	— ...	110	UF14	—	— ...	111
UBL21	M.N.FFF.	— ...	110	UF15	—	— ...	111
UBL71	—	— ...	110	UF21	N.FFF.	— ...	111
UC92	N.MMM. FFF.	— ...	110	UF41	H.N.FFF.M.N. 12AC5	— ...	111
UCC84	M.	— ...	110	UF42	N.FFF.M.	— ...	111
UCC85	H.ZZZ. N.FFF.M.	— ...	110	UF43	FFF.	— ...	111
UCF12	—	— ...	110	UF80	ZZZ.N.FFF. M.H.	— ...	111
UCF80	M.	— ...	110	UF85	ZZZ.H.	— ...	111
UCH4	N.FFF.	— ...	110	UF86	U.M.N.FFF. M.	— ...	129
UCH5	FFF.	— ...	110	UF89	H.MMM.	— ...	111

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
	M.N.F.F.F. U.			UU30/250	—	— ...	113
UF172	—	— ...	111	UU60/250	—	1W4-350 ...	113
UF174	—	— ...	112	UUI20/250	—	1W4-350 ...	113
UF175	—	— ...	112	UUI20/350	D.QQ.	(CV1796), RV120/350	113
UH3	—	— ...	112	UUI20/500	QQ.	(CV1064), APV4	113
UH4	—	— ...	112	UV203A	—	CV2986 ...	—
UHP51	—	— ...	112	UVG51	—	— ...	113
UHP52	—	— ...	112	UX6653	—	CV3592 ...	—
UL1	—	— ...	112	UY1	—	— ...	113
UL2	FFF.	— ...	112	UYIN	N.M. FFF.	— ...	113
UL11	—	— ...	112	UY2	—	— ...	113
UL12	N.	— ...	112	UY3	FFF.	— ...	113
UL21	—	— ...	112	UY4	FFF.	— ...	113
UL22	—	— ...	112	UY11	N. MMM.	— ...	113
UL41	M.	CV1977, 45A5	112	UY21	N.F.F.F. M.	— ...	113
UL43	—	— ...	112	UY22	—	— ...	113
UL44	FFF. M.	— ...	112	UY31	M.	— ...	113
UL46	M.	— ...	112	UY41	D.H.N. FFF.	31A3 ...	113
UL71	—	— ...	112	UY42	N.F.F.F.	— ...	113
UL84	H.MMM. U.N.M.	— ...	112	UY82	N.	— ...	113
UL171	—	— ...	112	UY85	F.MMM. N.M.	— ...	113
ULP	—	— ...	112	UY91	—	— ...	113
ULP51	—	— ...	112	UY92	N.	— ...	113
ULP61	—	— ...	112	VO133	—	— ...	125
UM4	M.	— ...	Appendix I	V2M70	—	— ...	113
UM11	M.	— ...	Appendix I	V20	U.	(CV764), URIC	113
UM34	M.	— ...	Appendix I	V20S	U.	CYI	113
UM80	M.	— ...	Appendix I	V20/7000	—	— ...	113
UM81	M.	— ...	Appendix I	V22/7000	—	— ...	113
UP6	—	— ...	112	V25	—	— ...	113
UP35U	—	— ...	112	V30/1	—	— ...	113
UPX	—	— ...	112	V41	—	— ...	113
UP2	—	— ...	112	V51	—	— ...	113
UPI3	—	— ...	112 & 125	V61	—	— ...	113
UQ80	FFF.	— ...	112	V99	Q.	— ...	113
URIC	—	CV1267, V20	112	V120	D.	CV3762 ...	—
URI	M.	CYI	112	V123	D.	CV3763 ...	—
UR2	M.	— ...	112	V226	D.	CV3765 ...	113
UR3	M.	— ...	112	V203A/IK	R.	(CV234) ...	—
UR3C	M.	CV3758	112	V203C/LD	R.	(CV230) ...	—
UT2	—	— ...	112	V233A/IK	R.	(CV2190) ...	—
UTH4	—	— ...	112	V235A/IK	R.	(CV2221) ...	—
UTH12	—	— ...	112	V240C/2K	R.	(CV2189) ...	—
UU2	—	— ...	112	V245	D.	(CV1367) ...	113
UU3	—	1W4-350	112	V246A/IK	R.	(CV228) ...	—
UU4	D.	CV3759, 1W4-350	112	V248A	D.	(CV1366) ...	113
UU5	D.	(CV1039), 1W4-500	112	V257	D.	(CV1723) ...	—
UU6	D.	CV1413	112	V311	—	— ...	113
UU7	D.	CV3761	112	V312	D.	CV3766 ...	113
UU8	D.	— ...	113	V339	D.	CV3767 ...	113
UU9	D.	CV1855, EZ40	113				
UUI0	D.	RV200/600	113				
UUI2	—	— ...	113				

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
V453	D.	— ...	113	VA16	XX.	(CV528)	—
V503	D.	CV3768	113	VA35	XX.	(CV285)	—
V625	R.P.	(CV93)	—	VA50	XX.	(CV2132)	—
V630	D.	(CV201)	—	VBFI1	—	— ...	114
V872	D.	(CV1116)	114	VCI	FFF.	— ...	114
V877	D.	CV3769	—	VCHI1	—	— ...	114
V884	D.	(CV131)	114	VCII1	FFF.	— ...	114
V885	D.	(CV132)	—	VDSB	J.	— ...	114
V887	D.	(CV136)	—	VDS	J.	— ...	114
V914	D.	(CV1170), 2D4A	114	VEG51	—	— ...	114
V994A	D.	CV3797	—	VELI1	—	— ...	114
V995	D.	CV3770	—	VF01	B.	(CV80)	—
V960	—	CV54	114 & Appendix II	VF03	B.	(CV81)	—
V970	D.	CV3772	—	VFT6	—	CV2976	—
VI010	D.	CV3773	—	VF3	—	— ...	114
VI020	D.	CV3774	—	VF7	FFF.	— ...	114
VI021	D.	CV3775	—	VF14	—	— ...	114
VI023	D.	CV3776	—	VFT4	—	— ...	Appendix I
VI029	D.	CV3777	—	VFT6	—	CV2747	Appendix I
VI040	D.	(CV987)	D.	VGI	—	CV2976	—
VI042	D.	(CV275)	—	VG406	—	— ...	114
VI043	D.	(CV401)	—	VG410	—	— ...	114
VI047	D.	(CV961)	—	VG411	—	— ...	114
VI052	D.	(CV441)	—	VG420	—	— ...	114
VI063PI	D.	(CV400)	—	VG421	—	— ...	114
V1101	C.	(CV1361)	—	VG2503	—	— ...	114
V1105	D.	CV3778	—	VG2908	—	— ...	114
V1111	D.	(CV1127)	—	VG3008	—	— ...	114
V1120	D.	(CV72)	114	VG3016	—	— ...	114
V1120B	D.	(CV73)	114	VG3630	—	— ...	114
V1133	D.	(CV276)	—	VG5006	—	— ...	114
V1135B	D.	(CV345)	—	VG5007	—	— ...	114
V1135C	D.	(CV277)	—	VG5107	—	— ...	114
VI501	D.	CV3581	—	VH2	—	— ...	114
VI505	D.	(CV1252)	—	VH3	—	— ...	114
VI507A	D.	(CV1504)	—	VH5	—	— ...	114
VI901	D.	(CV1504)	—	VHP13	—	— ...	114
VI904	—	(CV1072)	—	VHT2	—	FC2	114
VI906	D.	(CV20)	114 & Appendix II	VHT2A	H.	(CV1043), FC2A	115
VI907	D.	(CV1111)	114 & Appendix II	VHT4	H.	(CV2955), FC4	115
VI913	D.	(CV1508)	Appendix II	VHTA	H.	(CV2956)	115
VI920	D.	(CV121)	Appendix II	VHTS	H.	— ...	115
VI922	D.	(CV74)	—	VLI	FFF.	— ...	115
VI924	D.	(CV100)	—	VL4	FFF.	— ...	115
VI928	D.	(CV261)	114	VLS1	—	— ...	Appendix II
VI939	D.	(CV371)	—	VLS61	—	— ...	115
V2018	—	— ...	114	VLS452	A.	CV3784	—
V2024	D.	(CV125)	—	VLS492AG	A.	(CV1527)	—
V2030F	D.	(CV349)	—	VMI	—	— ...	115
V2046A	D.	(CV486)	—	VM4V	M.	AS4125	115
V2053	D.	(CV403)	—	VME4	—	— ...	Appendix I
V2118	U.	— ...	114	VMP4	J.	(CV1169)	115
V4200	—	— ...	114	VMP4G	J.	(CV1169)	115
				VMP4(met)	J.	(CV1169)	115
				VMS4	J.	(CV1165), AS4125	115
				VMS4B	J.	— ...	115

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
VO2	U.	FC2A ...	115	VS26	J.	(CV161) ...	—
VO2S	U.	— ...	115	VS210	—	PM12M ...	116
VO4	U.	(CV2955), FC4	115	VS215	—	PM12M ...	116
VO4S	U.	— ...	115	VSGA1	—	— ...	116
VO6	—	— ...	115	VT1	—	— ...	116
VO13	U.	FC13C ...	115	VT2	—	— ...	116
VO13S	U.	FC13 ...	115	VTP4	—	— ...	116
VO133	—	— ...	125	VX2	U.	VP2B ...	116
VP2	M.	CV3787 ...	115	VX2S	U.	— ...	116
VP2B	—	CV520 ...	115	VX4	—	— ...	116
VP2D	M.	— ...	131	VX4S	U.	— ...	116
VP3	—	— ...	113	VX6S	—	— ...	116
VP4(met)	M.	CV3788 ...	115	VX13	—	— ...	116
VP4A	M.U.	(CV1169) ...	115	VX13S	—	— ...	116
VP4B	M.U.	CV3582 ...	115	VY1	FFF.	— ...	116
VP4C	—	— ...	115	VY2	FFF.	— ...	116
VP4S	—	— ...	115	VY2N	—	— ...	117
VP6	C.	EF92 ...	115	W4	—	— ...	117
VP6S	—	— ...	115	W4-500	—	— ...	117
VPI2D	H.	— ...	115	W7/1	A.	(CV2352) ...	—
VPI3	U.	— ...	115	W7/2	A.	(CV2188) ...	—
VPI3A	M.	— ...	115	W17	J.	(CV785), DF91, IT4	117
VPI3B	U.	— ...	115	W21-4 Pin	J.	CV171 ...	117
VPI3C	M.	CV3790 ...	116	W21-7 Pin	J.	CV3804 ...	117
VPI3K	U.	— ...	116	W25	J.	— ...	131
VPI3S	U.	— ...	116	W30K	J.	CV3805 ...	117
VP20	—	— ...	116	W31	J.	CV3806 ...	117
VP21	J.	(CV1083) ...	116	W42	J.	— ...	117
VP22	D.	— ...	116	W61	J.	CV100 ...	117
VP23	D.	CV3792 ...	116	W63	J.	(CV1183) ...	117
VP24(met)	—	CV3793 ...	116	W76	J.	I2K7gt ...	117
VP41	D.	(CV21) ...	116	W77	J.	(CV131), EF92	117
VPI33	D.	CV1457 ...	116	W81	—	— ...	117
VP210	D.	CV3794 ...	116	W101	—	— ...	117
VP215	D.RR.	CV3795 ...	116	W107	J.	— ...	117
VPI320	D.	— ...	116	W118	J.	— ...	129
VPI321	D.	— ...	116	W119	J.	— ...	131
VPI322	D.	CV3796, VPI3B	116	W142	—	UF41, I2AC5	117
VPT2	—	— ...	131	W143	—	EF22 ...	117
VPT4	H.	(CV1083) ...	116	W145	—	— ...	117
VPT4	H.	(CV1169) ...	116	W147	—	EF39 ...	117
VPT4B	H.	(CV1169) ...	116	W148	—	— ...	117
VPT210	H.	(CV1083) ...	—	W149	—	— ...	117
VPTA	H.	— ...	116	W150	—	EF41, 6CJ5	117
VPTS	—	— ...	116	W213	—	— ...	117
VPU1	—	— ...	125	W216	—	— ...	117
VPY2	—	— ...	116	W318	—	— ...	117
VR75/30	A.	CV3798 ...	—	W406	FFF.	— ...	117
VR90-30	—	CV3799 ...	—	W411	FFF.	— ...	117
VR105-30	A.	CV686 ...	—	W412	—	— ...	117
VR150-30	A.	(CV216) ...	—	W415N	—	— ...	117
VS2	H.	CV3800, PM12M	116	W420	—	— ...	117
VS18BO	XX.	(CV3625) ...	—	W719	J.	EF85 ...	117
VS24	J.	CV3802, PM12M	116	W727	J.	(CV454), EF93	—
VS24/K	—	— ...	—	W729	J.	— ...	117
(met)	J.	CV3803, PM12M	116	W731D	A.	CV2538 ...	—

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
W739	J.	— ...	129	X18	J.	DK92 ...	119
W4080	FFF.	— ...	117	X20	J.	— ...	119 & 129
W4110	FFF.	— ...	117	X21	J.	CV3816, FC2A	119
WD2	—	— ...	129	X21 met	J.	CV3817 ...	119
WD30	J.	CV3810 ...	117	X22	J.	CV3818, FC2	119
WD40	—	— ...	117	X23	J.	(CVI082) ...	119
WD142	—	UAF42, 12S7	117	X24	J.	CV3819 ...	119
WD150	—	EAF42, 6CT7 ...	117	X24 met	J.	CV3820 ...	119
W709	—	— ...	117	X30	J.	— ...	119
WE23	—	— ...	117	X31	J.	CV3821 ...	119
WE24	—	— ...	117	X31 met	J.	CV3822 ...	119
WE27	—	— ...	117	X32	J.	— ...	119
WE28	—	— ...	118	X41	J.	(CVI460) ...	119
WE29	—	— ...	118	X41 met	J.	(CV2833) ...	119
WE30	—	— ...	118	X42	J.	(CV3576), MH4105	119
WE51	—	— ...	118	X61M	J.	(CV281) ...	119
WE52	—	— ...	118	X62	J.	— ...	119
WE350A	—	— ...	118	X63	J.	CV3825, 6A8 ...	119
WE377	—	— ...	118	X64	J.	(CVI280) ...	119
WE403A	—	— ...	118	X65	J.	CV3826, 6K8 ...	119
WHTS	—	— ...	125	X66	J.	(CVI099) ...	119
WT389	—	— ...	118	X71	J.	— ...	119
WR390	—	— ...	118	X73	J.	— ...	119
WT210-0012	—	— ...	118	X75	J.	— ...	119
WT210-0013	—	— ...	118	X76	J.	12K8 ...	119
WT210-0019	—	— ...	118	X77	J.	CVI32, EK90	119
WT210-0021	—	— ...	118	X78	—	— ...	119
WT210-0025	—	— ...	118	X79	J.	— ...	119
WT210-0037	—	— ...	118	X81	—	— ...	119
WT210-0040	—	— ...	118	X99	Z.	— ...	119
WT210-0006	—	— ...	118	X101	—	— ...	119
WT210-0007	—	— ...	118	X107	—	— ...	119
WT210-0042	—	— ...	118	X108	—	— ...	119
WT210-0048	—	— ...	118	X109	—	— ...	119
WT210-0081	—	— ...	118	X117	J.	— ...	—
WT210-0082	—	— ...	118	X118	J.	— ...	129
WT210-0083	—	— ...	118	X142	—	UCH42, 14K7	120
WT210-0084	—	— ...	118	X143	—	ECH21 ...	120
WT210-0085	—	— ...	118	X145	—	— ...	120
WT210-0087	—	— ...	118	X147	—	ECH35 ...	120
WT210-0089	—	— ...	118	X148	J.	— ...	131
WT210-0090	—	— ...	118	X150	—	ECH42 ...	120
WT210-0108	—	— ...	118	X661	RR.	(CV2183) ...	—
WT210-0148	—	— ...	118	X662	RR.	(CV2234) ...	—
WT-T102	—	— ...	118			(CV2256) ...	—
WT-T122	—	— ...	118	X719	J.	CV2128, ECH81	120
WT-T123	—	— ...	118	X727	J.	(CV453), EK90	120
WT-T124	—	— ...	118	X6030	S.	— ...	120
WT-T125	—	— ...	118	XBI	RR.	(CV2293) ...	—
WT-T126	—	— ...	118	XBI	RR.	(CV2293) ...	—
WT-T128	—	— ...	118	XD	—	— ...	120
WT-T130	—	— ...	118	XDI.5	RR.	— ...	120
WT-T131	—	— ...	119	XD2.0	RR.	— ...	120
WT-T135	—	— ...	119	XEI	RR.	(CV495) ...	—
X14	—	1A7 ...	119	XE2	RR.	(CV2202) ...	—
X17	J.	(CV782), DK91	119	XFR1	RR.	— ...	120

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page	Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
XFR2	RR.	— ...	120	XSG2.0V	RR.	CV3833	121
XFR3	RR.	— ...	120	XVS2.0V	RR.	— ...	121
XFR5	RR.	— ...	131	XW075A	—	— ...	121
XFW10	RR.	— ...	120	XW075B	RR.	— ...	131
XFW20	RR.	— ...	131	XW1.5	RR.	— ...	121
XFW30	RR.	— ...	120	XW2.0V	RR.	(CV1703)	121
XFW40	RR.	— ...	120	XXB	Q.	— ...	121
XFW50	RR.	— ...	120	XXD	Q.S.	— ...	121
XFY10	RR.	— ...	120	XXFM	S.	— ...	121
XFY11	RR.	— ...	120	XXL	S.	— ...	121
XFY12	RR.	— ...	120	XY	—	— ...	121
XFY14	RR.	— ...	120	XY1.4A	RR.	— ...	131
XFY15	RR.	— ...	125	XY1.4B	RR.	— ...	131
XFY20	RR.	— ...	120	XY1.4C	RR.	— ...	131
XFY21	RR.	— ...	120	XY1.5	RR.	— ...	121
XFY22	RR.	— ...	120	XY2.0V	RR.	— ...	121
XFY23	RR.	— ...	120	XY14B	—	— ...	121
XFY31	RR.	— ...	120	XY14CC	—	— ...	121
XFY32	RR.	— ...	120	Y13	—	— ...	121
XFY33	RR.	— ...	120	Y25	J.	— ...	Appendix I
XFY34	RR.	— ...	120	Y61	J.	(CV1103), 6U5	Appendix I
XFY35	RR.	— ...	120	Y62	—	— ...	Appendix I
XFY41	RR.	— ...	120	Y63	J.	(CV1103), 6U5	Appendix I
XFY43	RR.	— ...	120	Y64	J.	— ...	Appendix I
XFY51	RR.	— ...	120	Y65	J.	(CV51)	Appendix I
XFY53	RR.	— ...	120	Y119	J.	— ...	Appendix I
XFY54	RR.	— ...	125	Y220	RR.	(CV1118)	121
XG2-500	M.	CV1144	120	Y230	—	— ...	121
XGR3	—	(CV151)	—	YD2	—	— ...	129
XG5-500	M.	(CV2957)	—	Z14	—	IN5G	121
XH1.5	RR.	CV3830	120	Z21	J.	CV3836	121
XH2.0	RR.	— ...	120	Z21 (7 Pin)	J.	CV3837	121
XH3-045	M.	(CV372)	—	Z22	J.	(CV1322), SP2	122
XH8-100	RR.	(CV1787)	—	Z26	—	— ...	121
XH16-200	RR.	(CV2520)	—	Z62	J.	CV3838	121
XH25-500	RR.	CV3521	—	Z63	J.	6J7 ...	121
XHP1.5	RR.	— ...	131	Z66	J.	CV3839	121
XL	RR.	— ...	120	Z73	—	— ...	121
XLO1.5	RR.	— ...	121	Z77	J.	(CV138), EF91	121
XL02.0V	RR.	(CV1701)	121	Z90	J.	(CV1091), EF50	121
XLI.5	RR.	(CV1720)	121	Z142	—	UF42	121
XL2.0V	RR.	(CV3831)	121	Z145	—	— ...	121
XN	RR.	(CV14)	—	Z150	—	EF42	121
XP	RR.	— ...	121	Z152	—	EF80, 6BX6	121
XPI.5	RR.	(CV176)	121	Z203C	M.	CV2271	—
XP2.0V	RR.	CV1702	121	Z220	—	— ...	122
XRI-3200	M.	(CV2210)	—	Z239/IG	R.	CV2187	—
XRI-6400	M.	CV2215	—	Z300T	M.	(CV1992)	—
XRI-1600	M.	CV3706	—	Z309	J.	— ...	122
XR2	—	— ...	121	Z319/IG	R.	(CV2187)	—
XR6	RR.	CV465	125	Z319	J.	CV2276	122
XR7	RR.	CV466	125	Z329	J.	— ...	129
XR8	RR.	CV468	125	Z502S	M.	CV2325	—
XR9	RR.	— ...	129	Z719	J.	6BX6, EF80	122
XSG	—	— ...	121				
XSG1.5V	RR.	(CV175)	121				

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
Z729	J.	CV2901, EF86	122
Z359	—	— ...	122
Z759	—	— ...	122
Z800U	M.	(CV2236)	—
Z801U	M.	(CV2255)	—
Z803U	M.	CV2434	—
ZA1	J.	(CV1175)	—
ZA2	J.	(CV1095)	—
ZD	H.	— ...	122
ZD2	—	— ...	125
ZD17	J.	(CV784), DAF91	122

Commercial Valve	Manufacturer	Equivalent (or nearest in brackets)	Page
ZD25	—	— ...	129
ZD152	—	6N8, EBF80	122
ZG532	—	CV2647	—
ZG547	—	(CV372)	—
ZP455	—	CV2789	—
ZP477	—	CV914	—
ZP527	—	CV855	—
ZP579	—	CV3842	—
ZP584	—	CV3843	—
ZP590	—	CV3844	—

SERVICE VALVE INDEX & CROSS REFERENCE

The equivalents given below are purely for convenience, and it does not necessarily follow that the data for any given valve type will appear in the data pages or even that the valve given can be tested on an 'AVO' Valve Characteristic Meter, or an 'AVO' Valve Tester.

Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page
ADI	DLS10	...	ARP35	EF50	... 74	CV20	VI906	... 114
AR4	PMIHF	... 95	ARP36	SP61	... 104	CV21	VP41	... 116
AR5	P220	... 92	ARP37	QP25	... 98	CV22	BT45	... —
AR6	LP2	... 87	ARP38	KTZ73	... 86	CV24	HL41	... 81
AR7	4DI	... 7	ARS7	VS24	... 116	CV25	4242A	... —
AR8	HL23DD	... 81	ARS8	PM12V	... 95	CV26	813	... —
AR9	PMILF	... 95	ARTH2	ECH35	... 73	CV27	4357A	... —
AR10	TDD2A	... 107	ARTPI	TP22	... 107	CV28	ACT9	... —
AR11	4019B	... 43	ARTP2	TP25	... 107	CV29	E1235	... —
AR12	4020A	... 43	AT20	MZ05/20	... 89	CV30	4270A	... —
AR13	B406	... 58	AT35	DET25	... —	CV31	U20	... 108
AR14	220RC	... —	AT37	ACT36	... —	CV32	RG3-250M	... —
AR15	220LF	... —	ATS25	807	... 40	CV33	4077A	... 44
AR16	220B	... 37	ATP4	V248A	... 113	CV34	MR10...	... —
AR17	MH4	... 88	ATP5	V245	... 113	CV38	E1198	... —
AR20	4021B	... 43	ATP7	V266	... —	CV39	S22AF	... —
AR21	ECB33	... 72	ATP10	I062A	... 44	CV40	E1255	... —
ARD2	DI	... 61	ATP35	PVI-35	... 97	CV41	E1267	... —
ARD4	D42	... 62	ATP75	PT6	... —	CV42	E1256	... —
ARDD1	I0DI	... 23	ATP100	4069A	... —	CV44	E1155	... —
ARDD3	6H6	... 17	ATS25A	807	... 40	CV45	S130P	... —
ARDD5	EB34	... 71	ATS70	4282B	... —	CV46	8011	... —
ARH1	6L7	... 18	AU1	U18	... 108	CV49	3B/501A	... —
ARPI	PT2	... 96	AU2	RG250	... —	CV51	AI320	... —
ARP2	SP2	... 104	AU3	U12/14	... 108	CV52	E1231	... —
ARP3	9D2	... 23	AU3A	I561	... 42	CV53	3A/I46J	...
ARP4	SP210	... 104	AU4	U17	... 108		Appendix III	
ARP5	VP2	... 115	AU5	VI907	... 114	CV54	V960	... 114
ARP6	SP4	... 104	AU6	GU50	... —	CV55	E1190	... —
ARP7	42MPT	... 33	AU8	U22	... 108	CV56	E1325	... —
ARP8	AC4Pen	... 53	AU12	U15	... 108	CV57	E1271	... —
ARP9	PenI340	... 94	AU13	5Z4	... 10	CV58	E1273	... —
ARP9A	7D8	... 21	AW2	7475	... —	CV62	E1046	... —
ARPI0	PenA4	... 94	AW3	S130	... —	CV63	E1323	... 70
ARPI1	TSP4	... 107	AW4	STV280/40	... —	CV64	E1342	... —
ARPI2	VP23	... 116	AW5	ME41	... 124	CV65	Pen25	... 93
ARPI3	VP210	... 116	AW6	EM31	... 124	CV66	RL37	... —
ARPI4	220IPT	... 37	CV1	D051	... —	CV69	E1326	... —
ARPI5	KTW63	... 86	CV2	E1228	... —	CV71	ASGLIM	... —
ARPI6	6J7	... 18	CV3	AFN202	... —	CV72	V1120	... 114
ARPI7	6F6	... 17	CV4	E1229	... —	CV73	I1E3	... —
ARPI8	KT24	... 85	CV5	CV152	... —	CV74	ESU74	... —
ARPI9	SP41	... 104	CV6	E1148	... 70	CV75	4313C	... —
ARP20	SP42	... 104	CV8	E1356	... —	CV76	E1359	... —
ARP21	Z62	... 121	CV9	AL60	... 56	CV77	K TUBE	... —
ARP22	I16/Pen	... 36	CV12	E1191	... —	CV78	E1137	... 70
ARP23	MS/Pen	... 89	CV13	BT9B	... —	CV79	E1379	... —
ARP24	220VPT	... —	CV14	XN	... —	CV80	VF01	... —
ARP25	KT41	... 86	CV15	E1226	... —	CV81	VF08	... —
ARP26	KT44	... 86	CV16	S25A	Appendix III	CV82	3A/I47J	...
ARP33	MSP4	... 89	CV18	DET19	... 64		Appendix III	
ARP34	EF39	... 74	CV19	EHT1	... —	CV84	4033A	... 43

Service	Commercial		Service	Commercial		Service	Commercial	
Type	Equivalent	Page	Type	Equivalent	Page	Type	Equivalent	Page
CV85	V2023	...	CV155	EI190	...	CV230	DV55	...
CV86	V1507	...	CV158	KR3	...	CV232	MF	...
CV87	KRN2	...	CV159	ALI	...	CV233	B55	...
CV88	DV32	Appendix III	CV160	EI342	...	CV234	DV56	...
CV89	EI380	...	CV161	EI342	...	CV235	U23	...
CV90	EI368	...	CV162	5Z094 or	...	CV236	EI465	...
CV92	EI332	...		52094	...	CV237	KR6/2	...
CV93	V625	Appendix III	CV163	5744WA	...	CV238	RK6/3	...
CV94	DS103	...	CV164	CG3E	...	CV240	ACT24	...
CV95	R3/I0...	...	CV165	CS36A	...	CV242	GS18	...
CV96	R3/I6...	...	CV166	GEX54/3	...	CV243	4045A	Appendix III
CV97	R2/I0...	...	CV167	TY4/500B	...	CV244	AF2	...
CV98	R2/38...	...	CV168	XD60	...	CV245	4328D	...
CV99	EI373	...	CV169	XD61	...	CV248	GS16	...
CV100	V2D33B	...	CV170	I2SF7GT	...	CV249	4019A	...
CV105	EI371	Appendix III	CV171	W21(4 Pin)	117	CV250	CMG25RS	...
CV108	BM313	...	CV172	EI468	...	CV251	MX57	...
CV109	9KP5	...	CV173	EF55	...	CV252	ACR22	...
CV110	VS68	...	CV174	EI459	...	CV253	CS3A	...
CV114	EI265	...	CV175	XSG1.5	...	CV254	9L01A	...
CV115	EI415	...	CV176	XPI.5	...	CV256	NS2	...
CV116	KR6/I	...	CV177	813	...	CV257	ACT22	...
CV117	EI417	...	CV178	EI458	...	CV258	EI273	...
CV118	SP61	...	CV180	KR4	...	CV259	EI495	...
CV119	XJ	...	CV181	ECC32	...	CV260	SP61	...
CV120	MF	...	CV182	EI488	...	CV261	R10	...
CV121	V1920	Appendix II	CV185	PM202	...	CV262	9MP6	...
CV122	EI336	Appendix III	CV186	EI342	...	CV263	VX3026	...
CV123	EI330	...	CV187	U19	...	CV264	API188	...
CV124	807	...	CV188	7475	...	CV265	I9E2	...
CV125	2043	...	CV189	BS4	...	CV266	EI336	...
CV126	EI362	...	CV190	DLS10	...	CV267	EI336	...
CV127	S30A	...	CV191	EI494	...	CV268	EI330	...
CV128	SU750	...	CV192	EI481	...	CV269	VCR97	...
CV129	KRN2A	...	CV199	NT99	...	CV271	V986	...
CV130	KRN3	...	CV200	MZ2-200	...	CV272	KR6/4	...
CV131	9D6	...	CV201	V630	Appendix III	CV273	5861	Appendix III
CV132	V885	Appendix III	CV202	YF	...	CV275	V1042	...
CV133	6C4	...	CV207	AC/P4	...	CV276	IIE2	...
CV135	EY91	...	CV208	I487	...	CV277	I9G3	...
CV136	7D9	...	CV209	MX57	...	CV278	EI606	...
CV137	EAC91	...	CV211	V2030B	...	CV279	NG16	...
CV138	EF91	...	CV212	LS594	...	CV281	X61	...
CV139	6L34	...	CV214	EI531	...	CV283	6AL5	...
CV140	6AL5	...	CV215	EI497	...	CV284	STV30/20	...
CV141	U4B	...	CV216	VRI50/30	...	CV285	VA35	...
CV142	U2	...	CV217	KRN3	...	CV286	QS95/10	...
CV143	U3	...	CV218	KRN3	...	CV287	ACT23	...
CV144	U4	...	CV219	EI046	...	CV288	ACT23	...
CV145	U5	...	CV220	631/PI	...	CV290	EI527	...
CV147	U7	...	CV221	EI516	...	CV292	EI481	...
CV148	U8	...	CV222	EI489	...	CV295	BS54	...
CV149	U7	...	CV223	KRN2A	...	CV296	DDR2	...
CV150	PK150	...	CV224	KRN2A	...	CV298	FA15	...
CV152	GU21	...	CV225	ACT17	...	CV299	V230A/IK	...
CV153	EI411	...	CV228	DV40B	...	CV302	ECH22	...
CV154	EI419	...	CV229	I336	Appendix III	CV303	EF22	...

Service	Commercial		
CV304	EL22	...	76
CV305	EF51	...	75
Type	Equivalent		Page
CV306	MX52	...	—
CV307	VCRS30	...	—
CV309	QV04-7	...	99
CV310	NHPI	...	—
CV311	54/444	...	—
CV312	ESU74	...	—
CV313	QSY50-P40	...	—
CV315	TYI-51	...	—
CV317	—	Appendix II	
CV319	E1453	...	—
CV320	E4103/B/4	...	—
CV321	KT66	...	86
CV324	CVI628	...	—
CV326	I5B	...	—
CV327	EF52	...	75
CV328	L9	...	—
CV329	6F33	...	17
CV335	VCR522B	...	—
CV336	VCR522C	...	—
CV337	27M1	...	—
CV338	E1524	...	—
CV339	24B2	...	—
CV342	DLS19	...	—
CV343	V894	...	—
CV344	E1323	...	70
CV345	I2E1	...	25
CV346	EZ22	...	78
CV347	EBC21	...	72
CV349	V2030E	...	—
CV352	EBC33	...	72
CV353	M500	...	—
CV354	ME1005	...	—
	Appendix III		
CV357	DL65747	...	—
CV358	EF37A	...	74
CV359	NE17	...	—
CV360	NE18	...	—
CV361	{ SV-828	...	—
	{ 5B/700A	...	—
CV367	IN21B	...	—
CV368	9-3	...	—
CV369	IB35	...	—
CV370	2J42	...	—
CV371	19G6	...	28
CV372	3C45	...	—
CV374	S3A	...	—
CV375	EA50	...	71
CV377	VII35C	...	—
CV378	53KU	...	34
CV379	ACT19	...	—
CV380	EF54	...	75
CV382	T24/40JA	...	—
CV383	T24/40JB	...	—
CV384	DET5	Appendix III	
CV385	DL71	...	66

Service	Commercial		
Type	Equivalent		Page
CV386	DF70	...	65
CV387	DL72	...	66
CV389	VCRX210	...	—
CV391	5B/255M	...	9
CV394	EM34	...	124
CV395	QSI50/45	...	—
CV397	DET24	...	—
CV398	715B	...	—
CV399	MH4	...	88
CV400	3E7	...	—
CV402	BS68	...	—
CV403	FVD7	...	—
CV404	HR7	...	83
CV405	927	...	—
CV406	E1423	...	—
CV407	E4412/E/9	...	—
	with side		
	contacts		—
CV408	A1714	...	53
CV409	A1820	...	53
CV410	K3A	...	—
CV411	GM5	...	—
CV412	A800	...	—
CV413	G150/2D	...	—
CV415	TT15	...	108
CV416	6F17	...	17
CV417	EC91	...	72
CV418	MX2	...	—
CV419	EC91	...	72
CV420	VCRX277	...	—
CV421	CAT20C	...	—
CV422	QSI05/45	...	—
CV423	25SN7	...	30
CV424	QQV06-40	...	99
CV425	CGI-C	...	—
CV426	EY51	...	77
CV427	5D21	...	—
CV428	5B/254M	...	9
CV429	12AEP6	...	—
CV430	29C1	...	31
CV431	85A1	...	—
CV431	ME1400	...	—
CV432	ME1400	...	—
CV433	BIC1E	...	—
CV434	Q575/60	...	—
CV435	GT11	...	—
CV436	ACT25	...	—
CV437	KT76	...	86
CV438	G120/1B	...	—
CV439	22/11BXA	...	—
CV440	1601ABC	...	—
CV441	VI052	...	—
CV442	GEX35	...	—
CV443	CK505AX	...	—
CV444	MZI-75	...	—
CV445	5J/180E	...	—
CV446	3Q/260E	...	—

Service	Commercial		
Type	Equivalent		Page
CV447	4078GA	...	—
CV448	GEX54	...	—
CV449	85A2	...	—
CV450	EL38	...	76
CV452	6AT6	...	12
CV453	6BE6	...	13
CV454	6BA6	...	13
CV455	I2AT7	...	24
CV456	E1633	...	70
CV460	BS48	...	—
CV461	BS92	...	—
CV462	BS84	...	—
CV463	BS82	...	—
CV464	9L01A	...	—
CV465	EF72	...	75
CV466	EF73	...	75
CV467	EF70	...	75
CV468	EC70	...	72
CV469	EA76	...	71
CV471	EL70	...	77
CV472	EF74	...	75
CV473	EY70	...	77
CV474	5643	...	—
CV475	EF71	...	75
CV476	T921	...	—
CV477	5899	...	46
CV482	A237	...	—
CV483	QV04-7R	...	99
CV484	DL92	...	66
CV486	V2046a	...	—
CV487	CRT/51	...	—
CV488	BS90	...	—
CV489	BT75	...	—
CV490	19H5	...	—
CV491	I2AU7	...	24
CV492	I2AX7	...	24
CV493	6X4	...	20
CV494	B12	...	—
CV495	5802	...	—
CV496	CG14...	...	—
CV498	NE17	...	—
CV499	5B/256M	...	9
CV500	6T7	...	20
CV501	EBF32	...	72
CV502	LD210	...	87
CV503	5W4	...	10
CV504	6U5	...	—
CV505	MT16	...	—
CV506	GL8023	...	—
CV507	REL64	...	—
CV508	4B49	...	—
CV509	6V6G	...	20
CV510	6V6	...	20
CV511	6V6	...	20
CV512	6W7	...	20
CV513	4J53	...	—
CV514	2J36	...	—

Service Type	Commercial Equivalent	Page
CV515	6Y6 ...	20
CV516	3GPI ...	—
CV517	OZ4A ...	1
CV518	AC/VPI ...	55
CV519	Pen4DD ...	93
CV520	VP2B ...	115
CV521	R4410 ...	—
CV522	7B7 ...	21
CV523	12Y4 ...	26
CV524	TT12 ...	108
CV525	12A6 ...	24
CV526	12A6 ...	24
CV527	DA60... ...	—
CV528	VA16 ...	—
CV529	12AH7 ...	24
CV530	G71E ...	—
CV531	12C8 ...	25
CV532	GU11 ...	—
CV533	CAT17C ...	—
CV534	12J5 ...	25
CV535	12J5 ...	25
CV536	4120/AA ...	—
CV537	12SA7 ...	26
CV538	12SA7 ...	26
CV539	1B23 ...	—
CV540	12SC7 ...	26
CV541	1B3 ...	1
CV542	5J23 ...	—
CV543	12SK7 ...	26
CV544	12SK7 ...	26
CV545	ACSP3 ...	—
CV546	12SQ7 ...	26
CV547	12SQ7 ...	26
CV548	LP2 ...	87
CV549	25A6 ...	29
CV550	25A6 ...	29
CV551	26L6 ...	30
CV552	25L6 ...	30
CV553	25L6 ...	30
CV554	D63 ...	62
CV555	25Z5 ...	30
CV556	QP25 ...	98
CV557	D42 ...	62
CV558	25Z6 ...	30
CV559	25Z6 ...	30
CV560	TSP4 ...	107
CV561	35L6 ...	32
CV562	35L6 ...	32
CV563	DA30... ...	62
CV564	35Z3 ...	32
CV565	35Z3 ...	32
CV566	RG-2 ...	—
CV567	35Z5 ...	32
CV568	35Z5 ...	32
CV569	ECC35 ...	73
CV570	3Q/19SE ...	—
CV571	50L6 ...	34

Service Type	Commercial Equivalent	Page
CV572	6X5 ...	20
CV573	6X5 ...	20
CV574	EZ35 ...	78
CV575	5U4 ...	10
CV576	1B26 ...	—
CV577	1B36 ...	—
CV578	6A8 ...	11
CV579	6A8 ...	11
CV580	6A8 ...	11
CV581	6C5 ...	15
CV582	6C5 ...	15
CV583	6G5 ...	—
CV584	GS46 ...	—
CV585	6C6 ...	15
CV586	EL37 ...	76
CV587	6Q7 ...	19
CV588	6Q7 ...	19
CV589	6Q7 ...	19
CV590	6SJ7 ...	19
CV591	6SJ7 ...	19
CV592	6SJ7 ...	19
CV593	GZ32... ...	80
CV594	6SH7 ...	19
CV595	6SH7 ...	19
CV596	2C45 ...	—
CV597	2X2A... ...	5
CV598	715C ...	—
CV599	1B51 ...	43
CV600	5CPI ...	—
CV601	5BPI ...	—
CV602	3API ...	—
CV603	10 ...	23
CV604	30 ...	31
CV605	32 ...	31
CV606	37 ...	32
CV607	38 ...	32
CV608	41 ...	32
CV609	42 ...	33
CV610	45 ...	33
CV611	56 ...	34
CV612	57 ...	34
CV613	58 ...	34
CV614	75 ...	35
CV615	76 ...	35
CV616	77 ...	35
CV617	80 ...	35
CV618	83 ...	35
CV619	84/6Z4 ...	35 & 20
CV620	211 ...	—
CV621	801 ...	—
CV622	802 ...	40
CV623	803 ...	—
CV624	804 ...	—
CV625	805 ...	40
CV626	808 ...	—
CV627	810 ...	—
CV628	811 ...	—

Service Type	Commercial Equivalent	Page
CV629	814 ...	—
CV630	826 ...	—
CV631	828 ...	—
CV632	829 ...	—
CV634	832 ...	—
CV633	829A ...	—
CV635	833 ...	—
CV636	836 ...	40
CV637	837 ...	—
CV638	838 ...	—
CV639	843 ...	41
CV640	860 ...	—
CV641	861 ...	—
CV642	872A ...	—
CV643	874 ...	—
CV644	875A ...	—
CV645	876 ...	—
CV646	879 ...	41
CV647	884 ...	41
CV648	885 ...	—
CV649	956 ...	—
CV650	958 ...	—
CV651	991 ...	—
CV652	1603 ...	42
CV653	1611 ...	42
CV654	1612 ...	42
CV655	1613 ...	42
CV656	1616 ...	42
CV657	1620 ...	42
CV658	1622 ...	42
CV659	1625 ...	42
CV660	6AC7 ...	11
CV661	6AB7 ...	11
CV662	8012 ...	—
CV663	8025 ...	—
CV664	9002 ...	50
CV665	9003 ...	50
CV666	9004 ...	—
CV667	9005 ...	—
CV668	35T ...	—
CV669	279A ...	—
CV670	645 ...	—
CV676	726A ...	—
CV677	701A ...	—
CV678	702A ...	—
CV679	703A ...	—
CV683	316A ...	—
CV684	274B ...	38
CV685	VR150-30 ...	—
CV686	OC3 ...	—
CV687	446B ...	39
CV688	2C43 ...	—
CV689	700A ...	—
CV690	RK48A ...	—
CV691	357A ...	—
CV692	OZ4 ...	1
CV693	HF300 ...	—

Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page
CV694	I2SG7	26	CV753	IA3	1	CV812	3B24	6
CV695	700B	—	CV754	IA4P	1	CV813	959	—
CV696	700C	—	CV755	IA5	1	CV815	3D6	6
CV697	I2SJ7	26	CV756	IA5	1	CV816	3DPI	—
CV698	I2SJ7	26	CV757	IA6	1	CV817	3EPI	—
CV699	700D	—	CV758	IB4P	1	CV818	3Q4	7
CV700	I2SR7	26	CV759	IB5	1	CV819	3Q5	7
CV701	ESA892	—	CV760	IB7	1	CV820	3S4	7
CV702	830B	—	CV761	IB22	—	CV821	4AI	—
CV703	I2K8	25	CV762	IC21	—	CV822	4B24	—
CV704	RK20A	—	CV763	ICA4	—	CV823	7A	—
CV705	ID5GP	2	CV764	ID5	2	CV824	4E27	—
CV706	6U7	20	CV765	ID7	2	CV825	4SHA	—
CV707	HK54	—	CV766	IE5GP	2	CV826	4THA	8
CV708	I61	—	CV767	IF4	2	CV828	4TPB	8
CV709	72	35	CV768	IF5G	2	CV829	4TPB	8
CV710	368A	—	CV769	IF6	2	CV830	4TSP	8
CV711	32	31	CV770	IF7	2	CV831	5API	—
CV712	38	32	CV771	IG5	2	CV832	5API	—
CV713	IB27	—	CV772	IG6	2	CV833	89	35
CV714	C6A	—	CV773	IG6	2	CV834	5B/300B	—
CV716	8013A	50	CV774	IH4	2	CV836	5BP4	—
CV717	5R4GY	10	CV775	ILA6	3	CV837	I2C8	25
CV718	5FP7	—	CV776	ILB4	3	CV838	5CP7	—
CV719	2I2IA	—	CV777	ILC5	3	CV839	5GPI	—
CV720	723A	—	CV778	ILC6	3	CV840	5H4	—
CV722	725A	—	CV779	ILD5	3	CV841	5U4	10
CV723	I619	42	CV780	ILH4	3	CV842	5W4	10
CV724	816	40	CV781	ILN5	3	CV843	6AB5	—
CV725	IB24	—	CV782	IR5	3	CV844	6AC5	11
CV726	35Z3	32	CV783	IS4	3	CV845	6AC5	11
CV727	IN2I	—	CV784	IS5	3	CV846	6AC7	11
CV728	IP5GT	3	CV785	IT4	3	CV847	6AF6g	—
CV729	5V4	10	CV786	IT5	3	CV848	6AG5	11
CV730	6A3	10	CV787	2A7	4	CV849	6AC7	11
CV731	6F6	11	CV788	832A	—	CV850	6AK5	11
CV732	6W4gt	20	CV789	3C24	—	CV851	6B4	13
CV733	REL8D	—	CV790	2API	—	CV852	6C4	15
CV734	228A	—	CV791	2B7	4	CV854	6C7	15
CV735	845	—	CV792	2C22	4	CV855	6C2I	—
CV736	905	—	CV793	2C33	4	CV856	6G8	17
CV737	906	—	CV794	2D2	4	CV857	6H7	—
CV738	953	—	CV795	2D4A	4	CV858	6J6	18
CV739	3API	—	CV796	2DI3C	5	CV859	6J8	18
CV740	5MPI	—	CV797	2D2I	5	CV860	6K5	18
CV741	5LPI	—	CV798	2E22	5	CV861	6K5	18
CV742	FG67	—	CV800	2J22	—	CV862	6L5	18
CV743	GET2	—	CV801	2J54	—	CV864	6P7	18
CV744	GET4½	—	CV802	2C26	5	CV865	6SD7	19
CV745	HK24	—	CV803	2V3	5	CV866	6SJ7Y	19
CV746	468PI	—	CV804	2V3	5	CV867	6SR7	19
CV747	6AC7	11	CV805	50Y6	34	CV869	6V5gt	20
CV748	725A	—	CV807	3A4	5	CV870	6V7	20
CV749	IN23A	—	CV808	3A5	5	CV871	6Z5	20
CV750	01A	1	CV809	3A/105B	—	CV872	6Z7	21
CV751	HY75	—	CV810	3AE	—	CV873	6ZY5	21
CV752	OA4	—	CV811	I291	41	CV874	7	—

Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page
CV875	I642 ...	42	CV934	15R ...	—	CVI030	4060A ...	—
CV876	7A6 ...	21	CV936	24A ...	29	CVI031	ESG250 ...	—
CV877	7A7 ...	21	CV937	25A7 ...	29	CVI032	220B ...	37
CV878	7A8 ...	21	CV938	25AC5 ...	—	CVI034	DET3 ...	—
CV879	7B4 ...	21	CV939	25B6 ...	30	CVI035	QP21 ...	98
CV880	7B5 ...	21	CV940	25B8 ...	30	CVI036	220PA ...	37
CV881	7B5 ...	21	CV941	HK24 ...	—	CVI037	MH4 ...	88
CV882	7B6 ...	21	CV942	25Y5 ...	30	CVI038	MHL4 ...	88
CV883	7B8 ...	21	CV943	26 ...	30	CVI039	1561 ...	42
CV884	7BP7 ...	—	CV944	27 ...	31	CVI040	PX25 ...	98
CV885	7C5 ...	21	CV945	28D7 ...	31	CVI041	PM12M ...	95
CV886	7C5 ...	21	CV946	28D7 ...	31	CVI042	210LF ...	37
CV887	7C6 ...	21	CV947	31 ...	31	CVI043	210PG ...	37
CV888	7D7 ...	21	CV948	32L7 ...	31	CVI044	210DDT ...	37
CV889	7D8 ...	21	CV949	33 ...	31	CVI045	X56 ...	—
CV890	7E5 ...	21	CV951	32A ...	—	CVI046	PT25H ...	97
CV891	7E6 ...	21	CV952	4081 ...	—	CVI047	TZ05-50 ...	—
CV892	7E7 ...	21	CV953	32 ...	—	CVI048	215SG ...	37
CV893	7F7 ...	21	CV954	20K ...	—	CVI049	210SPT ...	37
CV894	7G7 ...	22	CV955	4409 ...	—	CVI050	HL2 ...	81
CV895	7H7 ...	22	CV956	4602 ...	—	CVI051	Pen220A ...	94
CV896	7K7 ...	22	CV957	32 ...	31E	CVI052	EL32 ...	76
CV897	7J7 ...	22	CV958	26J ...	—	CVI053	EF39 ...	74
CV898	7N7 ...	22	CV959	20K ...	—	CVI054	EB34 ...	71
CV899	7Q7 ...	22	CV960	E4504/B/16 ...	—	CVI055	EBC33 ...	72
CV900	7R7 ...	22	CV961	NC13 ...	—	CVI056	EF36 ...	74
CV901	7Y4 ...	22	CV962	E4504/E/16 ...	—	CVI057	EK32 ...	76
CV902	7W7 ...	22	CV964	E4205-B7 ...	—	CVI058	EP60 ...	—
CV904	892R ...	—	CV966	E4504/M/16 ...	—	CVI059	955 ...	—
CV905	9HP7 ...	—	CV967	E4103/B/4 ...	—	CVI060	807 ...	40
CV906	I602 ...	42	CV977	Twin CV55... ...	—	CVI061	DET19 ...	64
CV907	I2A ...	24	CV979	DSL10 ...	—	CVI062	TY1-50 ...	—
CV908	I2A5 ...	24	CV982	Button	—	CVI064	U12/14 ...	108
CV909	I2A7 ...	24		Tune-on	—	CVI065	SP61 ...	104
CV910	I2A8 ...	24	CV984	S2A ...	—	CVI066	P61 ...	92
CV911	I2B8 ...	24	CV986	15A ...	—	CVI067	6J5 ...	18
CV913	I2DP7 ...	—	CV987	NC13A ...	—	CVI068	STV280/40 ...	—
CV914	I2DP7 ...	—	CV988	Neon	—	CVI069	STV280/80 ...	—
CV915	I2FP7 ...	—		Type 'G'	—	CVI070	7475 ...	—
CV916	I2H6 ...	25	CV995	6AJ5 ...	11	CVI071	U52 ...	109
CV917	I2J7 ...	25	CV996	EL32 ...	76	CVI072	GU50 ...	—
CV918	I2K7 ...	25	CV997	3092 ...	—	CVI073	H63 ...	80
CV919	I2SF5... ...	26	CV998	2000T ...	—	CVI074	6J7 ...	18
CV920	I2SF5... ...	26	CV999	3C22 ...	—	CVI075	KT66 ...	86
CV921	I2SF7 ...	26	CVI000	4DI ...	7	CVI076	DA41... ...	—
CV922	I2SK7 ...	26	CVI001	SU2150A ...	105	CVI077	EM31 ...	125
CV923	I2SJ7 ...	26	CVI002	E1192 ...	70	CVI078	DI ...	61
CV924	I2SL7 ...	26	CVI018	215SG ...	37	CVI079	KT8 ...	85
CV925	I2SN7 ...	26	CVI019	PM2 ...	95	CVI080	4307A ...	—
CV926	4B35 ...	—	CVI020	220P ...	37	CVI081	4052A ...	—
CV927	I2Z3 ...	26	CVI021	210LP ...	—	CVI082	220TH ...	37
CV928	I3-4 ...	—	CVI022	220PA ...	37	CVI083	210VPT ...	37
CV929	I3SPA ...	27	CVI023	230XP ...	37	CVI087	I4L ...	—
CV930	I4F7 ...	27	CVI025	DET25 ...	—	CVI088	832 ...	—
CV931	I5 ...	27	CVI027	210LF ...	37	CVI089	TVO3-10A ...	108
CV932	446A ...	39	CVI028	220VSG ...	37	CVI090	E1046 ...	—
CV933	I5E ...	—	CVI029	ESU150 ...	—	CVI091	EF50 ...	74

Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page
CVI092	EA50 ...	71	CVI156	DEQ ...	—	CVI240	PZI-35 ...	—
CVI095	954 ...	—	CVI158	PMI4 ...	95	CVI246	PM202 ...	95
CVI096	5B/502A ...	—	CVI159	PMI4 ...	95	CVI250	4279A ...	—
CVI097	ECR60 ...	—	CVI160	I04V ...	36	CVI252	4212E ...	—
CVI098	E960T ...	—	CVI161	I04V ...	36	CVI253	EI161 ...	—
CVI099	X66 ...	119	CVI163	PD220A ...	93	CVI255	EI189 ...	—
CVI100	KTW62 ...	86	CVI164	ACSG ...	54	CVI256	EI232 ...	—
CVI101	MHLD6 ...	88	CVI165	VMS4... ...	115	CVI257	EI155 ...	—
CVI102	BL63 ...	59	CVI166	P220 ...	92	CVI259	ESU450 ...	—
CVI103	Y63 ...	125	CVI167	PM24A ...	95	CVI260	ESU208 ...	—
CVI104	PT15 ...	97	CVI168	PX4 ...	97	CVI261	RX3-120 ...	—
CVI105	ML6 ...	88	CVI169	VMP4G ...	115	CVI262	GUI ...	—
CVI106	9D2 ...	23	CVI170	D4I ...	62	CVI263	RGI-125 ...	—
CVI107	15D2 ...	28	CVI171	AT4 ...	—	CVI264	UI8 ...	108
CVI108	8D2 ...	22	CVI172	VMP4G ...	115	CVI265	UI5 ...	108
CVI109	4DI ...	7	CVI173	354V ...	39	CVI266	UI5 ...	108
CVI110	S130 ...	—	CVI174	KT42 ...	86	CVI267	U4020 ...	110
CVI111	VI907 ...	114	CVI177	KT42 ...	86	CVI268	5Y3 ...	10
CVI112	VI026 ...	—	CVI175	AP4 ...	—	CVI279	MU2 ...	89
CVI113	UI7 ...	108	CVI176	AP4 ...	—	CVI280	6L7 ...	18
CVI114	E1024 ...	—	CVI177	4DI ...	7	CVI281	KTW61 ...	86
CVI116	V872 ...	114	CVI178	DA30... ...	62	CVI282	MSP4 ...	89
CVI117	4IMTL ...	33	CVI179	ML4 ...	88	CVI283	SP4 ...	104
CVI118	KT2 ...	85	CVI180	244V ...	37	CVI284	MS/Pen ...	89
CVI119	DDL4 ...	64	CVI181	KT41 ...	86	CVI285	6N7 ...	18
CVI120	SU2150A ...	105	CVI182	H42 ...	80	CVI286	6L6 ...	18
CVI121	T4I ...	105	CVI183	W42 ...	117	CVI287	KT32 ...	85
CVI122	4IMXP ...	33	CVI184	A373 ...	—	CVI288	244V ...	37
CVI123	EF8 ...	74	CVI186	6F6 ...	17	CVI289	1561 ...	—
CVI124	MS/Pen ...	89	CVI187	D4I ...	62	CVI290	SU2150A ...	105
CVI125	MS/PenB ...	89	CVI188	N43 ...	90	CVI291	HVR2 ...	83
CVI126	4SH ...	—	CVI189	AC6Pen ...	53	CVI296	MUI4 ...	89
CVI127	Pen46 ...	94	CVI190	ACP4... ...	54	CVI300	10DI ...	23
CVI128	GTIC ...	—	CVI191	KTZ4I ...	86	CVI301	6H6 ...	17
CVI129	MS/Pen ...	89	CVI192	Z62 ...	121	CVI302	D42 ...	63
CVI130	HL23 ...	81	CVI193	X65 ...	119	CVI303	PMIHF ...	95
CVI131	4IDS ...	—	CVI194	20AI ...	29	CVI304	LP2	
CVI133	V960 ...	114	CVI195	KTW63 ...	86		(selected)	87
CVI134	HVR2 ...	83	CVI196	AC5PenDD ...	53	CVI305	4DI ...	7
CVI135	EI148 ...	70	CVI197	EC53 ...	72	CVI306	HL23DD ...	81
CVI136	EF54 ...	75	CVI198	ACP4... ...	54	CVI307	PMILF ...	95
CVI137	EC52 ...	72	CVI200	202 ...	—	CVI308	TDD2A ...	106
CVI138	E4412/B/9 ...	—	CVI201	4317 ...	—	CVI309	4019B ...	43
CVI140	I2MD6 ...	—	CVI202	304 ...	—	CVI310	KCI ...	84
CVI141	DPQ ...	—	CVI205	E1007 ...	—	CVI311	B406 ...	58
CVI142	MR75 ...	—	CVI206	D060 ...	—	CVI312	220RC ...	—
CVI143	GTIA ...	—	CVI207	ES450 ...	—	CVI313	220LF ...	—
CVI144	BT19 ...	—	CVI208	PM256 ...	95	CVI314	DLS10 ...	—
CVI145	BT9/A ...	—	CVI219	MZI-100 ...	—	CVI316	4021B ...	43
CVI147	BT35 ...	—	CVI220	4033L ...	43	CVI317	5625 ...	—
CVI148	E1289 ...	—	CVI221	PZI-75 ...	—	CVI318	VS24 ...	116
CVI149	BT41 ...	—	CVI222	ACT6 ...	—	CVI319	PM12V ...	95
CVI151	PM3 ...	95	CVI223	DET5AppendixIII		CVI320	SP2 ...	104
CVI152	PM4DX ...	95	CVI235	DET12		CVI321	9D2 ...	23
CVI153	PM254 ...	95		(SPECIAL) ...	—	CVI322	SP210 ...	104
CVI154	PM4DX ...	95	CVI237	PM24D ...	95	CVI323	VP2 ...	115
CVI155	DEQ Appendix III		CVI238	PM24D ...	95	CVI324	SP4 ...	104

Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page
CVI325	42MPT	33	CVI394	ACR18	—	CVI458	4IMP	32
CVI326	AC4Pen	53	CVI397	E4504/M/16	—	CVI459	MU2	89
CVI327	Pen1340	94	CVI400	CIC	—	CVI460	X41	119
CVI328	7D8	21	CVI401	CL33	61	CVI461	U22	108
CVI329	PenA4	94	CVI402	CY31	61	CVI462	A915	—
CVI330	TSP4	107	CVI403	DD41	—	CVI463	CBL31	60
CVI331	VP23	116	CVI404	EF36	74	CVI464	EF39	74
CVI332	VP21	116	CVI405	E1199	—	CVI466	P57	—
CVI333	220IPT	—	CVI406	HL41	81	CVI467	PY3-600	—
CVI334	KT24	85	CVI407	Pen45	94	CVI468	SP4	104
CVI335	SP41	104	CVI408	P41	92	CVI469	Z22	—
CVI336	SP42	104	CVI409	SP2	104	CVI470	3P/270B	—
CVI337	116/Pen	36	CVI410	TH2	106	CVI471	4049A	—
CVI338	220VPT	—	CVI411	TH41	107	CVI472	CMG25	—
CVI340	KT45	86	CVI412	TV4	174	CVI473	CMG25	—
CVI341	MSP4	89	CVI413	UU6	112	CVI474	CE20	—
CVI342	QP25	98	CVI414	VP41	116	CVI475	M501	—
CVI343	KTZ73	86	CVI415	4011A	—	CVI476	M507	—
CVI344	TP22	107	CVI418	10D1	23	CVI477	M507	—
CVI345	TP25	107	CVI419	11D3	23	CVI478	M501	—
CVI347	ECH35	73	CVI420	4078A	—	CVI479	M501	—
CVI349	RG5-500	—	CVI422	3D/10A	—	CVI480	M501	—
CVI350	TB3/750	—	CVI423	9D2	23	CVI481	M501	—
CVI351	TB4/1250	—	CVI424	20A1	29	CVI482	M501	—
CVI352	EM80	125	CVI425	7D5	21	CVI483	M519	—
CVI353	0A81	—	CVI426	EK2	76	CVI484	M519	—
CVI354	0A85	—	CVI427	EF9	74	CVI485	M519	—
CVI355	ESU300	—	CVI428	EBC3	71	CVI486	M519	—
CVI356	U22	108	CVI429	EL2	76	CVI495	M528	—
CVI359	ME41	88	CVI430	ACSP3	54	CVI496	M528	—
CVI361	MZ05-20	89	CVI431	ACT16	—	CVI497	M528	—
CVI363	DET16	—	CVI432	CMG8	—	CVI498	M528	—
CVI364	807	40	CVI433	EC31	72	CVI499	M528	—
CVI365	4282B	—	CVI434	EM4	174	CVI500	M528	—
CVI366	V248A	113	CVI435	GU2	—	CVI501	E1192	70
CVI367	V245	113	CVI436	HL2	81	CVI502	KT32	85
CVI368	V266	—	CVI437	E1143	—	CVI503	KT33C	85
CVI369	4061A	44	CVI438	KT61	86	CVI504	V1901	—
CVI370	PVI-35	97	CVI439	MT9F	—	CVI505	MH41	88
CVI371	PZI-35	—	CVI440	MT9L	—	CVI506	ESP450	—
CVI372	4069A	—	CVI441	MT12A	—	CVI508	V1913	—
CVI373	PY3-600	—	CVI442	MT14	—	Appendix III		
CVI374	807	40	CVI443	RI	99	CVI510	E1242	70
CVI375	EF85	75	CVI444	42SPT	33	CVI517	E4504/C/16	—
CVI376	EF80	75	CVI445	4012A	—	CVI518	09D	—
CVI377	GZ34...	80	CVI446	4107B	—	CVI521	E4412/M/9	—
CVI379	20K	—	CVI447	4030D	—	CVI522	E4013-B4	—
CVI380	20K	—	CVI448	4043C	—	CVI525	E4205/C/7	—
CVI382	ACR10	—	CVI449	4064B	—	CVI526	3EGI	—
CVI384	4IDS	—	CVI450	4227A	—	CVI527	VLS492AG	—
CVI385	E4504/B/16	—	CVI451	4274A	4	CVI529	E4412/E/9	—
CVI386	ACR3	—	CVI452	4300A	—	CVI530	6LY1	—
CVI387	ACR4	—	CVI453	4378	—	CVI535	EZ80	78
CVI388	ACR5	—	CVI454	225DU	37	CVI536	1608ABA	—
CVI389	ACR6	—	CVI455	411U	—	CVI537	3ACP2	—
CVI391	E4504/E/16	—	CVI456	Pen383	94	CVI538	5J32	—
CVI393	ACR17	—	CVI457	VPI33	116	CVI539	D.15	—

Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page
CVI540	33B/152M	32	CVI619	4212E	—	CVI679	DA30...	62
CVI543	I2MD6	—	CVI620	DET6	—	CVI680	PM202	95
CVI550	VTIA...	—	CVI621	ESW501	—	CVI681	TSP4 ...	107
CVI551	VTIC...	—	CVI622	4052A	—	CVI683	MKT4	88
CVI552	VX3B	—	CVI623	RGL250	—	CVI684	APP4C	56
CVI553	ESU450X	—	CVI625	RG3-250	—	CVI685	APP4C	56
CVI554	VT5B	—	CVI626	RGI-240A	—	CVI686	D418 ...	62
CVI555	VU6A	—	CVI627	5D/100A	—	CVI687	D418 ...	62
CVI557	VT9B	—	CVI628	GU8 ...	—	CVI688	4033L	43
CVI558	VT10D	—	CVI629	RG3-1250A...	—	CVI689	PAI ...	93
CVI559	VR12C	—	CVI630	ESP450	—	CVI690	9AI ...	23
CVI560	VR12F	—	CVI632	IN82	—	CVI691	DDL4	64
CVI561	VT13B	—	CVI633	3V4 ...	7	CVI692	AC/P	54
CVI562	VT13C	—	CVI634	XB2 ...	—	CVI694	3A/144A	—
CVI563	VR14A	—	CVI635	5A/163K	9	CVI695	DH30	65
CVI564	Vu16A	—	CVI636	LS5 ...	—	CVI696	B2I	57
CVI565	230XP	37	CVI637	LS5 ...	—	CVI697	X4I ...	119
CVI566	VR24B	—	CVI638	4101D	—	CVI698	A819 ...	53
CVI567	2C25 ...	4	CVI639	4101E	—	CVI699	SP4I ...	104
CVI568	4062A	—	CVI640	4002D	—	CVI700	SP4I ...	104
CVI569	R3 ...	99	CVI641	4102E	—	CVI701	XLO ...	—
CVI570	EK32 ...	76	CVI642	DER ...	—	CVI702	XP ...	121
CVI571	VT58A	—	CVI643	EI32 ...	—	CVI703	XW ...	—
CVI572	807 ...	40	CVI644	EI532	—	CVI704	57 ...	34
CVI573	4074B	—	CVI645	EI33 ...	—	CVI705	58 ...	34
CVI574	SP4I ...	104	CVI646	EI453	—	CVI706	2B7 ...	4
CVI575	VU71A	—	CVI647	LS5B ...	—	CVI707	2A5 ...	4
CVI576	KT38	—	CVI648	4205E	—	CVI708	80 ...	35
CVI577	EI143	—	CVI649	6C5 ...	15	CVI709	6D6 ...	16
CVI578	EF50	74	CVI650	LS5A ...	—	CVI710	6C6 ...	15
CVI579	954 ...	—	CVI651	G455B	—	CVI711	6B7 ...	13
CVI581	ECH35	73	CVI652	P220A	92	CVI712	42 ...	33
CVI582	SI30 ...	—	CVI653	KCI ...	84	CVI713	EF8 ...	74
CVI584	— Appendix III	—	CVI655	4019B	43	CVI714	EF9 ...	74
CVI585	T4I ...	105	CVI656	LS8 ...	87	CVI715	EBC3	71
CVI586	HL23	81	CVI657	4020B	43	CVI716	EI54I	—
CVI587	ECR35	—	CVI658	LS9B ...	87	CVI717	4307A	—
CVI588	ECR30	—	CVI659	4022B	—	CVI718	ACTP	55
CVI592	E4504/C/16	—	CVI660	LS7 ...	87	CVI719	U22 ...	108
CVI596	09I ...	—	CVI661	DL ...	66	CVI720	XLI.5	121
CVI597	E4103/B/4	—	CVI662	P215 ...	92	CVI721	XPI.5	121
CVI600	CATI	—	CVI663	4021B	43	CVI722	A90I ...	53
CVI601	CARI	—	CVI664	B406 ...	58	CVI723	V257	—
CVI602	CAR4	—	CVI665	DH ...	65	CVI724	5A/102D	8
CVI603	4104A	—	CVI666	P610 ...	—	CVI726	5A/105A	—
CVI604	SSI97I	—	CVI667	LS8A ...	87	CVI727	Z22 ...	—
CVI605	4013C	—	CVI668	4033L	43	CVI728	WE262B	—
CVI606	CAT2	—	CVI669	P625 ...	—	CVI731	SI30 ...	—
CVI607	OC2.5	—	CVI670	HLI320	82	CVI732	ML4 ...	88
CVI608	U4 ...	—	CVI671	4021A	43	CVI733	4108AG	—
CVI609	SW7 ...	—	CVI672	PEN36C	94	CVI734	3Q/213E	—
CVI610	MT4 ...	—	CVI673	PM2HL	95	CVI735	DC2P	63
CVI611	MR4 ...	89	CVI674	AC/S2Pen	54	CVI737	MW6-2	—
CVI612	VT9B	—	CVI675	N43 ...	90	CVI738	R5I6I	—
CVI614	ES1500A	—	CVI676	LS8A ...	87	CVI739	GC10/4B	—
CVI615	ESU1500	—	CVI677	AC52	—	CVI740	GS12C	—
CVI618	ES250M	—	CVI678	HLA2	82	CVI741	EL34 ...	76

Service Type	Commercial Equivalent	Page
CVI742	BK44	...
CVI743	BS64	...
CVI744	15L01A	...
CVI745	62BT	... 34
CVI746	30C12PI	...
CVI747	M505	...
CVI748	TTR31MC	...
CVI749	205D	... 36
CVI750	33A/100A	... 32
CVI751	34	... 32
CVI752	35	... 32
CVI753	35A5	... 32
CVI754	35TG	...
CVI755	1626	... 42
CVI756	1629	...
CVI757	900I	... 50
CVI758	1L4	... 2
CVI759	2C26A	... 4
CVI760	2126	...
CVI761	3FP7	...
CVI762	6AK6	... 11
CVI763	6J4	... 8
CVI764	CE2	...
CVI765	5664	...
CVI766	CX25	...
CVI768	7076	...
CVI769	2A6	... 4
CVI770	7A4	... 21
CVI771	39/44	32 & 33
CVI772	47	... 33
CVI773	82	... 35
CVI774	112A/12A	36 & 24
CVI775	36	... 32
CVI776	6D7	... 16
CVI777	7C7	... 21
CVI778	101D	...
CVI779	102D	...
CVI780	30TWIN	...
CVI781	310B	... 38
CVI782	340A	...
CVI783	9JPI	...
CVI784	6AK7	... 11
CVI785	1N26	...
CVI786	3K33	...
CVI787	4C35	...
CVI788	3J31	...
CVI789	5FPI4	...
CVI790	7Z4	... 22
CVI791	5LPI	...
CVI892	1960	...
CVI793	724B	...
CVI794	959	...
CVI795	723A/B	...
CVI796	DW4	... 68
CVI797	4081A	...
CVI798	2051	... 43
CVI799	350B	... 39

Service Type	Commercial Equivalent	Page
CVI800	1A7	... 1
CVI801	GS118	...
CVI802	1A7	... 1
CVI803	1C5	... 1
CVI805	1C5	... 1
CVI806	1D5	... 2
CVI807	2J31	...
CVI808	2J32	...
CVI809	2J33	...
CVI810	3J34	...
CVI811	1D8	... 2
CVI812	1E7	... 2
CVI813	2DPI	...
CVI814	5LPI	...
CVI815	6Q5	...
CVI816	6Y3	... 20
CVI817	1G4	... 2
CVI818	1H5	... 2
CVI819	6P5	... 18
CVI820	1H5	... 2
CVI821	1N5	... 3
CVI822	2J48	...
CVI823	1N5	... 3
CVI824	1Q5	... 3
CVI825	KT45	... 86
CVI826	1Q5	... 3
CVI827	M510	...
CVI828	M512	...
CVI829	1T5	... 3
CVI830	1B3	... 1
CVI831	2A3	... 4
CVI832	0A2	...
CVI833	0B2	...
CVI934	2A5	... 4
CVI835	3B28	...
CVI836	4B26	...
CVI837	2B7	... 4
CVI838	QQZO4-15	99
CVI839	6F13	... 17
CVI841	BS52	...
CVI842	2G	...
CVI843	2Y2	... 5
CVI844	GS3/B	...
CVI846	5T4	... 10
CVI847	19H4	... 28
CVI848	20A2	...
CVI849	5W4	... 10
CVI850	6L19	... 18
CVI851	5X4	... 10
CVI852	5X4	... 10
CVI853	6P25	... 19
CVI854	5Y3	... 10
CVI855	UU9	... 113
CVI856	5Y3	... 10
CVI857	5Y4	... 10
CVI858	BS62	...
CVI859	BS4A	...

Service Type	Commercial Equivalent	Page
CVI860	30D5	...
CVI861	5Z3	... 10
CVI862	6AQ5	... 12
CVI863	5Z4	... 10
CVI864	5Z4	... 10
CVI865	6R4	... 19
CVI866	M503	...
CVI867	6A6	... 11
CVI868	5T01A	...
CVI869	12T01A	...
CVI870	6A7	... 11
CVI871	K307	...
CVI873	6AB7	... 11
CVI876	1852	... 4
CVI878	6AD7	... 11
CVI879	HP4101	...
CVI880	7BM1A	...
CVI882	6AG7	... 11
CVI883	4H/180E	...
CVI884	33A/158M	... 32
CVI885	6B5	...
CVI886	EC80	... 72
CVI887	6B6	... 13
CVI888	EC81	... 72
CVI889	TSY4-500	...
CVI891	6B7	... 13
CVI892	2K28	...
CVI893	6B8	... 13
CVI894	6B8	... 13
CVI895	STV/70/60	...
CVI986	6C8	... 15
CVI897	4J34	...
CVI898	4J35	...
CVI899	6L18	... 18
CVI900	6D6	... 16
CVI901	6F11	... 17
CVI902	6D8	... 16
CVI903	592	...
CVI904	CAA322	...
CVI905	4-65A	...
CVI906	6E5	...
CVI907	CS2-C	...
CVI908	6F5	... 17
CVI909	6F5	... 17
CVI910	6F5	... 17
CVI911	6F6	... 17
CVI912	6F6	... 17
CVI913	CS44X	...
CVI914	4J31	...
CVI915	6F7	... 17
CVI916	4J33	...
CVI917	6F8	... 17
CVI918	6F8	... 17
CVI919	6F4	...
CVI920	6LD20	... 18
CVI921	U24	... 108
CVI924	TY2-125	...

Service Type	Commercial Equivalent	Page
CV1926	6G6 ...	17
CV1927	B142 ...	—
CV1928	12BA6 ...	25
CV1929	6H6 ...	17
CV1930	6H6 ...	17
CV1931	6H6 ...	17
CV1932	6J5 ...	18
CV1933	6J5 ...	18
CV1934	6J5 ...	18
CV1935	6J7 ...	18
CV1936	6J7 ...	18
CV1937	6J7 ...	18
CV1938	6K6 ...	18
CV1939	37X50 ...	—
CV1940	6K6 ...	18
CV1941	6K7 ...	18
CV1942	6K7 ...	18
CV1943	6K7 ...	18
CV1944	6K8 ...	18
CV1945	6K8 ...	18
CV1946	6K8 ...	18
CV1947	6L6 ...	18
CV1948	6L6 ...	18
CV1949	6D4 ...	—
CV1950	6L7 ...	18
CV1951	6L7 ...	18
CV1953	6N6 ...	—
CV1954	6N6 ...	—
CV1955	EF91 ...	75
CV1956	6N7 ...	18
CV1957	6N7 ...	18
CV1958	6N7 ...	18
CV1959	50C5 ...	33
CV1960	6R6 ...	19
CV1961	12AU6 ...	24
CV1962	6R7 ...	19
CV1963	6R7 ...	19
CV1964	6R7 ...	19
CV1966	6SA7 ...	19
CV1967	6SA7 ...	19
CV1968	CWS24A ...	—
CV1969	6SC7 ...	19
CV1970	6SC7 ...	19
CV1971	1T4 ...	3
CV1972	6SF5 ...	19
CV1973	6SF5 ...	19
CV1974	6S7 ...	19
CV1975	6S7 ...	19
CV1967	MV6-5 ...	—
CV1977	UL41 ...	112
CV1978	6SG7 ...	19
CV1979	61BT ...	34
CV1980	185BT ...	36
CV1981	6SK7 ...	19
CV1982	6SK7 ...	19
CV1984	6SC7 ...	19
CV1985	6SL7 ...	19

Service Type	Commercial Equivalent	Page
CV1986	6SN7 ...	19
CV1988	6SN7 ...	19
CV1989	SD6 ...	103
CV1990	6SQ7 ...	19
CV1991	6SQ7 ...	19
CV1992	1267 ...	—
CV1993	6SS7 ...	19
CV1995	6ST7 ...	19
CV1996	6ST7 ...	19
CV1999	IV ...	3
CV2000	— Appendix III	—
CV2001	— ...	—
CV2002	— ...	—
CV2003	— ...	—
CV2004	— ...	—
CV2005	— ...	—
CV2006	12AU7 ...	24
CV2007	— ...	—
CV2008	— Appendix III	—
CV2009	— Appendix III	—
CV2010	— Appendix III	—
CV2011	— Appendix III	—
CV2014	— Appendix III	—
CV2015	— ...	64
CV2029	G180/2G ...	—
CV2010	DF72 ...	65
CV2013	— Appendix III	—
CV2016	— Appendix III	—
CV2020	— Appendix III	—
CV2021	— Appendix III	—
CV2022	— Appendix III	—
CV2024	— Appendix III	—
CV2025	— Appendix III	—
CV2101	— Appendix III	—
CV2102	DL75 ...	66
CV2103	DF73 ...	65
CV2104	DAF70 ...	62
CV2105	DF70 ...	65
CV2106	DL66 ...	66
CV2107	DF66 ...	65
CV2108	9M06A ...	—
CV2110	E2004 ...	71
CV2115	E2004 ...	71
CV2124	BK24 ...	—
CV2125	BD78 ...	—
CV2126	3V/42DB ...	—
CV2127	6CH6... ...	15
CV2128	6AJ8 ...	11
CV2129	5763 ...	45
CV2130	TT16 ...	—
CV2131	5022 ...	—
CV2132	90AV ...	—
CV2133	90CG ...	—
CV2134	90CV ...	—
CV2135	8D5 ...	23
CV2136	6BW6 ...	14
CV2137	E4504/M/16 ...	—

Service Type	Commercial Equivalent	Page
CV2138	GM4 ...	—
CV2139	EHM2 ...	—
CV2140	B6 ...	—
CV2141	B6E ...	—
CV2142	B12E ...	—
CV2143	B24 ...	57
CV2144	B24E ...	—
CV2145	M6 ...	—
CV2146	DM6 ...	—
CV2147	G24H ...	—
CV2148	GM5B ...	—
CV2149	GM1B ...	—
CV2150	MX103 ...	—
CV2151	MX105 ...	—
CV2152	MX107 ...	—
CV2153	MX108 ...	—
CV2154	SIM2 ...	—
CV2155	SIM5 ...	—
CV2156	— Appendix III	—
CV2159	BR153 ...	—
CV2160	ESU77 ...	—
CV2161	K301 ...	—
CV2162	12L01A ...	—
CV2164	K302 ...	—
CV2166	4J50 ...	—
CV2171	A2087 ...	53
CV2173	G10H ...	—
CV2174	G240/2D ...	—
CV2175	DG7-5 ...	—
CV2179	E2134 ...	71
CV2180	19H4 ...	28
CV2181	BS104 ...	—
CV2183	X661 ...	—
CV2185	88D ...	—
CV2187	Z239/1G ...	—
CV2188	W7/2D ...	—
CV2189	V240C/2K ...	—
CV2190	V233A/1K ...	—
CV2191	DG13-2 ...	—
CV2192	9MW5AX ...	—
CV2193	89D ...	—
CV2194	G400/1K ...	—
CV2195	EF91 ...	75
CV2199	GC10A ...	—
CV2201	E2043 ...	—
CV2202	XE2 ...	—
CV2203	GHT1 ...	—
CV2204	TD03-10F ...	—
	Appendix III	—
CV2205	E4103/E/34 ...	—
CV2207	— Appendix III	—
CV2208	G50/1G ...	—
CV2209	6F33 (Special) ...	17
CV2210	5544 ...	—
CV2212	13D3 ...	27
CV2213	NT2 ...	—
CV2214	3B/240M ...	6

Service Type	Commercial Equivalent	Page
CV2215	5545 ...	—
CV2216	30E8/PI ...	—
CV2217	6K25 ...	18
CV2218	6157 ...	48
CV2220	5B/257M ...	9
CV2221	V235A-1K ...	—
CV2223	G10/241/K ...	—
CV2224	G1/371K ...	—
CV2225	I50B2 ...	—
CV2229	M502A ...	—
CV2231	E2266 Appendix III	—
CV2232	DDX52 ...	—
CV2233	G5H ...	—
CV2234	X662 ...	—
CV2235	EY84 ...	77
CV2236	Z800U ...	—
CV2237	IAD4... ...	1
CV2238	5672 ...	45
CV2239	5676 ...	45
CV2240	3B4 ...	6
CV2241	DY70 ...	—
CV2243	— Appendix III	—
CV2245	3J/160E ...	—
CV2247	G5H ...	—
CV2253	ME150I ...	—
CV2245	5678 ...	45
CV2255	Z801U ...	—
CV2256	X662 ...	—
CV2257	UDI66C ...	—
CV2258	C43B ...	—
CV2259	DL68 ...	66
CV2260	DF64 ...	65
CV2263	K305 ...	—
CV2266	CC3L... ...	—
CV2267	— Appendix III	—
CV2268	— Appendix III	—
CV2269	ME140I ...	—
CV2270	90AG	—
CV2271	GC10B ...	—
CV2273	K312 ...	—
CV2274	BS114 ...	—
CV2275	DC70... ...	63
CV2276	Z319 ...	122
CV2277	I3E1 Appendix III	—
CV2279	4 matched GEX36 ...	—
CV2281	M537 ...	—
CV2282	K308 ...	—
CV2284	4J50 ...	—
CV2286	E4412/E/9 with side contacts	—
CV2287	G10H ...	—
CV2288	DL66 ...	66
CV2289	U37 ...	109
CV2290	GEX36 ...	—
CV2291	I909A ...	—

Service Type	Commercial Equivalent	Page
CV2293	XB-1 ...	—
CV2295	3E29 ...	—
CV2296	NSP2 ...	—
CV2299	DL73 ...	66
CV2300	3A4 ...	5
CV2301	E4412/C/9 ...	—
CV2302	ICP1 ...	—
CV2304	K324 ...	—
CV2306	BS122 ...	—
CV2307	BS120 ...	—
CV2308	BS116 ...	—
CV2309	BS118 ...	—
CV2310	GEX64 ...	—
CV2314	MP31-55 ...	—
CV2315	CI2B ...	—
CV2316	6260B ...	—
CV2317	6260C ...	—
CV2321	GD86W/S ...	—
CV2322	BR161 ...	—
CV2323	BR179 ...	—
CV2324	CR176 ...	—
CV2325	{ Z502S ... GS10C/S ...	—
CV2328	MF31-95 ...	—
CV2329	4004B ...	—
CV2331	DL64 ...	66
CV2338	F2 ...	—
CV2343	K335 ...	—
CV2347	5B/258M ...	—
CV2348	5886 ...	—
CV2349	EN30 ...	—
CV2352	DG16-21 ...	—
CV2353	R61010 ...	—
CV2354	R6015 ...	—
CV2358	W7/ID ...	—
CV2360	5A6 ...	8
CV2361	DL69 ...	66
CV2362	M525 ...	—
CV2363	M525 ...	—
CV2364	M525 ...	—
CV2365	M525 ...	—
CV2367	M525 ...	—
CV2368	M525 ...	—
CV2370	3S4 ...	7
CV2371	DF61 ...	65
CV2372	MF22-75 ...	—
CV2373	M502A ...	—
CV2374	GD60 ...	—
CV2375	GD100 ...	—
CV2376	M521 ...	—
CV2382	EL822 ...	77
CV2383	BR191 ...	—
CV2384	ZS10C ...	—
CV2389	CXTI ...	—
CV2390	{ 3A4 ... DL93 ...	5 66
CV2393	BA9-20 ...	—

Service Type	Commercial Equivalent	Page
CV2399	{ RR3-1250A ... 2G/473C ...	— —
CV2400	CXT2 ...	—
CV2412	M253 ...	—
CV2416	C1133 ...	—
CV2418	GHT2 ...	—
CV2420	JPT9-01 ...	—
CV2421	JPT9-02 ...	—
CV2424	M549 ...	—
CV2425	M539 ...	—
CV2426	M529 ...	—
CV2431	DG7-32 ...	—
CV2432	6025 ...	—
CV2433	DF63 ...	—
CV2434	{ Z803U ... 6779 ...	— —
CV2500	35Z4 ...	3
CV2501	40 ...	32
CV2502	41FP ...	32
CV2503	41MH ...	32
CV2504	41MHL ...	32
CV2505	41MPG ...	32
CV2506	41MPT ...	32
CV2507	IU4 ...	3
CV2508	41STH ...	33
CV2509	41FP ...	32
CV2510	I22 ...	4
CV2511	420T ...	33
CV2512	420TDD ...	33
CV2514	43 ...	33
CV2516	2C39a ...	—
CV2517	2E30 ...	5
CV2518	4B32 ...	—
CV2519	4X150A ...	—
CV2520	5C22 ...	—
CV2521	6AH6... ...	11
CV2522	6AS6 ...	12
CV2523	6AS7G ...	12
CV2524	6AU66 ...	12
CV2525	6AV6 ...	12
CV2526	6AV6 ...	12
CV2527	6BA7 ...	13
CV2528	45DS ...	—
CV2529	45IU ...	33
CV2530	45Z5 ...	33
CV2531	46 ...	33
CV2532	49 ...	33
CV2533	50 ...	33
CV2534	50L6 ...	34
CV2535	52 ...	34
CV2536	53A ...	—
CV2537	55 ...	34
CV2538	59 ...	34
CV2539	61P ...	—
CV2540	63D ...	—
CV2541	71A ...	35
CV2542	72 ...	35

Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page
CV2543	73 ...	35	CV2606	284 ...	—	CV2668	846 ...	—
CV2544	78 ...	35	CV2607	284D ...	—	CV2669	849 ...	—
CV2545	79 ...	35	CV2608	300A ...	—	CV2670	849H ...	—
CV2546	81 ...	35	CV2609	330A ...	—	CV2671	851 ...	—
CV2547	83V ...	35	CV2610	3030 ...	—	CV2672	852 ...	—
CV2548	84 ...	35	CV2611	04TH ...	—	CV2673	852 ...	—
CV2549	85 ...	35	CV2612	307A ...	—	CV2674	863 ...	—
CV2550	100T ...	—	CV2613	310A ...	38	CV2675	864 ...	41
CV2551	100TH ...	—	CV2614	311A ...	38	CV2676	865 ...	—
CV2551	100TH ...	—	CV2615	313C ...	—	CV2678	5799 ...	—
CV2552	100TH ...	—	CV2616	314A ...	—	CV2679	866Jr ...	—
CV2553	101F ...	—	CV2617	323A ...	—	CV2680	868 ...	—
CV2554	111A ...	—	CV2618	327A ...	—	CV2683	878 ...	—
CV2556	117L7 ...	36	CV2619	328A ...	38	CV2685	880 ...	—
CV2557	117N7 ...	—	CV2620	329A ...	38	CV2686	889 ...	—
CV2558	117Z6 ...	36	CV2621	330B ...	—	CV2687	889R ...	—
CV2560	2151 ...	—	CV2622	331A ...	—	CV2688	891R ...	—
CV2561	122A ...	—	CV2623	332A ...	—	CV2689	893R ...	—
CV2562	164V ...	36	CV2624	337A ...	38	CV2690	904V ...	41
CV2563	204A ...	—	CV2625	338A ...	—	CV2691	913 ...	—
CV2565	2050 ...	—	CV2626	346A ...	—	CV2692	981 ...	—
CV2566	205E ...	36	CV2627	349A ...	38	CV2693	10KP7 ...	—
CV2567	205F ...	36	CV2628	349B ...	—	CV2694	930 ...	—
CV2569	210DET ...	37	CV2629	350A ...	—	CV2695	931 ...	—
CV2570	210HF ...	37	CV2630	351A ...	39	CV2696	931A ...	—
CV2571	210HL ...	37	CV2631	352A ...	39	CV2697	935 ...	—
CV2572	450TH ...	—	CV2632	354A ...	—	CV2698	5896 ...	46
CV2573	565I ...	—	CV2633	362A ...	39	CV2699	6088 ...	—
CV2574	210VPA ...	37	CV2634	367 ...	—	CV2700	957 ...	—
CV2575	5670 ...	45	CV2636	375A ...	39	CV2701	958A ...	—
CV2576	211SP ...	—	CV2637	388A ...	—	CV2704	7E5 ...	21
CV2577	26A7 ...	31	CV2638	393A ...	—	CV2705	1203 ...	41
CV2578	5687 ...	45	CV2639	394A ...	—	CV2706	7C4 ...	21
CV2579	218 ...	—	CV2640	405BU ...	39	CV2707	1231 ...	41
CV2580	220C ...	—	CV2642	417A ...	—	CV2709	1R4 ...	3
CV2581	2200T ...	37	CV2643	2C40 ...	—	CV2710	3D6 ...	6
CV2582	220VS ...	37	CV2644	460BU ...	40	CV2711	1500T ...	—
CV2584	231D ...	37	CV2645	R1 ...	99	CV2712	1609 ...	42
CV2585	39 ...	32	CV2647	532 ...	—	CV2713	1610 ...	42
CV2586	240B ...	37	CV2648	632A ...	—	CV2714	1614 ...	42
CV2587	242C ...	—	CV2650	12AY7 ...	24	CV2715	1630 ...	—
CV2588	244A ...	—	CV2651	707B ...	—	CV2716	6SC7 ...	19
CV2589	250TH ...	—	CV2652	709A ...	—	CV2717	1729 ...	—
CV2591	100TH ...	—	CV2653	714A ...	—	CV2718	1876 ...	43
CV2592	256B ...	—	CV2654	715A ...	—	CV2719	1924 ...	—
CV2593	257A ...	38	CV2655	715B ...	—	CV2721	6CJ6 ...	15
CV2594	258B ...	—	CV2656	724A ...	—	CV2722	3025 ...	—
CV2595	259A ...	38	CV2657	800 ...	—	CV2723	869B ...	—
CV2597	262A ...	38	CV2658	806 ...	—	CV2725	O9 ...	—
CV2598	264A ...	—	CV2659	3D21A ...	—	CV2726	6CK6 ...	16
CV2599	264C ...	38	CV2660	809 ...	—	CV2727	26D ...	—
CV2600	267B ...	—	CV2661	812 ...	—	CV2728	29D ...	—
CV2601	271A ...	38	CV2662	5639 ...	44	CV2729	E80F ...	68
CV2602	272A ...	38	CV2663	815 ...	—	CV2730	5800 ...	—
CV2603	274A ...	38	CV2664	822 ...	—	CV2731	63DS ...	—
CV2604	275A ...	38	CV2665	825 ...	40	CV2733	3951 ...	—
CV2605	282A ...	—	CV2666	829B ...	—	CV2734	4033A ...	—

Service Type	Commercial Equivalent	Page
CV2735	4015A ...	—
CV2736	3C24 ...	—
CV2738	RGI-240 ...	—
CV2742	114 ...	36
CV2743	4033AF ...	—
CV2744	4J34 ...	—
CV2745	4050AG ...	—
CV2746	4064A ...	—
CV2747	6U5G ...	125
CV2748	5Z4GT ...	10
CV2749	4081 ...	—
CV2750	89J ...	—
CV2751	4096AB ...	—
CV2752	4PR60A ...	—
CV2753	5684 ...	—
CV2754	5685 ...	—
CV2755	4251AX ...	—
CV2756	4260A ...	—
CV2759	4304 ...	—
CV2760	430B ...	—
CV2761	4304BB ...	—
CV2762	4316A ...	—
CV2764	4606 ...	—
CV2765	4673 ...	44
CV2766	4687 ...	—
CV2767	4960 ...	—
CV2768	8003 ...	—
CV2769	9006 ...	50
CV2770	13077 ...	—
CV2772	23043 ...	—
CV2773	68503 ...	—
CV2774	68504 ...	—
CV2775	68506 ...	—
CV2776	68510 ...	—
CV2777	4B28 ...	—
CV2778	2J21A ...	—
CV2779	4B36 ...	—
CV2786	26J ...	—
CV2788	NT13 ...	—
CV2789	9LP7 ...	—
CV2790	CIK ...	—
CV2791	K332 ...	—
CV2792	2K25 ...	—
CV2793	2J50 ...	—
CV2794	C10SS/2G ...	—
CV2795	1L4 ...	2
CV2796	6L6WGB ...	18
CV2797	5894A ...	—
CV2798	QQV03-10 ...	99
CV2799	QQV03-20 ...	99
CV2800	A40 ...	51
CV2801	A40/N3 ...	—
CV2803	2915 ...	—
CV2804	A915A ...	—
CV2805	A294 ...	—
CV2806	AC/2HL ...	53
CV2807	AC2HL ...	53

Service Type	Commercial Equivalent	Page
CV2808	AC2Pen ...	53
CV2809	AC5Pen ...	53
CV2810	E4504/m/16 ...	—
CV2811	AC/HL ...	54
CV2812	AC/HL ...	54
CV2813	AC/HLDD ...	54
CV2814	5D21 ...	—
CV2815	ACP ...	54
CV2816	3JP12 ...	—
CV2817	6L6GA ...	18
CV2818	AC/PT8 ...	—
CV2819	AC/S ...	—
CV2820	AC/SPI ...	54
CV2821	ECC33 ...	72
CV2822	AC/SG ...	54
CV2823	AC/SP3 ...	54
CV2924	AC/SPen ...	—
CV2825	ACT6 ...	—
CV2826	1B63A ...	—
CV2827	ACT10 ...	—
CV2829	293A ...	38
CV2830	AC/THI ...	54
CV2831	2C51 ...	4
CV2832	AC/VP2 ...	55
CV2833	AF3 ...	55
CV2834	AGTI ...	—
CV2835	5R4WGY ...	10
CV2836	APP4G ...	56
CV2837	APP4G ...	56
CV2838	— Appendix III	—
CV2839	AR300 ...	—
CV2840	5UP7 ...	—
CV2841	ARPI2T ...	—
CV2842	6C4W ...	15
CV2843	6J6W ...	18
CV2844	6X4W ...	20
CV2845	LS5 ...	—
CV2846	LS5B ...	—
CV2847	5704 ...	—
CV2848	CK707 ...	—
CV2849	K1051 ...	—
CV2850	AT200A ...	—
CV2851	3D22 ...	—
CV2852	2J56 ...	—
CV2953	RZ1-250 ...	—
CV2854	6AN5 ...	12
CV2855	6K4 ...	—
CV2856	1N23B ...	—
CV2857	1N23BM ...	—
CV2858	3B24W ...	6
CV2859	5846 ...	—
CV2860	AZI ...	56
CV2861	AZ2 ...	57
CV2862	AZ31 ...	57
CV2864	B21 ...	57
CV2865	B30 ...	57
CV2866	2C51W ...	4

Service Type	Commercial Equivalent	Page
CV2867	BUI00/6 ...	—
CV2868	CIA ...	—
CV2869	3JP7 ...	—
CV2870	CC3D ...	—
CV2871	CAT6 ...	—
CV2872	CAT9 ...	—
CV2874	1005 ...	41
CV2875	CL4 ...	61
CV2876	2D21W ...	—
CV2877	6AK5W ...	11
CV2878	CRT1 ...	—
CV2879	CRT1 ...	—
CV2880	CRT4/I ...	—
CV2882	6AL5W ...	11
CV2883	6A05W ...	—
CV2884	6AS6 ...	12
CV2885	54NCP11 ...	—
CV2886	M2H ...	—
CV2887	DACI ...	62
CV2888	EL31 ...	76
CV2889	DD620 ...	64
CV2890	DDT ...	64
CV2891	DE5 ...	64
CV2892	DE5B ...	—
CV2895	DET1SW ...	—
CV2896	52CG ...	—
CV2897	7MBIA ...	—
CV2898	DET8 ...	—
CV2899	DET10 ...	—
CV2900	DET10 ...	—
CV2901	EF86 ...	75
CV2903	OA2 ...	—
CV2905	3J/170E ...	—
CV2907	DFI ...	65
CV2908	3J/260E ...	—
CV2909	DH73 ...	65
CV2910	DK1 ...	66
CV2911	DL2 ...	66
CV2912	DL63 ...	66
CV2913	DLS1 ...	—
CV2914	1B40 ...	—
CV2916	1N25 ...	—
CV2918	1N28 ...	—
CV2919	1N43 ...	—
CV2920	E1148 ...	70
CV2923	1N69 ...	—
CV2924	1N70 ...	—
CV2925	EBF2 ...	72
CV2926	EBL31 ...	72
CV2927	EC50 ...	—
CV2928	1N81 ...	—
CV2929	ECH3 ...	73
CV2930	ECH33 ...	73
CV2931	2B22 ...	4
CV2932	2C42 ...	—
CV2933	2C46 ...	—
CV2934	3BPIA ...	—

Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page
CV2935	5JPI ...	—	CV2993	KU25... ..	—	CV3554	MPT42 ...	—
CV2936	4B22 ...	—	CV2994	HL23 ...	81	CV3555	IQ22 ...	—
CV2937	6A05 ...	—	CV2995	HL23DD ...	81	CV3557	MR300 ...	—
CV2938	EL33 ...	76	CV2996	HL41DD ...	81	CV3558	MR300/E ...	—
CV2939	6F4 ...	—	CV2997	HL63 ...	—	CV3559	2C53 ...	—
CV2940	EL36 ...	76	CV2998	HL133 ...	82	CV3560	2J51 ...	—
CV2941	EL40 ...	—	CV2999	HL133DD ...	82	CV3561	MS/Pen ...	89
CV2942	EMI Appendix I	—	CV3500	HL210 ...	82	CV3562	MSP41 ...	89
CV2943	ESU76 ...	—	CV3501	HL610 ...	—	CV3563	MT11SW ...	—
CV2944	ESU1500 ...	—	CV3502	HL1320 ...	82	CV3564	MT12 ...	—
CV2945	ESU75 ...	—	CV2503	HLDD1320 ...	82	CV3565	ME41 Appendix I	—
CV2946	ESU150 ...	—	CV2505	HY114B ...	—	CV3567	MUI ...	89
CV2947	ESU300 ...	—	CV3506	HY615 ...	83	CV3569	4J52 ...	—
CV2948	ESU450 ...	—	CV3508	6208 ...	—	CV3570	MU4250 ...	89
CV2949	FI23A ...	—	CV3509	IN31 ...	—	CV3571	MVSPen ...	89
CV2950	I29B ...	—	CV3510	4B31 ...	—	CV3572	MVSPenB ...	89
CV2952	FA13 ...	—	CV3511	371B ...	—	CV3573	MZ05-20 ...	89
CV2953	FA14 ...	—	CV3512	5696 ...	—	CV3574	MZI/76 ...	—
CV2954	FC2A ...	78	CV3514	K8140824 ...	—	CV3575	3B26 ...	6
CV2955	FC4 ...	78	CV3515	KB2 ...	84	CV3576	MX40 ...	89
CV2956	FC13C ...	79	CV3516	KK2 ...	85	CV3577	25A7gt ...	29
CV2957	FG17 ...	—	CV3517	5933 ...	46	CV3578	PM22D ...	95
CV2958	FG278 ...	—	CV3518	5948/1754 ...	—	CV3579	PTSE ...	—
CV2959	3B21 ...	6	CV3519	KT30 ...	85	CV3580	304TL ...	—
CV2960	FP54 ...	—	CV3520	KT31 ...	85	CV3581	VI501 ...	—
CV2961	IN54A ...	—	CV3521	5949/1907 ...	—	CV3582	VP4B ...	115
CV2962	IN38A ...	—	CV3522	6079 ...	—	CV3583	5HP1 ...	—
CV2963	4D21 ...	—	CV3523	6146 ...	48	CV3584	21/2 ...	—
CV2964	5D22 ...	—	CV3524	GI/236G ...	—	CV3586	471A ...	—
CV2965	RL7076-2A ...	—	CV3525	IN21C ...	—	CV3587	705A ...	—
CV2966	EY86 ...	77	CV3526	EL85 ...	77	CV3588	706A ...	—
CV2967	8020 ...	50	CV3527	KTW73 ...	86	CV3589	707A/B ...	—
CV2968	7F8 ...	21	CV3528	MS13 ...	—	CV3590	708A ...	—
CV2969	GT1 ...	—	CV3529	KT41 ...	86	CV3592	UX6653 ...	—
CV2970	5656 ...	45	CV3530	KTZ73 ...	86	CV3593	713A ...	40
CV2971	5675 ...	—	CV3531	L2 ...	86	CV3594	717A ...	40
CV5676	5876 ...	45	CV3532	L21 ...	86	CV3595	721A ...	—
CV2973	GU7 ...	—	CV3533	L22DD ...	86	CV3596	726B ...	—
CV2974	IN72 ...	—	CV3534	L30 ...	86	CV3597	726V ...	—
CV2975	6BQ5 ...	14	CV3535	CI4HM ...	—	CV3599	829B ...	—
CV2976	NE2 ...	80	CV3536	LS408A ...	—	CV3600	202PI ...	—
CV2977	H2 ...	80	CV3537	L500 ...	—	CV3601	7193 ...	49
CV2978	HI2 ...	80	CV3538	L610 ...	—	CV3602	5J26 ...	—
CV2979	H30 ...	80	CV3539	6024 ...	—	CV3604	GL464 ...	—
CV2980	DM70 Appendix I	—	CV3540	HT415 ...	—	CV3605	GL464 ...	—
CV2981	H410 ...	—	CV3541	LS6A ...	87	CV3606	5J29 ...	—
CV2982	H610 ...	—	CV3542	LS532 ...	—	CV3607	NP90 ...	—
CV2983	DL94 ...	66	CV3543	4D32 ...	—	CV3608	5J30 ...	—
CV2984	6080 ...	47	CV3545	5939 ...	—	CV3609	5517/ ...	—
CV2985	HD24 ...	81	CV3546	MHD4 ...	88		CK1017 ...	—
CV2986	HD203A ...	—	CV3547	MHI4 ...	—	CV3610	5663 ...	—
CV2987	HF100 ...	—	CV3548	IB24A ...	—	CV3611	5586 ...	—
CV2988	HF200 ...	—	CV3549	IB38 ...	—	CV3612	5686 ...	—
CV2989	HK354E ...	—	CV3550	IB41 ...	—	CV3613	6AR6 ...	12
CV2990	6136 ...	48	CV3551	IN38 ...	—	CV3614	6BL6 ...	—
CV2991	HL2 ...	81	CV3552	MPT4... ..	89	CV3615	6BM6 ...	—
CV2992	6106 ...	47	CV3553	MS4B ...	89	CV3616	6BN6 ...	14

Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page
CV3618	6L6wga	18	CV3678	2BPI	—	CV3746	U14	108
CV3619	6SJ7wgt	19	CV3679	RK49	—	CV3747	U15	108
CV3620	P220	92	CV3680	RK60	110	CV3748	2X2	5
CV3621	P410	92	CV3681	RK62	—	CV3749	576	—
CV3622	P610	—	CV3683	RKR47	—	CV3750	U22	108
CV3623	PA40	93	CV3685	QK283	—	CV3751	U21	108
CV3624	PE7B	—	CV3686	QK284	—	CV3752	U30	108
CV3625	PE8	—	CV3687	4J49	—	CV3753	U31	108
CV3626	PenB4	94	CV3688	2C33	—	CV3754	U50	109
CV3627	6SN7wgt	19	CV3689	3B29	—	CV3755	5755	45
CV3628	1B35A	—	CV3690	RZ-150	—	CV3756	U600	—
CV3629	6130	—	CV3691	S23	102	CV3758	UR3C	112
CV3630	Pen44	94	CV3692	S23	102	CV3759	R2	99
CV3631	Pen45DD	94	CV3693	10KP7	—	CV3760	UU5	112
CV3632	6131	—	CV3694	S130A	—	CV3761	UU7	112
CV3633	Pen231	94	CV3695	S215	102	CV3762	V120	—
CV3634	Pen428	94	CV3696	S215A	102	CV3763	V123B	—
CV3635	Pen1340	94	CV3697	12SX7gt	26	CV3765	V226	113
CV3636	Pen1346	—	CV3698	S610	—	CV3766	V312	113
CV3637	7BP7A	—	CV3699	5693	45	CV3767	V339	113
CV3638	PenA4	94	CV3702	SG215	103	CV3768	V503	113
CV3639	6F4	—	CV3703	SP4B	104	CV3769	V877	—
CV3640	PJ8	—	CV3704	SP13C	104	CV3770	V955	—
CV3641	PMIHL	95	CV3705	5691	45	CV3772	V970	—
CV3642	PMILF	95	CV3706	5796	—	CV3773	V1010	—
CV3643	PM2A	95	CV3707	6AL7gt	—	CV3774	V1020	—
CV3644	726C	—	CV3709	STV150/200	—	CV3775	V1021	—
CV3645	PM2DX	95	CV3710	AR63	—	CV3776	V1023	—
CV3646	845W	—	CV3711	N78	90	CV3777	V1029	—
CV3647	PM22A	95	CV3712	STV280/80A	—	CV3778	V1105	—
CV3648	PM24E	95	CV3714	822Spec	—	CV3779	4J26	—
CV3649	PM22	95	CV3715	SW5	—	CV3780	4J27	—
CV3650	12AY7	24	CV3719	SW7	—	CV3781	4J28	—
CV3651	12SH7gt	—	CV3721	T4D	105	CV3782	4J29	—
CV3652	PT5	96	CV3722	T20	—	CV3783	4J30	—
CV3653	PT6	—	CV3723	T41	105	CV3784	5B/102A	—
CV3654	PT11	—	CV3724	T200	—	CV3785	VMP4G	115
CV3655	12SP7	—	CV3725	GL446	—	CV3786	VMP4G	115
CV3656	PT425	97	CV3726	TDD2A	106	CV3787	VP2	115
CV3657	PV05-15	—	CV3727	TDD4	106	CV3788	VP4	115
CV3658	PVI-35	97	CV3729	IN47	—	CV3789	5842	45
CV3659	M501A	—	CV3730	TMC15B	—	CV3790	VPI3C	116
CV3660	M510A	—	CV3731	TMC16B	—	CV3791	VP21	116
CV3661	M501A	—	CV3732	TMC20B	—	CV3792	VP23	116
CV3662	M501A	—	CV3733	3KPI	—	CV3793	VP24	—
CV3666	12SW7	26	CV3734	6X5wgt	20	CV3749	VP210	116
CV3667	RGI-250	—	CV3735	TP26	107	CV3795	VP215	116
CV3668	12SY7	26	CV3736	K1105P2	—	CV3796	VPI322	116
CV3669	2K48	—	CV3737	QK353	—	CV3797	V944A	—
CV3670	RG4-1000	—	CV3738	VXR130	—	CV3798	OA3	—
CV3671	RK25	—	CV3739	TX3-200	—	CV3799	OB3	—
CV3672	RK28	—	CV3740	TX5-400	—	CV3800	VS2	116
CV3673	RK28A	—	CV3741	TZ2-300	—	CV3802	VS24	116
CV3674	RK31	—	CV3742	TZ20	—	CV3803	VS24	116
CV3675	9004	—	CV3743	U5	108	CV3804	W21	117
CV3676	2J42	—	CV3744	U6	—	CV3805	W30	117
CV3677	RK47	—	CV3745	1B58	—	CV3806	W31	117

Service	Commercial	Page	Service	Commercial	Page	Service	Commercial	Page
Type	Equivalent		Type	Equivalent		Type	Equivalent	
CV3808	6T4 ...	20	CV3868	RSQ15/5 ...	—	CV3931	5906 ...	46
CV3809	807w ...	40	CV3869	RSQ15/5 ...	—	CV3932	5977 ...	46
CV3810	WD30 ...	117	CV3870	RGQ10/4D ...	—	CV3933	5783 ...	—
CV3812	1P31 ...	—	CV3871	RS254 ...	—	CV3934	1N34A ...	—
CV3813	8A ...	—	CV3872	RS255 ...	—	CV3935	14R7 ...	27
CV3815	3BZ2 ...	—	CV3873	RS566 ...	—	CV3936	14S7 ...	27
CV3816	X21 ...	119	CV3874	ATR388 ...	—	CV3937	14R7 ...	27
CV3817	X21 ...	119	CV3875	KU54... ...	—	CV3938	12CS7gt ...	26
CV3818	X22 ...	119	CV3876	SAL39 ...	—	CV3939	6BM6a ...	—
CV3819	X24 ...	119	CV3877	1B56 ...	—	CV3940	2C39 ...	—
CV3820	X24 ...	119	CV3878	2-150D ...	—	CV3941	3RPI ...	—
CV3021	X31 ...	119	CV3879	4-400A ...	—	CV3942	5692 ...	45
CV3022	X31 ...	119	CV3880	4-100A ...	—	CV3943	5852 ...	46
CV3823	X41 ...	119	CV3881	EB41 ...	71	CV3944	2J30 ...	—
CV3825	X63 ...	119	CV3882	EBC41 ...	72	CV3945	2K45 ...	—
CV3826	X65 ...	119	CV3883	EAF42 ...	71	CV3947	3WP1 ...	—
CV3827	12C8gt ...	25	CV3884	ECC40 ...	73	CV3947	4J54 ...	—
CV3828	X66 ...	119	CV3885	EF40 ...	74	CV3948	4J55 ...	—
CV3829	293a ...	—	CV3886	EF41 ...	74	CV3949	4J56 ...	—
CV3830	XH1.5 ...	120	CV3887	EF42 ...	74	CV3950	4J57 ...	—
CV3831	XL2 ...	—	CV3888	ECH42 ...	73	CV3951	4J58 ...	—
CV3832	XP2 ...	121	CV3889	EL41 ...	76	CV3952	4J59 ...	—
CV3833	XSG2.0V ...	121	CV3890	EL42 ...	76	CV3953	4J78 ...	—
CV3834	XW2 ...	—	CV3891	EZ40 ...	78	CV3954	5CP7 ...	—
CV3835	Z21 ...	121	CV3892	AZ41 ...	57	CV3955	5CPI2 ...	—
CV3836	Z21 ...	121	CV3893	4X150G ...	—	CV3956	719A ...	—
CV3837	Z21 ...	121	CV3894	6BF7 ...	13	CV3957	1258 ...	—
CV3838	Z62 ...	121	CV2895	5702 ...	—	CV3958	5657 ...	—
CV3839	Z66 ...	121	CV3896	5784 ...	—	CV3959	5FP7A ...	—
CV3840	TTR31MR ...	—	CV3897	5787 ...	—	CV3960	5783 ...	—
CV3841	6F1 ...	17	CV3898	5829 ...	—	CV3961	6111 ...	47
CV3842	5J29 ...	—	CV3899	5932 ...	46	CV3963	559 ...	40
CV3843	5J30 ...	—	CV3900	5963 ...	46	CV3964	354 ...	—
CV3844	5J31 ...	—	CV3901	6161 ...	—	CV3965	2C46 ...	—
CV3845	RS366 ...	—	CV3902	6002 ...	—	CV3966	QK428 ...	—
CV3846	RS261 ...	—	CV3903	QK338 ...	—	CV3967	1N63 ...	—
CV3847	RS250 ...	—	CV3094	2K41 ...	—	CV3968	3DPIA ...	—
CV3848	RS260 ...	—	CV3905	5847 ...	45	CV3969	577 ...	—
CV3849	RS217 ...	—	CV3906	6117 ...	—	CV3970	5721 ...	45
CV3850	RS207 ...	—	CV3907	720C ...	—	CV3971	89L ...	—
CV3851	RS253 ...	—	CV3908	6BH6 ...	13	CV3972	6095 ...	47
CV3852	RS285 ...	—	CV3909	6BJ6 ...	14	CV3973	6AC7Y ...	11
CV3853	RS15 ...	—	CV3912	1U5 ...	3	CV3974	6AS7Y ...	12
CV3854	RS47 ...	—	CV3915	8025A ...	—	CV3975	6236 ...	—
CV3855	RS329 ...	—	CV3916	5647 ...	45	CV3976	M509 ...	—
CV3856	RS330 ...	—	CV3917	5703 ...	—	CV3977	1N35 ...	—
CV3857	RS283A ...	—	CV3918	5JP2A ...	—	CV3978	6AG7Y ...	11
CV3858	RS18 ...	—	CV3919	U82 ...	109	CV3979	OD3W ...	—
CV3859	RV271A ...	—	CV3920	A2196 ...	—	CV3980	12SR7GT ...	26
CV3860	RS282 ...	—	CV3921	A2244 ...	—	CV3981	G553 ...	—
CV3761	RS281 ...	—	CV3923	1N21B ...	—	CV3982	M506 ...	—
CV3862	RS55 ...	—	CV3924	6AC1w ...	11	CV3983	12SW7GT ...	26
CV3863	RS289 ...	—	CV3926	7C23 ...	—	CV3985	6SL7WGT ...	19
CV3864	RS389 ...	—	CV3927	12K8 ...	25	CV3986	6021 ...	46
CV3865	RS288 ...	—	CV3928	5636 ...	44	CV3987	5644 ...	—
CV3866	RS203 ...	—	CV3929	5840 ...	45	CV3988	6442 ...	—
CV3867	RSQ15/40 ...	—	CV3930	5718 ...	45	CV3989	6AN4 ...	12

Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page	Service Type	Commercial Equivalent	Page
CV3990	2E26 ...	5	CV4047	G400/2G ...	—	CV5031	M.548 ...	—
CV3991	4X150D ...	—	CV4048	QS1212 ...	—	CV5032	1X2A... ...	4
CV3992	HD6002 ...	—	CV4049	F/5726 ...	—	CV5033	3-14 ...	—
CV3993	IN67A ...	—	CV4050	F/5654 ...	—	CV5034	3JP11 ...	—
CV3994	IV2 ...	4	CV4051	F/6158 ...	—	CV5035	5ADPI ...	—
CV3995	6CB6 ...	15	CV4052	QS1202 ...	—	CV5036	6AF4 ...	11
CV3996	U709 ...	110	CV4053	QS1203 ...	—	CV5037	6BA6W ...	13
CV3997	JP9-15 ...	—	CV4054	F/5654 ...	—	CV5038	6BC4 ...	13
CV3998	E180F ...	68	CV4055	6132 ...	48	CV5039	6BL7 ...	14
CV3999	MW22/22 ...	—	CV4056	F/6132 ...	—	CV5040	6BQ6 ...	14
CV4001	F/6063 ...	—	CV4058	6C4WA ...	15	CV5041	6CL6 ...	16
CV4002	F/6064 ...	—	CV4059	M8097 ...	88	CV5042	12BH7 ...	25
CV4003	12AU7 ...	24	CV4060	S11E12 ...	122	CV5043	811A ...	—
CV4004	6057 ...	47	CV4063	6516 ...	49	CV5044	5836 ...	—
CV4005	6X4 ...	20	CV4066	M8190 ...	—	CV5045	5837 ...	—
CV4006	6059 ...	47	CV4067	M8167 ...	—	CV4056	5844 ...	45
CV4007	6AL5W ...	11	CV4068	6158 ...	48	CV5047	G7B ...	—
CV4008	6719 ...	45	CV4069	F/6158 ...	—	CV5048	V239C/1K ...	—
CV4009	6BA6W ...	13	CV4070	M8099 ...	88	CV5049	V241C/1K ...	—
CV4010	5654 ...	45	CV4076	M8179 ...	—	CV5050	212-G11A ...	—
CV4011	6AS6W ...	12	CV4080	M8225 ...	—	CV5051	HD2016A ...	—
CV4012	5750 ...	45	CV4501	5A/172G ...	—	CV5053	6098CT ...	47
CV4013	5670 ...	—	CV4502	5A/173G ...	—	CV5054	6390 ...	—
CV4014	6064 ...	47	CV4503	5A/174G ...	—	CV5055	EM.81 Appendix I	—
CV4015	6065 ...	47	CV4504	2S/141G ...	—	CV5056	A2094 ...	—
CV4016	5814 ...	45	CV4506	5A/175G ...	—	CV5057	5702WA ...	—
CV4017	5751 ...	45	CV5001	601C ...	—	CV5058	578WA ...	—
CV4018	2D21W ...	5	CV5002	CS3A ...	—	CV5059	5829WA ...	—
CV4019	6AQ5W ...	12	CV5003	BU28/4 ...	—	CV5060	Z759 ...	122
CV4020	OA2WA ...	—	CV5004	3JP2 ...	—	CV5061	7YP2 ...	—
CV4021	3B24WA ...	6	CV5005	6110 ...	47	CV5062	5841 ...	—
CV4022	6135 ...	48	CV5006	6021 ...	46	CV5063	1N70 ...	—
CV4023	6AU6WA ...	12	CV5007	6112 ...	47	CV5064	1N38A ...	—
CV4024	12AT7WA ...	24	CV5008	6080WA ...	47	CV5065	6U8 ...	20
CV4025	6AL5 ...	11	CV5009	6203 ...	48	CV5066	BL25 ...	—
CV4026	6R4wga ...	19	CV5010	5644 ...	—	CV5067	6SH7L ...	19
CV4027	5Y3wgtA ...	10	CV5011	TH1657A ...	—	CV5068	ES75H ...	—
CV4028	OB2wa ...	—	CV5012	1N23C ...	—	CV5069	6621 ...	—
CV4029	5902 ...	46	CV5013	1N23CR ...	—	CV5070	5FP11 ...	—
CV4030	G75/3G ...	—	CV5014	1N78 ...	—	CV5072	EZ81 ...	78
CV4031	6J6wa ...	18	CV5015	1N53 ...	—	CV5077	PL81 ...	94
CV4032	6814a ...	45	CV5016	1N32 ...	—	CV5080	EF37A ...	74
CV4033	F/6060 ...	—	CV5017	450TL ...	—	CV5082	M8234 ...	—
CV4034	F/6067 ...	—	CV5018	4J52A ...	—	CV5083	(QS75-20) ...	—
CV4035	F/6057 ...	—	CV5019	QK387 ...	—	CV5094	EL86 ...	77
CV4036	F/6443 ...	—	CV5020	QK388 ...	—	CV5105	OC45 ...	—
	Appendix III		CV5021	6V3A ...	20	CV5106	EIT ...	—
CV4037	F/5750 ...	—	CV5022	CS31A ...	—	CV5108	EFF60 ...	—
CV4039	6062 ...	47	CV5023	6D4mod. ...	—	CV5120	20CV ...	—
CV4040	S6F17... ...	122		AFX212 ...	—	CV6008	24BI ...	—
CV4041	S6F17F (flying leads) ...	17	CV5024	MX-408/U ...	—	NGT1	DPQ ...	—
CV4042	19G6 (flying leads) ...	28	CV5025	XB2 ...	—	NGT2	GTIC ...	80
CV4043	6061 ...	47	CV5026	1N320 ...	—	NGT4	GT1A ...	—
CV4044	6443 ...	49	CV5027	3V/390A ...	—	NGT121	T4I ...	105
CV4045	F/6061 ...	—	CV5028	3V/390B ...	—	NGT128	GTIC ...	80
			CV0529	6J4WA ...	18	NR15	PM3 ...	95
			CV5030	26Z5W ...	30	NR15A	PM4DX ...	95

Service Type	Commercial Equivalent	Page
NR16	PM254	95
NR16A	PM4DX	95
NR18	DEQ	—
NR22	PM14	95
NR23	PM14	95
NR26	MHL4	88
NR27	104V	36
NR27A	104V	36
NR28	PM2	95
NR31	MH4	88
NR35	PD220A	93
NR37	ACSG	54
NR38	VMS4...	115
NR39	PM22A	95
NR40	PM24D	95
NR41	210VPT	—
NR42	P220	92
NR43	PM24A	95
NR44	PX4	97
NR45	VMP4G	115
NR46	D41	62
NR47	PX25	98
NR48	EBC33	72
NR49	EF36	74
NR50	AT4	—
NR51	VMP4G	115
NR52	354V	39
NR53	KT42	86
NR54	AP4	—
NR54A	AP4	—
NR55	4DI	7
NR56	DA30...	62
NR57	ML4	88
NR58	244V	37
NR59	KT41	86
NR60	H42	80
NR61	W42	117
NR64	KTW62	86
NR65	MSP4	89
NR66	D41	62
NR67	6L7	18
NR68	6Q7	19
NR69	Y63	Appendix I
NR70	MS/Pen	89
NR71	MS/PenT	89
NR72	N43	90
NR73	6N7	18
NR74	PVI-35	97
NR75	ACP4	54
NR76	KTZ41	86
NR77	6L6	18
NR78	6C5	15
NR78A	L63	86
NR79	Z62	121
NR80	E1148	70
NR81	6K7	18
NR82	X65	119

Service Type	Commercial Equivalent	Page
NR83	6J7	18
NR84	20A1	29
NR85	6F6	17
NR86	KTW63	86
NR87	AC5PenDD	53
NR94	ACP4...	54
NS1	STX280/80	—
NS3	202	—
NS4	4713	—
NS5	304	—
NT18	D060	—
NT20	PM365	95
NT36	DA100	—
NT37	4033A	43
NT38A	PZI-75	—
NT39	ACT36	—
NT40	DET5	—
NT58	DET12	—
NT62	PM24D	95
NT62A	PM24D	95
NT65A	PZI-35	—
NT82	PM202	95
NU3	UI2/14	108
NU5	RX3-120	—
NY12	U18	108
NU13	U15	108
NU13A	U15	108
NU15	U4020	110
NU16	GU5	—
NU17	UU5	112
NU18	UI7	108
NU20	U50	109
NU31	MU2	89
NU33	SU2150A	105
NU33A	HVR2	83
NU34	HVR2	83
VI77	EM31	Appendix I
VI103	Y63	Appendix I
VR18	215SG	37
VR19	PM2	95
VR21	210LF	37
VR22	220PA	37
VR27	210LF	37
VR28	220VSG	37
VR32	220B	37
VR35	QP21	98
VR37	MH4	88
VR38	MHL4	88
VR40	PX25	98
VR41	PM12M	95
VR43	210PG	37
VR44	210DDT	37
VR45	X56	—
VR46	PT25H	97
VR47	TZ05-20	—
VR49	210SPT	37
VR53	EF39	74

Service Type	Commercial Equivalent	Page
VR54	EB34	71
VR55	EB3C3	72
VR56	EF36	74
VR57	EK32	76
VR57A	EK32	76
VR59	955	—
VR65	SP61	104
VR65A	SP41	104
VR66	P61	92
VR67	6J5	18
VR78	D1	61
VR82	220TH	37
VR83	210VPT	37
VR91	EF50	74
VR91A	EF50	74
VR92	EA50	71
VR95	954	—
VR95A	954	—
VR99	X66	119
VR99A	ECH35	73
VR100	KTW62	86
VR101	MHLD6	88
VR102	BL63	59
VR105	ML6	88
VR106	9D2	23
VR107	15D2	28
VR108	8D2	22
VR109	4DI	7
VR109A	4DI	7
VR116	V872	114
VR117	4IMTL	33
VR117A	4IMTL	33
VR118	KT2	85
VR119	DDL4	64
VR122	4IMXP	33
VR123	EF8	74
VR124	MS/Pen	89
VR125	MS/PenB	89
VR126	4SH	—
VR129	MS/Pen	89
VR130	HL23	81
VR135	E1148	70
VR136	EF54	75
VR137	EC52	72
VR502	KT32	85
VR503	KT33C	85
VR505	MH41	88
VS68	STV280/40	—
VS69	STV280/80	—
VS70	7475	—
VT20	220P	37
VT23	230XP	37
VT23A	230XP	37
VT25	DET25	—
VT45	X56	—
VT46	PT25H	97
VT50	HL2	81

Service	Commercial		
Type	Equivalent	Page	
VT51	Pen220A	... 94	
VT52	EL32 ...	... 76	
VT60	807 ...	... 40	
VT60A	807 ...	... 40	
VT61	DET19	... 64	
VT61A	TV03-10	... 108	
VT62	TY1-50	... —	
VT73	6F5 ...	... 17	
VT74	6J7 ...	... 18	
VT75	KT66	... 86	
VT5A/B	KT44	... 86	
VT76	DA41...	... —	
VT79	KT8 ...	... 85	
VT80	4307A	... —	

Service	Commercial		
Type	Equivalent	Page	
VT81	4052A	... —	
VT88	832 ...	... —	
VT96	5B/502A	... —	
VT104	PT15 ...	... 97	
VT105	ML6 ...	... 88	
VT127	Pen46	... 94	
VT139	MH4 ...	... 88	
VT0180	EF39 ...	... 74	
VT195	5Z4G...	... 10	
VT501	E1192	... 90	
VT501A	E1192	... 70	
VU29	ESU150	... —	
VU39	MU12/14	... 89	
VU64	U12/14	... 108	

Service	Commercial		
Type	Equivalent	Page	
VU71	U52 ...	... 109	
VU71A	U52 ...	... 109	
VU72	GU5 ...	... —	
VU111	V1097	... 114	
VU113	U17 ...	... 108	
VU120	SU2150A	... 105	
VU120A	SU2150A	... 105	
VU133	V960 ...	... 114	
VU134	HVR2	... 83	
VU504	V1901	... —	
VU508	V1913 Appendix III		
VW36	220PA	... 37	
VW42	210LF	... 37	
VW48	215SG	... 37	

American Army V.T. Series Index and Cross Reference to British Service Types

American Army No.	Civilian No.	Page	American Army No.	Civilian No.	Page	American Army No.	Civilian No.	Page
VT1	203A ...	—	VT67	30 spec.	—	VT109	2051 ...	43
VT2	205B ...	—	VT68	6B7 ...	13	VT111	5BP4/1802P4	—
VT4B/C	211 ...	—	VT69	6D6 ...	16	VT112	6AC7 ...	11
VT5	215A ...	—	VT70	6F7 ...	17	VT114	5T4 ...	10
VT6	212A ...	—	VT72	842 ...	41	VT115	6L6 ...	18
VT7	WX12 ...	—	VT73	843 ...	41	VT115A	6L6gt ...	18
VT8	UV204 ...	—	VT74	5Z4 ...	10	VT116	6SJ7 ...	19
VT17	860 ...	—	VT75	75 ...	35	VT116A	6SJ7gt ...	19
VT19	861 ...	—	VT76	76 ...	35	VT116B	6SJ7y ...	19
VT22	204A ...	—	VT77	77 ...	35	VT117	6SK7 ...	19
VT24	864 ...	41	VT78	78 ...	35	VT117A	6SK7gt ...	19
VT25	10 ...	23	VT80	80 ...	35	VT118	832 ...	—
VT25A	10 spec.	—	VT83	83 ...	35	VT119	2X2 ...	5
VT26	22 ...	29	VT84	84/6Z4	35 & 20	VT120	954 ...	—
VT27	30 ...	31	VT85	6K7 ...	18	VT121	955 ...	—
VT28	24 ...	29	VT86	6K7 ...	18	VT122	530 ...	—
VT29	27 ...	31	VT86A	6K7g ...	18	VT123	5586 ...	—
VT30	01A ...	—	VT86B	6K7gt ...	18	VT124	1A5 ...	1
VT31	31 ...	31	VT87	6L7 ...	18	VT125	1C5 ...	1
VT33	33 ...	31	VT87A	6L7g ...	18	VT126	6X5 ...	20
VT34	207 ...	—	VT88	6R7 ...	19	VT126A	6X5g ...	20
VT35	35/51	32 & 34	VT88A	6R7g ...	19	VT126B	6X5gt ...	20
VT36	36 ...	32	VT88B	6RTgt ...	19	VT127	Nil ...	—
VT37	37 ...	32	VT89	89 ...	35	VT127A	Nil ...	—
VT38	38 ...	32	VT90	6H6 ...	17	VT128	1630 ...	—
VT39	869 ...	—	VT90A	6H6gt ...	17	VT129	304TL ...	—
VT39A	869A ...	—	VT91	6J7 ...	18	VT130	250TL ...	—
VT40	40 ...	32	VT91A	6J7gt ...	18	VT131	12SK7 ...	20
VT41	851 ...	—	VT92	6Q7 ...	19	VT132	12K8 ...	25
VT42	872 ...	—	VT92A	6Q7g ...	19	VT133	12SR7 ...	26
VT42A	872 spec.	—	VT93	6B8 ...	13	VT134	12A6 ...	24
VT43	845 ...	—	VT93A	6B8g ...	13	VT135	12J5 ...	25
VT44	32 ...	31	VT94	6J5 ...	18	VT135A	12J5 ...	25
VT45	45 ...	33	VT94A	6J5g ...	18	VT136	1625 ...	42
VT46	866 ...	—	VT94B	6J5 ...	18	VT137	1626 ...	42
VT46A	866A ...	—	VT94C	6J5 ...	18	VT138	1629 ...	—
VT47	47 ...	33	VT94D	6J5gt ...	18	VT139	VR150-30	—
VT48	41 ...	32	VT95	2A3 ...	4	VT140	1628 ...	—
VT49	39/44	32 & 33	VT96	6N7 ...	18	VT141	531 ...	—
VT50	50 ...	33	VT96B	6N7 ...	18	VT142	W.E39DY	—
VT51	841 ...	—	VT97	5W4 ...	10	VT143	805 ...	40
VT52	2C45 ...	—	VT98	6U5/6G5	—	VT144	813 ...	—
VT54	34 ...	32	Appendix I			VT145	5Z3 ...	10
VT55	865 ...	—	VT99	6F8 ...	17	VT146	1N5GT ...	3
VT56	56 ...	34	VT100	807 ...	40	VT147	1A7 ...	1
VT57	57 ...	34	VT100A	807 mod.	40	VT148	1D8 ...	2
VT58	58 ...	34	VT101	837 ...	—	VT149	3A8 ...	5
VT60	850 ...	—	VT103	6SQ7 ...	19	VT150	6SA7 ...	9
VT62	801 ...	—	VT104	12SQ7 ...	26	VT150A	6SA7gt ...	9
VT63	42 ...	33	VT105	6SC7 ...	19	VT151	6A8 ...	11
VT64	800 ...	—	VT106	803 ...	—	VT151A	6A8gt ...	11
VT65	6C5 ...	15	VT107	6V6 ...	20	VT152	6K6 ...	18
VT65A	6C5G ...	15	VT107A	6V6gt ...	20	VT152A	6K6gt ...	18
VT66	6F6 ...	17	VT107B	6V6g ...	20	VT153	12C8 ...	25
VT66A	6F6G ...	17	VT108	450TH ...	—	VT154	814 ...	—

American Army No.	Civilian No.	Page
VT158	3092 ...	—
VT161	12SA7 ...	26
VT162	12SJ7 ...	26
VT163	6C8 ...	15
VT164	1619 ...	42
VT165	1624 ...	42
VT166	371A ...	—
VT167	6K8 ...	18
VT167A	6K8g ...	18
VT168A	6Y6 ...	20
VT169	12C8 ...	25
VT170	1E5GP ...	2
VT171	IR5 ...	3
VT171A	Loctal equiv. of IR5 ...	—
VT172	IS5 ...	3
VT173	IT4 ...	3
VT174	3S5 ...	—
VT175	1613 ...	42
VT176	6AB7 ...	11
VT177	1LH4 ...	3
VT178	1LCS ...	3
VT179	1LN5 ...	3
VT180	3LF4 ...	7
VT181	7Z4 ...	22
VT182	3B7 ...	6
VT183	1R4 ...	3
VT184	VR90/30 ...	—
VT185	3D6 ...	6
VT186	Spec. ...	—
VT187	575A ...	—
VT188	7E6 ...	21
VT189	7F7 ...	21
VT190	7H7 ...	22
VT191	316A ...	—
VT192	7A4 ...	21
VT193	7C7 ...	21
VT194	7J7 ...	22
VT195	1005 ...	41
VT196	6W5 ...	20

American Army No.	Civilian No.	Page
VT197A	5Y3G ...	10
VT198A	6G6 ...	17
VT199	6SS7 ...	19
VT200	VR105-30 ...	—
VT201	25L6 ...	30
VT201C	25L6gt ...	30
VT202	9006 ...	50
VT203	9003 ...	30
VT204	HK24G ...	—
VT205	6ST7 ...	19
VT206A	5V4G ...	10
VT207	12AH7 ...	24
VT208	7B8 ...	21
VT209	12SG7 ...	26
VT210	IS4 ...	3
VT211	6SG7 ...	15
VT212	958 ...	—
VT213A	6L5 ...	18
VT214	12H6 ...	25
VT215	6E5 Appendix I	—
VT216	816 ...	40
VT217	811 ...	—
VT218	100TH ...	—
VT220	250TH ...	—
VT221	305 ...	—
VT222	884 ...	41
VT223	1H5 ...	2
VT224	RK34 ...	—
VT225	307A ...	—
VT226	3EPI/1806PI	—
VT227	7184 ...	49
VT228	8012 ...	—
VT229	6SL7 ...	19
VT230	350A ...	—
VT231	6SN7 ...	19
VT232	E1148 ...	70
VT233	6SR7 ...	19
VT234	114B ...	36
VT235	615 ...	40

American Army No.	Civilian No.	Page
VT236	836 ...	40
VT237	957 ...	—
VT238	956 ...	—
VT239	1LE3 ...	3
VT240	710A ...	—
VT214	7E5 ...	21
VT243	7C4 ...	21
VT244	5U4 ...	10
VT245	2050 ...	—
VT246	918 ...	—
VT247	6AG7 ...	11
VT248	3CPI/180pl	—
VT249	1006 ...	—
VT250	EF50 ...	74
VT251	WL44I series	—
VT252	923 ...	—
VT254	304TH ...	—
VT255	705A ...	—
VT256	GL486 ...	—
VT257	K-7 ...	—
VT259	829 ...	—
VT260	OA3 ...	—
VT264	3Q4 ...	7
VT266	1616 ...	42
VT267	WLS78 ...	—
VT268	12SC7 ...	26
VT269	717A ...	40
VT277	417 ...	—
VT279	GY2 ...	—
VT280	C7063 ...	—
VT281	HY145ZT ...	—
VT282	ZG489 ...	—
VT283	QF-206 ...	—
VT284	QF-197 ...	—
VT285	QF-200C ...	—
VT286	832A ...	—
VT287	815 ...	—
VT288	12SH7 ...	26
VT289	12SL7 ...	26

British Post Office V.T. Series Index and Cross Reference to British Service Types

Post Office				Post Office			
VT No.	CV Equiv.	Commercial Equiv.	Page	VT No.	CV Equiv.	Commercial Equiv.	Page
10	1610	MT4	...	91	1038	MHL4	...
11	1611	MR4	...	92	1735	DC2P	...
16	1607	OC2.5	...	93	1666	P610	...
17	1608	U4	...	94	1667	LS8A	...
19	1612	VT9B	...	95	1668	4033L	...
20	1613	—	...	98	1669	P625	...
24	1636	LS5	...	100	(CV1670)	HL1320	...
25	1637	LS5	...	100B	1670	H11320	...
26	1600	CAT1	...	102	1671	4021A	...
27	1601	CAR1	...	103B	1672	Pen36C	...
31	1638	4101D	...	104	1673	PX25	...
31	1639	4101E	...	105	1674	PM2HL	...
32B	1640	4002D	...	016	1674	AC/S2Pen	...
32D	1641	4102E	...	107	1675	N43	...
33	1642	DER	...	108	1676	LS8A	...
34	1614	ESI500A	...	109	1677	AC52	...
35	1615	ESU1500	...	110	1678	HLA2	...
36	1602	CAR4	...	111	1679	DA30	...
37B	1643	E132	...	1112	1680	PM202	...
37C	1644	E1532	...	113	1681	TSP4	...
38	1645	E133	...	114	1682	—	...
38A	1646	E1453	...	115	1683	MKT4	...
40	1647	LS5B	...	116	1684	APP4C	...
46	1616	—	...	116A	1685	APP4c	...
47	1603	4104A	...	118A	1686	D418	...
51	1617	—	...	118B	1687	D418	...
52	(CV1025)	DET25	...	119	1169	VMP4G	...
53	1604	SSI971	...	120	1688	3B/252B	...
54	1618	ES250M	...	121A	(CV1288)	3B/252B	...
56	1648	4205E	...	122	(CV244)	AF2	...
57	25	ES85	...	125	1689	PA1	...
58	1619	4212E	...	126	1690	9A1	...
59	1620	DET6	...	127	(CV1187)	D41	...
60	1605	4013C	...	127A	1691	DDL4	...
61	1609	SW7	...	128	1692	AC/P	...
62	1606	CAT7	...	130	1621	ESW501	...
65	1649	6C5	...	131	1168	PX4	...
66	1650	LS5A	...	132	1694	3A/144A	...
68	1651	G455B	...	133	1695	DH30	...
69	1652	P220A	...	136	1118	KT2	...
72	249	4019A	...	137	1081	4502A	...
73A	1653	KCI	...	138	1623	RGI-250	...
74	1654	—	...	139	399	MH4	...
75	1655	4109B	...	140	1166	P220	...
781	1656	LS8	...	142	1039	R3	...
79A	1657	4020B	...	143	1696	B21	...
80A	1658	L29B	...	144	1371	PZ1-35	...
81	1659	4022B	...	145	243	4045A	...
82	1660	LS7	...	146	1625	RG30250	...
85	1661	DL	...	147	1697	X41	...
86	1662	P215	...	148	1689	A819	...
87	1663	4021B	...	149	1349	RG5-500	...
88	1664	B406	...	150	1699	SP41	...
89	1665	DH	...	150A	1700	SP41	...
90	1732	ML4	...	151	1701	XL0	...

Post Office				Commercial				Post Office				Commercial			
VT No.	CV Equiv.	Equiv.	Page					VT No.	CV Equiv.	Equiv.	Page				
152	1702	XP	...	...	121			181	1052	EL32	...	...	76		
153	1703	XW	...	...	—			182	1823	IN5	...	...	3		
154	1067	6J5	...	...	18			183	1724	5A/102D	...	...	8		
155	1704	57	...	...	34			185	245	4328D	...	...	44		
156	1705	58	...	...	34			186	1726	5A/105A	...	...	—		
157	1706	2B7	...	...	4			187	1627	5D/100A	...	...	—		
158	1707	2A5	...	...	4			188	1727	Z22	...	...	—		
159	1708	80	...	...	35			189	1128	GT1c	...	...	80		
160	1709	6D6	...	...	16			190	1728	WE262B	...	...	—		
161	1710	6C6	...	...	15			191	1628	GU8	...	...	—		
162	1711	6B7	...	...	13			193	1100	KTW61	...	...	86		
163	1712	42	...	...	33			194	587	6Q7	...	...	19		
164	1713	EF8	...	...	74			195	1863	5Z4	...	...	10		
165	1714	1F9	...	...	74			196	509	6V6	...	...	20		
166	1715	EBC3	...	...	71			197	1629	RG3-1250A	...	...	—		
167	1716	E1541	...	...	—			198	1075	KT66	...	...	86		
168	1626	RG10240A	...	...	—			199	124	807	...	...	40		
169	1717	4307A	...	...	—			200	1065	SP61	...	...	104		
170	1718	AC/TP	...	...	55			201	1056	EF36	...	...	74		
171	1719	U22	...	...	108			202	1054	EB34	...	...	71		
177	1720	XLI.5	...	...	121			203	9	AL60	...	...	56		
178	1721	XPI.5	...	...	121			204	18	DET19	...	...	64		
179	1722	A901	...	...	53			205	1630	ESP450	...	...	—		
180	1053	EF39	...	...	74			206	1120	SU2150A	...	...	105		
								207	1091	EF50	...	...	74		

B.V.A. UTILITY EQUIVALENTS

The last figure of this number denotes the manufacturer and can be disregarded.

E.g., all the 260 series are equivalent to an EL33.

B.V.A.			Civilian			B.V.A.			Civilian			B.V.A.			Civilian		
No.	No.	Page				No.	No.	Page				No.	No.	Page			
132	HL23DD	...	81			172	TP25	...	107			264	EL33	...	76		
142	VP23	...	116			211	DW4/350	...	68			274	ECH35	...	73		
162	Pen25	...	93			243	EF29	...	74								

TEST DATA FOR RECEIVING AND SMALL TRANSMITTING VALVES

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
OZ4	007 060 010		—		250		58	3KΩ	No Data Available			A08	CCR
OO	364 200 000		5	0	40		1·	0·66	No Data Available			UX4	T
OOA	364 200 000		5	0	45		1·5	0·66	No Data Available			UX4	T
OI	364 200 000		5	4·5	90		2·5		80			UX4	T
OIA	364 200 000		5	9	125		3	0·8	80		0·72	UXA	T
OIAA	364 200 000		5	4·5	90		3·2	0·90	90		0·85	UX4	T
OIB	364 200 000		5	4·5	90		2·5	0·72	90		0·82	UX4	T
O84	642 300 000		4	2·0	125		4·0	1·4	125		1·4	B4	T
I	281 300 000		6				60		REC		20mA	UX4	R
IA3	281 008 300		1·4						D			B7G	D
IA4E	365 200 000	G ₁	2	3	150	75	2·2	0·65	100	75	0·6	UX4	P
IA4P	365 200 000	G ₁	2	3	90	75	2·2	0·72	80	75	0·7	UX4	P
IA4T	265 300 000	G ₁	2	3	150	75	2·2	0·625	100	75	0·6	UX4	P
IA5	036 540 200		1·4	4·5	90	90	4	0·85	80	75	0·8	A08	P
IA6	266 453 000	G ₁	2	0	150	75	3	0·425	80	60	0·4	UX6	P
IA7	026 546 300	G ₁	1·4	0	90	50	1·8	0·55	80	60	0·5	A08	H
IAB5	365 004 220		1·2	1·5	150	150	6·8	1·35	100	100		B8B	P
IAB6	265 461 300		1·4	4·1	60	60	1·65	0·1	No Data Available			B7G	H
IAC5	*4* 23* 650		1·25	4·5	60	60	2·0	0·75	60	60	0·75	B8D	P
IAC6	266 464 200		1·4	4·0	60		4	2·2	80			B7G	H
IAD4	652 430 000		1·25	1·6	90	90	5·7	2·3	80	75	2	B5A	P
IAD5	*4* 23* 650		1·25	3·0	60	60	1·85	0·73	60	0·73	0·73	B8D	P
IAE4	265 024 300		1·25	0	90	90	3·5	1·55	90	90	1·55	B7G	P
IAF4	265 024 300		1·4	0	90	90	1·65	0·95	80	90	0·9	B7G	P
IAF5	208 564 300		1·4	0	90	90	1·1	0·6	80	90	0·6	B7G	DP
IAH5	208 564 300		1·4	1·5	60	60	0·17	0·17	60	60	0·17	B7G	DP
IAJ4	265 *24 300		1·4	0·8	75	75	1·4	0·65	80	75	0·75	B7G	P
IAN5	265 224 300		1·4	0	60	60	1	0·75	80	75	0·8	B7G	P
IAS4	265 024 300		1·4	0	90	90	1·6	0·85	100	90		B7G	P
IAX2	230 232 032	D ₁	1·4						D			B9A	D
IB3	020 000 300		1·25						D			A08	R
IB4P	365 200 000	G ₁	2	3	90	75	1·6	0·6	80	60	0·6	UX4	P
IB4(T)	265 300 000	G ₁	2	2	175	75	1·7	0·65	100	60	0·6	UX4	P
IB5	268 943 000		2	3	130		0·8	0·57	100		0·5	UX6	DDT
IB6	265 406 300		1·4	1·5	90	75	1·5	0·75	80	75	0·75	B7G	P
IB7	026 546 300	G ₁	1·4	0	90	50	1·5	0·875	80	60	0·8	A08	H
IB8	037 546 280		1·4	0 6	90	0	0·15	0·27	80		0·15	A08	DTP
					90	90	6·3	1·15	80	75	1·1		
IC	289 300 000		6				1·0	D				UX4	D
ICI	266 424 300		1·4	4	75		4·5	1·2	80		1·4	B7G	H
IC2	266 464 300		1·4	4	60		4	1·2	80		1·4	B7G	H
IC3 (U.S.A.)	260 406 300		1·4	3	90		1·4	0·76	80		0·7	B7G	T
IC4	365 200 000	G ₁	2	0	175	75	2·5	1	150	75	1	UX4	P
IC5	036 540 200		1·4	7·5	90	90	7·5	1·55	80	75	1·5	A08	P
IC6	366 452 000	G ₁	2	0	175	75		1·05	150	75	1·05	UX6	H

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
IC7	026 546 300	G ₁	2	0	175	75		1.05	150	75	1.05	A08	H
IC8	240 236 540		1.25	0	30	30	.3		No Data Available			B8D	H
ID3	402 306 060		1.2	5	90		12.5	3.4	100		3.4	B8A	T
ID4	264 530 000		2	6	175	175	9.5	2.4	100	100		UX5	P
ID5	802 310 000		40				120		REC		60mA	B5	R
ID5eg	026 500 300	G ₁	2	3.0	125	60	2.2	0.68	100	60	0.6	A08	P
ID5GP	036 500 200	G ₁	2	3	90	75	2.2	0.72	80	60	0.7	A08	P
ID5GT	036 500 200	G ₁	2	3	150	75	2.2	0.65	100	60	0.6	A08	P
ID6	280 183 000		25				60		REC		60mA	UX6	R
ID7	036 546 200	G ₁	2	0	150	75	3	0.425	150	75	1.05	A08	P
ID8	037 546 280	G ₁	1.4	{ 0 9	90	0	1.1	0.575	80	60	0.5	A08	DTP
					90	90	5	0.925	80	75	0.9		
ID13	281 0*8 300		1.4						D			B7G	D
IE3	402 203 060		1.2	0	150		20	3.5	100			B9A	T
IE4	026 040 300		1.4	3	90		1.4	0.76	80		0.76	A08	T
IE5GP	036 500 200	G ₁	2	3	90	75	1.6	0.6	80	60	0.6	A08	P
IE5	036 500 200	G ₁	2	3	175	75	1.7	0.65	100	60	0.6	A08	P
IE7	036 447 250		2	4.5	150	150	7.5	1.435	100	100	1.4	A08	PP
IE8	240 236 540		1.25	0	60	60	1.8	0.74	No Data Available			B8D	H
IF1	265 024 300		1.4	0.8	75	75	1.4	0.65	80	60	0.75	B7G	P
IF2	265 024 300		1.4	1	90	75	2.9	0.92	80	75	0.92	B7G	P
IF3	265 024 300		1.4	1	90	50	1.9	0.75	80	60	0.75	B7G	P
IF4	364 520 000		2	3	90	90	4	1.4	80	75	1.4	UX5	P
IF5	036 540 200		2	3	90	90	4	1.4	80	75	1.4	A08	P
IF6	365 892 000	G ₁	2	1.5	175	75	2.2	0.65	150	75	0.6	UX6	DDP
IF7	036 985 200	G ₁	2	1.5	175	75	2.2	0.65	150	75	0.6	A08	DDP
IF7GV	036 895 200	G ₁	2	1.5	175	75	2.2	0.65	150	75	0.6	A08	DDP
IFD1	2*8 564 300		1.4	1.5	60	60	0.17	0.17	80	60	0.17	B7G	DP
IFD9	208 564 300		1.4	1	75	75	1.6	0.63	80	75	0.63	B7G	DP
IG4	036 040 200		1.4	6	90		2.3	0.825	80		0.825	A08	T
IG5	036 540 200		2	6	90	90	8.5	1.5	80	75	1.5	A08	P
IG6	026 447 300		1.4	0	90		1.0	0.675	80		0.67	A08	TT
IH4	026 040 300		2	9	150		3	0.9	100		0.9	A08	T
IH5	036 080 200	G ₁	1.4	0.5	100		0.13	0.22	80		0.27	A08	DT
IH6	036 894 200		2	3	150		0.8	0.575	100		0.57	A08	DDT
IJ5	036 540 200		2	16.5	150	150	7	0.95	100	100	0.9	A08	P
IJ6	026 447 300		2	3	150		1.7		100			A08	TT
IJ6GX	026 447 300		2	0	125		2		125			A08	TT
IK4	365 200 000	G ₁	2	0	150	75	2.5	1.05	150	75	1.05	UX4	P
IK5	026 500 300	G ₁	2	0	125	75	2.5	1.05	125	75	1.05	A08	P
IK5B	026 500 300	G ₁	2	0	125	75	2.5	1.05	125	75	1.05	A08	P
IK6	369 852 000	G ₁	2	3	150	90	0.9	0.6	100	75	0.6	UX6	DDP
IK7	026 895 300	G ₁	2	4.5	125	150	1.5	0.7	100	100	0.7	A08	DDP
IL4	265 024 300		1.4	0	90	75	2.9	0.925	80	75	0.9	B7G	P
IL5	026 540 300		2	6	175	175	9.5	2.4	100	150	2.4	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
IL6	266 451 300		1.4	0	90	50	4	0.55	80	60		B7G	G
IL60	642 300 000		1.0		150		6.0	1.2	150		1.2	B4	T
ILA4	365 004 020		1.4	4.5	90	90	4	0.85	80	75	0.85	B8B	P
ILA4E	365 004 020		1.4	4.5	90	90	3.5	0.8	80	75	0.8	B8B	P
ILA6	366 454 020		1.4	0	90	50	1.8	0.55	80	60	0.5	B8B	H
ILA6E	366 454 020		1.4	0	90	50	1.8	0.55	80	60	0.5	B8B	H
ILB4	365 004 020		1.4	9	90	90	5	0.925	80	75	0.9	B8B	P
ILB6	276 554 430		1.4	0	75		1.2		80			B8B	H
					90	75	0.4		80	75			
ILC5	365 124 020		1.4	0	90	50	1.15	0.775	80	60	0.77	B8B	P
ILC6	266 454 030		1.4	0	90	50	3	0.55	80	60	0.5	B8B	H
ILD5	365 804 020		1.4	0	90	50	0.6	0.578	80	60	0.5	B8B	DP
ILE3	350 0*4 020		1.4	3	90		1.4	0.76	80		0.76	B8B	T
ILF3	360 004 020		1.4	3	90		1.4	0.76	80		0.76	B8B	T
ILG5	365 124 020		1.4	1.5	90	90	3.7	1.15	80	90	1.15	B8B	P
ILH4	260 804 020		1.4	0	90		0.15	0.275	80		0.27	B8B	DT
ILN5	365 124 020		1.4	0	90	90	1.6	0.8	80	90	0.8	B8B	P
ILN5E	365 124 020		1.4	0	90	90	1.6	0.8	80	90	0.8	B8B	P
IM5G	036 500 200	G ₁	2	0	150	75	2.5	1	150	75	1	A08	P
IN5	036 500 200	G ₁	1.4	0	90	90	1.2	0.750	80	90	0.75	A08	P
IN6	036 548 200		1.4	4.5	90	90	3.4	0.8	80	75	0.8	A08	DP
IPI	365 024 300		1.4	5.2	90	90	5.0	1.4	80	75	1.4	B7G	P
IP5	036 500 200	G ₁	1.4	0	90	90	2.3	0.75	80	90	0.75	A08	P
IPI0	264 536 200		1.4	7	90	75	7.4	1.57	80	60	1.57	B7G	P
IPI1	365 024 300		1.4	4.5	90	90	9.5	2.15	80	75	2	B7G	P
IQ5	036 540 200		1.4	4.5	90	90	9.5	2.2	80	75	2.2	A08	P
IQ6	040 238 650		1.25	0	60	60	1.6	0.6	No Data Available			B8D	DP
IR	026 510 300	G ₁	1.4	0	90	90	1.2	0.75	80	90	0.75	A08	P
IR4	200 800 130		1.4						D			B8B	D
IR5	266 424 300		1.4	4	75		4.5	1.2	80		1.4	B7G	H
IS2A	32* 323 *23	D ₁	1.4						D			B9A	D
IS4	264 526 300		1.4	7	90	75	7.4	1.575	80	60	1.5	B7G	P
IS5	208 564 300		1.4	0	75	75	1.6	0.625	80	75	0.625	B7G	DP
IS6	604 238 050		1.2	0	60	60	1.6	0.6	No Data Available			B8D	DP
ISA6	021 405 360		1.4	0	90	75	2.45	0.97	80	75	0.97	A08	P
ISB6	036 580 240		1.4	0	90	75	1.45	0.665	80	75	0.66	A08	DP
IT	036 500 320	G ₁	1.4	4.5	90	90	0.9	2.1	80	75	2.1	A08	P
IT2	123 000 000	D ₁	1.4						D			B3G	D
IT4	265 024 300		1.4	0	90	75	3.5	0.9	80	75	0.9	B7G	P
IT5	036 540 200		1.4	6	90	90	6.5	1.15	80	75	1.15	A08	P
IT6	604 238 050		1.2	0	60	60	1.6	0.6	No Data Available			B8D	DP
IU4	265 024 300		1.4	0	90	90	0.8	0.68	80	90	0.9	B7G	P
IU5	265 804 300		1.4	0	75	75	1.6	0.625	80	75	0.6	B7G	DP
IU6	266 451 300		1.4	0	75	50	1.7	0.3	No Data Available			B7G	H
IV	281 300 000		6				60		REC			20mA	UX4 R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
IV2	8** 230 **8		0.625						D			B9A	D
IV4	260 *24 300		1.25	0	125	100	1.6		125	100		B7G	P
IV5	*4* 23* 650		1.2	4.5	60	60	2	0.75	No Data Available			B7G	P
IW4	265 004 300		1.4	9	90	90	5	0.925	80	75	0.9	B7G	P
IW5	040 230 650		1.25	0	60	60	1.8	0.73	No Data Available			B8A	P
IW50	642 300 000		1						D			B4	D
IX2	230 232 032	D ₁	1.25						D			B9A	R
IY2	200 300 000	D ₁	1.4						D			UX4	R
IZ1	020 000 300	D ₁	0.7						D			A08	D
IZ2	232 232 300	D ₁	1.25				2		D			B7G	R
2	642 300 000		2	4	150		1.5		100			B4	T
2/25A	200 300 000	D ₁	6				30		REC		18mA	UX4	R
2/50A	200 300 000	D ₁	5				60		REC		20mA	UX4	R
2A3	264 300 000		2.5	45	250		60	5.2	100		5.2	UX4	T
2A3H	364 200 000		2.5	62	300		40	5.25	100		5.25	UX4	T
2A5	265 413 000		2.3(3)	16.5	250	250	34	2.5	100	PenLF	2.5	UX6	P
2A6	269 913 000	G ₁	2.5	2	250		0.9	1.11	150		1.1	UX6	DDT
2A7	265 541 300	G ₁	2.5	8	250	100	3.5	1.15	150	100	1.1	Sm7	H
2AF4	642 314 600		2.5	4.0	100		15	6.6	80		6.0	B7G	T
2B3	*20 000 3*0	D ₁	1.7						D			A08	D
2B5	267 413 000		2.5		300		9		No Data Available			UX6	TT
2B7	265 891 300	G ₁	2.5	3	250	125	9	1.125	100	100	1.12	UX7	DDP
2B7S	265 891 300	G ₁	2.5	3	250	100	6	1	100	100	1	UX7	DDP
2B21	300 200 000	D ₁	2.5				5		D			UX4	R
2B22	021 010 310	D ₁	6						D			A08	D
2B25	200 800 300		1.4						D			B7G	D
2B26	280 300 000		2.5			120			REC		30mA	UX4	R
2B35	123 000 000	D ₁	6						D			B3G	D
2B36	123 000 000	D ₁	4						D			B3G	D
2BN4	142 351 400		2	1.5	150		9	6.8	100		7.0	B7G	T
2C21	217 461 300	G ₁	6	16.5	250		8.3	1.375	100		1.37	UX7	TT
2C22	020 000 310	A ₁ G ₁	6	10.5	300		11	3	100		3	A08	T
2C23	264 300 000		7.5	32	350		16	1.55	100		1.5	UX4	T
2C26	264 300 000		7	100	350		50		No Data Available			UX4	T
2C26	020 000 310	A ₁ G ₁	6	15	350		16		100			A08	T
2C48	265 004 130		6	15	250	250	70		100	150		B8B	P
2C50	265 004 130		12	15	250	250	70		100	150		B8B	P
2C51	214 607 413		6	2	150		8.2	5.5	125		5.5	B9A	TT
2C52	461 471 230		12.5	2	250		1.3	1.9	200		1.9	A08	TT
2CY5	412 365 100		2.5	1	125	80	10	8	125	75	8	B7G	P
2D1	289 130 000		2.5						D			UX5	DD
2D2	892 310 000		2						D			B5	DD
2D4	892 310 000		4						D		4.5	B5	DD
2D4A	892 310 000		4						D		4.5	B5	DD
2D4B	091 231 800		4						D			B7	DD

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
2D13	023 180 000	D ₂							D			B5	DD
2D13a	823 190 000		13						D			B5	DD
2D13C	892 310 000		13						D			B5	DD
2D21	412 316 100		6		400		50	6kΩ	No Data Available			B7G	Thyratron
2E22	254 130 000	A ₁	6	15	400	250	60	5.5	100	PenLF		UX5	P
2E24	235 242 300	A	3	18.5	400	200	16	3.2	200	100	3.2	A08	P
2E25	020 540 320		6	22.5	400	250	40		No Data Available			A08	P
2E26	125 141 300	A	6	20	200	200	20	3.5	100	75	3.5	A08	P
2E30	413 365 200		3	20	250	250	40	3.7	100	PenLF	3.7	B7G	P
2E31	652 430 000		1.25	0	20	20	0.4	0.5	No Data Available			B5A	P
2E32	652 430 000		1.25	0	20	20	0.4	0.5	No Data Available			B5A	P
2E35	652 430 000		1.25	0	20	20	0.27	0.38	No Data Available			B5A	P
2E36	652 430 000		1.25	0	20	20	0.27	0.38	No Data Available			B5A	P
2E41	658 243 000		1.25	0	20	20	0.36	0.37	No Data Available				P
2E42	658 243 000		1.25	0	20	20	0.35	0.37	No Data Available				P
2E50	412 265 300		6	20	250	250	10	3.4	100	100		B7G	P
2F7	275 641 300	G ₁	2.5	3.0	100		4.00		100	60	3.8	UX7	TP
2HMD	452 310 000	A ₁ A ₂	4	3.0	250	100	2.8		100	100			
2K2	026 500 300	G ₁	2	2.0	100	100	3.8	1.14	100	100	1.1	B5	PP
2P	642 300 000		2	22	250		40	7	100	100	0.9	A08	P
25	289 130 000		2.5				15		REC		10mA	UX5	RR
2T4	642 314 600		2.3	2.7	75		18	7	75		7	B7G	T
2T/270K	112 311 100	D ₁	4						REC		5mA	B7G	R
2U14	642 300 000		2		125		2	0.6	125		0.6	B4	T
2U15	642 300 000		2		150		4	0.8	100		0.8	B4	T
2V2	020 000 03*	D ₁	2.5						D			A08	D
2V3	020 000 300	D	2.5 (3)						D			A08	R
2W3	020 800 030		2.5			60			REC		20mA	A08	R
2X2	300 200 000	D ₁	2.5 (3)				1		D			UX4	R
2X2A	300 200 000	D ₁	2.5 (3)				1		D			UX4	R
2X3	020 800 030		2.5				120		REC		30mA	A08	R
2XP	642 300 000		2	36	300		50	7	100		7	B4	T
2Y2	200 300 000	D ₁	2.5				5		D			UX4	R
2Z2	280 300 000		2.5				60		REC		20mA	UX4	R
3	642 300 000		2	7.5	150		3.4	0.9	100		0.9	B4	T
3A2	230 232 032	D ₁	3						D			B9A	D
3A3	*2* 0*0 3*0	D ₁	3						D			A08	D
3A4	365 426 300		1.4	8.4	150	90	13.3	1.9	100	75	1.9	B7G	P
3A5	264 347 200		1.4	2.5	90		3.7	1.8	80		1.8	B7G	TT
3A8	237 546 380	G ₁	1.4	0	90	0	0.2	0.325	80	60	0.32	A08	DTP
				0	90	90	1.2	0.75	80	60			
3A/107A	264 300 000		4	8	125		6.5	1.6	100		1.6	UX4	T
3A/107B	642 300 000		4	8	125		6.5	1.6	100		1.6	B4	T
3A/108A	264 300 000		2	1.5	125		0.9	0.5	100		0.5	UX4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
3A/108B	642 300 000		2	1.5	125			0.9	100		0.5	B4	T
3A/109A	264 300 000		4	8	125		19	1.2	100		1.2	UX4	T
3A/109B	642 300 000		4	8	125		19	1.2	100		1.2	B4	T
3A/154M	260 0*4 130		6	2	250		12	3	100		3	B8B	T
3AF4A	642 314 600		3	4	100		15	6.6	100		7.5	B7G	T
3AL5	192 310 800		3				5		D			B7G	DD
3AU6	412 365 100		3	1.0	250	150	10.0	5.2	100	150	5.00	B7G	P
3AV6	412 398 600		3	2.0	250		1.2	1.6	200		1.6	B7G	DDT
3AY6	412 389 600		3	2.0	250		1.2	1.6	200		1.6	B7G	DDT
3B2	*2* 0** 3*0	D ₁	3						D			B8A	D
3B4	524 332 600		1.25	7.5	150	125		1.7	No Data Available			B7G	R
3B5	036 540 320		1.4	7	75	75	6.7	1.5	80	60	1.5	A08	P
3B7	364 204 730		1.4	0	90		5.2	1.85	80		1.85	B8B	TT
3B21	289 300 000		2.5				120		REC		30mA	UX4	RR
3B22	289 300 000		2.5				120		REC		30mA	UX4	RR
3B23	200 300 000	D ₁ D ₂	2.5				120		REC		30mA	UX4	RR
3B24	320 200 000	D ₁	2.5				30		REC		15mA	UX4	R
3B25	200 300 000	D ₁	2.5				120		REC		15mA	UX4	R
3B26	020 000 200	D ₁	2.5				15		REC		10mA	A08	R
3B27	280 300 000		2.5				120		REC		30mA	UX4	R
3B/240M	214 444 130	A	6	1	300		50	27	No Data Available			B8B	T
3B/241M	214 444 130	A	19	1	300		50	27	No Data Available			B8B	T
3B/252B	642 310 000		6	20	400		60	10	100		8	B5	T
3BA6	412 365 100		3	1.0	250	100	11.0	4.4	100	100	4.4	B7G	P
3BC5	412 365 100		3	1.3	250	150	7.5	5.7	100	150	5.8	B7G	P
3BE6	412 366 100		3	2.0	100		11	7.0	100		5.0	B7G	H
3BN4	142 361 400		2.8	2	150		9	6.8	100		6	B7G	T
3BN6	412 354 600		3	1.0	60	60	0.25	1.0	80	60	1.0	B7G	P
3BU8	157 231 461		3	1.0	100	60	1	1.5	100	60	1.5	B9A	PP
3BY6	412 365 400		3	2.5	250	100	6.5	2.4	100	100	2.0	B7G	H
3BZ6	412 365 100		3	1.0	125	125	14.0	8.0	200	150	6.0	B7G	P
3C2	020 *3* 2*0		1.5						D			A08	D
3C4	365 *24 300		1.4	5.2	90	90	5.0	1.4	80	75	0.75	B7G	P
3C5	036 540 320		1.4	9	90	90	6	1.4	80	75	1.4	A08	P
3C6	206 447 320		1.4	0	90		4.5	1.3	80		1.3	B8D	TT
3C36	412 365 100		3	2.2	200	150	9.5	6.2	100	150	6.0	B7G	P
3CB6	412 365 100		3	1.0	125	125	13.0	8.0	100	150	6.0	B7G	P
3CF6	412 365 100		3	1.0	125	125	12.0	7.8	100	150	6.0	B7G	P
3CS6	412 365 100		3	1.0	100	30	1.0	1.1	100		1.1	B7G	H
3D6	365 004 230		1.4	4.5	150	90	10.2	2.4	100	75	2.4	B8B	P
3DT6	412 365 100		3	2.2	150	100	1.1	0.8	150	100	2.0	B7G	P
3E5	365 024 300		1.4	8	90	90	6	1.2	80	75	1.2	B7G	P
3E6	265 134 020		1.4	0	90	90	2.5	1.8	90	90	1.8	A08	P
3G10	892 300 000		2.5				30		REC		15mA	B4	RR
3G130	892 300 000		2.5				30		REC		15mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
3LE4	365 004 230		1.4	9	90	90	1.8	1.6	80	75	1.6	A08	P
3LF4	365 004 230		1.4	4.5	90	90	8	2	80	75	2	B8B	P
3Q4	364 526 300		1.4	5	90	90	6.9	1.975	80	75	1.9	B7G	P
3Q5	036 540 320		1.4	4.6	90	90	9.0	2	80	75	2	A08	P
3S4	364 526 300		1.4	7	90	75	7.4	1.574	80	60	1.5	B7G	P
3V4	365 024 300		1.4	4.5	90	90	7.7	2	80	75	2	B7G	P
4	642 300 000		2	1	150		1	0.9	150		0.9	B4	T
4/100BU	892 300 000		4				120		REC		30mA	B4	RR
4A6G	026 447 230		2	1.5	90		1.2	0.9	80		0.9	A08	TT
4A07	642 300 000		4	2	100		1.4	1.2	100		1.2	B4	T
4A08	642 300 000		4		150		4	1.8	100		1.0	B4	T
4A10	642 300 000		4	2.5	125		6	1.8	125		1.8	B4	T
4A15	642 300 000		4		100		7	2.2	100		2.2	B4	T
4A80	642 310 000		4		150		6	2	150		2	B5	T
4A90	642 310 000		4		200		8	3.5	100		3.0	B5	T
4A120	642 310 000		4		125			1.4	125		1.4	B5	T
4AU6	412 365 100		4	1	250	150	10	5.2	100	150	5.2	B7G	P
4BA6	412 365 100		4.2	1	250	100	11	4.4	100	100	4.4	B7G	P
4BC5	412 365 100		4.2	1.3	250	150	7.5	5.7	100	150	5.7	B7G	P
4BC8	741 236 410		4.2	2.2	150		10.0	6.2	150		5.0	B9A	TT
4BE6	412 366 100		4.2	2	100		11	7	100		5	B7G	H
4BN6	142 354 600		4.2	1	60	60	0.25	1.0	80	60	1.0	B7G	P
4BQ7A	741 236 410		4	2.0	150		9.0	6.4	100		6.0	B9A	TT
4BS8	641 237 410		4.2	4.4	150		10	7.2	100		7	B9A	TT
4BU8	157 231 461		4.2	1	150	100	4	3.5	150	100	3.5	B9A	PP
4BX8	641 237 410		4.2		125		11	7.5	125			B9A	TT
4BZ7	741 236 410		4	2.2	150		10.0	6.8	100		6.0	B9A	TT
4BZ8	641 237 410		4.2	2	125		10	8	125		8	B9A	TT
4C1	264 300 000		3	3	90		5	1	80		1	UX4	T
4C1A	364 200 000		3	3	90		5	1	90		1	UX4	T
4C2	642 310 000		4	5	125		11	2.5	125		2.5	B5	T
4C3	642 310 000		4	3.5	200		6	2.4	100		2.0	B5	T
4C4	642 310 000		4	3.5	200		6	2.4	100		2.0	B5	T
4C5	642 300 000		4	10	400		30	4	No Data Available			B4	T
4C102	642 300 000		4	45	250		40	2	No Data Available			B4	
4C103	642 300 000		4	35	225		45	3.5	No Data Available			B4	T
4CB6	412 365 100		4.2	1	125	125	13	8	125	125	8	B7G	P
4CE5	412 365 100		4.2	1	125	125	11	7.6	125	125	7.6	B7G	P
4CX7	641 237 410		4.2	10	150		9	6.4	150			B9A	TT
4CY5	412 365 100		4.2	1	125	80	10	8	125	75	8	B7G	P
4D1	000 231 600	G ₁	13	3	250	10	5	100			4	B7	T
4D80	642 310 000		4		100	2	1	100			1	B5	T
4G30	892 300 000		4				15		D			B4	RR
4G105	892 300 000		4				30		REC		15mA	B4	RR
4G200	892 300 000		4				60		REC		20mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
4H07	642 300 000		4		150		3	1.1	100		1.0	B4	T
4H08	642 300 000		4		150		5	1.2	100		1.0	B4	T
4H80	642 310 000		4		200		6	2	100		0.2	B5	T
4K30	642 300 000		4	10	150		20	3.6	100		3.0	B4	T
4K32	642 300 000		4	15	200		30	3.6	100		3.0	B4	T
4K50	642 300 000		4	20	200		60	5	No Data Available			B4	T
4K60	642 300 000		4	20	300		60	3.5	No Data Available			B4	T
4K61	642 300 000		4		300			3	No Data Available			B4	T
4K100	642 300 000		4	3	300	200	50	4	No Data Available			B4	T
4L11	642 300 000		4		150		7	1.4	100		1.0	B4	T
4L12	642 300 000		4		150		9	2	100		1.5	B4	T
4L13	642 300 000		4		200		8	2	100		2	B4	T
4L13a	642 300 000		4	11	200		14	2.5	100			B4	T
4L14	642 300 000		4		200		10	2.2	No Data Available			B4	T
4L15	642 300 000		4		100			2.2	100		2.2	B4	T
4L16	642 300 000		4	8	150		100	2.2	100		2.0	B4	T
4L20	642 300 000		2		100			1.4	100		1.4	B4	T
4L28	642 300 000		4	4	150		10.5	4	100		3.0	B4	T
4L29	642 300 000		4	8	150		20	3.6	100			B4	T
4LMBT	642 310 000		4	1	200		3.4	2.6	100		2	B5	T
4N08	642 300 000		4		100		8	1.2	100		1.2	B4	T
4N100	642 310 000		4		150			3.5	100		3	B5	T
4N110	642 310 000		4		200		5	1.5	100		1.3	B5	T
4NG	892 300 000		4				30		REC		15mA	B4	RR
4P25	642 300 000	G ₂	4	19	250	150	12	1.3	100	100		B4	P
4S	289 130 000		2.5						D			UX5	D
4S09	542 300 000	A ₁	4		200		1	0.6	100			B4	P
4S120	542 310 000	A ₁	4		200		2	0.7	100	100		B5	P
4S121	542 310 000	A ₁	4		200	100	6	1.0	100	100		B5	P
4S126	542 310 000	A ₁	4	2	200	100	3	2	100	100		B5	P
4THA	645 231 700	G ₁	4	{ 5 2	100		1.5	1.5	80	60	1.5	B7	TH
4TP	446 231 500	A ₂	4		250	100	3.5	2.5	100	100	2.2		
4TPB	061 321 500	G ₁	4	5	150	150	16	4.5	150	100	4.5	B7	TP
4TSA	045 231 600	A ₁	4	3	250	150	12	8	100	100	7	B7	P
4TSP	041 231 500	A	4	0	250	100	5.0	1.6	250	100	1.6	B7	P
			4	3	250	150	12	8	100	100	7	B7	P
4W03	642 300 000		4		80		0.04	1.1	80		1.1	B4	T
4W03n	642 300 000		4		200		0.4	1.1	100		1.0	B4	T
4W08	642 300 000		4		150				100			B4	T
4W100	642 310 000		4		200		1.5	3.5	100		3	B5	T
4W120	642 310 000		4		200		2	0.07	100			B5	T
4W200	642 310 000		4		150			3.3	100		3	B5	T
4XP	642 300 000		4	28.5	250		48	5	100		7	B4	T
5A6	601 225 413		2.5	15	150	150	20		100	100		B9A	P
5A/102D	026 510 310	G ₁	7.5	18	175	150	42	2.5	100	100	2.5	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
5A/136D	026 510 310	G ₁	7.5	5.5	250	150	5.2	2	100	100	2	A08	P
5A/137D	026 510 310		6.3	2	250	100	1.8		100	100		A08	P
5A/150A	265 113 000		10	5.5	250	150	5.2	2	100	100	2	UX6	P
5A/152M	265 105 130		6	2	250	150	10	7.5	100	100	5	B8B	P
5A/155M	256 101 403		6	2	250	250		6.5	100	100	5	B9G	P
5A/156M	265 114 113	G ₁	6	1.7	250	250	10	7.7	100	150	6	B9G	P
5A/157D	026 510 310		6	2	250	100		1.8	100	100	1.8	A08	P
5A163K	141 236 115		6	1.5	200	200	15	15	No Data Available			B9A	P
5A/170K	141 230 615		6.3	1.5	175	150	13	16.3	No Data Available			B9A	P
5A/171G	102 513 410		A ₁	6	5	100	100	20	2.7	100	100	2.5	B8D
5AM8	145 236 181		5	1.7	200	150	11.5	7.0	100	150	7.0	B9A	DP
5AN8	641 237 541		5	{ 6.0 2.2	200 200	150	13.0 9.5	3.3 6.2	100 100	60 150	3.0 6.0	B9A	TP
5AQ5	412 365 400		5	12.5	250	250	45.0	4.1	100	PenLF	4.0	B7G	P
5AR4	*30 809 020		5				120		REC		30mA	A08	RR
5AS4	030 908 020		5				120		REC		30mA	A08	RR
5AS8	452 238 116		5	2.2	200	150	9.5	6.2	100	150	6.0	B9A	DP
5AT8	461 237 514		5	{ 1.0 1.8	100 250	150	8.5 7.7	5.8 4.6	100 100	60 150	5.0 4.0	B9A	TP
5AU4	020 809 030		5				180		REC		40mA	A08	R
5AV8	146 234 157		5	{ 6 2.2	200 200	150	13 1	3.3 9.5	No Data Available			B9A	TP
5AW4	020 809 030		5				120		REC		40mA	A08	RR
5AX4	020 809 030	A ₁	5				60		REC		20mA	A08	RR
5AZ4	020 809 030		5				60		REC		20mA	B8B	RR
5BI	542 300 000		2	1	150	90	2	1.3	150	90	1.3	B9A	P
5B8	146 234 157		5	{ 6 1.8	200 200	150	13 9.5	3.3 6.3	100 100	60 150	3 6	B9A	TP
5B/110M	265 104 130		6	6	250	150	38	6.5	100	100	5	B8B	P
5B/250A	254 130 000	A	6	12.5	400	250	83	6.3	100	150	6	UX5	P
5B/251M	215 044 130	A	6	15	250	250	72	6	100	100	5	B8B	P
5B/252M	265 044 130		6	15	250	250	72	6	100	100	5	B8B	P
5B/253M	265 044 130		19	15	250	250	72	6	100	100	5	B8B	P
5B/254M	215 144 130	A	6	20	300	250	50	5.6	100	100	5	B8B	P
5B/255M	265 144 130	A	6	20	300	250	50	5.6	100	100	5	B8B	P
5B/256M	215 144 130		19	20	300	250	50	5.6	100	100	5	B8B	P
5B/257M	265 144 130		12	20	300	250	50	5.6	100	100	5	B8B	P
5BE8	461 237 414		4	{ 1 1	150 250	100	18 10	8.5 5.2	100 150	60 100	7 5	B9A	TP
5BK7a	741 236 411		5	2	150		10.7	9.3	100		9	B9A	TT
5BQ7A	741 236 410		5.6	2	150		150	6.4	100		5	B9A	TT
5BR8	461 237 514		5	{ 1.0 0.95	150 250	100	18 10	8.5 5.2	100 100	60 100	8	B9A	TP
5BT8	981 236 541		4.7	2.2	200	150	9.5	6.2	100	100		B9A	DDP
5BZ7	741 236 410		5.6	2.2	150		10	6.8	100		6	B9A	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
5CG8	461 237 514		4.7	{ 0.85 1.5	100 250		8.5 7.7	5.8 4.6	100 100	60 100	{ 5.8 0.8	B9A	TP
5CL8	461 237 514		4.7	{ 0.95 1	125 125		15 12	8 5.8	100 100	60 100	{ 0.8 5.5	B9A	TP
5CZ5	504 234 1*6		45	6.7	100	100	43	9	100	100		B9A	P
5CM8	641 237 514		4.7	{ 2 2.2	250 200		1.8 9.5	2 6.2	100 100	60 100		B9A	TP
5DH8	461 237 514		5.2	{ 2.5 1	250 125		7 13	4.4 8.6	100 125		{ 4 8.6	B9A	TP
5E255	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
5E415	642 350 000		4	25	300	200	20	1.7	100	PenLF	1.7	B5	P
5MK9	002 380 000		5				60		REC		20mA	B7G	R
§5J6	672 344 100		5	{ 0.85 3.0	100 150		8.5 5.0	5.3 4.5	100 100		{ 5.3 5.3	B7G	TT
5T4A	041 231 500	A ₁	4	4.5	250	150	4.5	1.7	100	100		B7	P
5P29	120 540 310	A ₁	6	7	250	250	100	14.3	No Data Available			A08	P
5Q5	036 540 320		1.4	4.6	90	90	4.5	2	80	75	2	A08	P
5R4	020 809 030		5 (5.7)				60		REC		25mA	A08	RR
5R4GY	030 809 020		5 (5.7)				60		REC		20mA	A08	RR
5T4	020 809 030		5				120		REC		30mA	A08	RR
5T8	†91 238 146		5	3.0	250		1.0	1.2	150		1.3	B9A	DDDT
5U4	020 809 030		5 (5.7)				120		REC		70mA	A08	RR
5U8	645 237 114		5	{ 1.0 1.0	150 250	100	18.0 10.0	8.5 5.2	100 100	60 100	{ 7.0 5.0	B9A	TP
5V3	020 809 030		5				120		REC		30mA	A08	RR
5V4	030 809 020		5 (5.7)				60		REC		60mA	A08	RR
5V6	026 540 310		4.7	12.5	250	250	45.0	4.1	100	PenLF	4.0	A08	P
5W4	020 809 030		5				60		REC		20mA	A08	RR
5X3	289 300 000		5				15		REC		10mA	A08	RR
5X4	008 090 230		5				120		REC		30mA	A08	RR
5X8	146 231 457		5	{ 1.0 1.8	100 250	150	8.5 7.7	5.8 4.6	100 100	60 150	{ 5.0 4.0	B9A	TP
5Y3GB	030 809 020		5 (5.7)				60		REC		20mA	A08	RR
5Y3GR	020 809 030		5 (5.7)				60		REC		20mA	A08	RR
5Y3GT	020 809 030		5 (5.7)				60		REC		20mA	A08	RR
5Y4	008 090 230		5				60		REC		30mA	A08	RR
5Y4SG	008 090 230		5				60		REC		20mA	A08	RR
5Z3	289 300 000		5 (5.7)				120		REC		30mA	UX4	RR
5Z4	030 809 020		5 (5.7)				60		REC		30mA	A08	RR
5Z4G	030 809 020		5 (5.7)				60		REC		30mA	A08	RR
6/30L2	741 236 410		6.3	7.9	200		10	3.4	100	100	3	B9A	TT
6A3	264 300 000		6	36	250		60	5.25	100		5	UX4	T
6A4	264 530 000		6	9	150	150	14	1.9	100	100	1.9	UX5	P
6A5	026 040 310		6	45	250		60	5.25	100		5	A08	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6A6	274 146 300		6	5	250		3.0	1.6	100		3.1	UX7	TT
6A7	265 541 300	G ₁	6	8	250	100	3.5	1.15	100	100	1.15	Sm7	H
6A7E	265 541 300	G ₁	6	8	250	100	3.5	1.15	100	100	1.15	Sm7	H
6A7S	265 541 300	G ₁	6	8	250	100	3.5	1.15	100	100	1.15	Sm7	H
6A8GT	026 545 310	G ₁	6	8	250	100	3.5	1.15	100	100	1.15	A08	H
6AB4	602 304 100		6	2	250		10	5.5	100		5.5	B7G	T
6AB7	021 415 360		6	3	300	200	12.5	5	100	150	5	A08	P
6AB8	641 237 154		6	{ 2 8.0	100 200	0 200	4 17.5	1.4 3.5	100 100	60 150	1.4 3.5	B9A	TP
6AC5	026 040 310		6	0	250		2.5		No Data Available			A08	T
6AC7	021 415 360		6	2	300	150	10	9	100	100	8	A08	P
6AD4	402 013 080		6	11.5	100		1.4	2	100		2	B8B	T
6AD5	026 040 310		6	2	250		0.9	1.5	200		1.5	A08	T
6AD7	427 546 310		6	{ 25 16.5	250 250	0 250	4 34	0.325 2.5	100 100	60 PenLF	0.32 2.5	A08	TP
6AD8	541 236 891		6	2.0	250	90	6.7	1.1	100	90		B9A	DDP
6AE5	026 040 310		6	15	100		7	1.2	80		1.2	A08	T
6AE6	026 740 310		6	1.5	250		6.5	1	200		1	A08	TT
6AE7	026 414 310		6	13.5	250		10	3	100		3	A08	TT
6AE8	541 237 46*		6	{ 2 2	100 250		5.2 3.5	2.2	100 150	60 90	2.8	B9A	TH
6AF4	642 314 600		6	4	100		15	6.6	80		6	B7G	T
6AF4A	642 314 600		6	3	100		20	7.5	100		7.5	B7G	T
6AF5	026 040 310		6	18	175		7	1.5	100		1.5	A08	T
6AG5	412 365 100		6	1.5	250	150	6.5	5	100	100	5	B7G	P
6AG6	026 540 310		6	6	250	250	32	10	100	PenLF	9	A08	P
6AG7	120 415 360		6	3	300	150	30	11	100	100	10	A08	P
6AH4	420 060 310		6	23	250		30	4.5	100		4	A08	T
6AH5	520 604 310		6	18	350	250	54	5.2	100	PenLF	5	A08	P
6AH6	412 365 100		6	2	300	150	10	9	100	100	8	B7G	P
6AH7	461 471 230		6	16	250		10	2.2	100		2.2	A08	TT
6AH7GT	417 146 230		6	9	250		12	2.4	100		2.4	A08	TT
6AJ4	414 464 234		6	2	125		8	7	100		10	B9A	T
6AJ5	412 365 100		6	7.5	175	75	2.9	2.75	100	75		B7G	P
6AJ7	020 415 360		6		300	150	10.0	9.0	150	150	0.75	A08	P
6AJ8	541 237 164		6	{ 3.0 2.0	100 250		5.0 6.5	2.3 2.4	100 150	60 100	2.3 2.4	B9A	TH
6AK4	402 013 060		6	2.5	200		9.5	3.8	100		3	B8D	T
6AK5	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
6AK6	412 365 100		6	9	175	175	15	2.3	100	100	2.3	B7G	P
6AK7	120 415 360		6	3	300	150	30	11	100	100	9	A08	P
6AK8	†91 238 146		6	3.0	250		1.0	1.2	100		1.3	B9A	DDDT
6AL5	192 310 800		6						D		6.0	B7G	DD
6AL6	020 540 310	A	6	14	250	250	72	6	100	PenLF	6	A08	P
6AM4	414 464 234		6	1.0	200		10	9.8	100		6	B9A	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6AM5	412 360 500		6	13.5	250	250	16	2.6	100	PenLF	2.6	B7G	P
†6AM6	412 361 500		6	{ 2 1.5	250 200	250 150	10 4	7.5 6.4	100 100	PenLF PenLF	5 5	B7G	P
6AM8	145 236 181		6	1.7	200	150	11.5	7.0	100	150	7.0	B9A	DP
6AN4	642 314 600		6	1.3	200		13	10	100			B7G	T
6AN5	412 365 100		6	6	125	125	35	8	100	100	7	B7G	P
6AN6	289 ††1 300		6						D			B7G	DDDD
6AN7	541 230 764		6	{ 2.0 2.0	100 250	100	5.0 3.0	2.0 0.75	100 100	60 100	2.8	B9A	TP
6AN8	641 237 541		6	{ 6 2.2	200 200	150	13 9.5	3.3 6.2	100 100	60 150	3 6	B9A	TP
6AQ4	412 314 600		6	2.0	250		6.0	8.5	200		8.0	B7G	T
6AQ5	412 365 400		6	12.5	250	250	45	4.1	100	PenLF	4	B7G	P
6AQ6	412 398 600		6	3	250		1.0	1.2	150		1.2	B7G	DDT
6AQ7	918 461 230		6	2	250		2.3	1.6	100		1.6	A08	DDT
6AQ8	741 236 410		6	2.3	250		10.0	5.5	100		5.0	B9A	TT
6AR5	412 365 000		6	16	250	250	34	2.4	100	PenLF	2.4	B7G	P
6AR6	106 052 430		6	36	300	300	58	4.3	100	PenLF	4.3	A08	P
6AR7GT	206 598 130	G	6	2	250	100	7	2.5	100	100	2.5	A08	DDP
6AR7	461 891 230		6	2	250		1.3	1.05	200		1.05	A08	DDT
6AS4	001 080 230		6						REC			A08	R
6AS5	142 345 600		6	8.5	150	125	35	5.6	100	100	5	B7G	P
6AS6	412 365 100		6	2	125	125	5.5	3.5	100	100	3.5	B7G	P
6AS7	471 461 230		6	31.5	150		125	7	No Data Available			A08	TT
6AS8	541 238 116		6	2.2	200	150	9.5	6.2	100	150	6	B9A	DP
6AT6	412 389 600		6	3	250		1	1.2	100		1.2	B7G	DDT
6AT7n	641 237 410		6	{ 2 1	250 100		10 3.7	5.5 4.0	100 100		5 4.0	B9A	TT
6AT8	461 237 514		6	{ 1.0 1.8	100 250	150	8.5 7.7	5.8 4.6	100 100	60 150	5.8 4.0	B9A	TP
6AU4	001 080 230		6				120		REC		40mA	A08	R
6AU5	421 060 350		6	20	175	150	50	5.6	80	60	6	A08	P
6AU6	412 365 100		6	1	250	150	10.0	5.2	100	100	3.9	B7G	P
6AU7	641 227 413		3	8.5	250		10.5	2.2	100		2.0	B9A	TT
6AU8	146 231 457		6	{ 1.25 1.5	150 200	125	8.5 15.0	4.9 7.0	100 100	60 100	5.0 7.0	B9A	TP
6AV4	802 309 100		6				30		REC		15mA	B7G	RR
6AV5	421 060 350		6	22.5	250	150	57	5.9	100	100	5.8	A08	P
6AV6	412 389 600		6	2	250		1.2	1.6	100		1.2	B7G	DDT
6AW4	289 130 000		6				30		REC		15mA	UX5	RR
6AW5	208 190 310		6				30		REC		15mA	A08	RR
6AW6	412 365 100		6	1.8	250	150	7	5	100	150	5	B7G	P
6AW7	149 816 230		6	0	100		1.4	1.2	100		1.2	A08	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6AW8	146 231 457		6	{ 2.0 3.0	200 200	150	4.00 13.0	4.0 9.0	100 100	60 100	4.0 9.0	B9A	TP
6AX2	23* 232 *32	D ₁	6				120		D			B9A	D
6AX4	001 080 230		6				120		REC		35mA	A08	R
6AX5	029 080 310		6				60		REC		20mA	RR	RR
6AX6	028 190 310		6				120		REC		30mA	A08	RR
6AX7	641 227 413		3	2	250		1.2	1.6	100		1.2	B9A	TT
6AX8	546 237 114		6	{ 1 1.2	150 250	100	18 10	8.5 4.8	100 100		8	B9A	TP
6AY5	023 540 310		6	12.5	250	250	47	4.1	100	PenLF	4	A08	P
6AY8	026 589 310	G ₁	6	5	250	100	52	9.5	100	90	9	A08	DDP
6AZ5	810 230 190		6						D			B8A	DD
6AZ8	751 324 164		6	{ 6.0 2.3	200 200	150	13.0 9.5	3.3 6.0	100 100	60 100	3.0 6.0	B9A	TP
6B4	026 040 300		6	45	250		60	5.25	100		5	A08	T
6B6	026 980 310	G ₁	6	2	250		0.9	1.1	100		1.1	A08	DDT
6B7	265 891 300	G ₁	6	3	250	125	9	1.125	100	100	1.1	Sm7	DDP
6B7E	265 891 300	G ₁	6	3	250	125	9	1.125	100	100	1.1	Sm7	DDP
6B7S	265 891 300	G ₁	6	3	250	125	9	1.125	100	100	1.1	Sm7	DDP
6B8	026 985 310	G ₁	6	3	250	125	10	1.325	100	100	1.3	A08	DDP
6B8G	026 985 310	G ₁	6	3	250	125	9	1.125	100	100	1.2	A08	DDP
6B8SG	026 985 310	G ₁	6	3	250	125	9	1.125	100	100	1.2	A08	DDP
6BA5	402 063 190		6	2	100	100	5.5	2.1	100	100	2	B8A	P
6BA6	412 365 100		6	1	250	100	11	4.4	100	100	4.4	B7G	P
6BA7	641 231 106		6	2	100		187		100		7	B9A	H
6BA8	146 231 457		6	{ 8 2.5	200 200	150	8 13	2.7 9.00	100 100	60 100	5.0 9.0	B9A	TP
6BC4	642 314 460		6	1.5	150		14.5	10	100		10.0	B8A	T
6BC5	412 365 100		6	1.3	250	150	7.5	5.7	100	150	5.7	B7G	P
6BC7	180 239 111		6				5		D			B9A	RRR
6BC8	741 236 410		6	2.2	150		10.0	6.2	150		5	B9A	TT
6BD5	421 060 350		6	12	200	200		5	100	100	5	A08	P
6BD6	412 365 100		6	3	250	100	9	2	100	100	2	B7G	P
6BD7	641 238 09*		6	3.0	250		1.0	1.2	150		1.2	B9A	DDT
6BE6	412 366 100		6	2	100		11	7.0	100		5	B7G	H
6BE7	541 236 114		6	1	250	20	0.95	0.7	No Data Available			B9A	N
6BE8	461 237 514		6	{ 1 1	150 250	100	18 10	8.5 5.2	100 100	60 100	8	B9A	TP
6BF5	412 265 400		6	7.5	100	100	36	7.5	100	90	7	B7G	P
6BF6	412 398 600		6	9	250		9.5	1.9	100		1.9	B7G	DDT
6BF7	642 113 470		6	0.8	100		8	4.8	100		4.8	B8D	TT
6BG6	021 040 350	A	6	15	250	250	75	6	No Data Available			A08	P
6BG7	742 113 460		6	0.8	100		8	4.8	100		4.8	B9A	TT
6BH5	541 236 000		6	2.5	250	100	6.0	1.7	150	100	1.7	B9A	P
6BH6	412 365 100		6	1	250	150	7.4	4.6	100	100	3.4	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6BH8	146 321 457		6	{ 5.0 1.6	150 200		9.5 15.0	3.3 7.0	100 100	60 100		B9A	TP
6BJ5	412 36* 500		6	5	250	250	35	10.5	100	150	10	B7G	P
6BJ6	412 365 100		6	1	250	100	9.2	3.6	100	100	3.6	B7G	P
6BJ7	1†0 239 181		6						D			B9A	DDD
6BJ8	811 239 641		6	9	250		8	2.8	100			B9A	DDT
6BK5	604 231 450		6	5	250	250	35	8.5	100	150	8	B9A	P
6BK6	412 389 600		6	2	250		1.2	1.6	100		1.6	B7G	DDT
6BK7	741 236 410		6	1.0	100		9.0	6.1	100		6.0	B9A	TT
6BK7-A	741 236 410		6	2	150		10.7	9	100		9	B9A	TT
6BK8	501 236 014		6		150	150	3	1.8	100	100		B9A	P
6BL4	**1 *8* 230		6				180		REC		40mA	A08	
6BL7	471 461 230		6	9	250		40	7.0	100		6	A08	TT
6BL8	645 237 114		6	{ 2 2	100 175		14 10	5 6.2	100 100	60 150	5 6	B9A	TP
6BM5	412 365 400		6	6	250	250	30	7	No Data Available			B9A	P
6BM8	414 237 516		6	{ 0 16	100 200		3.5 35	2.5 6.4	100 100	60 100	2.5 6	B9A	TP
6BN4	142 361 400		6	2.2	150		9	7.00	100		7.0	B7G	T
6BN5	441 231 615		6	10.8	225	225	26.0	3.2	100	150	3.2	B9A	P
6BN6	142 354 600		6	1	60	60	0.25	1	80	60	1	B7G	P
6BN7	741 231 406		6	{ 15 1	250 125		24 5	5.5 2	No Data Available			B9A	TT
6BN8	026 895 310	G ₁	6	3	250	125	9	1.13	100	1000	1.1	A08	DDP
6BQ5	*41 23* 6*5		6	7.3	250	250	48.0	11.3	100	150	10.0	B9A	P
6BQ6	020 540 310	A	6	22.5	250	150	57	5.9	100	100	5	A08	P
6BQ7	741 236 410		6	2	150		9	6	150		6	B9A	TT
6BQ7-A	741 236 410		6	2	150		9	6.4	100		5	B9A	TT
6BR7	041 230 651		6	3	250	100	2	1.225	100	100	1.2	B9A	P
6BR8	461 237 514		6	{ 1.0 0.85	150 250		18 10	8.5 5.2	100 100	60 100	8	B9A	TP
6BS4	642 314 600		6	4	100		16.0	8.0	100		8	B7G	T
6BS5	541 236 **1		6	7.5	250	250	50	7	100	100		B9A	P
6BS7	001 230 651	G ₁	6	3	250	100	2	1.25	100	100	1.2	B9A	P
6BS8	641 237 410		6	2.2	150		10	7.2	100		7	B9A	TT
6BT4	280 009 130		6				30		REC		15mA	B8A	RR
6BT6	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
6BT8	891 236 541		6	2.2	200	150	9.5	6.2	100	100		B9A	DDP
6BU6	412 389 600		6	9	150		9.5	1.9	100		1.9	B7G	DDT
6BU8	157 231 461		6		100	60	2.2	1.5	100	60		B9A	PP
6BV7	865 239 141		6	5	250	250	38	10	100	150	10	B9A	DDP
6BV8	146 239 118		6	3.7	200		11	5.6	100			B9A	DDT
6BV4	800 230 901		6				30		REC		15mA	B9A	RR
6BV6	*41 230 651		6	13	300	225	34	3.75	100	150	3.7	B9A	P
6BV7	141 230 651		6	2.4	250	250	9.7	8.2	100	100	7	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6BW8	918 234 156		6.3	1.1	250	100	10	5.2	100	100		B9A	DDP
6BX4	802 308 100		6				30		REC		15mA	B7G	RR
6BX6	141 230 651		6	3	200	200	8	7.2	100	100	7	B9A	P
6BX7	471 461 230		6	16.4	250		42	7.6	100		6	A08	TT
6BX8	641 237 410		6	5	125		11	7.5	125		7	B9A	TT
6BY5	120 980 310		6				60		REC		20mA	A08	RR
6BY6	412 365 400		6	2.5	250	100	6.5	2.4	100	100	2	B7G	H
6BY7	141 230 651		6	2.0	250	100	10.0	6.0	150	100	5.0	B9A	P
6BY8	026 598 310	G ₁	6	4	250	250	44	12	100	PenLF	10	A08	DD
6BZ6	412 365 100		6	1.0	100	125	14	8	125	125	7	B7G	P
6BZ7	741 236 410		6	2.2	150		10.0	6.8	100		6.0	B9A	TT
6BZ8	641 237 410		6	1	125		10	8	125		8	B9A	TT
6C4	602 364 100		6	8.5	250		10.5	2.2	100		3	B7G	T
6C5	026 040 310		6	8	250		8	2	100		2	A08	T
6C6	265 113 000	G ₁	6	3	250	100	2	1.225	100	100	1.2	UX6	P
6C7	260 981 300	G ₁	6	9	250		4.5	1.25	100		1.2	5m7	DDT
6C8	026 147 310	G ₁	6	4.5	250		3.2	1.6	100		1.6	A08	TT
6C9	276 454 130		6	2.5	100		5.0	3.0	100	60	3.0	B8A	TH
				2.5	250	100	8.0	2.5	100	100	2.5		
6C10	276 454 130		6	2.0	100		5.0	2.2	100	60	2.8	B8A	TH
				2.0	250	100	8.0	2.4	100	100	3.5		
6C11	276 454 130		6	3	100		5	2.3	100	60	2.3	B9A	TH
					125	125	5		100	100			
6C12	541 237 164		8	3	100		3	2	100	60	3	B9A	TH
				2	250	100	6.5	2.4	100	100	2.4		
6C31	027 546 310	G ₁	6	4.0	100		7	3.4	100	60	5	A08	TH
				3.0	250	100	5	2.8	100	100	3.1		
6CA4	8*1 23* 9**		6				60		REC		20mA	B9A	RR
6CA5	142 345 600		6	4.5	125	125	36	9.2	125	126	9.2	B7G	P
6CA7	126 540 310		6	14.5	250	250	57	8.5	100	100	9.0	A08	P
6CB5	521 441 350	A	6	30.0	175	175	90	8.8	100	100	8.0	A08	P
6CB6	412 365 100		6	1.0	125	125	13	8.0	100	150	6	B7G	P
6CD6	021 040 350	A	6	30	175	175	75	7.7	100	100	7.0	A08	P
6CE5	412 365 100		6	1	125	125	11	7.6	125	125	7.6	B7G	P
6CF6	412 365 100		6	1.0	125	125	12	7.8	100	150	6	B7G	P
6CF8	501 236 014		6	2	250	150	3	1.85	100	100		B9A	P
6CG6	412 365 100		6	8.0	250	150	9	2	100	100		B7G	P
6CG7	641 237 410		6	8.0	250		9.0	2.6	100		3.0	B9A	TT
6CG8	461 237 514		6	2	100		8.5	5.8	100	60	5.9	B9A	TP
				2	250	150	7.7	4.6	100	150	4		
6CH6	041 230 651		6	4.5	250	250	40	11.0	100	150	9.0	B9A	P
6CH7	741 236 411		6	2.2	150		10	6.8	150		6.8	B9A	TT
6CH8	175 321 446		6	2	200		13	3.3	100		4.9	B9A	TP
				2.2	200	150	9.5	6.3	100	150	5		
6CJ5	260 054 130		6	2.5	250	100	6	2.2	100	100	2.2	B8A	P
6CJ6	*41 23* *51	A	6	22	175	175	45	6.2	100	100	5	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6CK5	250 054 130	A ₁	6		250	250	36	10	100	PenLF	8	B8A	P
6CK6	541 231 600			5.5	250	250	36.0	10.0	100	150	9.0	B9A	P
6CL5	521 441 350		6	40	175	175	90	6.5	100	100		A08	P
6CL6	145 236 154		6	3	250	150	30	11	No Data Available			B9A	P
6CL8	461 237 514		6	{ 0.85 1	125 125		15 12	8 5.8	100 100	60 100	8 5	B9A	TP
6CM5	026 540 310	A ₁	6	7	250	250	72	14.5	100	PenLF		A08	P
6CM6	504 234 106		6	12.5	250	250	45	4.1	100	100	4	B9A	P
6CM7	701 236 441		6	{ 7.0 8.0	200 250		5.0 20.0	2.0 4.4	100 100	60 100	2.8 4.7	B9A	TT
6CM8	641 237 514		6	{ 2 2	250 200		1.8 9.5	2 6.2	100 100	60 100		B9A	TP
6CN6	120 540 310		6	7	250	250	100	14.3	100	PenLF	10	A08	P
6CN7	981 331 462		3	3	250		1.0	1.2	100		1.3	B7G	DDT
6CQ6	412 361 500		6	2.5	250	200	8.0	2.5	100	150	2.5	B7G	P
6CQ8	645 237 114		6	{ 0.85 1	125 125	125	15 12	8 5.8	100 125		8 5.8	B9A	TP
6CR6	182 365 400		6	2.0	250	100	9.5	2.0	250	100	1.95	B7G	DT
6CS5	514 234 1*6		6	10	200	125	47	8	100	100		B9A	P
6CS6	412 365 100		6	1.0	100	30	1.0	1.1	No Data Available			B7G	H
6CS7	604 237 411		6	{ 8.5 10.6	250 250		10.5 19	2.2 4.5	100 100		2 4	B9A	TT
6CT7	268 154 130		6	2	250	100	5	1.8	100	100	1.8	B8A	DP
6CU5	142 345 600		6	8	125	100	50	7.5	125	100	7.5	B8G	P
6CU6	020 540 310		6	22.5	250	150	57	5.5	100	100	6.0	A08	P
6CU7	276 454 130		6	{ 2 2	100 250	100	5 8	2.2 2	100 100	60 100	2.8 3.5	B8A	TH
6CV7	264 089 130		6	3	250		1	1.3	150		1.3	B8A	DDT
6CW5	*41 23* 6*5		6	12.5	175	175	70	10	100	100	9	B9A	P
6CW7	147 234 116		6	1.5	90		12	6	100		6	B9A	TT
6CX7	641 237 411		6	2	150		9	6.4	100		6	B9A	TT
6CX8	146 231 456		6	{ 1.5 2	150 200	125	9 24	4.6 10	100 100	60 60	4.6	B9A	TP
6CZ5	504 234 1*6		6	14	250	250	46	4.8	100	100		B9A	P
6D1	123 000 000		6						D			B3G	D
6D2	192 310 800		6						D			B7G	RR
6D3	812 380 000		6						D			B7G	R
6D5	026 040 310	G ₁	6	40	275		31	2.1	100		2.1	A08	T
6D6	265 113 000		6	3	250	100	8.2	1.6	100	100	1.6	UX6	P
6D7	265 101 300		6	3	250	100	2	1.225	100	100	1.2	Sm7	P
6D8	027 546 310		6	{ 3 3	150 250	100	4.2 3.5		100 150	60 100		A08	H
6DA6	041 230 651		6	2.0	250	100	9.0	3.6	250	100	3.6	B9A	P
6DB6	412 365 100		6	1	150	150	5.8	2	100	100		B7G	P
6DC6	412 365 100		6	2.2	200	150	9.5	5.5	150	100	5.0	B7G	P
6DE6	412 365 100		6	1.1	125	125	16	8	100	100	8	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6DG6	026 540 310		6	7.5	200	125	47	8	100	PenLF		A08	P
6DN6	021 040 350	A ₁	6	18	200	125	70	9	100	100		A08	P
6DQ6	020 540 310	A	6	22.5	250	150	75	6.6	125	100		A08	P
6DR4	123 000 000	D ₁	6						D			B3G	D
6DR6	*41 23* *51		6	23	175	175	45	6.6	100	100		B9A	P
6DT6	412 365 100		6	2.2	150	100	1.1	0.8	150	100	2.0	B7G	P
6E6	274 146 300		6	27.5	250		18	1.7	100		1.7	UX7	TT
6E7	265 101 300	G ₁	6	3	250	100	8.2	1.6	100	100	1.6	Sm7	
6E8G	027 546 310	G ₁	6	4.8	150		3.3	2.8	150	60	2.8	A08	TH
6EH6	412 365 100		6	1	250	100	2.3		100	100			
6EX4	802 309 100		6				30		REC		15mA	B9A	RR
6FI	261 514 130		6	1.8	200	200	10	9	100	60	8	B8A	P
6F5	020 600 310	G ₁	6	2	250		0.9	1.5	100		1.5	A08	T
6F6	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
6F7	275 641 300	G ₁	6	3.0	100		3.5	0.5	100	60	0.5	Sm7	TP
				3.0	100	100	6.3	1.05	100	100	1.05		
6F7B	275 641 300	G ₁	6	3.0	100		3.5	0.5	100	60	0.5	UX7	TP
				3.0	100	100	6.3	1.05	100	100	1.05		
6F7E	275 641 300	G ₁	6	3.0	100		3.5	0.5	100	60	0.5	UX7	TP
				3.0	100	100	6.3	1.05	100	100	1.05		
6F7M	023 756 410	G ₁	6	3.0	100		3.5	0.5	100	60	0.5	UX7	TP
				3.0	100	100	6.3	1.05	100	100	1.05		
6F8	027 146 310	G ₁	6	8	250		9	2.6	100		2.6	A08	TT
6FI I	260 154 130		6	1.8	250	100	4.4	2.2	100	100	2.2	B8A	P
†6FI2	412 361 500		6	2	250	250	10	7.5	100	PenLF	5	B7G	P
				1.5	200	150	4	6.4	100	PenLF	5		
6FI3	260 154 130		6	1.8	200	200	10	9	150	150	8	B8A	P
6FI4	260 154 130		6	1.25	150	150	28	10.6	100	100	8	B8A	P
6FI5	260 154 130		6	2.5	250	100	7	2.3	100	100	2.3	B8A	P
6FI6	261 154 130		6	2.5	250	100	6	2.2	100	100	2.2	B8A	P
6FI7	412 361 500		6	2	150	150	46	6	100	100		B7G	P
6FI8	141 230 651		6	1.3	175	100	12	4.5	125	100		B9A	P
6FI9	141 230 651		6	2	250	100	10	6	150	100	5	B9A	P
6F32	216 510 030	G ₁	6	4.5	200	200	5.1	3	100	150	3	M08	P
6F33	412 361 500		6	4	200	200	5.75	3.55	100	100	1.5	B7G	P
6FX4	902 309 100		6				30		REC		15mA	B7G	RR
6G6	026 540 310		6	9	175	175	15	2.3	100	100	2.3	A08	P
6G7	026 985 310	G ₁	6	3	250	125	10	1.325	100	100	1.3	A08	DDP
6G8	026 985 310	G ₁	6	3	250	125	9	1.125	100	100	1.1	A08	DDP
6GG6	802 300 190		6				30		REC		15mA	F8	RR
6H4	020 800 310		6						D			A08	D
6H6	029 180 310		6						D		4	A08	DD

† See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6H8G	026 895 310	G ₁	6	2	250	125	8.5	2.4	100	100	2.4	A08	DDP
6H8MG	026 895 310	G ₁	6	2	250	125	6	1.8	100	100	1.8	A08	DDP
6J4	412 344 600		6	1.5	150		15	12	100		10	B7G	T
6J5	026 040 310		6	8	250		9	2.6	100		2.6	A08	T
6J6	762 344 100		6	3	150		5	4.5	100		5.3	B7G	TT
6J7	026 510 310	G ₁	6	3	250	100	2	1.225	100	100	1.2	A08	P
6J8	027 546 310	G ₁	6	3 3 3	150			1.6	100	60	1.6	A08	TH
					250	100	1.3	1.2	100	100	1.5		
6K5	026 000 310	G ₁	6		250		1.1	1.4	200		1.4		
6K6	026 540 310		6	18	250	250	32	2.3	100	PenLF	2.3	A08	P
6K7	026 510 310G ₁		6	3	250	125	10.5	1.56	100	100	1.6	A08	P
6K8	027 546 310	G ₁	6	1 3	100		8	2.5	100	60	3	A08	TH
					250	100	4	1.2	100	100	1.6		
6K25	026 040 310		6		100		30	2KΩ	No Data Available			A08	Thyratron
6L1	274 164 130		6	8.6	200		10	2.8	100		2.0	B8A	TT
6L5G	026 040 310		6	9	250		8	1.9	100		1.9	A08	T
6L6	026 540 310		6	18	350	250	54	5.2	100	PenLF	5.2	A08	P
6L7	026 540 310	G ₁	6	3	250	100	5.3	1.1	100	100	1.1	A08	H
6L12	741 236 410		6	2.3	250		10	5.9	100		5	B9A	TT
6L18	260 064 130		6	13.3	250		12.0	5.5	80		7.0	B8A	T
6L19	274 164 130		6	1.8	200		5	3.1	150		3.1	B8A	TT
6L34	412 314 600		6	1.5	250		10	9	150		7	B7G	T
6LD3	264 098 130		6	1.9	250		0.85	1.95	150		1.9	B8A	DDT
6LD12	191 238 146		6	3	250		1	1.2	100		1.3	B9A	DDDT
6LD20	264 098 130		6	5.9	250		5	2.3	100		3.0	B8A	DDT
6M3	*28 0*0 *30		6						D			A08	R
6M5	541 230 600		6	7	250	250	36	10.0	100	100	10.0	B9A	P
6M6	026 540 310		6	6	250	250	36	9.5	100	PenLF	8	A08	P
6M7	026 510 310	G ₁	6	2.5	250	125	10.5	3.4	100	100	3.2	A08	P
6M7MG	026 510 310	G ₁	6	2.5	250	125	6	2	100	100	2	A08	P
6M8	137 546 280	G ₁		1.0 3.0	100		0.5	1.1	100	60	1.1	A08	DTP
					100	100	8.5	1.9	100	100	1.9		
6N3	*** 23* **8		6				180		REC		50mA	B9A	R
6N4	412 361 400		6	3	175		12	6	150		6	B7G	T
6N7	027 446 310		6	5	250		3	1.6	100		1.6	A08	TT
6N8	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
6NK7	026 510 310	G ₁	6	2	250	100	5	2.3	100	100	2.3	A08	P
6PI	026 540 310		6	8.5	250	250	40	8.8	100	150	8	A08	P
6P5	026 040 310		6	13.5	250		5	1.25	100		1.4	A08	T
6P6	215 413 000	A	6	8.0	250	150	34		100	100		UX6	P
6P7	023 756 410	G ₁	6	3.0 3.0	100		3.5	0.5	100	60	0.5	A08	TP
					100	100	6.3	1.05	100	100	1.05		
6P8	027 546 310	G	6	2.4 2.4	100		2.2		100	60		A08	TH
					250	75	1.5		100	75			
6P9	412 365 400		6	6	250	250	30	7	No Data Available			B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6P15	041 230 605		6	7.5	250	250	49	11.3	100	150	10	B9A	P
6P25	026 540 310		6	8.5	250	250	40	8.8	100	100	8	A08	P
6P26	026 540 310		6	8.5	250	250	40	8.8	100	PenLF	8	A08	P
6P28	020 540 310	A	6	8.8	100	250	72	9.5	100	PenLF	9	A08	P
6PX6	026 540 310		6	6	250	35	9.2	9.2	100	PenLF	8	A08	P
6PZ8	026 598 310	G ₁	6	6	250	250	36	9.2	100	PenLF	8	A08	DDP
6Q4	441 230 446		6	1.5	250		15	12.0	No Data Available			B9A	T
6Q6	026 080 310		6	3	250		1.2	1.05	150		1.05	A08	DT
6Q7	026 980 310	G ₁	6	3	250		1	1.2	100		1.5	A08	DDT
6QL6	541 236 154		6	11.5	175	175	52	9.5	125	100		B9A	P
6R	026 510 310	G	6	2	250	100	3.7	2.0	100	100		A08	P
6R3	*** 23* **8	C	6				120		REC		30mA	B9A	R
6R4	401 230 060		6	2	150		30	5.5	100		5	B9A	T
6R6	026 500 310	G ₁	6	3	250	100	7	1.45	100	100	1.4	A08	P
6R7	026 980 310	G ₁	6	9	250		9.5	1.9	100		1.9	A08	DDT
6R8	8†1 239 146		6	9	250		9.5	1.9	100		1.9	B9A	DDDT
6RV	026 510 310	G ₁	6	2	250	100	6.4	2.1	100	100	2.1	A08	P
6S2	*** 23* ***	D ₁	5						D			B9A	D
6S4	*1* 234 **6		6	8	250		26	4.5	100		4.5	B9A	T
6S6	120 600 350	G ₁	6	2	250	100	13	4	100	100	4	A08	P
6S7	026 510 310	G ₁	6	3	250	100	8.5	1.75	100	100	1.7	A08	P
6S8	†18 916 230	G ₁	6	2	250		0.9	1.1	200		1.1	A08	DDDT
6SA7	126 641 310		6	3.6	100		12	4.3	100		1.4	A08	H
6SA7G	026 641 310		6	3.6	100		12	4.3	100		1.4	A08	H
6SB7Y	126 541 310		6	1	250	100	3.8		100	100		A08	H
6SC5	026 400 310		6	4	250		7.5	2.7	100		2.7	A08	T
6SC7	074 461 230		6	2	250		2	1.325	200		1.3	A08	TT
6SD7	021 415 360		6	2	250	100	6	3.6	100	100	3.6	A08	P
6SE7	021 415 360		6	1.5	250	100	4.5	3.4	100	100	3.4	A08	P
6SF5	014 060 320		6	2	250		0.9	1.5	200		1.5	A08	T
6SF7	041 581 230		6	1	250	100	12.4	2.05	100	100	2	A08	DP
6SG7	021 415 360		6	1	250	125	11.8	4.7	100	100	4.7	A08	P
6SH7	021 415 360		6	1	250	150	10.8	4.9	100	150	4.9	A08	P
6SJ7	021 415 360		6	3	250	100	3	1.65	100	100	1.6	A08	P
6SK7	021 415 360		6	3	250	100	9.2	2	100	100	2	A08	P
6SL7	461 471 230		6	2	250		2.3	1.6	150		1.6	A08	TT
6SN7	461 471 230		6	8	250		9	2.9	100		2.6	A08	TT
6SQ7	041 896 230		6	2	250		0.9	1.1	200		1.1	A08	DDT
6SR7	041 986 230		6	9	250		9.5	1.9	100		1.9	A08	DDT
6SS7	021 415 360		6	3	250	100	9	1.85	100	100	1.8	A08	P
6ST7	041 896 230		6	9	250		9.5	1.9	100		1.9	A08	DDT
6SU7	471 461 230		6	2	250		2.3	1.6	200		1.6	A08	TT
6SV7	041 586 230		6	1	250	150	7.5	3.4	100	150	3.5	A08	DP
6SZ7	041 986 230		6	3	250		1	1.2	200		1.2	A08	DDT
6T	205 413 000	A ₁	6	12.5	250	250	4.5	4.1	100	PenLF	4	UX6	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6T4	642 314 600		6	3.0	80		18.0	7.0	80		7.0	B7G	T
6T6	026 500 310	G ₁	6	1	250	100	10	5.5	100	100	5.5	A08	P
6T7	026 980 310	G ₁	6	3	250		1.2	1.052	100		1.05	A08	DDT
6T8	†91 238 146		6	3	250		1	1.2	150		1.3	B9A	DDDT
6TE8	427 546 310	G ₁	6	{ 2 2	100 250	100	3.7 3.5		100 100	60 100		A08	TH
6TE9	651 237 440		6	{ 2.5 7.0 1.5 14.5	100 200 150 500	90	4 3 6 72	2 0.75 1.1 6	100 100 150 100		2	B9A	TH
6TH8	027 546 310	G ₁	6		500	75	3.5		100	60 75		A08	TH
6TP	205 413 000	A ₁	6		250	250			100	PenLF	6	YX6	P
6U3	*** 123* **8		6				180		REC		40mA	B9A	R
6U4	001 080 230		6				120		REC		30mA	A08	R
6U6	026 540 310		6	14	200	150	56	6.2	100	100	6.2	A08	P
6U7	026 510 310	G ₁	6	3	250	100	8	1.5	100	100	1.5	A08	P
6U8	654 237 114		6	{ 1 1	150 250	0 100	18 10	8.5 5.2	100 150	60 100	7 5	B9A	TP
6V3	080 230 808	C	6				120		REC		40mA	B9A	R
6V3P	000 230 009	C	6				120		REC		40mA	B9A	R
6V4	8*1 23* 9**		6				30		REC		15mA	B9A	RR
6V5	006 540 230		6	12.5	250	250	45	4.1	100	PenLF	4.1	A08	P
6V6	026 540 310		6	12.5	250	250	45	4.1	100	PenLF	4	A08	P
6V7	026 980 310	G ₁	6	20	250		8	1.1	100		1.1	A08	DDT
6V8	681 234 †19		6	3	250		1	1.2	100		1.3	B9A	DDDT
6W2	023 000 000	D ₁	6						D			B3G	D
6W3	**1 23* **8		6				120		REC		40mA	B9A	R
6W4	001 080 230		6				120		REC		30mA	A08	R
6W5	028 090 310		6				60		REC		20mA	A08	RR
6W6	026 540 310		6	9.5	150	150	58	8	100	100	8	A08	P
6W7	026 510 310	G ₁	6	3	250	100	2	1.225	100	100	1.2	A08	P
6WC5	265 414 300		6	1.5	250	100			125	100		UX7	O
6X2	023 000 000	D ₁	6						D			B3G	D
6X3	020 000 310	D ₁	6				5		D			A08	R
6X4	802 309 100		6				30		REC		35mA	B7G	RR
6X5	028 090 310		6				30		REC		35mA	A08	RR
6X8	146 231 457		6	{ 1.0 1.8	100 250	150	8.5 7.5	5.8 4.6	100 100	60 150	5.0 4.0	B9A	TP
6Y3	020 000 300	D ₁	6				30		REC		15mA	A08	R
6Y5	208 193 000		6				30		REC		15mA	UX6	RR
6Y6	026 540 310		6	13.5	150	150	58	7	100	100	7	A08	P
6Y7	027 446 310		6	0	250		5.3	1.8	150		1.8	A08	TT
6Z3	381 200 000		6				60		REC		20mA	UX4	R
6Z4	289 130 000		6				30		REC		45mA	UX5	RR
6Z5	328 192 000		6				30		REC		15mA	UX6	RR
6Z6	028 190 310		6				30		REC		15mA	A08	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6Z7	026 447 310		6	0	175		4.2	0.55	150		0.55	A08	TT
6ZDH3A	264 913 000		6	2	225		1.5	1.5	100		1.2	UX6	DT
6ZPI	265 413 000		6	9	200	200	15	1.75	100	100		UX6	P
6ZY5	028 090 310		6				15		REC		15mA	A08	RR
7A2	642 310 000	S	4	17	250	250	40	3.2	100	PenLF	2.3	B5	P
7A2	045 231 600		4	17	250	250	40	3.2	100	PenLF	2.3	B7	P
7A3	045 231 600		4	6	250	250	32	10	100	100	10	B7	P
7A4	260 0*4 130		6	8	250		9	2.6	100		2.6	B8B	T
7A5	265 004 130		6	9	125	125	44	6	100	90	6	B8B	P
7A6	219 008 130		6				5		D			B8B	RR
7A7	265 104 130		6	3	250	100	9.2	2	100	100	2	B8B	P
7A8	266 451 130		6	1	250	100	14	1.4	100	100	1.6	B8B	O
7AB7	526 141 310		6	2	250	100	4	1.8	100	100	1.2	B8B	P
7AC7	412 365 100		6		300	150	10	9	100	100	8	B7G	P
7AD7	265 104 130		6	2.3	300	150	28	9.5	100	150	9	B8B	P
7AF7	217 446 130		6	9	250		9	2.1	100		2.1	B8B	TT
7AG7	265 114 130		6	2	250	250	6	4.2	200	200	4.2	B8B	P
7AH7	265 114 130		6	2	250	250	6.8	3.3	100	150	3.3	B8B	P
7AJ7	265 104 130		6	3	250	100	2.2	1.575	100	100	1.5	B8B	P
7AK7	265 104 130		6	0	150	90	40	6.5	100	100	1.5	B8B	P
7AN7	147 234 116		7.5	1.5	90		12	6	100		6	B9A	TT
7AU7	741 226 413		3.5	8.5	250		10.5	2.2	100		2.2	B9A	TT
7B4	260 004 130		6	2	250		0.9	1.5	200		1.5	B8B	T
7B5	265 004 130		6	18	250	250	32	2.3	100	PenLF	2.3	B8B	P
7B6	264 *98 130		6	2	250		0.9	1.1	200		1.1	B8B	DDT
7B7	265 104 130		6	3	250	100	8.5	1.75	100	100	1.7	B8B	P
7B8	265 454 130		6	2	250	100		1.15	100	100	1.1	B8B	H
7C4	2*0 800 130		6				5		D			A08	R
7C5	265 004 130		6	12.5	250	250	45	4.1	100	PenLF	4.1	B8B	P
7C5LT	265 004 130		6	12.5	250	250	45	4.1	100	PenLF	4.1	B8B	P
7C6	264 198 130		6	1	250		1.3	1	250		1	B8B	DDT
7C7	265 114 130		6	3	250	100	2	1.3	100	100	1.3	B8B	P
7D3	045 231 600		40	20	150	125	36	2.4	100	100	3.8	B7	P
7D5	045 231 600		13	16.5	250	250	34	2.35	100	PenLF	2.3	B7	P
7D6	045 231 600		40	6	250	250	32	10	100	100	10	B7	P
7D7	076 451 130		6	3	250	100	1.3	0.27	125	100		B8B	TH
7D8	045 231 600		13	6	250	250	32	10	100	100	10	B7	P
7D9	412 360 500		6	13.5	250	250	16	2.6	100	PenLF	2.6	B7G	P
7D9	045 231 600		13	25	250	250	32	1.8	100	PenLF	1.8	B7	P
7D10	*41 230 651		6	4.5	250	250	40	11	100	150	9	B8A	P
7E5	426 141 630		6	3	175		5.5	3	150		3	B8B	T
7E6	264 *94 130		6	8	250		9.5	1.9	100		1.9	B8B	DDT
7E7	269 854 130		6	3	250	100	7.5	1.3	100	100	1.3	B8B	DDP
7F7	217 446 130		6	2	250		2.3	1.6	200		1.6	B8B	TT
7F8	427 116 340		6	3	250		6	3.3	200		3.3	B8B	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
7F16	261 154 130		6	2.5	250	100	6	2.2	100	100	2.2	B8A	P
7G7	265 114 130		6	2	250	100	6	4.5	100	100	4.6	B8B	P
7G8	265 441 730		6	2.5	250	100	4.5	2.1	100	100	2.1	B8B	PP
7H6	265 114 130		6	2.5	250	150	9.5	3.5	100	150	3.5	B8B	P
7H7	265 114 130		6	2	250	150	10	4.2	100	150	4.2	B8B	P
7J7	276 454 130		6	{ 3 3	150 250		6.6 1.4	1.4	150 100	60 100	1.4	B8B	TH
7K7	216 498 130		6	2	250		2.3	1.6	200		1.6	B8B	DDT
7L7	265 104 130		6	1.5	250	100	4.5	3.1	100	100	3.1	B8B	P
7N7	217 446 130		6	8	250		9	2.6	100		2.6	B8B	TT
7Q7	266 414 130		6	2	100		15	6	100		4.5	B8B	H
7R1	280 300 000		7.5				60		REC		20mA	UX4	R
7R7	269 854 130		6	1	250	100	6.2	3.4	100	100	3.4	B8B	DDP
7S7	276 454 130		6	{ 1 2	100 250		4.8 4	1.4 2	100 100	60 100	1.8 2.2	B8B	TH
7T7	265 104 130		6	1	250	150	10.8	4.9	100	150	4.9	B8B	P
7V7	265 114 130		6	2	300	150	10	5.8	100	150	5.8	B8B	P
7W7	265 114 130		6	2	300	150	10	5.8	100	150	5.8	B8B	P
7X6	218 009 130		6				30		REC		15mA	B8B	RR
7X7	264 189 130		6	1	250		1.9	1.5	250		1.5	B8B	DDT
7Y4	208 009 130		6				30		REC		30mA	B8B	RR
7Z4	209 008 130		6				60		REC		20mA	B8B	RR
8A1	041 231 500	A	4	1.5	200	75	3.5	4	100	75	4	B7	P
8A1	542 310 000	A	4	1.5	200	75	3.5	4	100	75	4	B5	P
8A2	542 310 000	A	4	2.1	200	100	3	2.4	100	100	2.4	B5	P
8A8	645 237 114		9	{ 2.0 2.0	100 175		14.0 10.0	5.0 6.2	100 100	60 150	5.0 6.0	B9A	TP
8AU8	146 231 457		8.5	{ 1.25 1.5	150 200		8.5 16	4.9 7	100 100	60 100	5 7	B9A	TP
8AW8	146 231 456		8.4	{ 2 3	200 200		4 13	4 9	100 100	60 100	4 9	B9A	TP
8BA8	146 231 456		8.4	{ 8 3	200 200	150	8 13	2.7 9	100 100	60 100	5	B9A	TP
8BQ7A	641 237 410		8.4	2	150		9	6.4	100		6	B9A	TT
8CG7	741 236 410		8.4	8	250		9	2.6	100		3	B9A	TT
8CM7	701 236 441		8.4	{ 7 8	200 250		5 20	2.0 4.4	100 100		2.8 4.7	B9A	TT
8CN7	891 221 643		4.2	3	250		1	1.2	100		1.3	B9A	DDT
8CX8	146 231 456		8.0	{ 1.5 2	150 200		9 25	4.6 10	100 100	60 60	4.6	B9A	TP
8D2	061 231 500	G ₁	13	3	250	100	2	1.25	100	100	1.25	B7	P
†8D3	412 361 500		6	{ 2 1.5	250 200	250	10 4	7.5 6.4	100 100	PenLF PenLF	5 5	B7G	P
8D4	026 510 310	G ₁	6	2	250	100	3	1.8	100	100	1.8	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
8D5	041 230 651		6	3	250	100	2	1.225	100	100	1.2	B9A	P
8D6	141 230 651		6	2.0	175	175	10.0	2.5	100	100	2.5	B9A	P
8D7	001 230 651	G ₁	6	3	250	100	2	1.25	100	100	1.2	B9A	P
8G140	892 300 000		8				60		REC		20mA	B4	RR
9A1	045 231 500	A	4	1.5	200	75	5	4.25	100	75	4.2	B7	P
9A1	542 310 000	A	4	1.5	200	75	5	4.25	100	75	4.2	B5	P
9A3	061 231 500	G ₁	4	2	250	125	10	1.8	100	100	1.8	B7	P
9A8	645 237 114		9	{ 2 2	100 175	175	14 10	5 6.2	100 100	60 150	5 5	B9A	TP
9AB4	602 304 100		9	2	250		10	5.0	100		5.0		
9AK8	†91 238 146		9.5	2.3	200		1.0	1.4	100		1.4	B9A	DDDT
9AQ8	641 237 410		9	2.1	200		10	5.8	200		5.8	B9A	TT
9AU7	741 226 413		4.7	3.5	250		10.5	2.2	100		2.2	B9A	TT
9BQ7A	641 237 410		8.4	2	150		9	6.4	100		6	B9A	TT
9BM5	412 365 400		9	6	250	250	30	7				B9A	P
9BVV6	*41 230 651		9	12.5	250	250	45	4.1	100	150	4	B9A	P
9D2	061 231 500	G ₁	13	3	250	125	10.5	1.65	100	100	1.8	B7	P
9D6	412 361 500		6	2.5	250	200	8	2.5	100	100	2.5	B7G	P
9D7	141 230 651		6	1.5	250	100	10	8.4	100	100		B9A	P
9J6	762 344 100		9	0.85	100		8.5	5.3	100		5.3	B7G	TT
9P9	412 365 400		9	6	250	250	30	7	100	100		B9A	P
9U8	645 237 114		9.5	{ 1.0 1.0	150 250	100	18.0 10.0	8.5 5.2	100 100	60 100	8.5 5.0	B9A	TP
10	264 300 000		7.5	32	250		16	1.55	100		1.55		
10C1	276 454 130		28	{ 3.3 2.5	100 175	100	6 8	3 2.5	100 100	60 100	3 2.5	B8A	TH
10C2	276 454 130		28	{ 3.3 1.5	100 175	100	6.0 3.0	3.0 5.0	100 100	60 100	3.0 5.0		
10C8	641 237 541		10.5	{ 2.7 1.5	250 125	125	7.3 11.5	4.4 8.0	100 125	60 125	5 8	B9A	TP
10D1	892 310 000		13				5		D			B5	RR
10D2	192 310 800		19				5		D			B7G	RR
10F1	261 514 130		22	1.8	200	200	10	9	100	150	7	B8A	P
10F3	260 154 130		22	2.35	200	200	6	6.5	100	150	7	B8A	P
10F9	260 154 130		13	2.5	175	100	7	2.3	100	100	2.3	B8A	P
10F18	141 230 651		13	1.3	175	100	12	4.5	100	100		B9A	P
10L1	412 314 600		19	1.5	250		10	8.5	100		8	B7G	T
10LD3	264 098 130		14	1.1	150		0.6	1.95	150		1.9	B8A	DDT
10LD11	264 098 130		15	5.9	250		5	2.3	100		3	B8A	DDT
10P13	260 054 130		40	6.0	150	150	30	7.5	100	100	6.0	B8A	P
10P14	026 540 310		40	9.4	175	175	40	7.2	100	PenLF	6	A08	P
11	362 400 000		1.1	4.5	90		2.5	0.425	80		0.4	UX4	T
11A2	908 231 600	G ₁	4	2	200		3	2.8	100		2.8	B7	DDT
11D3	908 231 600	G ₁	13	2	250		0.6	1.1	100		1.1	B7	DDT
11D5	908 231 600	G ₁	13	3	250		3.8	1.5	150		1.5	B7	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
11E1	216 540 030		6		250	250	50	7.3	100	100	7	M08	P
11E2	020 540 310	A	6		200	200	25	9	100	150	8	A08	P
11E8	200 647 310	G ₁	11		150		20		100			A08	TT
11X5	028 090 310		11				30		REC		15mA	A08	RR
12	364 200 000		1.1	4.5	90		2.5	0.425	80		0.4	UX4	T
12A	264 300 000		5	4.5	90		5	1.5	80		1.5	UX4	T
12A4	142 330 406		6	9.0	250		23	0.8	250		0.8	B9A	T
12A5	265 413 200		6	15	100	100	17	1.7	100	90	1.7	UX7	P
12A6	026 540 310		12.5	12.5	250	250	30	2	100	PenLF	3	A08	P
12A7	265 181 300	G ₁	12.5	12.5	150	150	30	0.975	REC		15mA	Sm7	RP
12A8	026 545 310	G ₁	12.5	8	250	100	3.5	1.15	100	100	1.1	A08	H
12AB5	504 234 156		12	12.5	250	250	45.0	4.1	250	200	4.0	B9A	P
12AC5	26* *54 130		12	3	200	125	2.3	2.3	100	150	2.3	B8A	P
12AD7	641 227 413		6	2	250		1.25	1.6	100			B9A	TT
12AH7	417 146 230		12.5	3.6	100		3.7	1.55	80		1.55	A08	TT
12AH8	541 227 463		6	0	100		5.7	3.5	100	60	3.5	B9A	TH
12AK7	741 226 413		6	2	250	100	1.2	1.6	150	100	2.8	B9A	TT
12AJ7	541 237 464		12	2.5	100		4	2.0	100	60	2	B9A	TH
12AJ8	541 237 464		12	1.2	60	90	2.5	0.65	100	100		B9A	TH
12AL5	192 310 800		12.5	1.2	100	60	1.7		100	60		B9A	TH
12AQ5	412 365 400		12.5	12.5	250	250	45	4.1	100	150	4	B7G	P
12AS5	142 345 600		12	8.5	150	100	35	5.6	150	100	5.6	B7G	P
12AT6	412 389 600		12.5	3	250		1	1.2	100		1.2	B7G	DDT
12AT7	741 226 413		6	2	250		10	5.5	200		5	B9A	TTT
12AU4	001 080 230		12				120		REC		40mA	A08	R
12AU6	412 365 100		12.5	1	250	150	10.8	5.2	100	100	5.2	B7G	P
12AU7	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
12AV5	421 060 350		12	22.5	250	150	57	5.9	100	100	5.8	A08	P
12AV6	412 389 600		12.5	2	250		1.2	1.6	100		1.2	B7G	DDT
12AV7	741 226 413		6	1.0	150		18	8.5	100		7	B9A	TT
12SW6	412 365 100		12.5	1.5	250	150	7	5	100	PenLF	5	B7G	P
12AW7	412 365 100		12.5	1.8	250	150	7	5	100	150	5	B7G	P
12AX4	001 080 230		12.5				120		REC		35mA	A08	R
12AX7	741 226 413		6	2	250		1.2	1.6	150		1.6	B9A	TT
12AY7	641 227 413		6	4	250		3	1.75	100		1.7	B9A	TT
12AZ7	741 226 413		6.3	2.0	200		10.0	5.5	100		5.5	B9A	TT
12B4	142 330 406		6	17.5	150		34.0	6.4	150		6.3	B9A	T
12B6	026 080 310	G ₁	12.5	2	250		0.9	1.1	150		1.1	A08	DT
12B7	265 104 130		12.5	3	250	100	9.2	2	100	100	2	B8B	P
12B8	127 561 340	G ₁	12.5	1.1	100	0	0.6	1.5	100	60	1.5	A08	TP
				3	100	100	8	2.1	90	90	1.8		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
12BA6	412 365 100		12.5	1	250	100	11	4.4	100	100	4.4	B7G	P
12BA7	641 231 106		12.5	2	100		18	7	100		7	B9A	H
12BD6	412 365 100		12.5	3	250	100	9	2	100	100	2	B7G	P
12BE6	412 366 100		12.5	2	100		11	7	100		5	B7G	H
12BF6	412 398 600		12.5	9	250		9.5	1.9	100		1.9	B7G	DDT
12BH7	741 226 413		6	10.5	250		11.5	3.1	100		4	B9A	TT
12BK5	604 231 450		12	5.0	250	250	35.0	8.5	100	150	8.0	B9A	P
12BK6	412 389 600		12.5	2	250		1.2	1.6	150		1.6	B7G	DDT
12BN6	142 354 600		12.5	1	60	60	0.25	1	80	60	1	B7G	P
12BQ6	020 540 310	A ₁	12	22.5	250	150	57	5.9	100	100	5	A08	P
12BR7	641 228 913		6	2	250		10	5.5	100		4	B9A	DDT
12BT6	412 389 600		12.5	3	250		1.0	1.2	150		1.2	B7G	DDT
12BU6	412 389 600		12.5	9	250		9.5	1.9	150		1.9	B7G	DDT
12BV7	141 223 651		9	2.2	250	150	27	13	100	100		B9A	P
12BW4	800 230 901		12				30		REC		15mA	B9A	RR
12BY7	141 223 651		6	2.1	250	150	25	12.0	150	100	10.0	B9A	P
12BZ7	741 226 413		6	2.0	250		2.5	3.2	100		3.0	B9A	TT
12C5	142 345 600		12	7.5	125	100	49	7.5	100	90	6	B7G	P
12C8	026 985 310	G ₁	12.5	3	250	125	10	1.325	100	100	1.3	A08	DDP
12CA5	142 345 600		12	4.5	125	125	36	9.2	100	100	8	B7G	P
12CM6	504 234 106		12	12.5	250	250	45	4.1	100	100		B9A	P
12CR6	182 365 400		12	2	250	100	6.9	2.2	100	100	2	B7G	DP
12CS6	112 365 400		12	1	100	30	0.8	1.5	No Data Available			B7G	P
12CT8	641 237 541		12	1.4	150		9	4.9	100	60	4.5	B9A	TP
12CU5	142 345 600		12	1.5	200	125	15	7	100	100			
				8	125	100	50	7.5	100	100	7	B7G	P
12CU6	020 540 310	A ₁	12	22	250	150	57	5.8	100	100		A08	P
12D4	**1 *8* 230		12						D			A08	D
12DA6	041 230 651		12	1	175	100	12	4.4	100	100		B9A	P
12DQ6	020 540 310	A ₁	12	22.5	250	150	75	6.6	100	100		A08	P
12EI	020 540 310	A ₁	6	18	150	150	75	9.6	100	100	10	A08	P
12E5	026 040 310		12.5	13.5	250		5	1.45	100		1.4	A08	T
12E8	027 546 310	G ₁	12	2	100	100	3.3		100	60		A08	TH
							3	0.56	100	100	0.56		
12F	280 300 000		5				60		REC		20mA	UX4	R
12F5	020 600 310	G ₁	12.5	2	250		0.9	1.5	150		1.5	A08	T
12G4	602 364 100		12	8	250		10	3.0	100		3	B7G	T
12G7	026 980 310	G ₁	12.5	3	250				D			A08	DD
12G8	714 226 143		6										
12H4	623 364 100		6	8	250		9	2.6	90		3	B7G	T
12H6	029 180 310		12.5						D		4	A08	DD
12J5	026 040 310		12.5	8	250		9	2.6	100		2.6	A08	T
12J5	026 510 310	G ₁	12.5	3	250	100	2	1.225	100	100	2.2	A08	P
12K7	026 510 310	G ₁	12.5	3	250	125	10.5	1.65	100	100	1.6	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE	
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V			
12K8	027 546 310	G ₁	12.5	{ 1 3	100		8	2.5	100	60	3	A08	TH	
12L6	026 540 310		12		250	100	4	1.2	100	100	1.6		A08	P
12L8	414 752 360		12.5		8.25	200	125	46	8.0	100	100		8.0	A08
12M7	026 510 310	G ₁	12	9	175	175	13	2.15	100	100	2.1	A08	P	
12NK7	026 510 310	G ₁	12.5	2.5	100	100	6	2.2	100	100	2.2	A08	P	
				2	250	100	5	2.3	100	100	2.3	A08	P	
12Q7	026 980 310	G ₁	12.5	3	250		1	1.2	150		1.2	A08	DDT	
12S7	268 154 130		13	2	200	90	5	2	100	100	1.9	B8A	DP	
12S8	†18 916 230	G ₁	12.5	2	250		0.9	1.1	150		1.1	A08	DDDT	
12SA7	126 641 340		12.5	3.6	100		12	4.3	100		4.5	A08	H	
12SA7G	026 641 340		11.5	3.6	100		12	4.3	100		4.5	A08	H	
12SC7	074 461 230		12.5	2	250		2	1.325	150		1.3	A08	TT	
12SF5	014 060 320		12.5	2	250		0.9	1.5	150		1.5	A08	T	
12SF7	041 586 230		12.5	1	250	100	12.9	2.05	100	100	2	A08	DP	
12SG7	021 415 360		12.5	1	250	125	11.8	4.7	100	100	4.7	A08	P	
12SH7	021 415 360		12.5	1	250	150	10.8	4.9	100	150	4.9	A08	P	
12SJ7	021 415 360		12.5	3	250	100	3	1.65	100	100	1.6	A08	P	
12SK7	021 415 360		12.5	3	250	100	9.2	2	100	100	2	A08	P	
12SL7	461 471 230		12.5	2	250		2.5	1.6	150		1.6	A08	TT	
12SN7	461 471 230		12.5	8	250		9	2.6	100		2.6	A08	TT	
12SQ7	041 896 230		12.5	2	250		0.9	1.1	150		1.1	A08	DDT	
12SR7	041 986 230		12.5	9	250		9.5	1.9	100		1.9	A08	DDT	
12SS7	021 415 360		12.5	3	250	100	9	1.85	100	100	1.8	A08	P	
12SW7	041 986 230		12.5	9	250		9.5	1.9	100		1.9	A08	DDT	
12SX7	471 461 230		12.5	8	250		9	2.6	100		2.6	A08	TT	
12SY7	126 641 340		12.5	1	100		22	4.5	100		4.5	A08	H	
12TE8	427 546 310		12	{ 	100		3.4		100	60		A08	TH	
					250	100	3.7		100	100				
					100		3.4		100	60				
12TE9	651 237 440		12	{ 	250	100	3		100	100		B9A	TH	
					250				100					
					250				100					
12V6	026 540 310		12.5	12.5	250	250	45	4.1	100	150	4	A08	P	
12W6	026 540 310		12	9.5	150	150	58	8.0	100	100	8.0	A08	P	
12WC5	265 414 300		12	1.5	250	100			No Data Available			UX7	O	
12X3	210 300 000	D ₁	12.5				60		REC		20mA	UX4	R	
12X4	802 309 100		12.5				30		REC		15mA	B7G	RR	
12Y4	892 310 000		12				31		REC		15mA	UX4	RR	
12Z4	281 300 000		12.5				60		REC		60mA	UX4	R	
12Z5	281 319 200		6				30		REC		15mA	UX7	RR	
12ZDH3A	264 813 000		12	2	225		1.5	1.5	125		1.2	UX6	DT	
12ZPIA	265 413 000		12	9	200	200	30	2.3	100	PenLF		UX6	P	
13	298 300 000		5				60		REC		20mA	UX4	RR	
13BCIU	206 081 930	G ₁	12.5	1.8	200		3	2	150		2	B8B	DDT	
13BF2U	206 581 930	G ₁	12.5	2.1	200	200	5	2	100	200	2	B8B	DDP	
13DI	461 471 230		25	8	250		2	2.6	100		2.5	A08	TT	
13D2	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT	

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
13D3	741 226 413		6	4-6	250		6	2-3	100		2-3	B9A	TT
13DHA	908 231 600	G ₁	13	1-5	250		1	1-5	100		1-5	B7	DDT
13F9U	206 501 130	G ₁	12-5	2-6	200	200	6-2	2.2	100	200	2-2	B8B	P
13HI	023 110 560	G ₁	3	2	200	100	3	2	100	100	2	85C	P
13H2	023 110 560	G ₁	13	3	200	100	8.2	1-8	100	100	1-8	85C	P
13PGA	645 231 700	G ₁	13	{ 20 3	200 250		4 3-5		100 100	60 100		B7	H
13SPA	061 231 500	G ₁	13	3	200	100	2-3	1-7	100	100	2-25		P
13V1	013 189 560	G ₁	13	8-5	200	200	45	4-4	100	PenLF	4	85C	DDP
13VPA	061 231 500	G ₁	13	3	200	100	7	1-8	100	100	1-8	B7	P
14	265 130 000	G ₁	14	3	250	90	4	1-05	100	90	1	UX5	P
14A4	260 0-4 130		12-5	8	250		9	2-6	100		2-6	B8B	T
14A5	265 004 130		12-5	12-5	250	250	30	3	100	PenLF	3	B8B	P
14A7	265 104 130		12-5	3	250	100	9-2	2	100	100	2	B8B	P
14AF4	216 447 130		12	10	250		9	2-1	100		2	B8B	TT8
14AF7	216 447 130		12-5	9	250		9	2-1	100		2-1	B8B	TT
14B6	264 *89 130		12-5	2	250		0-9	1-1	150		1-1	B8B	DDT
14B8	265 454 130		12-5	2	250	100		1-15	100	100	1-1	B8B	H
14C5	265 004 130		12-5	12-5	250	250	47	4-1	100	PenLF	4-1	B8B	P
14C7	265 114 130		12-5	3	250	100	2-2	1-575	100	100	1-5	B8B	P
14E6	264 *98 130		12-5	8	250		9-3	1-9	100		1-9	B8B	DDT
14E7	269 854 130		12-5	3	250	100	7-5	1-3	100	100	1-3	B8B	DDP
14F6	026 540 310		14	16-5	250	250	35	2-5	100	150	2-5	A08	P
14F7	217 446 130		12-5	2	250		2-3	1-6	150		1-6	B8B	TT
14F8	427 116 340		12-5	3	250		6	3-3	150		3-3	B8B	TT
14H7	265 114 130		12-5	2	250	150	10	4-2	100	100	4-2	B8B	P
14J7	276 454 130		12-5	{ 3 3	150 250		6-6 1-4	1-4	100 100	60 100	1-4	B8B	TH
14K7	276 454 130		14	{ 2 2	100 200	90	6-4 2-7	2-2 1-5	100 100	60 75	2-8 1-5		TH
14L7	264 098 130		14	1-6	175		15	1-65	150		1-65	B8A	DDT
14N7	217 446 130		12-5	8	250		9	2-6	100		2-6	B8B	TT
14Q7	266 414 130		12-5	2	100		15	6	100		4-5	B8B	H
14R7	269 854 130		12-5	1	250	100	6-2	3-4	100	100	3-4	B8B	DDP
14S7	276 454 130		12-5	{ 1 2	100 250	100	4-8 4	1-4 2	100 100	60 100	1-6 2-2	B8B	TH
14V7	265 104 130		12-5	2	300	150	9-6	5-8	100	100	5-8		P
14W7	265 114 130		12-5	2-2	300	150	10	5-8	100	100	5-8	B8B	P
14X7	264 189 130		12-5	1	250		1-9	1-5	150		1-5	B8B	DDT
14Y4	208 009 130		12-5				30		REC		15mA	B8B	RR
14Z3	281 300 000		12-5				60		REC		20mA	UX4	R
15	265 130 000	G ₁	2	1-5	150	75	1-85	0-75	100	75	0-75	UX5	P
15	264 300 000		2-5	33	250		22	2-35	100		2-0	UX4	T
15A2	645 231 700	G ₁	4	{ 20 3	200 250		4 3-5		100 100	60 100		B7	H

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
15A6	451 231 600		15	2.9	175	175	36	10	100	100	9	B9A	P
15A8	124 541 360	A ₂	15	{ 8 7.5	250 100		9 45	2.6 7.3	100 100	60 100	2 7.5	A08	TP
15D1	645 231 700	G ₁	13	{ 20 3	200 250		4 100		100 100	60 100		B7	H
15D2	645 231 700	G ₁	13	{ 20 3	200 250	100	3.5 4		100 100	60 100	0.6 4.6	B7	H
15X6	029 180 310		25				30		REC		15mA	A08	RR
16	280 300 000		7.5				60		REC		20mA	UX4	R
16A5	*41 23* 6*5		16	14.2	200	200	45	7.5	100	100	7	B9A	P
16A8	414 237 516		16	{ 0 11.5	100 175		3.0 41	2.2 7.5	100 100	60 100	3.0 6.0	B9A	TP
160N8	414 237 516		15	{ 100 16	200 200		3.3 35	3.6 6.4	100 100	60 100	3.6	B9A	TP
16D1	046 231 700		13		300		45		100			B7	TT
17	264 130 000		14	6	90		2.7	0.8	80		0.8	UX5	T
17AV5	421 060 350		16	22.5	250	150	57	5.9	100	100	5.8	A08	P
17AX4	001 080 230		16				120		REC		35mA	A08	R
17BQ6	020 540 310	A ₁	17	22.5	250	150	75	6.6	125	100		A08	P
17C5	142 345 600		16	7.5	125	100	49	7.5	100	90	6	B7G	P
17C8	541 236 891		17	2	200	125	5	2.2	100	100	2	B9A	DDP
17D1	869 231 500	G ₁	13	3	250	125	9	1.1	100	100	1.1	B7	DDP
17DQ6	020 540 310	A ₁	16	22.5	250	150	75	6	125	100		A08	P
17N8	541 236 891		17	2.0	200	75	5	2.2	100	75	2	B9A	DDP
17Z3	*** 23* **8	C	17				120		REC		60mA	B9A	R
18	265 413 000		14	16.5	250	250	34	2.5	100	PenLF	2.5	UX6	P
18A5	421 060 350		18	17	200	125	40	4.8	100	100		A08	P
18AK5	412 365 100		18	2.5	175	125	7.7	5.1	125	100	5.1	B7G	P
18AQ5	412 365 100		18	7.2	175	175	28	3.5	100	125	3.5	B7G	P
18C51	214 607 413		18	2	150		8.2	5.5	126		5.4	B9A	TT
18J6	672 344 100		18	1	100		6.5	5	100		5	B7G	T
19	364 472 000		2	3	150		1.7		100			UX6	TT
19AJ8	541 237 164		19	{ 3.0 2.0	100 250	100	5.0 6.5	2.3 2.4	100 150	60 100	2.3 2.4	B9A	TH
19AQ5	412 365 400		19	12.5	250	200	47	4.1	100	150	4	B7G	P
19AU4	**1 080 230		19				120		REC		40mA	A08	R
19BD	**1 23* **8		19				60		REC		16mA	B9A	R
19BG6	021 040 350	A	19	15	250	250	75	6.0	100	PenLF	6.0	A08	P
19BY7	141 213 651		19	2	160	100	9.7	5.9	200	100	6	B9A	P
19C8	8†1 239 146		19	1	100		0.5	1.25	100		1.25	B9A	DDDT
19D8	541 237 464		19	{ 0 2.6	100 200	125	13.5 7.6	3.7 2.4	100 100	60 100	3.7 2.4	B9A	TH
19G3	020 000 300	D ₁	4				30		REC		17mA	A08	R
19G6	112 311 100	D ₁	4				30		REC		15mA	B7G	R
19HI	002 300 000	D ₁	4				60		REC		23mA	B4	R
19H4	020 000 300	D ₁	2.5				30		REC		13mA	A08	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
19J6	762 344 100		19	1	100		8.5	5.3	100		5.3	B7G	TT
19SU	**1 23* **8		19				120		REC		36mA	B9A	R
19T8	†91 238 146		19	3	250		1	1.2	150		1.2	B9A	DDDT
19U3	**1 23* **8		19				120		REC		40mA	B9A	R
19V8	681 234 †19		19	3	250		1	1.2	100		1.3	B9A	DDDT
19W3	**1 23* *08		19				120		REC		35mA	B9A	R
19X3	**1 23* **8		19				120		REC		60mA	B9A	R
19X8	146 231 457		19	{ 1.0 1.8	100 250		8.5 7.7	5.8 5.6	100 100	60 150	5.0 4.0	B9A	TP
19Y3	**1 23* **8		19				120		REC		60mA	B9A	R
20	364 200 000		3	16.5	90		3	0.415	80		0.4	UX4	T
20A1	645 231 700	G ₁	4	{ 12.5 1.5	100 250		2.3 2.2		100 100	60 75	1.2 2.8	B7	TH
20D1	182 310 900		9.5			75	5		D			B7G	RR
20D2	745 231 600	G ₁	13	{ 7.5 3	100 250	100	3.8 2.5		100 100	60 100		B7	TH
20D3	541 227 463		6	{ 1 3	100 250	100	3.6	3.6	100 100	60 100	3.6	B9A	TH
20F2	260 154 130		11	1.25	150	150	27	10.6	100	100	9.0	B8A	P
20J8	027 546 310	G ₁	20	{ 1.5 3	100 250	100	1.5 1.5		100 100			A08	H
20L1	274 164 130		12	12.0	250		10.0	2.8	100		2.8	B8A	TT
20P1	020 540 310	A	38	30	200	200	80	6	100	100	5	A08	P
20P2	020 540 310	A	38	7.5	225	225		13.5	100	100	10	A08	P
20P3	026 540 310		20	9.4	175	175	42	7.2	100	100	6	A08	P
20P4	020 540 310	A	38	33	200	200	100	6	No Data Available			A08	P
20P5	260 054 130		20	6.3	180	150	29	7.5	100	100	7.0	A08	P
21A6	*41 23* *51	A	21	28	200	200	40	6	100	100	5	B9A	P
21A7	276 454 130		21	{ 150 3	100 250	100	3.5 1.3		100 100	60 100		B8B	TH
21B6	*41 23* *51	A ₁	21	23	175	175	45	6.5	100	100		B9A	P
21TH8	027 546 310	G ₁	21	{ 2.5 1.5	100 200	90	4 3	2 0.75	100 100	60 90	2	A08	TH
22	365 200 000	G ₁	3	1.5	150	50	1.7	0.375	125	60	0.5	UX4	P
22AC	265 300 000	G ₁	2.5	3	90	90	4	1.05	80	90	1	UX4	P
24	264 300 000		2	13.5	175		8	1.6	100		1.2	UX4	T
24A	265 130 000	G ₁	2.5	3	175	90	4	1	100	90	1	UX5	P
24E	265 130 000	G ₁	2.5	3	175	90	4	1	100	90	1	UX5	P
24NG	281 193 000		40				30		REC		15mA	UX6	RR
24S	265 130 000	G ₁	2.5	3	175	90	4	1	100	90	1	UX5	P
25	542 300 000	A	2		150	75	2.5	1	100	75	1	B5	P
25	268 843 000		2	3	125		1	0.5	125		0.5	UX6	DDT
25A6	026 540 310		25	18	150	125	33	2.375	100	90	3.5	A08	P
25A7	126 548 310		25	{ 15 0	100 125	100	60 20.5	1.8 0.76	REC 100		20mA 1.8	A08	RP
25ACID	206 008 030	G ₁	1.4					0.4	100		0.3	A08	DT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
25AV5GA	421 060 350		25	22.5	250	150	57	5.9	100	100	5.8	A08	P
25AX4	001 080 230		25				120		REC		30mA	A08	R
25B6	026 540 310		25		150	150	61	5	100	100	5	A08	P
25B8	127 561 340	G ₁	25	{ 1.0 3.0	100 100		0.6 7.6	1.5 2.0	100 100	60 100	1.5 2.0	A08	TP
25BG6	021 040 350	A ₁	25	22	125	125	69	5.0	No Data Available			A08	P
25BK5	604 231 450		25	5	250	250	35	8.5	100	150	8	B9A	P
25BQ6	020 540 310	A	25	22.5	250	150	57	5.9	100	100	5	A08	P
25C5	142 345 600		25	7.5	125	100	49	7.5	100	90	6	B7G	P
25C6	026 540 310		25	14	200	150	61	7.1	100	100	7	A08	P
25CA5	142 345 600		25	4.5	125	125	36	9.2	125	125	9.2	B7G	P
25CD6	021 040 350	A	25	30.0	175	175	75	7.5	100	100	7.5	A08	P
25CU6	020 540 310	A	25	22.5	250	150	57	5.9	100	100	6.0	A08	P
25D8	127 546 380	G ₁	25	{ 1.0 3.0	100 100		0.5 8.5	1.1 1.9	100 100	60 100	1.1 1.9	A08	DTP
25DN6	021 040 350	A ₁	25	18	125	125	70	9	No Data Available			A08	P
25DQ6	020 540 310	A ₁	25	22.5	250	150	75	6	100	100		A08	P
25E5	020 540 310	A ₁	25	21	175	175	100	11	No Data Available			A08	P
25EC6	021 040 350	A ₁	25	22.5	125	125	70	7.5	No Data Available			A08	P
25FID	206 501 040	G ₁	1.4	2.5	125	125	1.2	0.72	100	100	0.7	A08	P
25F5	142 345 600		25	7.5	100	100	37	5.8	No Data Available			B7G	P
25L6	026 540 310		25	8.25	200	125	46	8	100	90	8	A08	P
25MK15	002 380 100		25				25		REC		20mA	B7G	R
25RE	281 193 000		25				30		REC		15mA	UX6	RR
25SN7	461 471 230		25	8	250		9	2.6	REC		2.5	A08	TT
25S	268 943 000		2	3	150		0.8	0.57	100		0.57	UX6	DDT
25T3G	020 000 310	D ₁ D ₂	25				60		REC		15mA	A08	RR
25U4	001 080 230		25				120		100		30mA	A08	R
25V5	028 190 310		25				60		REC		20mA	A08	R
25W4	001 080 230		25				120		REC		30mA	A08	RR
25W6	026 540 310		25	8.5	250	125	46	8	100	100	8	A08	P
25W9	001 080 230		25				120		REC		30mA	A08	R
25X4	020 080 310		25				120		REC		30mA	A08	R
25X5	020 080 310		25				120		REC		30mA	A08	RR
25X6	028 190 310		25				30		REC		15mA	A08	RR
25Y4	020 080 310		25				60		REC		20mA	A08	R
25Y5	281 193 000		25				60		REC		40mA	UX6	RR
25Y5G	028 190 310		25				60		REC		40mA	A08	RR
25Y6	028 190 310		25				30		REC		15mA	A08	RR
25Z3	281 300 000		25				60		REC		20mA	UX4	R
25Z4	028 080 310		25				120		REC		60mA	A08	R
25Z5	291 183 000		25				60		REC		60mA	UX6	RR
25Z6	029 180 310		25				60		REC		60mA	A08	RR
26	264 300 000		1.5	10	150		5.5	1.1	100		1.1	UX4	T
26A6	412 365 100		26	1.8	250	250	10.5	4	100	100	4	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
26A7	414 752 360		26	4.5	30	30	20	5.5	No Data Available			A08	PP
26AQ8	641 237 410		26	1.5	175		8.7	6	100		6	B9A	TT
26B6	026 540 310		35	18	250	125	33	2.375	100	90	2.3	A08	P
26BK6	412 389 600		26	2	250		1.2	1.6	150		1.6	B7G	DDT
26BQ6	020 540 310	A ₁	25	22.5	250	150	55	5.8	100	100		A08	P
26C6	412 398 600		26	9	250		9.5	1.9	100		1.9	B7G	DDT
26CG6	412 365 100		26		250	150	9	2	100	100		B7G	P
26D6	412 365 100		26	0	100	100	2.7	7.2	100	100	6	B7G	H
26E6	026 540 310		26	14	200	125	60	7.1	100	100	7	A08	P
26NG	281 193 000		40				30		REC		15mA	UX6	RR
26Z5W	801 229 013		13				30		REC		15mA	B9A	RR
26Z6	801 239 010		26				60		REC		15mA	B9A	RR
27	264 130 000		2.5	21	250		5.2	0.95	100		0.95	UX5	T
27S	264 130 000		2.5	21	250		5.2	0.95	100		0.95	UX5	T
27SU	320 080 210		13				120		REC		70mA	A08	R
27SV	230 080 310		13				180		REC		40mA	A08	R
28AK8	8+1 239 146		28	2	200		1.3	1.5	100		1.4	B9A	DDDT
28AX8	8+1 239 146		28	1.0	100		0.8	1.4	100		1.45	B9A	DDDT
28D7	245 671 430		28	3.5	30	30	12.5	3.4	No Data Available			B8B	PP
28Z5	208 009 130		28				60		REC		20mA	B8B	RR
29	264 413 000		2.5	3	175		4.5	1.45	100		1.4	UX6	T
29C1	220 283 330		4						D			A08	D
30	364 200 000		2	9	150		3	0.9	100		0.9	UX4	T
30A5	142 345 600		30	6.7	100	100	43	9.2	No Data Available			B7G	R
30C1	645 237 114		9	{ 2.0 2.0	100 175		14 10.0	5.0 6.6	100 100	60 150	5.1 6.0	B9A	TP
30F5	141 230 651		7.5	1.8	175	175	10	8.8	100	100			
30FL1	641 237 541		9.4	{ 7.9 2.1	200 175		10 10	3.6 7.5	100 100	60 100		B9A	TP
30GP9	026 543 100		30	19	200	200	45	3.5	100	100			
30LI	147 234 116		7.5	3.4	150		26.0	6.6	100		6.0	B9A	TT
30P4	02* 540 310	A ₁	25	21	175	175	100	11	No Data Available			A08	P
30PI2	*41 23* 6*5		12	10.3	175	175	31	6.7	100	100		B9A	P
30PI4	026 540 310		13	9.4	175	175	42	7.2	100	100		A08	P
30PI6	041 230 605		16	14.2	200	200	45	8.2	100	100	7	B9A	P
30PL1	641 237 154		13	{ 7.9 9.6	200 175		10 28	3.4 6	100 100	60 100		B9A	TP
30X	264 300 000		2	12.5	175		3.1	9.3	100		9		
31	364 200 000		2	22.5	150		8	0.925	100		0.9	UX4	T
31A3	280 000 130		31				60		REC		20mA	B8A	R
32	365 200 000	G ₁	2	3	150	75	1.7	0.64	100	75	0.6	UX4	P
32E	365 200 000	G ₁	2	3	150	75	1.7	0.64	100	75	0.6	UX4	P
32L7	126 548 310		32.5	{ 5	90	90	60 38	6	REC 80		20mA 6	A08	RP
33	364 520 000		2	14	150	150	14.5	1.45	100	100	1.4		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
33A/100A	020 440 310	A ₁ A ₂	6	14	300		10	3	No Data Available			A08	TT
33A/138A	204 140 300	A ₁ A ₂	7	7	250		15	3	100		3	UX7	TT
33A/158M	216 447 130		6	5	200		20	2.8	200		2.8	B8B	TT
33B/152M	421 342 134	A ₁ A ₂	6	1	300		40.0	18.5	No Data Available			B9G	TT
34	365 200 000	G ₁	2	3	150	75	2.8	0.6	100	75	0.6	UX4	P
34E	365 200 000	G ₁	2	3	150	75	2.8	0.6	100	75	0.6	UX4	P
35	265 130 000	G ₁	2.5	3	250	90	6.5	1.05	100	75	1.05	UX5	P
35A5	265 004 130		35	8	200	100	41	5.9	100	90	5.9	B8B	P
35B5	412 365 400		35	7.5	125	100	40	5.8	100	90	5.8	B7G	P
35C5	142 345 600		35	7.5	125	100	40	5.8	100	90	5.8	B7G	P
35L6	026 540 310		35	7.5	200	100	40	5.8	100	90	5.8	A08	P
35QL6	451 236 154		35	11.5	175	175	52	9.5	100	100	8.3	B8A	P
35RE	281 193 000		35				60		REC		20mA	UX6	RR
35S	265 120 000	G ₁	2.5	3	250	90	6.5	10.8	100	90	1.8	UX5	P
35W4	002 383 100		27.5				60		REC		70mA	B7G	R
35X4	**2 38* 100		35				60		REC		20mA	B7G	R
35Y4	280 200 130		27.5				60		REC		20mA	B8B	R
35Y5	280 200 130		27.5				60		REC		20mA	B8B	R
35Z3	280 000 130		35				120		REC		60mA	B8B	R
35Z3LT	280 000 130		35				120		REC		60mA	B8B	R
35Z4	020 080 310		35				120		REC		60mA	A08	R
35Z4GT	020 080 310		35				120		REC		60mA	A08	R
35Z5	022 080 310		27.5				60		REC		60mA	A08	R
35Z6	028 190 310		35				60		REC		20mA	A03	RR
36	265 130 000	G ₁	6	3	250	90	3.2	1.08	100	90	1.08	UX5	
37	264 130 000		6	18	250		7.5	1.1	100		1.1	UX5	T
38	265 130 000	G ₁	6	18	175	175	14	1.05	100	100	1.05	UX5	P
39	265 130 000	G ₁	6	3	175	90	5.8	1	100	90	1	UX5	P
40	364 200 000		5	1.5	175		0.2	0.2	150		0.2	UX4	T
40PPA	045 231 600		40	25	150	150	36	2	100	100	4	B5	P
40SUA	802 310 000		40				60		REC		60mA	B5	R
40Z5	022 080 310		35				120		REC		30mA	A08	R
41	265 413 000		6	18	250	250	32	2.3	100	100	2.3	UX6	P
41E	265 413 000		6	18	250	250	32	2.3	100	100	2.3	UX6	P
41FP	642 310 000		4	18	250		19	2.8	100		2.8	B5	T
41M	026 540 310		6	18	250	250	32	2.3	100	PenLF	2.3	A08	P
41MDG	652 310 000	G ₁	4	0	150	100		0.25	150	100	0.25	B5	P
41MH	642 310 000		4	1.5	200		3.2	3	100		4	B5	T
41MHF	642 310 000		4	2	150		2.5	2.8	125		2.8	B5	T
41MHL	642 310 000		4	3	200		4	3.1	100		4.5	B5	T
41MLF	642 310 000		4	4.5	175		7.5	1.9	125		1.9	B5	T
41MP	642 310 000		4	7.5	200		24	6.0	100		7.5	B5	T
41MPG	454 231 600	G ₁	4	1.5	250	100	3.3		100	100		B7	H
41MPT	041 231 500	A ₁	4	1.5	250	100	12	4.8	100	100	4.8	B7	P
41MRC	642 310 000		4	1	200		2.5	2.6	150		2.6	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
41MSG	465 230 574		4	1.5	125	60	0.8	2.5	100	60	2.5	B9	PP
41MTA	642 310 000		4	1	100		4.9	4	100		4	B9	T
41MTB	642 310 000		4	1	100		3.6	2.6	100		2.6	B5	T
41MTL	642 310 000		4	2.5	200		5.9	3	100		3	B5	T
41MTS	645 231 700		4	1	250	100	5	1.6	100	100	1.6	B7	PP
41MVSG	542 310 000	A ₁	4	1.5	200	200	3	2	100	100	2	B5	P
41MXP	642 310 000		4	12.5	200		40	6.0	100		7.5	B5	T
41STH	645 231 700	G ₁	4	1.5	100		2		200	100	1.6	B7	TH
				1.5	200	60	1		100	60	2.5		
42	264 300 000		1.5	13.5	175		3.9	0.8	100			UX4	T
42	254 413 000		6	16.5	250	250	34	2.5	100	PenLF	2.5	UX6	P
42E	265 413 000		6	16.5	250	250	34	2.5	100	PenLF	2.5	UX6	P
42MP/Pen	045 231 600		4	5.5	250	250	32	6	100	PenLF	7	B7	P
42MPT	041 231 500	A	4(5)	3	200	200	34	8.5	100	PenLF	8	B7	P
42/OT	045 231 600		4	5.5	250	275	34	7	100	PenLF	7	B7	P
42/OTDD	968 231 500	G ₁	4	5.5	250	250	34	7	100	PenLF	7	B7	DDP
42PTB	061 231 500	G ₁	4	3	200	200	34	8.5	100	150	8	B7	P
42SPT	041 231 500	A	4	10.5	250	250	64	11	100	PenLF	10	B7	P
43	265 413 000		25	18	150	125	33	2.375	100	100	2.3	UX6	P
43E	265 413 000		25	18	150	125	33	2.375	100	100	2.3	UX6	P
43MG	026 540 310		25	18	250	125	33	2.375	100	100	2.3	A08	P
43IU	892 300 000		4(5)				60		REC		20mA	B4	RR
44	265 130 000	G ₁	6	3	175	90	5.8	1	100	90	1	UX5	P
44A/160M	241 657 143		6	14	250	250	30	3.9	100	100	3	B9G	PP
44IU	892 300 000		4				60		REC		30mA	B4	RR
44SU	802 300 000		4				30		REC		15mA	B4	R
45	264 300 000		2.5	50	250		34	2.175	100		2.1	UX4	T
45A	264 300 000		2.5	68	325		43	2.37	100		2.37	UX4	T
45A5	26* *54 130		45	9	175	175	54	9.5	100	100	7	B8A	P
45B5	041 23* 6*5		45	12.5	175	175	70	10	100	100		B9A	P
45IU	892 300 000		4(5)				120		REC		30mA	B4	RR
45LIU	206 540 130		45	13	200	200	45	7.5	100	100	7	A08	P
45Z3	28* 108 300		45				60		REC		70mA	B7G	R
45Z5	022 080 310		37.5				60		REC		20mA	A08	R
46	264 630 000		2.5	33	250		22	2.35	100		2.3	UX5	T
47	264 530 000		2.5	16.5	250	250	31	2.5	100	PenLF	3.8	UX5	P
48	265 413 000		30	10	100	100	52	3.8	100	90	3.8	UX6	P
49	264 630 000		2	20	125		6	1.125	100		1.1	UX5	T
50	264 300 000		7.5	70	400		55	2.1	100		2.1	UX4	T
50A5	265 004 130		50	7.5	125	100	49	8	100	90	7	B8B	P
50AX6	028 190 310		50				120		REC		30mA	A08	RR
50B5	412 365 400		50	7.5	125	100	49	7.5	100	90	6	B7G	P
50BK5	604 231 450		50	5	250	250	35	8.5	100	PenLF		B9A	P
50CID	206 089 030	G ₁	1.4	1.5	100		1.5	0.92	100		0.92	A08	DDT
50C5	142 345 600		50	7.5	125	100	49	7.5	100	90	6	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
50C6	026 540 310		50	13.5	150	150	58	7	100	100	7	A08	P
50CD6	021 040 350	A	50	30	175	175	75	7.5	100	100	7	A08	P
50F2D	206 501 030	G ₁	1.4	1.5	100	125	1.4	1	100	100	1	A08	P
50LID	206 540 030		1.4	4.5	100	125	4.8	1	100	100	1	A08	P
50L6	026 540 310		50	8-25	200	125	46	9.5	100	75	8	A08	P
50X6	219 008 130		50				60		REC		20mA	B8B	RR
50YIU	388 208 120		45				120		REC		30mA	A08	R
50Y6	029 180 310		50				60		REC		20mA	A08	RR
50Y7	028 193 310		46				60		REC		20mA	A08	RR
50Z6	029 180 310		50				120		REC		30mA	A08	RR
50Z7	029 183 310		48				60		REC		20mA	A08	RR
51	265 130 000	G ₁	2.5	3	250	90	6.5	10.5	175	90	10.2	UX5	P
52	264 530 000		6	1	255	100	41	2	125	100	2	UX5	P
52CD6	021 040 350	A	52									A08	P
52KU	030 908 020		5				60		REC		30mA	A08	RR
53	275 146 300		2.5	5	250		3	1.6	100		3.1	UX7	TT
53KU	030 908 020		5(5-7)				120		REC		40mA	A08	RR
54KU	030 908 020		5				120		REC		60mA	A08	RR
55	269 813 000	G ₁	2.5	20	250		8	1.1	100		1.1	UX6	DDT
55A/165M	245 761 430		12	15	150	150	60	4	100	100		B8G	PP
56	264 130 000		2.5	13.5	250		5	1.45	100		1.45	UX5	T
56A5	264 130 000		6	13.5	250		5	1.45	100		1.45	UX5	T
57	265 113 000	G ₁	2.5	3	250	100	2	1.225	100	100	1.2	UX6	P
57A5	265 113 000	G ₁	6	3	250	100	2	1.22	100	100	1.2	UX6	P
58	265 113 000	G ₁	2.5	3	250	100	8	1.5	100	100	1.5	UX6	P
58A5	265 113 000	G ₁	6	3	250	100	8	1.5	100	100	1.5	UX6	P
59	265 411 300		2.5	18	250	250	35	2.5	100	PenLF	2.5	UX7	P
59B	265 410 300		2.5	26	250	250	26	6	100	PenLF	6	UX7	P
60/250	892 300 000		4				30		REC		15mA	B4	RR
61BT	020 540 310	A	6	20	200	200	40	4	100	100	4	A08	P
615PT	520 604 310		6	10.5	250	250	64	11	100	PenLF	9	A08	P
615PT	021 540 310	A	6	10.5	250	250	64	11	100	PenLF	9	A08	P
62BT	020 540 310	A	6	18	175	175	100	10	100	100	9	A08	P
62DDT	264 098 130		6	3	250		1.00	1.3	150		1.3	B8A	DDT
62TH	276 454 130		6	2	100		5	2.2	100	60	2.6	B8A	TH
				2	150	100	8	2	100	100	3.5		
62VP	261 154 130		6	2.5	250	100	6	2.2	100	100	2	B8A	P
63	020 540 230	A ₁	1.2	22.5	250	125	25		100	100		A08	P
635PT	256 101 403		6	2	250	250	10	6.5	100	PenLF	6	B9G	P
63TI	641 237 154		6	2.3	100		4	1.4	100	60	1.4	B9A	TP
				8	200	200	17.5	3.3	100	PenLF	3		
63TP	641 237 154		6.3	2.3	100		4	1.9	100	60	1.4	B9A	TP
				8	200	200	17	3.3	100	150	3		
64	265 130 000	G ₁	6	3	175	90	3.1	1.05	100	90	1.05	UX5	P
645PT	111 230 651		6.3	2	175	175	10	7.4	100	100	6	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
65	265 130 000	G ₁	6	3	175	90	4.5	1	100	90	1	UX5	P
66KU	280 009 130		6				30		REC		15mA	B8A	RR
67	264 130 000		6	9	150		5	1.1	100		1.1	UX5	T
67PT	261 054 130		6	7	250	250	36	10	100	50	9	B8A	P
68	265 130 000	G ₁	6	13.5	150	90	14	1.4	100	75	1.4	UX5	P
68A	265 130 000		6	13.5	125	125	14	1.4	100	100		UX5	P
69	264 413 000		6	3	175		4.5	1.45	150		0.5	UX6	T
70	264 413 000		6	6	175		2.3	0.5	150		0.5	UX6	T
70A7	126 548 310		70	7.5	125	100	60		REC		15mA	A08	RP
							40	5.8	100	90	5.8		
70L7	126 541 380		70	7.5	125	100	60		REC		20mA	A08	RP
							40	7.5	100	90	6.5		
71	264 300 000		5	40	175		20	1.7	100		1.7	UX4	T
71A	264 300 000		5	16.5	90		10	1.4	80		1.4	UX4	T
71B	254 300 000		5	40	175		20	1.7	100		1.7	UX4	T
72	300 200 000	D ₁	2.5				30		REC		15mA	UX4	R
73	*2* 0** 3*0	D ₁	2.5				15		REC		10mA	A08	R
75	269 813 000	G ₁	6	2	250		0.9	1.1	150		1.1	UX6	DDT
76	264 130 000		6	13.5	250		5	1.45	100		1.4	UX5	T
77	265 113 000	G ₁	6	3	250	100	2.3	1.25	100	100	1.2	UX6	P
77E	265 113 000	G ₁	6	3	250	100	2.3	1.25	100	100	1.2	UX6	P
78	235 113 000	G ₁	6	3	250	125	10.5	1.65	100	100	1.6	UX6	P
78E	265 113 000	G ₁	6	3	175	75	4	1.1	100	75	1.1	UX6	P
79	274 163 000	G ₁	6	0	250		5.3	1.8	150		1.8	UX6	TT
80	298 300 000		5(5.7)				60		REC		20mA	UX4	RR
80M	289 300 000		5(5.7)				60		REC		20mA	UX4	RR
81	280 300 000		7.5				60		REC		20mA	UX4	R
81M	280 300 000		7.5				60		REC		20mA	UX4	R
82	289 300 000		2.5				60		REC		20mA	UX4	RR
82V	389 200 000		2.5				60		REC		20mA	UX4	RR
83	289 300 000		5				120		REC		20mA	UX4	RR
83V	398 200 000		5				60		REC		60mA	UX4	RR
84	289 130 000		6				30		REC		30mA	UX5	RR
85	269 813 000	G ₁	6	20	250		8	1.1	100		1.1	UX6	DDT
85AS	268 913 000	G ₁	6	20	250		8	1.11	100		1.1	UX6	DDT
85S	268 913 000	G ₁	6	10.5	250		3.7	0.75	125		1.1	UX6	DDT
88	289 300 000		5				60		REC		20mA	UX4	RR
89	265 113 000	G ₁	6	10	100	100	9.5	1.2	100	90	1.2	UX6	P
90	264 413 000		2.5	0	150		3.5	1.4	150		1.4	UX6	T
90AC	642 310 000		4	12.5	200		40	7.5	100		7	B5	T
92	264 413 000		6	0	250		3.5	1.4	100		1.4	UX6	T
95	265 413 000		2.5	20	325	300	42	2.3	100	PenLF	2.3	UX6	P
96	281 300 000		10				120		REC		30mA	UX4	R
98	289 130 000		6				30		REC		15mA	UX5	RR
99V	426 300 000		3.3	4.4	90		2.5	0.42	100		0.42	UX4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
99X	264 300 000		3.3	4.5	90		2.5	0.42	100		0.42	UX4	T
100AC	642 310 000		4	6	200		5	2	100		2	B5	T
104V	642 310 000		4	1	100		15	3.5	100		3.5	B5	T
112A	364 200 000		5	4.5	90		5	1.575	80		1.5	UX4	T
114	020 000 300	A ₁ G ₁	1.4		175		15		100			A08	T
114B	020 000 300	A ₁ G ₁	1.4	4.0	175		12	1.1	100		1.1	A08	T
116/Pen	005 231 600	G ₁	11.5	1	100	100		7	100	100	6	B7	P
117L7	126 458 310		117	5.2	100	100	60		REC		20mA	A08	RP
					100	100	43	5.3	100	90	5.3		
117M7	126 458 310		117	5.2	100	100	60		REC		20mA	A08	RP
					100	100	43	5.3	100	90	5.3		
117Z3	*02 381 000		117				60		REC		20mA	B7G	R
117Z4	020 080 310		117				60		REC		20mA	A08	R
117Z6	029 180 310		117				60		REC		20mA	A08	RR
120	642 310 000		2	12	150		12		100			B5	T
121VP	26* *54 130		12.5	3.0	200	126	7.2	2.3	100	150	2.3	B8A	P
124AC	542 310 000	A	4	1.4	200	60	1.6	0.9	100	60	0.9	B5	P
141DDT	264 089 130		14	1.55	170		1.5	1.65	100		1.5	B8A	DDT
141TH	276 454 130		14	2	100		5.0	2.0	100	60	2.8	B8A	TH
					250	100	8.0	2.2	100	75	1.5		
142BT	026 540 310		14	8.5	200	200	29	3.7	100	100	3.7	A08	P
144V	642 310 000		4	8	200		6	1.4	100		1.4	B5	T
154V	642 310 000		4	6	200		9	2	100		2	B5	T
163Pen	041 23* 6*5		16	10.4	175	175	53	9.5	No Data Available			B9A	P
164V	642 310 000		4	9	200		12	3.4	100		3.4	B5	T
171DDP	541 236 891		17	2	200	125	5	2.2	100	100	2	B9A	DDP
181	264 300 000		3	30	175		16	1.05	100		1.05	UX4	T
182A	264 300 000		5	45	200		18	1.5	100		1.5	UX4	T
182B	264 300 000		5	35	250		18	1.5	100		1.5	UX4	T
182B	264 300 000		5	35	250		18	1.5	100		1.5	UX4	T
183	264 300 000		5	60	250		30	1.7	100		1.7	UX4	T
185BT	020 540 310	A ₁	18	18	175	175	100	9.5	100	100	8	A08	P
185BTA	020 540 310	A ₁	18	18	175	175	100	9.5	100	100	8	A08	P
200A	264 300 000		5	0	50		1.5	0.67	No Data Available			UX4	T
202DDT	809 231 600	G ₁	20	3	200		3	2.4	150		2.4	B7	DDT
202MPG	545 231 600	G ₁	20	1.5	200	100	3.0		100	100		B7	H
2025PB	061 231 500	G ₁	20	1.5	250	100	4.8	2.8	100	100	2.8	B7	P
2025TH	645 231 700	G ₁	20	1.5	100		2		100	60		B7	TH
					200	60	1		100	60			
202VP	041 231 500	A	20	1.5	250	100	4.3	2.2	100	100	2.2	B7	P
202VPB	061 231 500	G ₁	20	1.5	250	100	4.3	2.2	100	100	2.2	B7	P
203THA	545 231 600	G ₁	20	2	250	100	3.5		100	100		B7	H
205D	264 300 000		3.5	29	400		30		100		1.8	UX4	T
205E	264 300 000		4.5	22.5	350		29	1.94	No Data Available			UX4	T
205F	264 300 000		4.5	18	300		31	1.75	No Data Available			UX4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
210DDT	682 390 000	G ₁	2	1	100		2.3	1.1	100		1.1	B5	DDT
210DET	642 300 000		2	4.5	150		3	1.1	100		1.1	B4	T
210HF	642 300 000		2	3	150		1.6	1.5	100		1.5	B4	T
210HL	642 300 000		2	3	150		1.6	1.1	100		1.1	B4	T
210HPT	642 350 000		2	4.5	150	170	7.5	2.5	100	100	2.5	B5	P
210LF	642 300 000	G ₁	2	4.5	150		4.8	1.4	100		1.4	B4	T
210PG	645 230 700		2	{ 0 1.5	150	40	1.1		150	60	0.4	B7	H
210RC	642 300 000		2		150		0.4		150	75	1.5		
210SPG	645 230 700		2		150		0.85	0.8	150		0.8		
210SPT	041 230 500		2	{ 0 1	150	40	1.1		150	75	0.5	B7	H
210SPT	041 230 500	A	2		150		0.5		150		1.5		
210T	264 300 000	A ₁	7.5	32	350		16	1.55	100		1.55	UX4	T
210VPA	041 230 500		2	1	150	60	2.9	1.11	150	60	1.1	B7	P
210VPT	041 230 500		2	1	150	60	1.9	1.1	150	60	1.1	B7	P
213	289 300 000		5				30		REC		15mA	UX4	RR
213Pen	*41 23* *51		21	22	175	175	45	6.2	100	100	6	B9A	P
215P	642 300 000	A	2	7.5	150		10	2.25	100		2.2	B4	T
215SG	542 300 000		2	1	150	60	1.4	1.1	150	60	1.1	B4	P
217A	228 300 000		10			120			REC		30mA	UX4	R
220B	446 230 700		2	3	150		5.0	1.5	100		1.5	B7	TT
220DD	892 310 000		2						D			B5	DD
220HPT	642 350 000	A	2	4.5	150	150	8	2.5	100	100	2.5	B5	P
220IPT	040 230 500		2	1.5	125	60	2.2	1	100	60	1	B7	P
220OT	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
220P	642 300 000		2	7.5	150		11	2.25	100		2.2	B4	T
220PA	642 300 000		2	4.5	150		10	4	100		4	B4	T
220PT	642 350 000	A	2	9	150	150	19	2.5	100	100	2.5	B5	P
220SG	542 300 000		2	1	150	60	1.5	1.6	100	60	1.6	B4	P
220TH	645 230 700		2	{ 3 0	100	60	1.7	1.2	100	60	1.2	B7	TH
220VS	542 300 000		2		125		0.6	0.6	125	60	0.6		
220VSG	542 300 000		2		100		2.0	1.6	100	60	1.6		
225DU	082 323 900	D ₁	2				15		REC		10mA	B7	RR
230	642 300 000		2	20	150		18	3	100		3	B4	T
230	200 300 000		5				30		REC		15mA	UX4	R
230PT	642 350 000		2	15	150	150	14	2	100	100	2	B5	P
230XP	642 300 000		2	18	150		22	3	100		2	B4	T
231D	264 300 000	G ₁	3	3	90		2.1	8.4	100		0.51	UX4	T
240B	446 230 700		2	1	125		8.5		100			B7	TT
240QP	446 235 700		2	12	150	150	6		100	100	2.5	B7	PP
244	264 130 000		2	6	150		5.5	1	100		1	UX5	T
244V	642 310 000		4	5.5	200		5.5	2.8	100		2.8	B5	T
245A	265 130 000	G ₁	2	1.5	150	50	4.8	0.64	No Data Available			UX5	P
247A	206 040 030		2	4.5	150		3.2	0.94	100		0.94	A08	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
249B	223 300 000	D ₁	2.5				120		REC		30mA	UX4	R
252A	264 300 000		5	50	400		60	3.4	100		3.4	UX4	T
255	268 943 000		2	3	150		0.8	0.57	100		0.5	UX6	DDT
257	264 530 000		5	21.5	125	100	200	1.35	100	90	1.3	UX5	P
257A	240 300 000	A ₁	3	3	90		2.1	0.51	100		0.51	UX4	T
259A	265 130 000	G ₁	2	1.5	175	75	5.5	1.38	100	75	1.3	UX5	P
259B	265 130 000	G ₁	2	1.5	175	75	5.5	1.38	100	75	1.3	UX5	P
262B	261 300 000	G ₁	10	4.5	150		2.8	0.9	100		0.9	UX4	T
264	264 300 000		1.1	9	150		2.5	0.64	100		0.64	UX4	T
264E	264 300 000		1.4	8	100		2.1	0.58	100		0.58	UX4	T
264C	264 300 000		1.5	8	100		2.1	0.58	100		0.85	UX4	T
271A	264 130 000		5	30	400		37.5	2.9	100		100	UX5	T
272A	264 130 000		10	15	150		5.4	0.76	100		0.76	UX5	T
274A	289 300 000		5				60		REC		20mA	UX4	RR
274B	289 300 000		5				60		REC		20mA	UX4	RR
275A	264 300 000		5	4.5	200		47	2.7	100		2.7	UX4	T
281A	264 530 000		5	60	150	75	35	1.47	No Data Available			UX5	P
283A	265 130 000	G ₁	2	1.5	175	75	5.9	1.36	100	75	1.36	UX5	P
285	265 130 000	G ₁	2	12	175	150	8.8	0.88	100	100	0.88	UX5	P
286A	265 113 000	G ₁	2	1.5	175	75	6.2	1.2	100	75	1.2	UX6	P
290A	265 113 000	G ₁	10	1.5	175		5.4	1.22	150		1.2	UX6	P
291A	275 641 300	G ₁	10	{ 3 7.5	175 175	75	4.5 3.1		100 100	60 75		B7	H
292A	268 913 000	G ₁	10	6	150		2.1	0.66	100		0.66		DDT
293A	265 413 000		10	18	175	175	14.5	1.05	100	100	1.05	UX6	P
302THA	645 231 700	G ₁	30	{ 2 250	100 250	100	1.5 3.5		100 250	60 100		B7	TH
303A	268 943 000		2	6	150		2	0.64	100		0.64	UX6	DDT
304AC	542 310 000	A	4	2	200	100	3	1.9	100	100	1.9	B5	P
309A	265 413 000		10	1.5	175	75	4.8	1.1	100	60	1.1	UX6	P
310A	265 113 000	G ₁	10	3	150	150	5.5	1.8	100	100	1.8	UX6	P
310B	265 113 000	G ₁	10	3	150	150	5.5	1.8	100	100	1.8	UX6	P
311A	265 130 000	G ₁	10	15	150	150	30	2.8	100	100	2.8	UX5	P
3115U	28* *** 130		31				60		REC		20mA	B8A	R
324A	200 300 000	D ₁	5				5		D			UX4	R
328A	265 113 000	G ₁	7.5	3	150	150	5.5	1.8	100	100	1.8	UX6	P
329A	265 130 000	G ₁	7.5	15	150	150	37.5	3.3	100	100	3	UX5	P
329L	265 130 000	G ₁	7.5	15	150	150	37	3.3	100	100	3	UX5	P
332Pen	026 540 310		33	8.5	200	200	45	8	100	100	7	A08	P
336A	265 413 000		10	14	250	250	30	4.2	100	100		UX6	P
337A	265 113 000	G ₁	10	3	150	150	6.3	1.6	100	100	1.6	UX6	P
345A	289 130 000		6				60		REC		20mA	UX5	RR
347A	020 600 310	G ₁	6	4.5	150		2.8	0.9	100		0.9	A08	T
348A	026 510 310	G ₁	6.3		125	125	5.5	1.8	100	100		A08	P
349A	026 540 310		6	14	250	250	30	4.2	100	PenLF	4.2	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
350B	026 540 310	G ₁	6	20	400	250	85	6.25	No Data Available			A08	P
351A	028 090 310		1				120		REC		20mA	A08	RR
352A	268 913 000		10	6	150		2.1	0.65	100		0.65	UX6	DDT
354V	642 310 000		4	4.5	250		6.5	3.6	100		3	B5	T
361A	243 560 000		1.4		50	40	0.4	0.57	No Data Available			UX5	P
362A	243 560 000		1.4		50	50	1.26	0.56	No Data Available			UX5	P
367A	060 524 310		6	20	400	250	85	6.2	No Data Available			A08	P
373A	021 455 310		2		150	150	2	1.32	100		1.3	A08	P
374A	021 405 310		3		125	125	18	3	125		3	A08	P
375A	026 540 310		20		40	40	12	4.7	No Data Available			A08	P
383A	120 406 030		6		125		7.5	2.8	100		2.8	A08	T
385A	125 040 130		6		125		7.5	2.5	100		2.5	A08	P
387A	125 040 130		6		125		5.6	4	100		3.8	A08	P
401A	265 300 000		5	9	50		1.5	0.8	No Data Available			UX4	T
402	264 300 000		3	40	175		40	1	100		1	UX4	T
402-OT	005 231 600	G ₁	40	12	250	250	32	7	100	PenLF	7	B7	P
402P	000 231 600	G ₁	4	15	200		27	5.5	100		7.5	B7	T
402Pen	005 231 600	G ₁	40	6.7	200	200	40	7	100	100	7	B7	P
402PenA	005 231 600	G ₁	40	9	150	150	56	8	100	100	8	B7	P
403A	413 265 100		6	2.3	150	150	7	4.4	100	100	4	B7G	P
405BU	892 300 000		4				15		REC		10mA	B4	RR
406	642 300 000		4		150		5.5	0.5	100		0.5	B4	T
407A	214 637 412		20	2	150		8.2	5.5	100		5.5	B9A	TT
408BU	892 300 000		4				15		REC		10mA	B4	RR
410HF	642 300 000		4	2.5	200		0.2	0.22	100		0.2	B4	T
410P	642 300 000		4	16	250		12	1.8	100		1.8	B4	T
410RC	642 300 000		4	2.5	200		0.2	0.2	100		0.2	B4	T
410SG	542 300 000	A	4	1	200	100	4.5	0.9	100	100	0.9	B4	P
412BU	892 300 000		4				30		REC		17mA	B4	RR
412SU	802 300 000		4				60		REC		22mA	B4	R
415PT	642 350 000		4	25	300	200	20	1.7	100	PenLF	1.7	B5	P
415QT	642 350 000		4	25	300	200	20	1.8	100	PenLF	1.8	B5	P
415SP	642 300 000		4	18	150		11	1.6	100		1.6	B4	T
420T	045 231 600		4	4.4	250	250	40	10.5	100	PenLF	9	B7	P
425PT	642 350 000		4	17	250	150	12	1.3	100	100	1.3	B5	P
435A	402 106 053		6	10	175	150	13	16.3	No Data Available			B9A	P
437A	304 002 116		6	10	150		40		No Data Available			B9A	T
441U	892 300 000		4				60		REC		20mA	B4	RR
442BU	892 300 000		4				60		REC		20mA	B4	RR
446A/B	021 000 310	A ₁ G ₁	6	3	250		15	4.5	100			A08	T
450	642 300 000		4	55	250		50	3.5	100		3.5	B4	T
450	264 300 000		7.5		400		55	2.1	100		2.0	UX4	T
450AC	542 310 000	A	4		200	100	3.5	3	100	100	3	B5	P
451PT	26* *54 130		45	9	175	175	54.5	9.5	100	100	7	B8A	P
451U	823 900 000		4				120		REC		30mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
460BU	892 300 000		4				60		REC		20mA	B4	RR
482A	264 300 000		5	45	200		18	1.5	100		1.5	UX4	T
482B	264 300 000		5	35	250		18	1.5	100		1.5	UX4	T
483	264 300 000		5	60	250		30	1.7	100		1.7	UX4	T
484V	642 310 000		4	2.5	200		0.25	1.2	100		1.2	B5	T
485	264 130 000		3	9	175		5.8	1.4	100		1.4	UX5	T
486	026 040 300		3	3	90		3	0.61	80		0.6	A08	T
500	892 300 000		4				30		REC		15mA	B4	RR
506	892 300 000		4				30		REC		15mA	B4	RR
506BU	892 300 000		4				30		REC		15mA	B4	RR
506K	892 300 000		2				30		REC		15mA	B4	RR
509	892 300 000		2				60		REC		20mA	B4	RR
511D	892 300 000		4				60		REC		20mA	B4	RR
538A	741 226 413		6	2	250		10	5.5	200		5	B9A	TT
542A	602 304 100		6	2	250		10	5.5	200		5.5	B7G	T
543A	402 013 060		6	2.5	200		9.5	3.8	100		3	B8D	T
543B	402 013 060		6	2.5	200		9.5	3.8	100		3	B8D	T
544A	602 364 100		6	8.5	250		10.5	2.2	100		3	B7G	T
546A	802 309 100		6				30		REC		15mA	B7G	RR
547A	120 415 360		6	3	300	150	30	11	100	100	10	A08	P
§548A	762 344 100		6	{ 0.85 3	100		8.5	5.3				} B7G	TT
549A	192 310 800		6		150		5	4.5	100		5.3		
550A	471 461 230		6	2	250		2.3	1.6	150		1.6	A08	TT
559	021 010 030	D ₁					5		D			A08	R
605	642 300 000		4	6	150		10	1.4	100		1.4	B4	T
612BU	892 300 000		6				30		REC		15mA	B4	RR
615	642 300 000		4	41	150		4	1.4	100		1.4	B4	T
620T	642 300 000		6	95	400		62.5	2.3	100		2.3	B4	T
635GTX	026 040 310		6	20	350		20		No Data Available			A08	T
660	642 300 000		6	100	400		120	2.3	100		2.3	B4	T
680XP	642 300 000		6	100	400		3.5	1.1	100		1.1	B4	T
713A	021 415 350		6	2	125	125	7.5	3.95	100	100	3.9	A08	P
717A	021 415 360		6	2	125	125	7.5	4	100	100	4	A08	P
731A	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
802	205 411 300	A	6	18	400	250	30	2.2	100	PenLF	2.0	UX7	P
805	642 300 000		6	6	150		10	1.4	100		1.4	B4	T
807	254 130 000	A ₁	6	12.5	400	250	83	6.5	100	PenLF	6	UX5	P
816	200 300 000	D ₁	2.5				120		REC		30mA	UX4	R
825	642 300 000		6	0	150		6	1.4	150		1.4	B4	T
825BU	892 300 000		7.5				60		REC		20mA	B4	RR
836	2** 00* 300	D ₁	2.5				120		REC		30mA	B7G	R
840	254 130 000	A	2	3	175	75	1	0.4	100	60	0.4	UX5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
842	264 130 000		7.5	100	400		25	1.25	100		1.25	UX5	T
843	264 130 000		2.5	25	350		25	1.7	100		1.7	UX5	T
864	364 200 000		1.1	4.5	90		2.9	0.61	80		0.61	UX4	T
871	200 300 000	D ₁	2.5				120		REC		30mA	UX4	R
879	300 200 000	D ₁	2.5				5		D			UX4	R
884	026 040 310		6		300		55	4KΩ	No Data Available			A08	Thyratron
885	264 130 000		2.5		300		55	4KΩ	No Data Available			UX5	Thyratron
904V	642 310 000		4	2	200		2	2	150		2	B5	T
950	041 230 500	A	2	16.5	175	150	7	0.95	100	100	0.95	B7	P
951	265 300 000	G ₁	2	3	175	60	1.7	0.65	100	60		UX4	P
985	289 130 000		5				30		REC		15mA	UX5	RR
986	289 300 000		5				60		REC		20mA	UX4	RR
994V	642 310 000		4	0	100			3.6	100		3.6	B5	T
1002	802 300 000		1.8				60		REC		25mA	B4	R
1005	008 092 030		6				30		REC		15mA	A08	RR
1007	008 090 230		1.0				60		REC		20mA	A08	RR
1012	289 300 000		1.7				120		REC		30mA	UX4	RR
1028	202 322 200	D ₁	6				60		REC		23mA	B7G	R
1103	809 231 600	G ₁	13	2	225		1.5	1.5	100		1.2	B7	DDT
1130	892 300 000		1.8						D			B4	DD
1201	426 141 630		6	3	175		5.5	3	150		3	B8B	T
1201	892 300 000		2.5				30		D			B4	DD
1203	200 800 130		6						D			B8B	D
1203A	200 800 130		6						D			B8B	D
1204	526 141 310		6	2	250	100	1.75	1.2	100	100	1.2	B8B	P
1206	265 441 730		6	2.5	250	100	4.5	2.1	100	100	2.1	B8B	PP
1221	265 113 000	G ₁	6	3	250	100	2	1.22	100	100	1.2	UX6	P
1223	026 510 310	G ₁	6	3	250	100	2	1.22	100	100	1.2	A08	P
1229	265 300 000	G ₁	2	3	150	75	1.7	0.64	100	75	0.64	UX4	P
1230	264 300 000		2	9	150		3		100			UX4	T
1231	265 104 130		6	30	300	200	13	6.3	100	100	6.3	B8B	P
1232	265 114 130		6	2	250	100	6	4.5	100	100	4.5	B8B	P
1247	000 230 000	D ₁	0.625						D			B8A	D
1273	265 104 130		6	3	250	100	2.2	1.5	100	100	1.5	B8B	P
1274	028 090 310		6				30		REC		15mA	A08	RR
1275	289 300 000		5				120		REC		30mA	UX4	RR
1276	264 300 000		4.3	45	250		60	5.25	No Data Available			UX4	T
1280	265 104 130		12.5	3	250	100	2.2	1.5	100	100	1.5	B8B	P
1282	265 114 130		6	2	300	150	10	5.8	100	150	5.8	B8B	P
1284	265 104 130		12.5	3	250	100	9	2	100	100	2	B8B	P
1288	364 240 730		1.4	0	90		5.2	1.85	80		1.85	A08	TT
1291	274 304 620		1.4		90		5.2	1.85	80		1.85	A08	TT
1292	364 204 730		1.4	0	90		5.2	1.85	80		1.85	A08	TT
1293	260 064 030		1.4	0	90		4.7	1.3	80		1.3	B8B	T
1294	200 800 130		1.4						D			A08	D

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
1299	365 004 230		1.4	4.5	150	90	10.2	2.4	100	90	2.4	B8B	P
1560	289 300 000		5				60		REC		20mA	UX4	RR
1560	892 300 000		5				60		REC		20mA	B4	RR
1561	892 300 000		4				60		REC		20mA	B4	RR
1562	280 300 000		7.5				120		REC		30mA	UX4	R
1602	264 300 000		7.5	23.5	250		10	1.33	100		1.33	UX4	T
1603	265 113 000	G ₁	6	3	250	100	2	1.225	100	100	1.2	UX6	P
1608	264 300 000		2.5	90	400		95		No Data Available			UX4	T
1609	364 520 000		1.1	1.5	125	75	2.5	0.725	100	75	0.72	UX5	P
1610	264 530 000		2.5	16.5	250	250	31	2.5	100	PenLF	3.8	UX5	P
1611	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
1612	026 540 310	G ₁	6	3	250	100	5.3	1.1	100	100	1.1	A08	H
1613	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
1614	026 540 310		6	18	350	250	54	5.2	100	PenLF	5.2	A08	P
1616	200 300 000	D ₁	2.5				120		REC		30mA	UX4	R
1619	026 540 310		2.5	10	300	250	45	4.5	100	PenLF	4.5	A08	P
1620	026 510 310	G ₁	6	3	250	100	2	1.225	100	100	1.2	A08	P
1621	026 540 310		6	16.5	250	250	34	3.5	100	PenLF	2.5	A08	P
1622	026 540 310		6	18	350	250	54	5.2	100	100	5.2	A08	P
1624	026 540 310		2.5	10	300	250	45	4.5	100	PenLF		A08	P
1625	254 130 000	A ₁	12	12.5	400	250	83	6.5	100	PenLF	6	UX5	P
1626	026 040 310		12.5	32	250		20	2.1	100		2.1	A08	T
1631	026 540 310		12.5	18	350	250	54	5.2	100	PenLF	5.2	A08	P
1632	026 540 310		12.5	8	200	100	50	9.5	100	90	9	A08	P
1633	471 461 230		25	8	250		11.5	2.6	100		2.6	A08	TT
1634	074 461 230		12.5	2	250		2	1.325	150		1.3	A08	TT
1635	027 446 310		6	0	300		3.5	0.9	100		0.9	A08	TT
1637	026 500 310	G ₁	6	18	250	250	32	3.8	100	PenLF	3.8	A08	P
1638	029 180 310		6						D			A08	DD
1639	026 890 310	G ₁	6	5.5	250		5	2	100		2	A08	DDT
1641	200 300 000	D ₁ D ₂	5				120		REC		30mA	UX4	RR
1641/RK60	200 300 000	D ₁ D ₂	5				15		REC		12mA	UX4	RR
1642	216 471 300	G ₁	6	16.5	250		8.3	1.3	110			UX7	TT
1644	414 752 360		12.5	9	175	175	13	2.15	100	100	2.1	A08	PP
1649	021 415 360		6	2	300	150	10	9	100	100	8	A08	P
1654	2** 00* 300	D ₁	1.4						D			B7G	D
1655	074 461 230		6	2	250		2	1.325	200		1.3	A08	TT
1659	268 913 000	G ₁	2.5	2	250		0.9	1.1	150		1.1	UX6	DDT
1662	364 526 300		1.4	8.4	150	90	13.3	1.9	100	75	1.9	B7G	P
1664	026 985 310	G ₁	2.5	3	250	125	10	1.325	100	100	1.3	A08	DDP
1701	892 300 000		1.8				120		REC		30mA	B4	RR
1801	892 300 000		4				15		REC		10mA	B4	RR
1805	892 300 000		4				30		REC		15mA	B4	RR
1807	892 300 000		4				30		REC		15mA	B4	RR
1810	003 200 000	D ₁	4				30		REC		15mA	B4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
1815	892 300 000		4				60		REC		20mA	B4	RR
1817	892 300 000		4				120		REC		30mA	B4	RR
1821	892 300 000		4				30		REC		15mA	B4	RR
1823	892 300 000		4				30		REC		15mA	B4	RR
1831	892 300 000		4				30		REC		12mA	B4	RR
1832	082 300 000		4				120		REC		30mA	B4	R
1851	026 510 310	G ₁	6	2	300	150	10	9	100	100	8	A08	P
1852	021 415 360		6	2	300	150	10	9	100	100	8	A08	P
1853	021 415 360		6	3	300	200	12.5	5	100	150	5	A08	P
1861	892 300 000		4				60		REC		20mA	B4	RR
1867	389 200 000		4				60		REC		20mA	UX4	RR
1875	023 000 000	D ₁	4				5		D			8SC	R
1876	123 000 080		4				5		D			8SC	R
1877	002 300 000	D ₁	4				3		D			B4	R
1882	023 080 090		5				60		REC		20mA	8SC	RR
1883	023 080 090		5				60		REC		20mA	8SC	RR
2051	026 041 310		6		250		75	2.5kΩ	No Data Available			A08	Thyratron
2101	264 530 000		2	4.5	150	150	8	1.7	100	100	1.7	UX5	P
2102	268 953 000		2	1	100		2.5	1.3	100		1.3	UX6	DDT
2103	274 546 300		2	7.5	150	150	4	1.5	100	100	1.6	UX7	PP
2151	265 413 000		14	31	250	250	47	2.7	100	PenLF	2.4	UX6	P
2318	892 300 000		4				30		REC		15mA	B4	RR
2506	892 300 000		4				15		REC		10mA	B4	RR
3006	802 300 000		4						D			B4	D
3074A	204 140 300	A ₁ A ₂	6		300		50	3.0	No Data Available			UX7	TT
3075A	002 300 000	D ₁	2						DI			B4	D
3329A	265 113 000	G ₁	7.5		175	125	31	2.9	100	100		UX6	P
3481	026 510 310	G ₁	6	13.5	150	150	5.5	1.8	100	100	1.8	A08	P
3720	364 200 000		5	1.5	175		0.2	0.2	150		0.2	UX4	T
3871	264 300 000		30	19	100	100	52	3.8	100	90	3.8	UX6	P
3872	364 200 000		2	9	150		3		100			UX4	T
3873	365 200 000	G ₁	2	3	150	75	1.5	0.64	100	75	0.6	UX4	P
3921	264 300 000		2.5	50	250		34	2.17	100		2.1	UX4	T
3924	265 130 000	G ₁	2.5	3	175	90	4	1	100	90	1	UX5	P
4019A	264 300 000		4		200		9.7	1.3	100		1.2	UX4	T
4019B	642 300 000		4	4	100		7.5	1.27	100		1.2	B4	T
4020A	264 300 000		2	2	150		1.2	0.6	100		0.6	UX4	T
4020B	264 300 000		2	2	150		1.2	0.6	100		0.6	UX4	T
4021A	264 300 000		4	10	150		32.5	3	100		0.6	UX4	T
4021B	642 300 000		4	8	125		23	3	100		3	B4	T
4022AR	264 300 000		4	6	200		16.2	2.2	100		2.0	UX4	T
4033	264 130 000		6	20	400		50	9	100		8	UX5	T
4033A	642 310 000		6	20	400		50	9	100		8	B5	T
4033L	642 310 000		6	20	400		60	10	100		8	B5	T
4037A	802 300 000		4				120		REC		30mA	B4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
4061A	205 411 300	A	6	10	400	200	50	2.5	100	150	2.5	B7	P
4074A	204 140 300	A ₁ A ₂	6	13	300		15	3	100		3	UX7	TT
4077A	003 200 000	D ₁	5				120		REC		30mA	B4	R
4274A	289 300 000		5				120		REC		30mA	UX4	RR
4300A	364 200 000		5	90	400		50		No Data Available			UX4	T
4310A	265 113 000	G ₁	10	5.5	250	150	5.2	2	100	100	2	UX6	P
4328A	265 113 000	G ₁	7.5	5.5	250	175		2	100	150	2	UX6	P
4328D	026 510 310	G ₁	7.5	5.5	250	150	5.2	2	100	100	2	A08	P
4608	642 310 000		4	6	150		11	2.5	100		2.5	B5	T
4610	542 310 000	A	4	1.3	200	100	1.5	0.9	100	100	0.9	B5	P
4613	642 300 000		4	22	250		48	3.5	No Data Available			B4	T
4614	642 310 000		4	16	200		12	1.3	No Data Available			B5	T
4618	542 310 000	A	4	2	200	100	3	2.2	100	100	2.2	B5	P
4619	892 300 000		4				30		REC		15mA	B4	RR
4631	264 300 000		2	1.5	150		0.7		150			UX4	T
4636	542 310 000		4	2	200	100	3	2.3	100	100		B5	P
4650	642 350 000		4	63	300	300	30		No Data Available			B5	P
4652	892 300 000		4				60		REC		20mA	B4	RR
4654	411 230 050	A	6	14	250	275	72.0	8.5	No Data Available			8SC	P
4654K	023 114 500	A ₁	6	12.6	250	275	72	8.5	125	125		8SC	P
4655	462 300 000		4.5				60		REC		15mA	B4	RR
4657	642 310 000		4	1.5	200		1	2.2	200		2.2	B5	T
4670	432 564 570		2	8.5	90	90	1		80	75		8SC	PP
4673	642 310 000	G ₁	4	2.5	250	200	8	5	100	PenLF	5	B5	P
4673	023 110 560	G ₁	4	4	250	200	8	5	100	150	5	8SC	P
4679	026 447 300		6	2.5	250		8	5	100		4.6	A08	F
4682	023 100 560	G ₁	4		375	250	24		100	PenLF		8SC	P
4683	023 004 060		4		350		43		100			8SC	T
4684	023 104 560		4		375	250	24		100	PenLF		8SC	P
4688	023 104 560		4		375	275	48		100	PenLF		8SC	P
4689	023 104 560		6		375	275	43		100	PenLF		8SC	P
4694	023 104 560		6	7.5	375	250	24	8	100	PenLF		8SC	P
4699	023 104 560		6	12.5	300	300	55	13	100	PenLF	9	8SC	P
5516	235 242 300	A	3	14	400	250	75	4	100	PenLF	4	A08	P
5556	264 300 000		4.5	30	350		9	0.98	No Data Available			UX4	T
5590	412 365 100		6	4.5	90	90	3.9	2	80	90	2	B7G	P
5591	412 365 100		6	1.9	175	125	7.7	5.0	125	100	5.0	B7G	P
5603	021 415 360		6	12.5	150	150	50	5.4	100	100	5.4	A08	P
5608	412 365 100		6	12	125	125	7.5	5	100	90	5.0	B7G	P
5610	612 364 000		6	1.5	90		17	4	80		4.0	B7G	T
5618	265 134 200		3	8	275	75	19	3.5	100	60	3.5	B7G	P
5635	442 *63 710		6	0.5	100		4.8		100		3.8	B8B	T
5636	412 163 510		6	3	100	100	4	1.9	100	100	1.9	B8D	P
5637	402 013 060		6		100		1.4	2.7	100		2.7	B8B	T
5639	412 163 510		6	2.6	150	100	21	9	100	100	9	B8D	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
5640	412 163 510		6	9	100	100	31	5	100	100	5	B8B	P
5641	082 813 080		6				30		REC		15mA	B8D	R
5647	381 280 000		6				5.0		D			B5A	D
5654	412 365 100		6	2	125	125	7.5	5	100	100	5	B7G	P
5656	544 231 761		6	2	150	125	15	5.8	100	100		B9A	PP
5659	026 540 310		12.5	12.5	250	250	32		100	PenLF		A08	P
5660	026 895 310	G ₁	12.5	3	250	125	10	1.325	100	100	1.3	A08	DDP
5661	021 415 360		12.5	0.4	250	100	9.2	2	100	100	2	A08	P
5670	214 607 413		6	2	150		8.2	5.5	125		5.5	B9A	TT
5672	653 420 000		1.25	6.5	60	60	3.1	0.65	No Data Available			B5A	P
5676	624 300 000		1.25	5	125		4	1.6	125		1.6	B5A	T
5678	652 430 000		1.25	0	60	60	1.8	1	No Data Available			B5A	P
5679	218 309 120		6				5		D			B8B	RR
5686	141 235 615		6	12.5	250	250	27	3.1	100	100		B9A	P
5687	641 221 437		6	12.5	250		16	4.1	100		7	B9A	TT
5690	238 192 310		6				120		REC		30mA	A08	RR
5691	471 461 230		6	2	250		2.3	1.6	150		1.6	A08	TT
5692	471 461 230		6	9	250		6.5	2.2	100		2.2	A08	TT
5693	021 415 360		6	3	250	100	3	1.65	100	100	1.6	A08	P
5694	126 447 310		6	6	300		7	3.2	No Data Available			A08	TT
5718	402 013 060		6	2.0	100		13.0	5.5	100		5.5	B8D	T
5719	402 013 060		6	1.3	150		1.8	2.3	100		1.6	B8B	T
5721	641 227 413		6	2	250		1.3	1.6	100		1.6	B9A	TT
5722	802 208 300		3						D			B7G	D
5725	412 365 100		6	2	125	125	5.2	3.2	100	100	3.5	B7G	P
5726	192 310 800		6						D			B7G	RR
5732	026 510 310	G ₁	6	3	125	100	8	2.2	100	100	2	A08	D
5749	412 365 100		6	1	250	100	11	4.4	100	100	4.3	B7G	P
5750	412 366 400		6	2	100		11	7.0	100		6	B7G	H
5751	741 226 413		6	3.0	250	250	1.0	1.2	100		1.2	B9A	TT
5755	471 461 230		6	2	250		2.3	1.6	200		1.6	A08	TT
5763	601 235 144		6	7.5	250	250	45	7	100	PenLF	7	B9A	P
5797	411 235 600		26.5	1	30	30	0.5	1.0	No Data Available			B8D	P
5812	413 365 200		3	23	250	250	40	4.1	100	PenLF	4.1	B7G	P
5814	741 226 413		6	8.5	250		10.5	2.2	100		3.0	B9A	TT
5824	026 540 310		25	22	125	125	61	5	125	125	5	A08	P
5825	200 300 000	D ₁	1.5						D			UX4	D
5838	028 090 310		12				30		REC		15mA	B8A	RR
5839	028 090 310		26				30		REC		15mA	A08	RR
5840	412 163 510		6	1.4	100	100	7.0	5.0	100	100	5.0	B8D	P
5842	602 441 443		6	1.5	150		26	24.0	100		2.4	B9A	T
5844	672 344 100		6	2.3	100		4.8	3.4	100		3.4	B7G	TT
5845	802 290 300		6						D			B7G	DD
5847	402 106 053		6	2	150	150	13	12.5	150	150	12	B9A	P
5851	206 005 340		2.5	7.5	125	125	5.5	1.6	125	125	1.6	B8B	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
5852	028 090 310		6				30		REC		15mA	A08	RR
5873	264 114 730		6	3	150		9	2.9	100		2.3	B8B	TT
5879	401 230 561		6	3	250	100	1.8	1	100	100	1	B9A	P
5881	026 540 310		6	12.5	300	200	48	5.3	100	150	5	A08	P
5894	245 134 200	A ₁ A ₂	6		400	250	30	3.4	No Data Available			B7A	PP
5896	812 093 100		6				15		REC		15mA	B8B	RR
5897	402 013 060		6	2.3	150		14	6.5	100		5.8	B8A	T
5898	402 013 060		6	2	150		1.8	2.3	100		1.7	B8A	T
5899	412 163 510		6	2.0	100	100	13.0	5.5	100	100	5.0	B8D	P
5900	412 163 510		6		100	100	7.2	4.5	100	100	4.5	B8A	P
5901	412 163 510		6	1.5	100	100	7.5	5.0	100	100	2.4	B8A	P
5902	412 163 510		6	6.5	100	100	30	4.2	No Data Available			B8A	P
5903	812 093 100		26				5		D			B8B	RR
5905	412 163 510		26	0	20	20	2.3	2.8	No Data Available			B8A	P
5906	412 163 510		26	1.5	100	100	7.5	5	100	100	5	A08	P
5907	412 164 510		26	0	20	20	2.7	3.0	No Data Available			B8A	P
5908	412 163 510		26	0	20	20	2.3	1.7	No Data Available			B8A	P
5910	265 *24 300		1.4	0	90	90	1.6	0.9	100	90	0.9	B7G	P
5915	412 365 100		6	0	75	75	6.3	2	80	75	2	B7G	H
5916	412 163 510		26		100	100	4.4	1.28	100	100	1.2	B8A	P
5920	762 344 100		6	2.1	100		8.5	6	100		6	B7G	TT
5930	264 300 000		2.5	45	250		60	5.25	No Data Available			UX4	T
5931	020 809 030		5				120		REC		30mA	A08	RR
5932	026 540 310		6	14	250	250	72	6	100	PenLF	5.2	A08	P
5933	254 130 000	A	6	14	300	250	83	6.5	100	150	6	UX5	P
5947	222 833 380		4.4						D			A08	D
5961	126 541 340		6		250	100			100	100		A08	H
5963	741 226 413		6	0	75		8	2.8	80		2.8	B9A	TT
5964	762 344 100		6	1	100		9.5	6	100		6	B7G	TT
5965	741 226 413		6	1.8	150		8.2	6.5	150		6.0	B9A	TT
5967	624 334 260		1.25		40		3	2	No Data Available			B8B	TT
5968	240 670 430		1.25	0	40		0.7	1.3	No Data Available			B8B	TT
5969	245 675 430		1.25	3	125	40	6	1.7	No Data Available			B8B	PP
5977	402 013 060		6	2.7	100		10	4.5	100		4.5	B8B	T
5987	462 613 060		6	18	100		9	1.85	100		1.85	B8B	T
5992	026 540 310		6	12.5	250	250	45	4.1	100	PenLF	4	A08	P
5993	802 010 309		6				30		REC		15mA	B9A	RR
5998	461 471 230		6		100		100	15.5	No Data Available			A08	TT
6004	020 000 030	D ₁ D ₂	2.5				60		REC		20mA	A08	RR
6005	412 365 400		6	12.5	250	250	45	4	100	150	4	B7G	P
6006	021 415 360		6	14	250	125	11	4.7	100	100		A08	P
6007	653 420 000		1.25	0.2	20	20	0.47	0.42	No Data Available			B5A	P
6008	653 420 000		0.625	1.15	20	20	0.5	0.1	No Data Available			B5A	P
6021	642 113 470		6	1.0	100		6.5	5.4	100		5	B8D	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6026	001 230 460		6	2.6	125		12	5.9	100		5.9	B8B	T
6028	412 365 100		20	1.8	125	125	7.5	5.0	100	125	5.0	B7G	P
§6030	672 344 100		6	{ 3 0.85	150 100		5 8.5	4.5 5.8	100 100		5.8 5.8	B7G	TT
6042	461 471 230		25	8	250		9	2.6	100		2.6	A08	TT
6045	672 344 100		6	0.5	100		9	6.4	100		6.4	B7G	TT
6046	026 540 310		25	8.2	200	125	46	8	100	125	8	A08	P
6052	812 093 100		6				30		REC			B8B	RP
6053	812 093 100		26				5		D			B8B	DD
6057	741 226 413		6	2	250		1.2	1.6	150		1.6	B9A	TT
6058	192 310 800		6						D			B7G	RR
6059	041 230 651		6	3	250	100	2	1.225	100	100	1.2	B9A	P
6060	741 226 413		6	2	250			5.5	200		5	B9A	TT
6061	*41 230 651		6	13	300	225	34	3.75	100	150	3.7	B9A	P
6062	601 235 114		6	7.5	250	250	45	7	100	150	7	B9A	P
6063	802 309 100		6				30		REC		15mA	B7G	RR
±6064	412 361 500		6	{ 2 1.5	250 200	250 150	10 4.0	7.5 6.4	100 100	150 150	5 5	B7G	P
6065	412 361 500		6	2.5	250	250	8	2.5	100	100	2.5	B7G	P
6066	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
6067	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
6072	741 226 413		6	4	250		3	1.75	100		1.7	B9A	TT
6080	471 461 230		6	30	100		100	7	No Data Available			A08	TT
6082	471 461 230		26.5	30	100		100	7	No Data Available			A08	TT
6084	501 236 014		6	2.0	250	125	10	9.0	150	100		B9A	P
6085	641 227 413		6	5.5	250		6	2.7	100		2	B9A	TT
6086	541 236 **1		18	1.8	200	100	8.3	8.2	100	100	8	B9A	P
6087	020 809 030		5										
6087	020 809 030		6				60		REC		20mA	A08	RR
6094	452 634 516		6	12.5	250	250	45	6	100	PenLF	6	B9A	P
6095	412 365 400		6	12.5	250	250	45	4.1	100	PenLF	4	B7G	P
6096	412 365 100		6	2	125	125	7.5	5	125	125	5	B7G	P
6097	192 310 800		6						D			B7G	RR
6098	106 052 430		6	22.5	250	250	77	5.4	100	100		A08	P
6099	672 344 100		6	{ 3 0.85	150 100		5 8.5	4.5 5.3	100 100		5.8 5.8	B7G	TT
6100	602 364 100		6	8.5	250		10.5	2.2	100		3.0	B7G	T
6101	762 344 100		6	2	150		9	5.5	100		6	B7G	TT
6106	020 809 030		5				60		REC		20mA	A08	RR
6110	812 093 100		6				5		D			B8B	RR
6111	642 113 470		6	1.9	100		8.5	5	100		5	B8B	TT
6112	642 113 470		6	1.4	150		1.75	2.5	100		0.8	A08	TT
6113	641 471 230		6	3	250		3	1.7	100		1.6	A08	TT
6118	026 890 310		6	3	250		1.0	1.2	150		1.3	A08	DDT

† See note on Page 8

§ See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6125	8*2 384 100		6	8.5	250		10.5	2.2	150		2.2	B7G	T
6132	*41 230 651		6	4.5	250	250	40	11	100	150	9	B9A	P
6134	021 415 360		6	2	300	150	10	9	100	150		A08	P
6135	6*2 364 100		6	8.5	250		10.5	2.2	100		2.2	B7G	T
6136	412 365 100		6	1.0	250	150	10.6	5.2	100	150	5	B7G	P
6137	021 415 360		6	3	250	100	9.2	2	100	100	2	A08	P
6145	265 104 130		5		150	100	34	10	100	100		B7G	P
6146	125 141 310	A	6	30	200	200	100	7	No Data Available			A08	P
6147	206 035 240		1.25	7.5	125	125	5.5	1.6	100	125	1.5	B8B	P
6153T	023 164 570	G ₁	6	{ 2 2	100 250		16 12	5 3.5	100 100	60 100	5 3	} 85C	TH
						100							
6156	412 360 500		6	13.5	250	250	16	2.6	100	150	2.6	B7G	P
6157	**1 23* ***	D ₁	6				120		REC		30mA	B9A	R
6158	741 226 413		6	4.6	250		6	2.3	100		2.3	B9A	TT
6159	125 141 130	A	26	30	200	100	100	7	No Data Available			A08	P
6180	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
6186	412 365 100		6	1.4	250	150	7	5	100	100	4	B7G	P
6187	412 365 100		6	2	125	125	5.2	3.2	100	125	3.0	B7G	P
6188	461 471 230		6	2	250		2.3	1.6	150		1.4	A08	TT
6189	641 227 413		6	8.5	250		10.5	2.2	100		3	B9A	TT
6197	145 236 154		6	3	250	150	30	11	100	150	10	B9A	P
6201	741 226 413		6	2	250		10	5.5	100		5	B9A	TT
6202	802 309 100		6				60		REC		20mA	B7G	RR
6203	800 230 109		6						REC			B9A	RR
6205	412 163 510		6	1.4	100	100	7.5	5	100	100	5	B8D	P
6211	741 226 413		6	2	100		4.6	3.6	100		3.6	B9A	TT
6215	020 000 300	D ₁							D			A08	D
6216	641 236 510		6	6	200	100	47	8.8	100	100		B9A	P
6227	041 230 651		6	5.2	200	200	30	9	100	100		B9A	P
6247	442 613 000	A ₁	6	3	200		4	3	100		2.6	B7G	T
6265	412 365 100		6	1	250	150	9	4	100	125		B7G	P
6267	501 236 014		6	1.0	250	100	3.0	1.85	100	100	1.8	B9A	P
6287	156 236 546		6	12.5	250	250	48	4.1	100	100		B9A	P
6293	125 141 300	A ₁	6		200	200	100	7.3	No Data Available			A08	P
6302	265 113 000	G ₁	6	2.2	300	150	11	9	No Data Available			UX6	P
6305	112 311 100	D ₁	4				5		REC		5mA	B7G	R
6325	108 090 230		6				60		REC		20mA	A08	RR
6327	121 040 350		6	22.5	250	250	120	8	100	100		A08	P
6336	471 461 230		6	41.5	150		100	11	No Data Available			A08	TT
6350	614 227 140		6	2	250		12	5.5	100		5	B9A	TT
6374	**1 23* **8	D ₁	6				120		REC		30mA	B9A	R
6375	400 230 060		1.25	4.5	150		12.0	3.4	150		3.4	B8D	T
6385	214 607 413		6	2.1	150		82	5.5	125		5.5	B9A	TT
6386	214 607 413		6	2	100		9.6	4	100		4	B9A	TT
6394	461 471 230		26.5	45	150		100	11	No Data Available			A08	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6397	306 025 240		1.25	7.5	125	125	7	1.9	100	100		B8B	P
6417	601 235 144		12.5	7.5	250	250	45	7	100	150	7	B9A	P
6443	**1 23* ***	D ₁	6				120		REC		36mA	B9A	R
6463	614 227 143		6	2	250		12	5.5	100			B9A	TT
6485	412 365 100		6	1.6	300	150	10	9	100	100		B7G	P
6488	412 653 160		6	2.0	100	100	7.5	5.0	100	100	5.0	B8D	P
6489	261 360 000		6		100		8		100			SM5	T
6516	412 360 500		6	13.5	250	250	16.0	2.6	100	150	2.6	B7G	P
6520	461 471 230		6	60	150		50	7	No Data Available			A08	TT
6542	542 134 500	A ₁ A ₂	6	2	200	200	50	4.5	100	100		B7A	PP
6550	026 540 310		6	16.5	400	225	87	9	No Data Available			A08	P
6660	412 365 100		6	1.1	250	100	11	4.4	100	100	4.3	B7G	P
6661	412 365 100		6	1.0	250	150	7.4	4.6	100	100		B7G	P
6662	412 365 100		6	1.0	250	100	9.2	3.6	100	100	3.6	B7G	P
6663	182 310 900		6						D			B7G	RR
6669	412 365 400		6	12.5	250	250	47	4.1	100	PenLF	4	A08	P
6677	145 236 154		6	3	250	150	30	11	100	100		B9A	P
6679	641 227 413		6	2	250		10	5.5	200		5	B9A	TT
6680	641 227 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
6681	641 227 413		6	2	250		1.2	1.6	150		1.6	B9A	TT
6686	041 230 651		6	2.5	200	200	20	11	100	100		B9A	P
6687	412 365 100		6	5	125	75	0.5	0.6	125	75	0.6	B7G	H
6688	141 23* 615		6	1	200	150	13.1	16.5	No Data Available			B9A	P
6689	541 236 **1		6	1.7	200	125	10	9	100	100		B9A	P
6697	641 227 413		6	8.5	250		10	2.0	150			B9A	TT
6760	641 236 510		18	7.5	125	125	70	12	No Data Available			B9A	P
6761	641 236 510		6	7.5	125	125	70	13	No Data Available			B9A	P
6829	641 227 413		6	2.2	150		10.7	8.1	150		8.1	B9A	TT
6850	542 134 500	A ₁ A ₂	12		200	200	50	4.5	100	100		B7A	PP
6870	141 223 651		6	3.5	250	250	25	8.5	100	100	8	B9A	P
6883	125 141 130	A ₁	12	30	200	200	100	7	No Data Available			B9A	P
6893	125 141 130	A ₁	12	30	200	200	100	7	No Data Available			B9A	P
§6927	672 344 100		6	{ 3 0.85	150 100		5 8.5	4.5 5.8	100 100		5 5	B7G	TT
6928	412 365 400		6	12.5	250	250	45	4.1	100	PenLF	4		
6955	641 227 413		6	8.5	250		11.5	2.3	100			B9A	TT
7000	026 510 310	G ₁	6	3	250	100	2	1.225	100	100	1.2	A08	P
7184	026 540 360		6	15	250	250	70		100	PenLF		A08	P
7193	020 000 310	A ₁ G ₁	6	10.5	300		11	3	100		3	A08	T
7700	265 113 000	G ₁	6	3	250	100	2	1.2	100	100		UX6	P
7752	412 365 100		6	2	125	125	5.5	3.5	100	100	3.5	B7G	P
7755	412 365 100		6		30	30	3	2.75	No Data Available			B7G	P
7756	106 052 430		6	36	300	300	58	4.3	100	PenLF	4.3	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
8013A	200 300 000	D ₁	2.5				15		REC		10mA	B4	R
8016	020 000 030	D ₁	1.25						D			A08	D
8020	200 300 000	D ₁	5				120		REC		30mA	UX4	R
9001	412 365 100		6	3	250	100	2	1.4	100	100	1.4	B7G	P
9002	612 364 100		6	7	250		6.3	2.2	100		2.22	B7G	T
9003	412 365 100		6	3	250	100	6.7	1.8	100	100	1.8	B7G	P
9006	812 380 100		6				5		D			B7G	R
9072	020 000 310	A ₁ G ₁	6		300		15	2.5	No Data Available			A08	T
18013	061 231 500	G ₁	4		200	200	8	5	100	100		B7	P
18014	005 231 600	G ₁	4		200	200	35	8	100	100		B7	P
18015	061 231 500		21		125	125	8	8.3	125	125	8.3	B7	P
18016	005 231 600		21		125	125	48	9	125	125	9	B7	P
18040	265 104 130		18	3.4	200	200	15	10	100	150	10	B8B	P
18042	541 236 ***I		18	1.8	200	100	8.3	8.2	100	100	8	B9A	P
18043	541 236 ***I		6	1.8	200	200	8.2	8.2	100	100	8	B9A	P
18045	041 230 651		18	3	200	200	20	11	100	150	10	B9A	P
18046	041 230 651		18	3	200	100	20	11	100	150	10	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
A11A	892 300 000		4				60		REC		20mA	B4	RR
A11B	892 300 000		4				60		REC		20mA	B4	RR
A11C	892 300 000		4				60		REC		20mA	B4	RR
A11D	892 200 000		4				60		REC		20mA	B4	RR
A20B	892 310 000		4						D			B5	DD
A23A	809 231 600	G ₁	4	7	250		4.0	2.0	100		2.9	B7	DDT
A26	264 300 000		1S	1.5	90		4.5	1.16	80		1.16	UX4	T
A27D	819 236 500	G ₁	4	6	250	250	36	9.5	100	PenLF	9.5	B7	DDP
A28	264 300 000		1S	1.5	90		7.5	1.16	80		1.16	UX4	T
A30	264 300 000		1S	27	175		22	1.08	100		1.08	UX4	T
A30B	642 310 000		4	2	250		10	5.5	200		5.5	B5	T
A30D	642 310 000		4	3.5	200		6	2.4	100		2.4	B5	T
A32	264 300 000		1S	3	150		1.5	0.94	150		0.94	UX4	T
A36A	645 231 700	G ₁	4	2	150		6	1.2	150	60	1.2	B7	TH
				2	200	100	3.5		200	75			
A46B	645 231 700	G ₁	4	2	100		22	6	100	60	6	B7	TH
				2	250	150	3.5		100	PenLF			
A36C	645 231 700	G ₁	4	3	100	0	9	3.8	100	60	5.0	B7	TH
				2.5	250	100	3.25	2.5	100	100	3.0		
A40	264 300 000		1S	40.5	175		21	1.5	100		1.5	UX4	T
A40M	254 130 000	A	4	1.5	200	100	3	2	200	100	3	UX5	P
A40M	542 310 000	A	4	1.5	200	100	3	2	200	100	3	B5	P
A48	264 300 000		1S	4.5	90		4.5	1.18	80		1.18	UX4	T
A50A	542 310 000	A	4	2	200	100	3	2.3	100	200	2.3	B5	P
A50A	040 231 500	A	4	2	200	100	3	2.3	100	100	2.3	B7	P
A50B	061 231 500	G ₁	4	1.5	250	250	6	3.5	200	200	3.5	B7	P
A50M	041 231 500	A	4	2	200	125	4.5	2.3	100	100	2.3	B7	P
A50M	542 310 000	A	4	2	200	125	4.5	2.3	100	100	2.3	B5	P
A50N	542 310 000	A	4	2	225	100	4.25	2.5	200	100	2.5	B5	P
A50N	041 231 500	A	4	2	225	100	4.25	2.5	200	100	2.5	B7	P
A50P	060 231 500	G ₁	4	3	250	250	11.5	2	100	PenLF	2	B7	P
A70B	642 310 000	S	4	25	250	250	36	2.6	100	PenLF	B5	B5	P
A70B	045 231 600		4	25	250	250	36	2.6	100	PenLF	2.6	B7	P
A70C	045 231 600		4	3	250	250	36	9	100	PenLF	9	B7	P
A70D	045 231 600		4	3	250	250	36	9	100	PenLF	9	B7	P
A70D	642 350 000		4	5.8	250	250	36	9.5	100	150	8	B5	P
A70E	045 231 600		4	14	250	275	72	8.5	100	PenLF	8.5	B7	P
A70P	045 231 600		4	14.5	250	250	70		100	PenLF		B	P
A80A	123 174 560	G ₁	4	1.8	90		2		100	90	1.3	8SC	O
				8.5	250	75	1.6		200		2.5		
A80A	645 231 700	G ₁	4	1.8	90	75	2		100	90	1.3	B7	O
				8.5	250	75	1.5		100	90	1.5		
A104	642 300 000		1.1	10	100		5	0.35	100		0.35	B4	T
A106	264 300 000		1.4	9	100		2	0.4	100		0.4	UX4	T
A106	642 300 000		1.4	9	100		2	0.4	100		0.4	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
A109	264 300 000		1.4	9	150		2	0.45	100		0.4	UX4	T
A110	264 300 000		1.4	4.5	125		4	0.4	125		0.4	UX4	T
A110	642 300 000		1.4	4.5	125		3	0.4	125		0.4	B4	T
A125	642 300 000		1.25	3	150		0.4	0.45	100		0.4	B4	T
A203	642 300 000		2	30	150		12	1.5	100		1.5	B4	T
A205	642 300 000		2	18	150		7	1.2	100		1.2	B4	T
A206	642 300 000		2	8.5	150		3.8		100		1	B4	T
A209	642 300 000		2	9	150		4	1.0	100		1.0	B4	T
A210	642 300 000		2	9	125		3	0.9	100		0.9	B4	T
A211	642 300 000		2	2	150		2	1.2	100		1.2	B4	T
A225	642 300 000		2	3	150		1	1.0	100		1.0	B4	T
A235	042 300 000	A	2	0	150		1.5	0.4	150		0.4	B4	T
A241	642 300 000	S	2	2	20	20	1.2	1.0	No Data Available			B4	P
A242	265 300 000	G ₁	2	3	125	75	1.7	0.6	100	75	0.6	UX4	P
A303	264 300 000		3	27	150		3	0.6	100			UX4	T
A306	264 300 000		3	15	150		1.5	0.4	100			UX4	T
A404	642 300 000		4	10	100		4	0.45	100		0.45	B4	T
A406	642 300 000		4	9	150		6	0.45	100		0.45	B4	T
A408	642 300 000		4	4	150		4	1.5	100		1.5	B4	T
A409	642 300 000		4	9	150		3.5	0.9	100		1.2	B4	T
A410	642 300 000		4	3	150		3.5	0.5	100		1.2	B4	T
A410	264 300 000		4	3	150		3.5	0.5	100		1.2	UX4	T
A410N	642 300 000		4	3	150		3.5	0.5	100		0.5	B4	T
A411	642 300 000		4	3	200		6	2.5	150		2.5	B4	T
A414K	642 300 000		4	4.5	150		4	2	100		2	B4	T
A415	642 300 000		4	4	150		4	1.5	100		2	B4	T
A416	642 300 000		4	4.5	150		4	2	100		2	B4	T
A420	642 300 000		4	4	150		4	1.5	100		1.5	B4	T
A425	642 300 000		4	2.5	200		0.25	1.2	100		1.2	B4	T
A430	642 300 000		4	3	200		6	2.5	150		2.5	B4	T
A430	042 300 000	A	4	0	150		1.5	0.5	150		0.5	B4	T
A430N	642 310 000		4	4.5	250		6.5	3.5	100		3	B5	T
A435	642 300 000		4	1	150		2.1	0.5	150		0.5	B4	T
A440N	642 310 000		4	1.6	200		0.2	2.2	150		2.2	B5	T
A442	542 300 000	A	4	1	200	100	4	0.7	200	100	0.8	B4	P
A442	254 300 000	A	4	1	200	100	1.0	0.4	200	100	0.8	UX4	P
A557	602 310 000	G ₁	4	8	150		28	2	100		2	B5	T
A577	602 310 000	G ₁	4	20	250		40	2	100		2.0	B5	T
A600	642 300 000		6	9	150		4	1.5	100		1.5	UX4	T
A609	642 300 000		6	9	150		4	1.5	100		1.5	B4	T
A615	642 300 000		6	4.5	150		4	2.4	100		2.4	B4	T
A630	642 300 000		6	1.5	150		0.7	1.5	150		1.5	B4	T
A635	642 300 000		6	0	150		1.2	1.5	150		1.5	B4	T
A642	542 300 000	A	6	1	200	100		0.7	200	100	0.7	B4	P
A802	642 310 000		4	3	100		2.5	2.5	100		2.5	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE	
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V			
A819	060 231 500	G ₁	4		250	250	8	7.5	100	100		B7	P	
A863	026 500 310	G ₁	6	3	250	100	2	1.23	100	100	1.2	A08	P	
A901	045 231 600		5		100	100	50	9	No Data Available			B7	P	
A1685	026 510 310	G ₁	6.3	3	125	100	8	3.2	100	100	3.2	A08	P	
A1685M	026 510 310	G ₁	6	3	125	100	8	3.2	100	100	3.2	A08	P	
A1714	412 30* 600		6	2.5	150		10	8.5	100		8	B7G	T	
A1820	265 004 130		6		250	250	40	10.5	100	PenLF	9	B8B	P	
A1834	471 461 230		6	40	100		52	3	No Data Available			A08	TT	
A2087	6*2 360 800		4.4				5		D			B7G	R	
A2118	642 350 000		20	3	200		6	2.3	100		2	B4	T	
A2134	412 36* 500		6	7.8	150	150	55	9.5	100	100	9	B7G	P	
A2272	21* *1* *13	A ₁	6.3						D			B9G	R	
A4090	642 310 000		4	3.5	250		6	2.4	150		2.4	B5	T	
A4110	642 310 000		4	3.5	200		6	2.4	100		2.2	B5	T	
AAB1	023 1+0 980		4						D			85C	DDD	
AA61	274 164 130		6	5.2	250		6	2.7	100		2.7	B8A	TT	
AB1	902 310 000	D ₁	4						D			B5	DD	
ABC1	023 198 060	G ₁	4	7	250		4	2	100		2	85C	DDT	
ABC91	412 389 600		6	2	250		1.2	1.6	100		1.4	B7G	DDT	
ABLI	023 198 560	G ₁	4	6	250	250	36	9	100	PenLF	9.0	85C	DDP	
AC/042	642 300 000		2	38	300		50	5	100		5	B4	T	
AC/044	642 300 000		4	38	300		50	5	100		5	B4	T	
AC054	642 300 000		4	22	250		48	3.5	No Data Available			B4	T	
AC/064	642 300 000		4	21	200		20	3	100		3	B4	T	
AC084	642 300 000		4	22	300		17	1.1	100		1.1	B4	T	
AC084N	642 300 000		4	0	100		21	2.5	100		2.5	B4	T	
AC2	023 100 060	G ₁	4	5.5	250		6	2.5	100		2.5	85C	T	
AC2DD	869 231 500	G ₁	4	5.	250	250	32		100	PenLF		B7	DDP	
AC2/HL	642 310 000		4	1.2	250		2.5	6.5	100		5	B5	T	
AC2/Pen	045 231 600		4	5.3	250	250	32	8.5	100	PenLF	8	B7	P	
AC2/PenDD	869 231 500	G ₁	4	5.3	250	250	32	8.5	100	PenLF	8	B7	DDP	
AC3Pen	045 231 600		4	3	250	250	36	9	100	PenLF	9	B7	P	
AC4/Pen	045 231 600		4(5)	7	225	225	56	11	100	100	10	B7	P	
AC5/Pen	045 231 600		4	8.5	250	250	40	9.4	100	PenLF	9.4	B7	P	
AC5/PenDD	869 231 500	G ₁	4(5)	8.5	250	250	40	9.4	100	PenLF	9.4	B7	DDP	
AC6/Pen	045 231 000	A	4(5.5)	6.9	300	225	63	9.5	100	100	8.5	B7	P	
AC104	642 310 000		4	10	150		8.5	3.5	100		3.5	B5	T	
AC701	103 060 020	G ₁	4	1.6	40		0.5	0.7	No Data Available			B8D	T	
ACD	802 310 000		4						D			B5	D	
ACDD														
(HIVAC)	892 310 000		4						D			B5	DD	
AC/DDT	809 231 600	G ₁	4	4	200		5	2.3	100		2.3	B7	DDT	
AC/DX	642 310 000		4	3	200		5	3.5	100		3.5	B5	T	
AC/G	642 310 000		4	7.5	200		8	2.7	100		2.7	B5	T	

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
ACHF	642 310 000		4	3	200		3	2.5	100		2.5	B5	T
ACHL	642 310 000		4	2.5	200		7	2.0	100		3.5	B5	T
AC/HLDD	809 231 600	G ₁	4	3	200		4.9	2.6	100		2.6	B7	DDT
ACHLDDD	910 231 680	G ₁	4	3	200		4.9	2.6	100		2.7	B9	DDDT
ACHL4	642 310 000		4	5	250		5	3.3	100		3.3	B5	T
ACHL4DD	809 231 600	G ₁	4	3	250		7	2.5	100		2.5	B7	DDT
ACHM4	542 310 000	A	4		250	100	10	2.5	100	100	2.5	B5	P
AC/HP	041 231 500	A	4	1.5	200	100	4.2	3.2	100	100	3.2	B7	P
AC/HP	543 210 000	A	4	1.5	200	100	4.2	3.2	100	100	3.2	B5	P
ACHVP	542 310 000	A	4	2	200	100	3	2.3	100	100	2.3	B5	P
ACHI	174 652 300	G ₁	4	2 2	150 150	75	5 2.5	2.0	100 80	60 75	2	C7	TH
ACH4	642 310 000		4	4	200		3	3.3	100		3.3	B5	T
AC/L	642 310 000		4	13.5	200		17	4.25	100		4.25	B5	T
ACL4	642 310 000		4	15	250		9	4	100		4	B5	T
AC/LP	642 310 000		4	14	200		18	4.25	100		4.25	B5	T
ACME4	642 310 000	S	4	16	250	250	26		100	PenLF		B5	P
ACP	642 300 000		4	21	200		19	3	100		3	B4	T
AC/P	642 310 000		4	13.5	200		17	2.75	100		2.75	B5	T
ACPI	642 310 000		4	28	200		24	2.3	100		2.3	B5	T
ACP/4	042 310 000	A	4	1	100		20	7	100		7	B5	T
ACP/4	642 310 000		4	20	250		20	4	100		4	B5	T
ACPN	642 350 000		4	12	250	200	22		100	PenLF		B5	P
ACPNDH	642 350 000		4	10	250	200	18		100	PenLF		B5	P
AC/PP	642 300 000		4	25	400		50	5	100		5	B4	T
ACPP	045 231 600		4	5.5	250	250	32		No Data Available			B7	P
AC/Pen.	045 231 600		4	15.5	250	250	32	2.7	100	100	2.5	B7	P
AC/Pen.	642 310 000	S	4	12	200	200	24	2.5	100	100	2.5	B5	P
ACPT	642 310 000	S	4	8	250	200	31		100	PenLF		B5	P
ACPX4	642 310 000		4	18	250		30	4	100		4	B5	T
ACPX4a	642 300 000		4	25	250		50	5	100		5	B4	T
ACQ	045 231 600		4	22	400	250	57	6	100	PenLF	6	B7	P
ACQA	045 231 600		6	23	400	250		6	100	PenLF	6	B7	P
AC/SIVM	542 310 000	A	4	1.4	200	75	5.6	1.1	200	75	1.1	B5	P
AC/S2	542 310 000	A	4	1.0	200	60	6	3.4	200	60	3.4	B5	P
ACS2Pen	041 231 500	A	4	1.5	250	100	8	4.6	200	100	5.5	B7	P
AC/SG	542 310 000	A	4	1.5	200	60	4.5	1.9	200	60	1.9	B5	P
AC/SGVM	542 310 000	A	4	2	200	60	5.8	2.0	200	60	2	B5	P
AC/SH	542 310 000	A	4	1.5	200	75	7.4	2.5	200	75	3.5	B5	P
AC/SL	041 230 500	A	4	1	200	75	3.8	2.0	200	75	2.0	B7	P
AC/SL	061 230 500	G ₁	4	1	200	75	3.8	3.3	200	75	3.3	B7	P
ACSP1	041 231 500	A	4	3	200	200	4.9	2.7	100	PenLF	2.7	B7	P
ACSP3	061 231 500	G ₁	4	1.5	250	100	9	7.5	200	100	7.5	B7	P
ACTH1	645 231 700	G ₁	4	2.7 3	75 250	100	6.0 3	3.0 3.5	100 250	60 100	3.5 3.8	B7	TH

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
ACTHIA	271 640 530	G ₁	4	3 3 3 5	75 250 150 250		6.0 3 1.5 5.5	3.0 3.5 1.4 1.6	80 100 100 250	60 100 60 200	3 3.5 1.4 3.4	MO8 B9	TH TP
ACTP	571 231 640	G ₁	4	0	200	75	5	3	200	75	3	B5	P
ACVG	542 310 000	A	4	1.5	200	75	9.3	2.7	200	75	3.3	B5	P
ACVH	542 310 000	A	4	1.5	200	100	5.7	2.5	200	100	3	B7	P
AC/VP	041 231 500	A	4	1.5	200	100	5.7	2.5	200	100	3	B5	P
AC/VP	542 310 000	A	4	1.5	200	100	5.7	2.5	200	100	3	B7	P
ACVPB	061 231 500	G ₁	4	1.5	250	150	12	4	250	200	4	B7	P
AC/VP1	041 231 500	A	4	2.8	250	200	7.4	2	100	PenLF	2	B7	P
AC/VP2	061 231 500	G ₁	4	2.8	250	200	7.4	2	100	PenLF	2	B7	P
AC/VP4	041 231 500	A	4		250	100	6	3	100	100	3	B7	P
ACVS	542 310 000	A	4	1.5	200	75	4.4	2.0	200	75	3	B5	P
ACVS4	542 310 000	A	4	2	250	50	6	2	200	60	2	B5	P
AC/Y	045 231 600		4	10	250	250	32	3.5	100	100	3.5	B7	P
AC/Y	642 310 000	S	4	10	250	250	32	3.5	100	100	3.5	B5	P
AC/YC	045 231 600		4	10	250	250	68	7.5	100	PenLF	7.5	B7	P
AC/YY	045 231 600		4	10	250	250	68		100	PenLF		B7	P
AC/Z	642 310 000	S	4	5.5	250	250	32	7.5	100	PenLF	8	B5	P
AC/Z	045 231 600		4	5.5	250	250	32	7.5	100	PenLF	8	B7	P
AC/ZDD	869 231 500	G ₁	4	5.5	250	250	32	8	100	PenLF	8	B7	DDP
AD	281 300 000		6				60		REC		20mA	UX4	R
ADI	023 004 060		4	45	250		60	6	100		6	8SC	T
ADI/350	023 004 060		4	66	350		42		100			8SC	T
ADG	642 310 000		20	10	200		10	3.5	100		3.5	B5	T
ADHF	642 310 000		20	3	200		5	3.5	100		3.5	B5	T
ADHP	041 231 500	A	20		200	100	5	2.8	200	100	2.8	B7	P
ADL	652 310 000		20	13	200		20	3	100		3	B5	T
ADPN	642 350 000		20	15	250	200	22		100	PenLF		B5	P
ADVHP	041 231 500	A	20		200	100	5.5	2.5	200	100	2.5	B7	P
AE	265 413 000		13	13.5	100	100	8.5	1.65	100	90	1.65	UX6	P
AF	281 300 000		2.5				120		REC		20mA	UX4	R
AF2	542 310 000	A	4	2	200	100	4.25	2.5	200	100	3.2	B5	P
AF3	023 110 560	G ₁	4	3	250	100	8	1.8	250	100	1.8	8SC	P
AF7	023 110 560	G ₁	4	2	250	100	3	2.1	250	100	2.1	8SC	P
AG	289 300 000		5				120		REC		20mA	UX4	RR
AF8	026 546 310		6	2	200	50	3.5		No Data Available			A08	O
AG495	642 310 000		4	4	200		4	2.5	100		2.5	B5	T
AG4100	642 300 000		4	3	150		5	2	125		2	B4	P
AH1	023 145 560	G ₁	4	2	250	75	3	1.8	200	75	1.8	8SC	P
AH100	023 145 560	G ₁	4	2.5	200	100	5.5	1.5	100	100	1.5	8SC	P
AH4105	542 310 000	A	4	2	200	125	4.5	2.3	100	100	2.3	B5	
AK2	123 164 570	G ₁	4	2 2	100 250	75 75	4.2 4.3	0.9 2.2	80 100	75 75	0.9 2.0	8SC	O

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
AL1	023 004 560		4	15	250	250	36	2.8	100	PenLF	2.8	8SC	P
AL2	023 100 560	G ₁	4	25	250	250	36	2.6	100	PenLF	2.6	8SC	P
AL2/375	023 100 560	G ₁	4	25	250	250	36	2.6	100	PenLF	2.6	8SC	P
AL3	245 231 600		4	3	250	250	36	9	100	PenLF	9	B7	P
AL3	023 104 560		4	6.5	250	250	36	9.5	100	150	8	8SC	P
AL4	145 231 600		4	3	250	250	36	9	100	PenLF	9.5	B7	P
AL4	023 104 560		4	6.5	250	250	36	9.5	100	150	8	8SC	P
AL4/375	145 231 600		4	6	250	250	34	9.5	100	PenLF	8	B7	P
AL4/375	023 104 560		4	6	250	250	34	9.5	100	150	8	8SC	P
AL5	145 231 600		4	14	250	275	72	8.5	100	PenLF	7	B7	P
AL5	023 104 560		4	15	250	250	72	7	100	150	6	8SC	P
AL5/375	023 104 560		4	14	250	275	72	8.5	100	PenLF	6	8SC	P
AL60	041 231 500	A	4(5)	7	250	250	72	14.5	100	PenLF	8.5	B7	P
AL495	642 310 000		4	12	250		20	4	100		4	B5	T
AMOE	045 231 600		4	14	250	250	72	9	100	PenLF	9	B7	P
AN4092	642 310 000	D ₁	4	3.5	200		6	2.0	100		2	B5	DT
AP495	642 310 000		4	1.5	200		2.5	5	150		5	B5	T
APP4A	045 231 600		4	16.5	250	250	36	3.5	100	PenLF	3.5	B7	P
APP4As	023 100 560	G ₁	4	16.5	250	250	36	3.5	100	PenLF	3.5	8SC	P
APP4B	045 231 600		4	5	250	250	32	10	100	PenLF	10	B7	P
APP4Bs	023 104 560		4	5	250	250	32	10	100	PenLF	10	8SC	P
APP4C	145 231 600		4(5)	5	250	250	36	10	100	PenLF	10	B7	P
APP4D	145 231 600		4	16	250	250	72	7	100	PenLF	7	B7	P
APP4E	145 231 600		4(5)	13.5	350	275	72	8.5	100	PenLF	8.5	B7	P
APP4E	023 104 560		4(5)	13.5	350	275	72	8.5	100	PenLF	8.5	8SC	P
APP4G	061 231 500	G ₁	4(5)	6	250	250	36	10	100	PenLF	10	B7	P
APP4G	005 231 600	G ₁	4(5)	6	250	250	36	10	100	PenLF	10	B7	P
APP495	642 350 000		4	23	300	200	25	2	100	100	2	B5	P
APP4100	642 310 000	S	4	15	250	250	24	2.5	100	150	2.5	B5	P
APP4120	642 310 000	S	4	15	350	200	22	3.5	100	100	3.5	B5	P
APV4	892 300 000		4				60		REC		20mA	B4	RR
APV4100	892 300 000		4				60		REC		20mA	B4	RR
APV4200	892 300 000		4				60		REC		20mA	B4	RR
AR495	642 310 000		4	1	100			5	100		5	B5	T
AR4100	642 310 000		4	3	200		3	2	150		2	B5	T
AR4101	642 310 000		4	1	100			3	100		3	B5	T
AS494	542 310 000	A	4		200	100	15	1.5	100	100	1.5	B5	P
AS495	542 310 000	A	4	2	200	100	1	3.4	200	100	3.4	B5	P
AS4100	542 310 000	A	4	6	200	100	4	1.425	100	90	1.4	B5	P
AS4120	542 310 000	A	4	2	200	100	3	3	150	100	3	B5	P
AS4125	542 310 000	A	4	2	250	100	3	3	200	100	3	B4	P
AX	264 300 000		5	9	150		3	0.8	100		0.8	UX4	T
AX1	892 300 000		4				60		REC		20mA	B4	RR
AX50	892 300 000		4				20		REC		30mA	B4	RR
AZI	023 080 090		4				30		REC		20mA	BSC	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
AZ2	023 080 090		4				60		REC		20mA	8SC	RR
AZ3	023 180 090		4				60		REC		20mA	8SC	RR
AZ4	023 080 090		4 (5)				60		REC		30mA	8SC	RR
AZ11	902 300 080		4				60		REC		20mA	F8	RR
AZ12	902 300 080		4 (5)				60		REC		20mA	F8	RR
AZ21	288 039 920		2				30		REC		17mA	A08	RR
AZ31	020 809 030		4				30		REC		20mA	A08	RR
AZ32	020 809 030		4				60		REC		20mA	A08	RR
AZ33	028 090 300		4				60		REC		20mA	A08	RR
AZ41	*8* **9 230		4				30		REC		10mA	B8A	RR
AZ50	023 080 090		4 (5)				120		REC		30mA	8SC	RR
B2	642 300 000		2	2	125		2	1.2	100		1.2	B4	T
B7	642 300 000		6		125		8	0.67	100		0.67	B4	T
B11	642 300 000		6		200		20	1.4	100		1.4	B4	T
B21	447 230 600		2	3	150		5.0	1.5	100		2.1	B7	TT
B22	446 230 700		2		150		5		150			B7	TT
B23	642 300 000		2		125		4	0.75	100		0.75	B4	T
B24	446 230 700		2	0	150		7		100			B7	TT
B30	461 236 400		13	0	175		30		100			B7	TT
B36	471 461 230		13	8	250		9	2.6	100		2.6	A08	TT
B63	264 147 300		6	5	250		6	3.1	200		3.1	UX7	TT
B65	471 461 230		6	8	250		9	2.6	100		2.6	A08	TT
B105	264 300 000		1.4	18	150		8	1.0	100			UX4	T
B105	642 300 000		1.4	18	150		8	1.0	100			B4	T
B152	741 226 413		6	2	250		10.0	5.5	200		5	B9A	TT
B203	642 300 000		2	26	150		11	1.5	100		1.5	B4	T
B204	264 300 000		2	22.5	125		8	0.9	100		0.9	UX4	T
B205	642 300 000		2	18	150		7	1.2	100		1.2	B4	T
B205	264 300 000		2	18	150		7	1.2	100		1.2	UX4	T
B217	642 300 000		4.5	4.5	150		3	1.3	100		1.3	B4	T
B217	264 300 000		2	4.5	150		3	1.3	100		3	UX4	T
B228	264 300 000		2	2	150		2	1.2	150		1.4	UX4	T
B228	642 300 000		2	2	150		2	1.2	100		1.2	B4	T
B230	446 230 700		2	1	150		5.5		150			B7	TT
B240	470 642 300		2	0	150		15		150			C7	TT
B240	264 473 000		2		150		15		No Data Available			UX6	TT
B242	542 300 000	A	2	0	200	75	4.5	1.1	100	75	1.1	B4	P
B242	254 300 000	A	2	0	200	75	4.5	1.1	100	75	1.1	UX4	P
B255	542 300 000	A	2	1	150	100	1.8	1.2	150	100	1.2	B4	P
B255	254 300 000	A	2	1	150	100	1.8	1.2	150	100	1.2	UX4	P
B262	542 300 000	A	2	1	150	100	1.8	1.3	150	100	1.3	B4	P
B262	265 300 000	G ₁	2	1	150	100	1.8	1.3	150	100	1.3	UX4	P
B309	741 226 413		6	2	250		10	5.5	100		5	B9A	TT
B319	147 234 116		7.5	1.5	90		12	6	100		6	B9A	TT
B329	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
B339	741 226 413	G ₁	6	2	250		1.2	1.6	150		1.6	B9A	T
B342	265 300 000		2	2.5	150	75	4	1.3	150	75	1.3	UX4	P
B403	642 300 000		4	30	150		15	1.5	100		1.5	B4	T
B403	264 300 000		4	30	150		15	1.5	100		1.2	UX4	T
B405	642 300 000		4	18	150		11	1.6	100		1.6	B4	T
B405	264 300 000		4	18	150		11	1.6	100		1.4	UX4	T
B406	642 300 000		4	15	150		8	1.4	100		1.4	B4	T
B406	264 300 000		4	15	150		8	1.3	100		1.3	UX4	T
B409	642 300 000		4	16	250		12	2	100		2	B4	T
B409	264 300 000		4	16	250		12	2	100		2	UX4	T
B415	642 300 000		4	4.5	150		3	2	100		2	B4	T
B415	264 300 000		4	4.5	150		3	2	100		2	UX4	T
B242	642 300 000		4	2.3	200		6	2.5	150		2.5	B4	T
B424S	642 300 000		4	3	200		6	2.5	100		2.5	B4	T
B424	264 300 000		4	2.3	200		6	2.5	150		2.5	UX4	T
B425	642 300 000		4	4.5	150		3	2	100		2	B4	T
B425	264 300 000		4	4.5	150		3	2	100		2	UX4	T
B438	264 300 000		4	2.5	200		0.2	2	150		2	UX4	T
B438	642 300 000		4	2.5	200		0.2	2	150		2	B4	T
B438S	642 300 000		4	1.5	200		2	2	150		2	B4	T
B442	542 300 000	A	4	1	200	100	4.5	0.9	200	100	0.9	B4	P
B442M	542 300 000	A	4	1	200	100	4.5	0.9	100	100	0.9	B4	P
B442M	254 300 000	A	4	1	200	100	4.5	0.9	100	100	0.9	UX4	P
B442S	542 300 000	A	4	1	200	100	4.5	0.9	100	100	0.9	B4	P
B443	642 350 000		7	17	200	150	12	1.2	100	PenLF	1.2	B5	P
B443S	642 350 000		4	12	250	75	12	1.6	100	60	1.6	B5	P
B443	264 300 000	G ₂	4	17	200	150	12	1.2	100	PenLF	1.2	UX4	P
B443s	642 300 000	G ₂	4	12	250	75	12	1.6	100	60	1.6	B4	P
B443s	264 300 000	G ₂	4	12	250	75	12	1.6	100	60	1.6	UX4	P
B491	642 310 000		4	1.5	200		4	4	150		4	B4	T
B543	642 350 000		5	15	200	150	12	1.3	150	100	1.3	B5	P
B543(s)	642 350 000		5	15	200	150	12	1.3	150	100	1.3	B5	P
B543	264 300 000	G ₂	5	15	200	150	12	1.3	150	100	1.3	UX4	P
B543	642 300 000	G ₂	5	15	200	150	12	1.3	150	100	1.3	B4	P
B605	642 300 000		6	18	150		9	1.8	100		1.8	B4	T
B605	264 300 000		6	18	150		9	1.8	100	100	1.8	UX4	T
B609	642 300 000		6	18	250		12	1.8	100		1.8	B4	T
B719	741 236 410		6	2	250		10.0	6.0	250		6.0	B9A	TT
B2006	642 310 000		20	18	200		15	1.6	100		1.6	B5	T
B2038	642 310 000		20	3	200		6	2.3	100		2.3	B5	T
B2041	602 300 000	G ₁	20	1	100		2.5	0.1	100		0.1	B4	T
B2042	542 310 000	A	20	2	200	60	4	1	100	60	1	B5	P
B2043	642 310 000	S	20	18	200	200	20	1.7	100	100	1.7	B5	P
B2044S	642 310 000	D ₁	20	3	200		6	1.8	100		1.8	B5	DT
B2045	542 310 000	A	20	2	200	60	4	1	150	60	1	B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
B2046	542 310 000	A	20	2	200	100	3	2.2	150	100	2.2	B5	P
B2047	542 310 000	A	20	2	200	100	4	2	150	100	2	B5	P
B2055	542 310 000	A	20	1.5	200	100	3	2	100	100	2	B5	P
B2052T	542 310 000	A	20	2	200	100	3	2	150	100	2	B5	P
B2099	642 310 000		20	1.6	200		0.2	3	150		3	B5	T
BA2	446 230 700		2	0	150		1.5		150			B7	TT
BB1	902 310 000	D ₁	16						D			B5	DD
BBC12	682 390 000	G ₁	2	4.5	150		2.5	1.5	100		1.5	B5	DDT
BB220A	446 230 700		2	3	150		4		100			B7	TT
BB240	446 230 700		2	6	150		2.2		100			B7	TT
BCH1	465 231 700	G ₁	24	{ 2	100		5	1.2	100		1.2	{ B7	TP
					200	50	1.3	0.75	100	60			
BF1	642 300 000		4	15	150		8	1.3	100		1.3	B4	T
BF61	261 054 130		6	7	250	250	36	10	100	150	8	B8A	P
BF62	261 054 130		6	10	225	225	26	3.2	100	150	3.2	B8A	P
BF451	261 054 130		45	9	175	175	54.5	9.5	100	100	7	B8A	P
BL2	652 310 000	G ₁	30	20	200	100	40	3	100	90	3	B5	P
BL63	027 146 310	G ₁	6	16	250		14	4.2	100		4.2	A08	TT
BHP61	023 010 560	G ₁	2	0.5	125	125	2.5	0.7	125	125	0.7	85C	P
BLP61	023 004 560		2		150	150	7	2.7	100	100		85C	P
BM968	200 300 000	D ₁	2.5				60		REC		35mA	UX4	R
BPM04	412 365 400		6.3	12.5	250	250	45	4.1	100	PenLF	4	B7G	P
BW3	642 350 000		2	4.5	150	125	6	2.2	100	100	2.2	B5	P
BW602	642 300 000		2	12	150		12	3.4	100		3.4	B4	T
BW1304	642 300 000		2	6	150		6	3.2	100		3.2	B4	T
BX2	446 230 700		2	0	175		2.5		100			B7	TT
BX604	642 300 000		2	12	150		8	1.5	100		1.5	B4	T
C3G	261 504 130		6.3	1.8	225	150	13	13.5	100	100		B8B	P
C3G	216 514 130		6.3	1.8	225	150	13	13.5	100	100		B8B	P
C3M	261 504 130		20	4.5	225	150	15.0	6.0	100	100	5.2	B8B	P
C9	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
C10B	023 100 080		20				75		REC		23mA	85C	R
C10B	802 310 000		20				60		REC		23mA	B5	R
C20C	982 310 000		13						D			B5	DD
C23B	809 231 600	G ₁	13	5	200		4	2	100		2	B7	DDT
C25	642 300 000		4	2.5	200		2.3	1.2	150		1.2	B4	T
C30	261 504 130		6.3	4.5	225	150	15	6	100	100		B8B	P
C30B	000 231 600	G ₁	13	4	200		4	3.2	150		3.2	B7	T
C36A	645 231 740		21	{ 1.5	100		4	2	125	60	1.2	{ B9	TH
					225	75	3		100	75			
C36C	645 231 740		29	{ 2.5	100		4	2	100	60		{ B9	TH
					225	75	3	3.5	250	100			
C36B	645 231 700	G ₁	29	{ 2.2	100				100	75	5.0	{ B7	TH
					250	150	3.4		200	75	3.0		
C50B	061 231 500	G ₁	12	2.2	200	200	2.5	2.8	100	PenLF	2.8	B7	P
C50N	061 231 500	G ₁	13	2	200	200	9.5	2	100	150	2	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
C70D	023 110 560	G ₁	33	8.5	200	200	45	8	100	PenLF	7	8SC	P
C70D	045 231 600		35	8.5	200	200	45	8	100	PenLF	7	B7	P
C80B	123 154 560		13	1.5	200	90	1.9		150	75		8SC	O
C109	642 300 000		1	9	150		3.5	0.5	100		0.5	B4	T
C125	642 300 000		1	3	150		0.75	0.8	125		0.8	B4	T
C135	042 300 000	A	1.4	0	150		1.5	1	150		1	B4	T
C142	542 300 000	A	1	1.5	150	75	1.7	0.8	100		0.8	B4	P
C144	245 134 200	A ₁ A ₂	6.3	15	300	200	40	9	No Data Available			B7A	PP
C180	245 134 200	A ₁ A ₂	6.3	20	300	250	55	3.5	No Data Available			B7A	PP
C243	642 350 000		2	15	150	150	17	1.5	100	100	1.5	B5	P
C243N	642 350 000		2	4.5	150	125	6	3.2	150	100	2.2	B5	P
C243N	264 530 000		2	4.5	150	125	6	2.2	150	100	2.2	UX5	P
C405	642 300 000		4	32	250		20	1.9	100		1.9	B4	T
C405	264 300 000		4	32	250		20	1.9	100		1.9	UX4	T
C408	642 300 000		4	7	150		14	2.9	100		2.9	B4	T
C443	642 350 000		4	25	300	200	20	1.7	100	PenLF	1.7	B5	P
C443N	642 350 000		4	42	300	200	20	1.5	100	PenLF	1.5	B5	P
C443N/5	642 350 000		4	20	300	150	20	1.5	100	100	1.5	B5	P
C453	642 350 000		4	25	300	200	20	1.7	100	PenLF	1.7	B5	P
C508	264 300 000		5	9	150		6.2	1.7	100		1.7	UX4	T
C509A	642 300 000		5	10	150		10	1	100		1	B4	T
C603	642 300 000		6	40	175		20	1.7	100		1.7	B4	T
C606	642 300 000		6	27	250		20	3.3	100		3.5	B4	T
C643	642 350 000		6	21	300	200	20	1.5	100	PenLF	1.5	B5	P
CB215	446 230 700		2	1	150		15	1.7	100		1.7	B7	TT
CB2155	023 064 470		2	1	150		12	1.7	100		1.7	8SC	TT
CB220	446 230 700		2	3	150		15		100			B7	TT
CBC1	023 198 060	G ₁	13	7	250		4	2	100		2	8SC	DDT
CBL1	023 189 560	G ₁	44	8.5	200	200	45	8	100	PenLF	7	8SC	DDP
CBL6	023 198 560	G ₁	44	8	100	100	45	6	100	75	6	8SC	DDP
CBL31	026 985 310	G ₁	44	8.5	200	200	45	8	100	PenLF	7	A08	DDP
CCI	023 100 060	G ₁	13	3.7	200		2.6	2	150		2	8SC	T
CC2	023 100 060	G ₁	13	5.5	250		6	2.5	200		2.5	8SC	T
CCHI	023 156 470	G ₁	20	10	200		2.5	2.3	100	60	2.3	8SC	TH
					200	50	2		100	60			
CCH2	023 164 570	G ₁	29	10	200		2.5	2.3	100	60	2.3	8SC	TH
					200	75	2		100	75			
CCH35	027 546 310	G ₁	7.5	2	100		5.4	2.2	100	60	2.8	A08	TH
					250	100	5	2.4	200	100	4		
CE230	320 200 000	D ₁	2.5				30		REC		15mA	UX4	R
CF1	023 110 560	G ₁	13	2	200	100	3	2.3	100	100	2.3	8SC	P
CF2	023 110 560	G ₁	13	2	200	100	4.5	2.2	100	100	2.2	8SC	P
CF3	023 110 560	G ₁	13	2	100	75	7.5	2.1	100	75	2.1	8SC	P
CF7	023 110 560	G ₁	13	2	100	100	3	2.1	100	100	2.1	8SC	P
CF50	123 100 560	G ₁	30	2	200	100	1.5	3.3	100	100	3.3	8SC	P
CF51	123 100 560	G ₁	30	2	250	100	1.7	3.3	100	100		8SC	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
CF61	276 454 130		6	2	100		5	2.2	100		2.8	B8A	TH
				2	250	100	3	2	100	100	2.4		
CF141	276 454 130		14	2	100		6.4	2.2	100		2.8		
CHI	023 145 S60	G ₁	13	2	200	90	2.7	1.5	100	75	1.5	B8A	TH
CK1	023 154 S60	G ₁	13	1.5	250	75	3	1.8	200	75	1.8		
CK3	023 154 S60	G ₁	19	15	200	100	8	3	200	75	1.6		
									No Data Available			85C	P
												85C	P
												85C	O
CKS46	653 420 000		1.25	0	20	20	0.4	0.45	No Data Available			BSA	P
CK1002	008 090 010		6				30	3KΩ	No Data Available			A08	CCR
CK1005	008 092 030		6.3				30		REC 15mA			A08	RR
CK1006	289 300 000		2				60		REC 20mA			UX4	RR
CK1007	008 092 030		1				60		REC 20mA			A08	RR
CK1012	289 300 000		2				120		REC 30mA			UX4	RR
CK1024	008 090 010		6				60	3KΩ	No Data Available			A08	CCR
CK1028	202 322 300	D ₁	6				60		REC 20mA			B7G	R
CK1091	200 900 300		1.4						D			B7G	D
CKS814	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
CL1	023 100 S60	G ₁	13	14	200	200	25	2.5	100	PenLF	2.5	85C	P
CL2	023 100 S60	G ₁	24	15	100	100	50	3.8	200	75	3.8	85C	P
CL3	160 452 300		35	9.5	200	200	40	5.5	150	100	5	C7	P
CL4	023 100 S60	G ₁	33	8.5	200	200	45	8	100	PenLF	7	85C	P
CL6	023 100 S60	G ₁	35	9.5	200	100	45	8	100	90	7	85C	P
CL33	026 540 310		33	8.5	200	200	45	8	100	100	7	A08	P
CV135	812 380 000		6				60		REC 23mA			B7G	R
CV137	812 314 600		6	3	200		7.5	2.5	100		2.5	B7G	DT
CV139	412 314 600		6	1.5	250		10	9	100		6	B7G	T
CV1510	265 501 403		6		400	250	30	3	100	150	3	B9G	P
CY1	023 100 080		20				60		REC 60mA			85C	R
CY1c	803 210 000		20				60		REC 20mA			B5	R
CY2	123 190 080		30				60		REC 20mA			85C	RR
CY21	208 001 003		25				120		REC 23mA			B9A	R
CY31	020 080 310		20				120		REC 60mA			A08	R
CY32	029 180 310		30				60		REC 23mA			A08	RR
CZ30	028 193 210		80				60		REC 20mA			A08	RR
CZ501d	265 113 000	G ₁	3.5	2.5	250	125	6.5	3.5				UX6	P
CZ504D	265 413 000		5.5	13.5	250	200	40	3.5				UX6	P
D020	642 300 000		7.5	50	400		55	2.1	100		2.1	B4	T
D _{1/2}	280 300 000		7.5				60		REC 20mA			UX4	R
D1	123 000 000	D ₁	4				5		D			B3G	R
D1	642 300 000		4	1	40		1	0.8	No Data Available			B4	T
D1	289 300 000		5				60		REC 20mA			UX4	RR
D2	642 300 000		4	6	100		2.2	0.25	100		0.25	B4	T
D2M9	182 310 900		6.3				5		D			B7G	DD
D4	642 310 000		4	3	200		4	3.3	150		3.3	B5	T
D13U	023 100 060	G ₁	13	5	225		6	2.5	100			85C	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
D024	642 300 000		4	40	400		63	7.5	100		6.0	B4	T
D025	642 300 000		6	75	300		60	3.75	100		3.75	B4	T
D026	642 300 000		4	92	400		63	3.8	100		3.8	B4	T
D030	642 300 000		4	100	400		60	6.9	100		6.0	B4	T
DO42	918 236 500	G ₁	4	6	250	250	36	9.5	100	150	8.0	B7	DDP
D41	892 310 000		4						D			B5	DD
D42	812 300 000		4				15		D			B4	D
D43	012 300 000	A	4				15		D			B5	DD
D61	268 154 130		6.3	2	250	125	5	1.8	100	100		B8A	DP
D63	028 190 310		6						D		9mA	A08	DD
D77	192 310 800		6						D			B7G	DD
D105	264 300 000		1	18	150		8	2	150		2	UX4	T
D105	642 300 000		1	18	150		8	2	150		2	B4	T
D110	264 300 000		4	40	250		40	2.7	100		2.7	UX4	T
D110	642 300 000		4	40	250		40	2.7	100		2.7	B4	T
D121	268 154 130		12.5	2	200	90	5	2	100	100	2	B8A	DP
D152	192 310 800		6						D			B7G	RR
D210	642 300 000		2	3	150		3.5	1.25	100		1.25	B4	T
D210DW	603 200 000	G ₁	2	4.5	150		2.4	1.35	100		1.35	B4	T
D243	642 350 000		2.5	27	300	200	20	2	100	PenLF	2	B5	T
D400	892 310 000		4						D			B5	DD
D404	642 300 000		4	40	250		40	2.7	100		0.45	B4	T
D410	642 300 000		4	3	150		3.5	0.5	150		0.5	B4	T
D418	102 300 000	D ₁	4						D			B4	D
D604	023 181 910		6						D			85C	DD
DA	000 231 600	G ₁	13	2.6	200		3.7	2.2	150		2.2	B7	T
DA1	642 300 000		2	1	40		0.35	0.4	No Data Available			Sm4	T
DA2	642 300 000		2	2.15	40		1.25	0.5	No Data Available			Sm4	T
DA3	642 300 000		2	2.8	40		1.8	0.62	No Data Available			Sm4	T
DA30	642 300 000		4(5)	70	300		60	3.5	100		6.0	B5	T
DA42	214 300 000	A ₁	7.5		400			3.0	No Data Available				T
DA90	281 0*8 300		1.4				5		D			B7G	R
DA101	200 800 300		1.2						D			B7G	D
DA406	542 300 000	A	4	2.5	150	75	3	0.8	100	75	0.8	B4	P
DAC1	023 008 060	G ₁	1.4	0	90		0.14	0.27	80		0.27	85C	DT
DAC21	206 008 030	G ₁	1.4	0	125		0.75	0.4	80		0.3	A08	DT
DAC22	264 008 030		1.25	0	90		0.35	0.3	90		0.3	B8G	DT
DAC25	264 228 230		1.25	0	125		0.6	0.35	125		0.35	A08	DT
DAC31	036 080 200	G ₁	1.4	0	90		0.45	0.27	80		0.27	A08	DT
DAC32	036 080 200	G ₁	1.4	0	90		0.15	0.275	90		0.275	A08	DT
DAF1	802 362 450		1.2	0	125	60	1.4		125	60		F8	P
DAF11	802 362 450		1.2	0	90	50	0.8	0.55	80	60	0.55	F8	DP
DAF40	268 354 230		1.4	0	75	75	0.85	0.7	80	75	0.8	B8A	DP
DAF41	268 354 230		1.4	1.0	75	75	0.85	0.7	80	75	0.8	B8A	DP
DAF70	604 238 050		1.25	0	60	60	0.8	0.45	80	75		B8D	DP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DAF91	208 564 300		1.4	1	90	90	2	0.72	80	90	0.72	B7G	DP
DAF92	265 804 300		1.4	1	90	90	2	0.72	90	90	0.72	B7G	DP
DAF96	208 564 300		1.4	1.5	60	60	0.17	0.17	80	75	0.17	B7G	DP
DAF191	2*8 564 300		1.4	0	60	60	2.2	0.75	No Data Available			B7G	DP
DASI	542 300 000	A	2	2.7	125	125	1.5	0.58	100	100	0.58	Sm4	P
DB	446 230 700		25	0	250		40		250			B7	TT
DBC21	206 098 030	G ₁	1.4	1.5	125		1.6	0.9	100		0.9	A08	DDT
DBC25	208 904 630		1.2	1.5	125		1.6	0.9	125		0.9	B8B	DDT
DBC31	026 980 300	G ₁	1.4	1.5	125		1.6	0.9	100		0.9	A08	DDT
DC2/HLDD	809 231 600	G ₁	25	1	200			2	100		2	B7	DDT
DC2P	642 310 000		35	13.5	200		17	3.75	100		3.75	B5	T
DC2/Pen	045 231 600		35	10	250	200	30	2.5	100	100	2.5	B7	P
DC2/Pen	642 310 000	S	35	10	250	200	30	2.5	100	100	2.5	B5	P
DC2SG	542 310 000	A	20	1	200	75	5.5	1.8	200	75	1.8	B5	P
DC2SGVM	542 310 000	A	20	2	200	60	5.8	1.5	200	60	1.5	B5	P
DC3HL	642 310 000		25	1	80		0.34	0.38	100		0.38	B5	T
DC11	602 302 400		1.25	2.5	90		2.0	1.0	80		1.0	F8	T
DC25	260 024 030		1.25	3.5	100		1.8	0.85	100		0.85	B8B	T
DC70	400 230 060		1.25	4.5	150		14.5	3.7	100		3.4	B8D	T
DC80	402 320 060		1.2	3.5	150		20	3.5	100			B9A	T
DC90	266 044 300		1.4	3.0	90		3.0	1.1	90		1.1	B7G	T
DC93	204 036 200		1.4	5	100		10	2.4	100		2.3	B7G	T
DC96	266 044 300		1.4	2.5	90		2.1	1.0	90		0.95	B7G	T
DC193	2*4 *36 200		1.4	5	100		10	2.4	100		2.4	B7G	T
DCC90	274 346 200		1.4	2.5	90		3.7	1.8	80		1.8	B7G	TT
DCHI	207 540 630	G ₁	1.4	{	60		2.1	1.4	60	60	1.4	A08	TH
					125	125	1.0	1.0	100	100			
DCHI1	642 273 450		1.25	{	90		0.85		100	60		F8	TH
					125	60	1.0		100	60			
DCH21	207 540 630	G ₁	1.4	{	60		2.1	1.4	No Data Available			A08	TH
					90	60	1		80	60			
DCH22	276 454 030		1.25	{	60		1.4		No Data Available			A08	TH
					90	50	0.75						
DCH25	276 454 030		1.4	{	60		2	1.3	No Data Available			A08	TH
					90	60	1		80	60			
DCH31	027 546 300	G ₁	1.4	{	60		2.1	1.4	No Data Available			A08	TH
					90	60	1	1.4	80	60			
DC/HL	642 310 000		6	1	100			3	100		3	B5	T
DC/P	642 310 000		8	1	200			4.5	200		4.5	B5	T
DC/SG	542 310 000	A	6	0	125	75		2.75	200	75	2.75	B5	P
DD4	892 310 000		4						D			B5	DD
DD4D	091 231 800		4						D			B7	DD
DD6	892 310 000		6						D			B5	DD
DD6	192 310 800		6						D			B7G	RR
DD6Ds	023 190 910		6						D			8SC	DD
DD6G	192 310 800		6						D			B7G	DD

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DD13	892 310 000		13				5		D			B5	DD
DD41	219 080 130		4						D			M08	RR
DD101	219 080 130		10						D			M08	DD
DD207	892 300 000		2						D			B4	DD
DD465	902 310 000	D ₁	4						D			B5	DD
DD620	892 310 000		6						D			B5	DD
DD818	892 310 000		8						D			B5	DD
DD960	204 036 200		1.4	3	60		9	2.45	No Data Available			B7G	T
DDA1	892 310 000		4						D			B5	DD
DDD11	742 302 460		1.2	4.5	125		1.5	1.0	125		1.5	F8	TT
DDD25	206 447 030		1.4	1.5	100		3.5	1.2	100		1.2	A08	TT
DDL4	892 310 000		4				5		D			B5	RR
DDP4B	968 231 500	G ₁	4	5	250	250	36	8	100	PenLF	7	B7	DDP
DDP4M	918 236 500	G ₁	4	5	250	250	36	8	100	PenLF	7	B7	DDP
DD/Pen	849 231 500	A	4	2.5	200	100	5	2.7	100	100	2.7	B7	DDP
DDPP4B	869 231 500	G ₁	4	5	250	250	36	10	100	PenLF	9	B7	DDP
DDPP4BS	023 189 560	G ₁	4	5	250	250	36	10	100	PenLF	9	8SC	DDP
DDPP4M	869 231 500	G ₁	4(5)	5	250	250	36	10	100	PenLF	9	B7	DDP
DDPP6B	968 231 500	G ₁	6	6	250	250	36	9.5	100	PenLF	9	B7	DDP
DDPP6BS	023 189 560	G ₁	6	5	250	250	36	10	100	PenLF	9	8SC	DDP
DDPP39	968 231 500	G ₁	39	8	200	200	45	8.5	100	PenLF	8	B7	DDP
DDPP39M	918 236 500	G ₁	39	8	200	200	45	8.5	100	PenLF	8	B7	DDP
DDPP39S	023 198 560	G ₁	44	8	200	20	45	8.5	100	PenLF	8	8SC	DDP
DDR2	256 101 403		6	5	250	250	40	12	No Data Available			B9G	P
DDR3	812 380 000		6				60		REC		20mA	B7G	R
DDR7	412 360 500		6	12.5	250	250	16	2.6	100	PenLF	2.6	B7G	P
DDT	908 231 600	G ₁	4	3	200		3.4	2.4	100		2.4	B7	DDT
DDT2	682 390 000	G ₁	2	3	150		1	1.4	100		1.4	B5	DDT
DDT2B	682 390 000	G ₁	2	4.5	150		2.5	1	100		1.0	B5	DDT
DDT2BS	023 089 060	G ₁	2	4.5	150		2.5	1	100		1.0	8SC	DDT
DDT4	809 231 600	G ₁	4	3	200		3	2.5	150		2.5	B7	DDT
DDT4(S)	908 231 600	G ₁	4	5	250		4	3.6	150		3.6	B7	DDT
DDT4(S)	023 198 060	G ₁	4	5	250		4	3.6	150		3.6	8SC	DDT
DDT6	809 231 600	G ₁	6	5.5	250		5	2	150		2	B7	DDT
DDT6S	023 189 060	G ₁	6	5.5	250		5	2	150		2	8SC	DDT
DDT13	908 231 600	G ₁	13	4	200		5	2.0	150		2.3	B7	DDT
DDT13S	023 189 060	G ₁	13	5	200		4	3.6	100		3.6	8SC	DDT
DDT16	809 231 600	G ₁	16	3	200		5	2.5	100		2.5	B7	DDT
DDT213	809 231 600	G ₁	13	4	200		5	2.25	150		2.2	B7	DDT
DDT215	682 390 000	G ₁	2	3	150		3	1.6	100		1.6	B5	DDT
DDT220	682 390 000	G ₁	2.5	4.5	150		2.5	1	100		1.0	B5	DDT
DE1	264 130 000		2.5	21	250		5.2	0.975	100		0.975	UX5	T
DE5	280 300 000		2.5				120		REC		30mA	UX4	R
DET19	204 140 300	A ₁ A ₂	6		300		25	2.1	No Data Available			UX7	TT
DET20	020 000 310	A ₁ G ₁	6	5.5	250		12	3	100		3	A08	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DF1	032 000 560	G ₁	1.4	0	90	90	1.2	0.75	80	90	0.75	8SC	P
DF11	602 302 450		1.2	0	90	50	0.9	0.65	80	60	0.6	F8	P
DF21	206 501 030	G ₁	1.4	0	90	90	1.2	0.7	80	90	0.7	A08	P
DF22	206 501 030	G ₁	1.4	1.5	90	90	1.4	1.1	80	90	1.1	A08	P
DF23	265 114 130		1.25	1.5	90	60	0.65	0.58	80	60	0.58	A08	P
DF25	265 114 130		1.25	0.5	125	60	1	0.65	125	60	0.65	A08	P
DF26	265 114 130		1.25	1.1	125	90	1.2	0.3	125	90	0.3	A08	P
DF31	026 510 300	G ₁	1.4	0	90	90	1.2	0.65	80	90	0.65	A08	P
DF32	026 510 300	G ₁	1.4	1.5	90	90	1.4	1.1	80	90	1.1	A08	P
DF33	036 500 200	G ₁	1.4	0.5	90	90	0.82	0.75	80	90		A08	P
DF60	652 430 000		1.25	2.0	60	60	0.5	0.8	No Data Available			B5A	P
DF61	652 430 000		1.25	1.0	60	60	0.9	0.8	No Data Available			B5A	P
DF62	652 430 000		1.25	1.0	90	90	7.4	2.0	80	75		B5A	P
DF64	652 430 000		0.625	0.62	20	20	0.60	0.1	No Data Available			B5A	P
DF65	265 430 000		0.625	1.15	20	20	0.05	0.1	No Data Available			B5A	P
DF66	653 420 000		0.625	1.05	20	20	0.05	0.1	No Data Available			B5A	P
DF67	653 420 000		0.625	1.15	20	20	0.05	0.1	No Data Available			B5A	P
DF70	*4* 23* 650		0.625	0	40	40	0.37	0.22	No Data Available			B8D	P
DF72	*40 230 650		1.25	0	60	60	1.7	1.0	No Data Available			B8D	P
DF73	*40 230 650		1.25	0	80	75	1.7	0.8	80	75	0.8	B8D	P
DF91	265 024 300		1.4	0	90	75	3.5	0.9	80	60	0.9	B7G	P
DF92	265 024 300		1.4	2.0	90	60	1.9	0.7	80	60	0.7	B7G	P
DF96	265 024 300		1.4	1	90	75	3.7	1	80	60	1	B7G	P
DF96	265 *24 300		1.4	0.8	75	75	1.4	0.65	80	75	0.75	B7G	P
DF97	265 224 300		1.4	0	60	60	1.68	0.84	80	75	0.8	B7G	P
DF167	653 420 000		0.625	0	20	20	0.1		No Data Available			B5A	P
DF191	265 *24 300		1.4	0	60	60	4.2	1	No Data Available			B7G	P
DF904	265 *24 300		1.4	0	90	90	1.6	0.9	90	90	0.9	B7G	P
DF906	265 3*4 300		1.4	0	40	40	3	1.7	No Data Available			B7G	P
DF50	246 557 430		1.4	1.1	20	20	2.25	1.2	No Data Available			A08	PP
DF51	246 557 430		1.4	0	20	20	2.1	0.7	No Data Available			A08	PP
DF101	634 572 400		1.4	0	40	40	1	0.22	No Data Available			B7G	PP
DG210	642 350 000		2	1.5	100	20	1	1	No Data Available			B5	P
DH	642 310 000		16	3	200		6	3.7	100		3.7	B5	T
DH30	908 231 600	G ₁	13	2	200		2.8	4.5	150		4.5	B7	DDT
DH42	908 231 600	G ₁	4	3	250		1.1	1.2	150		1.2	B7	DDT
DH63	026 890 310	G ₁	6	3	250		1.1	1.2	150		1.2	A08	DDT
DH73	026 890 310	G ₁	6	3	250		4.5	2	250		2	A08	DDT
DH74	026 890 310	G ₁	13	3	250		1.1	1.2	100		1.2	A08	DDT
DH76	026 980 310	G ₁	13	3	250		1.1	1.2	150		1.2	A08	DDT
DH77	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
DH81	264 *98 130		6	3	250		1	1.2	150		1.2	B8B	DDT
DH101	264 *98 130		19	3	250		1	1.2	150		1.2	B8B	DDT
DH107	412 389 600		19	3	250		1	1.2	150		1.2	B7G	DDT
DH142	264 098 130		14	1.6	175		1.5	1.65	100		1.4	B8A	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DH147	026 890 310	G ₁	6	5.5	250		5	2	100		2	A08	DDT
DH149	264 198 130		6	1.0	250		1.3	1.0	250		1.0	B8A	DDT
DH150	264 098 130		6	3	250		10.	1.3	150		1.3	B8A	DDT
DH719	981 23† 146		6	3	250		1.0	1.3	100		1.3	B9A	DDDT
DHD	908 231 600	G ₁	16	3.2	200		3.2	2.2	200		2.2	B7	DDT
DHL	642 310 000		16	1.5	150		3.8	4.5	100		4.5	B5	T
DK1	023 064 560	G ₁	1.4	0	90	50	1.8	0.55	80	60	0.55	8SC	H
DK21	206 540 630	G ₁	1.4	2	60	60	4.5	1.4	80	60	1.4	A08	H
DK32	036 546 200	G ₁	1.4	0	90	50	1.8	0.55	80	60	0.55	A08	H
DK40	265 454 030		1.4	2	75	75	0.9	0.7	80	75		B8A	O
DK91	266 424 300		1.4	4	75		4.5	1.2	80		1.4	B7G	H
DK92	266 464 300		1.4	4	60		4.0	1.2	80		1.2	B7G	H
DK96	265 461 300		1.4	1.5	75	50	1.0	0.4	80	60	0.4	B7G	H
DK192	265 454 300		1.4		60	60			No Data Available			B7G	H
DL	642 310 000		16	8	200		25	4.5	100		4.5	B5	T
DL1	023 004 560		1.4	3	90	90	4	1.25	80	75	1.25	8SC	P
DL2	032 004 560		1.4	7.5	90	90	7.5	1.55	80	75	1.55	8SC	P
DL11	602 302 450		1.2	4.4	90	90	3.7	1.0	80	90	1	F8	P
DL21	206 540 030		1.4	3	90	90	4	1.3	80	90	1.3	A08	P
DL22	265 024 330		1.25	4	125	125	5	1.6	100	100	1.6	A08	P
DL25	265 204 330		1.25	4.7	125	125	4.5	2.1	100	100	2.1	A08	P
DL31	036 540 200		1.4	3	90	90	4	1.25	80	75	1.25	A08	P
DL33	036 540 320		1.4	4.5	90	90	9.5	2.2	80	75	2.2	A08	P
DL35	036 540 200		1.4	7.5	90	90	7.5	1.55	80	75	1.55	A08	P
DL36	036 540 200		1.4	4.5	90	90	9.5	2.2	90	90	2.2	A08	P
DL41	362 054 220		1.4	5.8	125	125	5	1.3	80	90	1.3	B8A	P
DL63	026 890 310	G ₁	6	3	250		4.2	1.6	100		1.6	A08	DDT
DL64	652 430 000		1.25	1.5	20	20	0.16	0.18	No Data available			B5A	P
DL65	365 420 000		1.25	0.2	20	20	0.47	0.42	No Data Available			B5A	P
DL66	653 420 000		1.25	1.4	20	20	0.3	0.35	No Data Available			B5A	P
DL67	653 420 000		1.25	0.2	20	20	0.47	0.42	No Data Available			B5A	P
DL68	653 420 000		1.25	2.2	20	20	0.6	0.43	No Data Available			B5A	P
DL69	652 430 000		1.25	2.5	90	90	1.75	0.85	80	75	0.85	B5A	P
DL70	*4* 23* 650		1.25	7.5	150	90	7.5	1.9	150	90	1.0	B8D	P
DL71	*4* 23* 650		1.25	1.25	40	40	0.6	0.55	No Data Available			B8D	P
DL72	*4* 23* 650		1.25	4.5	40	40	1.25	0.5	No Data Available			B8D	P
DL73	*40 230 650		1.25	9	100	100	15	2.5	100	100	3.8	B8D	P
DL74	026 890 310	G ₁	13	3	250		5.1	1.65	100		1.65	A08	DDT
DL75	*40 230 650		1.25	2.5	90	90	1.7	0.85	90	90	0.9	B8D	P
DL82	264 *98 130		6.0	3	250		5.0	1.4	150		1.4	B8B	DDT
DL91	264 526 300		1.4	7	90	75	7.4	1.58	80	60	1.5	B7G	P
DL92	264 536 200		1.4	7	90	75	7.4	1.58	80	75	1.58	B7G	P
DL93	365 426 300		1.4	8.4	150	90	13.3	1.9	100	75	1.9	B7G	P
DL94	365 024 300		1.4	4.5	90	90	9.5	2.15	80	75	2.15	B7G	P
DL95	264 536 200		1.4	4.5	90	90	9.5	2.15	80	75	2.1	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DL96	265 034 200		1.4	5.2	90	90	5.0	1.4	80	60	1.4	B7G	P
DL98	524 233 600		1.25	38	150	125	25	1.7	No Data Available			B7G	P
DL167	653 420 000		1.25		20	20	0.5	1.5	No Data Available			B5A	P
DL145	264 098 130		15	5.9	250		5	2.3	150		2.3	B8A	DDT
DL192	264 536 200		1.4	7	60	60	7	1.5	No Data Available			B7G	P
DL193	265 436 200		1.4	7.5	105	60	9.5	2.9	150	60	2.9	B7G	P
DL620	653 420 000		1.25	6.5	60	60	3.1	0.65	80	75	0.65	B5A	P
DL651	653 420 000		1.25	0	20	20	0.4	0.45	No Data Available			B5A	P
DL907	365 004 200		1.4	5.5	125	125	15	3.1	125	125	3.1	B7G	P
DLL21	246 547 330		1.4	8.7	125	125	1		100	100		A08	PP
DLL25	046 547 230		1.4	9.4	125	125	17		125	125		B8G	PP
DLL31	326 447 250		1.4	5	90	90	3		80	75		A08	PP
DLL101	264 574 300		1.4	7	90	60	8.2	1.1	80	60	1.2	B7G	PP
DLL102	264 574 300		1.4	{ 0 0	40 40	40 40	1.3 2.0	0.55 0.55	No Data Available No Data Available			B7G	PP
DLP51	023 004 560	C	4		17	250	250	36	2.5	No Data Available			8SC
DN41	968 231 500	G ₁	4	3.3	250	200	32	10	100	PenLF	9	B7	DDP
DN143	264 598 130		6	6.2	250	275	44	9.5	100	PenLF	9	B8B	DDP
DO24	642 300 000		4	40	400		63	7.5	100		6.5	B4	T
DO26	642 300 000		4	92	400		63	3.8	100		6.3	B4	T
DO30	642 300 000		4	100	400		60	4	100		4	B4	T
DP	264 008 030		16	7.5	200		25	6	100		6	A08	DT
DP5	642 350 000		4	5	250	250	10	4	100	PenLF	4	B5	P
DP7	023 004 560		4	20	250	250	20	2.5	100	PenLF	2.5	8SC	P
DP61	412 365 100		6	8.5	175	125	7.7	5.1	150	150	4	B7G	P
DP495/6	869 231 500	G ₁	4	6.5	250	250	35	9.5	100	PenLF		B7	DDP
DP4480	819 236 500	G ₁	44	8.4	200	200	46	8	100	PenLF	7	B7	DDP
DP/Pen	045 231 600		16	10	200	200	31	3.5	100	100	3.5	B7	P
DPT	045 213 600		16	10	200	200	40	3.1	100	PenLF	3.1	B7	P
DPT	642 310 000	G ₂	16	10	200	200	40	3	100	PenLF	3	B5	P
DS	000 231 600	G ₁	13	3	200		4	2.5	150		2.5	B7	T
DS	542 310 000	A	16	1.5	200	75	2.8	1.1	200	75	1.1	B5	P
DSB	542 310 000	A	16	1	150	90	3.4	3.2	150	90	3.2	B5	P
DSPen	061 231 500	G ₁	16	1.5	200	100	4.0	2.3	200	100	2.3	B7	P
DT7	642 300 000		4	16	200		14	2	100		2	B4	T
DT436	023 198 060	G ₁	4	7	250		4	2	100		2	8SC	DDT
DT1336	023 198 060	G ₁	13	5	200		4	2	100		2	8SC	DDT
DUI	802 300 000		4				30		REC		15mA	B4	R
DU2	892 300 000		4				30		REC		17mA	B4	RR
DU3	892 300 000		4				15		REC		10MA	B4	RR
DU4	892 300 000		4				30		REC		15mA	B4	RR
DU5	892 300 000		4				30		REC		17mA	B4	RR
DUI0	802 300 000		4				60		REC		25mA	B4	R
DVSG	542 310 000	A	16	1	200	75	7.5	2.5	100	75	2.5	B5	P
DVS Pen	542 310 000	A	16	1.5	200	100	6.5	1.0	200	100	3	B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DW1	892 300 000		4				15		REC		10mA	B4	RR
DW2	892 300 000		4				30		REC		20mA	B4	RR
DW2X	892 300 000		4				30		REC		20mA	B4	RR
DW3	892 300 000		4				60		REC		20mA	B4	RR
DW4	892 300 000		4				60		REC		20mA	B4	RR
DW4/350	892 300 000		4				60		REC		20mA	B4	RR
DW4/500	892 300 000		4				60		REC		20mA	B4	RR
DW5	802 300 000		4				120		REC		30mA	B4	R
DW7X	892 300 000		4				30		REC		15mA	B4	RR
DW8	892 300 000		5				30		REC		15mA	B4	RR
DW30	892 300 000		7.5				60		REC		20mA	B4	RR
DW802	642 300 000		4	25	250		26	4	100		4	B5	T
DW1508	642 310 000		4	7.5	150		4	1.5	100		1.5	B5	T
DW4011	642 310 000		4	5.0	200		5.0	3.6	150		3.6	B5	T
DW4023	642 310 000		4	3.0	150		2.5	1.75	100		1.7	B5	T
DX2	642 300 000		2	3	150		3.5	1.4	100		1.4	B4	T
DY30	*2* 0*0 3*0	D ₁	1.25						D			A08	D
DY80	23* 232 *32	D ₁	1.25						D			B9A	D
DY86	32* 323 *23	D ₁	1.4						D			B9A	D
DY87	23* 232 *32	D ₁	2.4						D			B9A	D
DY604	642 300 000		4	15	150		8	1.3	100		1.3	B4	T
DZ2	542 300 000	A	4	1	200	100	4	0.7	100	100	4	B4	P
E	642 300 000		4	9	200		1.7	0.4	100		0.4	B4	T
E	264 300 000		3	22.5	125		6.5		125			UX4	T
E4	642 300 000		4	16	200		12	1.8	100			B4	T
E4D	892 300 000		4				30		REC		15mA	B4	RR
E4F	892 300 000		4				60		REC		20mA	B4	RR
E4H	802 300 000		4				125		REC		30mA	B4	R
E4K	003 200 000	D ₁	4				60		REC		20mA	B5	R
E4L	003 200 000	D ₁	4				120		REC		30mA	B5	R
E20V	023 100 080		20				60		REC		20mA	8SC	R
E80CC	641 337 412		6.3	5.5	250		6	2.8	100		2.5	B9A	TT
E80F	510 236 014		6.3	1.65	250	100	3	1.85	150	100	1.8	B9A	P
E80L	041 230 651		6.3	5.2	200	200	30	9	100	100		B9A	P
E81L	041 230 651		6.3	3.0	200	200	20	11	100	100		B9A	P
E83F	541 236 **1		6.3	2.0	200	125	10	9	100	125	12.0	B9A	P
E87L	041 230 651		6	6	250	150	36	10	100	100		B9A	P
E88CC	641 237 410		6.3	1.2	90		15	12.5	100		13.0	B7G	TT
E90CC	672 344 100		6.3	2.1	100		8.5	6	100		8.5	B7G	TT
E91H	412 365 100		6.3	5	125	75	0.5	0.6	125	75	0.6	B7G	H
E92CC	672 344 100		6.3	1.7	150		8.5	6	100		5.6	B7G	TT
E180CC	641 227 413		6.3	1.9	150		8.5	6.3	100		7.8	B9A	TT
E180F	141 23* 615		6	1.0	200	150	13.1	16.5	No Data Available			B9A	P
E181CC	641 227 413		6.3	3	150		8.5	4.7	100		5.6	B9A	TT
E235	642 300 000		2	7.5	150		13	3	100		3	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
E405	642 300 000		4	32	250		20	2	100		2	B4	T
E406	642 300 000		4	34	250		8	2.3	100		2.3	B4	T
E406N	642 300 000		4	34	250		8	2.3	100		2.3	B4	T
E408	642 300 000		4	30	400		26	2	100		2	B4	T
E408N	642 300 000		4	36	400		30	2.7	100		2	B4	T
E409	642 310 000		4	16	200		12	1.3	100		1.3	B5	T
E409N	642 310 000		4	16	200		12	1.3	100		1.3	B5	T
E410	642 300 000		4	28	400		30	6	100		6	B4	T
E414	642 310 000		4	6	150		6.5	2	100		2	B5	T
E414	642 300 000		4	15	150		8	1.3	100		1.3	B4	T
E415	642 310 000		4	8	200		6	1.4	100		1.4	B5	T
E415	264 130 000		4	8	200		6	1.4	100		1.4	UX5	T
E420	642 300 000		4	18	150		11	1.6	100		1.6	B4	T
E422	642 300 000		4	16	250		12	5	100		5	B4	T
E424	642 310 000		4	2.5	200		6	2.4	100		2.4	B5	T
E424R	612 300 000	G ₁	4	5	200		6	1.6	100		1.6	B4	T
E424N	642 310 000		4	3.5	200		6	2.4	100		2.4	B5	T
E425	642 310 000		4	4.5	150		3	3	100		1	B5	T
E428	642 310 000		4	3.0	200		6.0	2.4	100		2.4	B5	T
E430	642 310 000		4	3	150		4	2	100		2	B5	T
E430N	642 310 000		4	15	200		15	3	100		3	B5	T
E435	642 310 000		4	1.5	200		3	1.0	100		3	B5	T
E438	642 310 000		4	3	200		2.5	1.5	100		1.5	B5	T
E441N	652 300 000	G ₁	4	0	100	0	1.7	1	100		1	B4	T
E442	542 310 000	A	4	1.3	200	60	1.5	0.9	200	60	0.9	B5	P
E442S	542 310 000	A	4	2	200	60	4	1	100	60	1	B5	P
E443H	642 350 000		4	15	250	250	36	2.8	100	PenLF	2.8	B5	P
E443N	642 350 000		4	40	400	200	30	1.9	100	100	1.9	B5	P
E444	258 413 000	A	4	3	200	90	4	3	100	90		UX6	DP
E444N	258 413 000	A	4	3	100	90	4	3	100	50	3	UX6	DP
E444S	642 310 000	D ₁	4	3.5	200		6	2	100		2	B5	DT
E445	542 310 000	A	4	2	200	100	6	1	100	100	1	B5	P
E446	542 310 000	A	4	2	200	100	3	2.3	100	100	2.3	B5	P
E447	542 310 000	A	4	2	200	125	4.5	2.3	100	100	2.3	B5	P
E448	164 552 300	G ₁	4	1.5	200	125	3	0.58	100	100		C7	P
E449	165 452 300	G ₁	4	2	200	75	3	1.8	100	75	1.8	C7	P
E451	642 350 000		4	0	400	250	17		100	150	2.4	B4	P
E452T	542 310 000	A	4	2	200	100	3	2	100	100	2	B5	P
E452T	254 130 000	A	4	2	200	100	3	2	100	100	2	UX5	P
E453	045 231 600		4	15	250	250	24	2.5	100	PenLF	2.5	B7	P
E454	216 809 300	G ₁	4	3.5	200		3.5	1.6	100		1.6	UX7	DDT
E455	542 310 000	A	4	1.5	200	100	3	2	100	100	2	B5	P
E455	254 130 000	A	4	1.5	200	100	3	2	100	100	2	UX5	P
E462	542 310 000	A	4	2	200	100	3	2	100	100	2	B5	P
E463	045 231 600		4	22	250	250	36	2.7	100	PenLF	2.7	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
E499	642 310 000		4	1.6	200		0.2	4	150		4	B5	T
E501D	265 113 000	G	3.5	2.5	250	125	6.5	3.5	100	100		UX6	P
E501R	265 113 000	G	6.3	2.5	250	125	6.5	3.5	100	100		UX6	P
E504D	265 413 000		5	13.5	250	200	40	3.5	100	100		UX6	P
E504P	265 413 000		6.3	13.3	250	200	40	3.5	100	100		UX6	P
E543	045 231 600		4	15	250	250	24	2.5	100	PenLF	2.5	B7	P
E646	020 080 310		26				120		REC		30mA	A08	R
E703	642 300 000		7.5	100	400		30	1	100		1	B5	T
E851	030 908 020		5				120		REC		30mA	A08	RR
E1137	366 446 622		6	2.3	250		32	16	No Data Available			B9G	T
E1148	020 000 310	G ₁ A	6	5.5	250		14	3.0	100		3.0	A08	T
E1192	021 450 310	A	6	11	250	150	30	3.5	100	100	3.5	A08	P
E1242	265 101 403		6		400	250	30	3	100	150	3	B9G	P
E1323	020 000 310	A G ₁	6	3	100		25	6.7	100		6	A08	T
E1413	265 024 300		1.4	1	90	75	3.5	0.9	80	75	0.9	B7G	P
E1478	642 300 000		4	1	100			6.9	100		6.0	B5	T
E1484	208 564 300		1.4	1	90	90	2.7	0.63	80	90	0.6	B7G	DP
E1489	241 657 143		6		350	250	21	3.9	100	100	3.9	B9G	PP
E1517	412 361 500		6	2.5	200	200	8	2.5	100	100	2.5	B7G	P
E1518	412 361 500		6	2	250	250	10	7.5	100	150	5	B7G	P
E1606	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
E1624	6*2 364 100		6	8.5	250		10.5	2.2	100		2.2	B7G	T
E1654	026 510 310	G ₁	6	1.5	200	200	10.9	8.5	100	150	8	A08	P
E1662	412 360 500		6	12	250	250	20	2.6	100	PenLF	2.6	B7G	P
E1677	002 300 000	D ₁	2				15		REC		10mA	B4	R
E1678	026 510 310	G ₁	13	3	250	100	7.6	1.5	100	100	1.5	B7G	P
E1681	026 540 310		15	13	175	175	35	2.5	100	100	2.5	A08	P
E1682	020 800 310		30				120		REC		30mA	A08	R
E1706	256 051 463		6	8	250	175	80	13	100	100	10	B9G	P
E1709	064 471 230		6	2	250		2	1.35	150		1.3	A08	TT
E1733	009 **8 230		6				60		REC		20mA	B8B	RR
E1736	265 004 130		6	4.4	250	250	40	10.5	100	PenLF	10.0	B8B	P
E1740	209 008 130		6				30		REC		15mA	B8B	RR
E1751	192 310 800		6				5		D			B7G	RR
E1780	009 **8 230		4				30		REC		15mA	B8B	RR
E1787C	316 541 120		6	9	250	175	50	8	100	100	8	B9G	P
E1794	265 104 130		19	3	250	75	2.5	2.8	100	60	2.8	B8B	P
E1795	280 008 130		50				120		REC		30mA	B8B	R
E1796	265 004 130		80	9.5	175	175	70	10	100	100	9	B8B	P
E1809	265 104 136		6	3	250	100	8	2.8	100	100	2.8	B8B	P
E1813	264 198 130		19	3	250		1	1.2	100		1.2	B8B	DDT
E1816	364 526 300		1.4	7	90	75	7.4	1.575	80	60	1.5	B7G	P
E1835	005 231 600	G ₁	13	4.4	250	250	40	10.5	100	PenLF	9	B7	P
E1838	264 198 130		6	3	250		1	1.2	100		1.2	B8B	DDT
E1848	264 *98 130		6	2	200		10	1.4	200		1.4	B8B	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
E1884	002 300 000	D ₁	2				5		D			B4	R
E1912	412 389 600		6	3	250		1	1.2	100		1.2	B7G	DDT
E1935	241 657 143		6	26	250	200	30	3.9	100	100	3.9	B9G	PP
E1938	802 309 100		6				30		REC		15mA	B7G	RR
E1969	542 376 400		6	$\begin{Bmatrix} 2 \\ 1 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 250 \end{Bmatrix}$	$\begin{Bmatrix} 75 \\ 75 \end{Bmatrix}$	$\begin{Bmatrix} 5 \\ 5.3 \end{Bmatrix}$	$\begin{Bmatrix} 2.2 \\ 2.2 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 250 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 75 \end{Bmatrix}$	$\begin{Bmatrix} 2.8 \\ 2.8 \end{Bmatrix}$	B7G	TH
E1976	412 361 500		19	2.5	200	200	8	2.5	100	150	2.5	B7G	P
E1984	412 36* 500		6	5.5	250	250	35	10	100	PenLF	9	B7G	P
E1985	281 008 300		40				60		REC		20mA	B7G	R
E1987	412 36* 500		40	8	175	150	50	10	100	100	9	B7G	P
E1994	471 461 230		13	8	250			2.6	100		2.6	A08	TT
E2004	*2* 0*0 3*0	D ₁	1.25				5		D			A08	R
E2020N	642 310 000		20	18	200		15	1.6	100		1.6	B5	T
E2047	412 361 500		12.5	2.5	200	200	8	2.5	200	200	2.5	B7G	P
E2122	902 308 100		6				30		REC		15mA	B7G	RR
E2128	241 657 143		19	16.5	250	150	30	3.9	100	100	3.9	B9G	PP
E2134	412 36* 500		6		175	175	55	9.5	100	100	7	B7G	P
E2153	412 36* 500		13	8	175	150	50	10	100	100	9	B7G	P
E2178	**1 23* **8		20				120		REC		38mA	B9A	R
E2179	*41 23* *51	A	20	12	150	150	50	8.5	100	100	7	B9A	P
E2185	026 040 310		6	8	250		9	2.6	100		2.6	A08	T
E2223	*** 23* **8		25				120		REC		30mA	B9A	R
E2256	**1 23* **8		20				120		REC		40mA	B9A	R
E2382	021 *4* 350	A	52		150	150	100	16	No Data Available			A08	P
EA40	200 800 130		6				5		D			B8A	R
EA50	123 000 000	D ₁	6						D		6.3mA	B3G	D
EA76	281 380 000		6				5		D			B5B	R
EA111	023 010 000	D ₁	6.3				60		REC		20mA	F8	R
EA111	812 300 190		6.3				5		D			F8	RR
EA191	182 311 900		6.3				5		D			B7G	DD
EA1901	182 310 900		6.3						D			B7G	DD
EAB1	023 110 890		6						D			B5C	DDD
EABC80	*91 238 146		6	3	250		1.0	1.2	100		1.3	B9A	DDDT
EAC91	812 314 600		6	3.2	200		7.5	2.8	100		2.8	B7G	DT
EAF21	265 814 130		6.3	2	250	100	6	2.8	100	100		B8G	P
EAF41	268 154 130		6	4	250	100	5.0	1.8	100	100	1.8	B8A	DP
EAF42	268 154 130		6	2	250	100	5	1.8	100	100	1.8	B8A	DP
EB4	023 180 910		6						D			B5C	DD
EB11	802 301 190		6						D			F8	DD
EB34	029 180 310		6				5.0		D			A08	DD
EB40	208 090 130		6						D			B8A	DD
EB41	201 908 130		6				5		D			B8A	RR
EB91	192 310 800		6						D			B7G	DD
EBC1	023 198 060	G ₁	6	7	250		4	2	100		2	B5C	DDT
EBC3	023 189 060	G ₁	6	5.5	250		5	2	100		2	B5C	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EBC11	892 301 460	G ₁	6	8	250		5	2.2	100		2	F8	DDT
EBC21	264 *89 130		6	5.5	250		5	2	100		2	B8B	DDT
EBC30	023 189 060		6	4.3	200		4	2	150		2	85C	DDT
EBC33	026 890 310		6	5.5	250		5	2	100		2	A08	DDT
EBC41	264 098 130		6	3	250		1	1.3	100		1.2	B8A	DDT
EBC51	389 060 420		6.3	7.5	250		70	4.0	100		4.0	B9G	DDT
EBC80	641 238 090		6.3	3.0	250		1.0	1.2	100		1.2	B9A	DDT
EBC81	641 238 09*		6	3	250		1.0	1.2	250		1.2	B9A	DDT
EBC90	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
EBC91	412 389 600		6	2	250		1.2	1.6	200		1.6	B7G	DDT
EBF1	023 198 560	G ₁	6	3	250	125	9	1.1	100	100	1.1	85C	DDP
EBF2	032 198 560	G ₁	6	2	250	100	5	1.8	100	PenLF	1.8	85C	DDP
EBF11	982 361 450		6	2	250	100	5	1.8	100	100	1.8	F8	DDP
EBF15	982 361 450		6	2	250	100	12	5	100	100	5	F8	DDP
EBF21	268 954 130		6	3.2	250	100	7.5	2.2	100	100		B8G	DDP
EBF32	026 895 310	G ₁	6	2	250	100	5	1.8	100	100	1.8	A08	DDP
EBF35	216 589 130	G ₁	6	2	250	100	5	1.8	100	100	1.8	A08	DDP
EBF80	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
EBF81	541 236 891		6.3	2	250	75	6.7	1.1	100	100		B9A	DDP
EBF89	541 236 891		6.3	2	250	100	9	3.8	100	100		B9A	DDP
EBF171	892 541 360	G ₁	6.3	3.2	250	80	6	1.8	100	80		B8B	DDP
EBL1	023 189 560		6	6	250	250	36	9.5	100	PenLF	9.0	85C	DDP
EBL21	264 598 130		6	6.0	250	250	36	9.0	100	PenLF	9.0	B8B	DDP
EBL31	026 895 310		6	6	250	250	36	9.5	100	PenLF	9.0	A08	DDP
EBL71	264 589 130		6	5	250	250	44	9.5	250	200	9.5	A08	DDP
EC2	023 100 060	G ₁	6	5.5	250		6	2.5	100		1.5	85C	T
EC21	206 401 003		6	4	250		5	2.7	100		2.5	B9G	T
EC31	026 040 310		6	16	250		20	3.2	100		3.2	A08	T
EC40	244 644 130		6	1.5	275		15	12	100		9	B8A	T
EC41	206 040 130		6	5.5	175		20	4.5	125		4.5	B8A	T
EC52	241 600 003	A G ₁	6	2.6	250		10	6.5	100		6.5	B9G	T
EC53	123 000 000		6	3.3	200		7.5	2.9	100		2.9	B3G	T
EC54	244 664 413		6	1.5	250		10	9	100		7	B9G	T
EC70	462 603 160		6	2	100		13	5.5	100		5.5	B8D	T
EC80	441 230 446		6	1.5	250		15	12	150		10	B9A	T
EC81	401 230 060		6	2	150		30	5.5	100		3	B9A	T
EC84	414 464 234		6.3	1.1	125		16	10	100		10	B9A	T
EC90	6*2 364 100		6	8.5	250		10.5	2.2	100		3.3	B7G	T
EC91	412 314 600		6	2	250		6	8.5	200		8.0	B7G	T
EC92	602 304 100		6	2.0	250		10.0	5.0	100		5.0	B7G	T
EC93	642 314 600		6	4	100		16.0	8.0	100		8	B7G	T
EC94	642 314 600		6.3	2.5	100		16	6.6	100		6.6	B7G	T
ECC31	027 446 310		6	4.6	250		6	2.3	100		2.3	A08	TT
ECCC32	461 471 230		6	4.6	250		6	2.3	100		2.3	A08	TT
ECC33	461 471 230		6	4	250		9	3.8	100		3.6	A08	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
ECC34	461 471 230		6	16	250		10	2.2	100		2.2	A08	TT
ECC35	461 471 230		6	2.5	250		2.3	2	100		2	A08	TT
ECC40	274 164 130		6	5.2	250		6	2.7	100		2.7	B8A	TT
ECC81	741 226 413		6	2	250		10	5.5	150		5	B9A	TT
ECC82	741 226 413		6	8.5	250		10.5	2.2	100		2	B9A	TT
ECC83	741 226 413		6	2.0	250		1.2	1.6	150		1.6	B9A	TT
ECC84	147 234 116		6	1.5	90		12	6.0	100		6.0	B9A	TT
ECC85	741 236 410		6	2.3	250		10	5.9	100		5	B9A	TT
† ECC91	672 344 100		6	0.85	100		8.5	5.3	100		5.3	B7G	TT
				3.0	150		5.0	4.5	100		5.3		
ECC180	641 237 410		6.3	2.0	150		9	6.4	100		6.3	B9A	TT
ECC801	641 227 413		6.3		250		10	5.5	100			B9A	TT
ECC8025	641 227 413		6.3	8.5	250		10.5	2.2	100		2.0	B9A	TT
ECF1	023 164 570	G ₁		3.0	150	0	8.0	2.2	150	60	2.6	85C	TP
				2.0	250	100	5.0	2.5	100	100	2.5		
ECF12	642 371 450		6	0	100	0	11.0	3.0	100	60	3.0	F8	TP
				2	250	100	5.0	2.0	100	100	2.0		
ECF80	645 237 114		6	2	100	0	14	5	100	60	5	B9A	TP
				3	250	200	7	5.5	150	150	5		
ECF82	645 237 114		6	1.0	150		18.0	8.5	100	60	7.0	B9A	TP
				1.0	250	100	10.0	5.2	100	100	5.0		
ECH2	023 164 570	G ₁	6	1	100		9.5	5.5	100	60	5.0	85C	TH
				2.5	250	100	3.25		200	100	3.0		
ECH3	023 164 570	G ₁	6	2	100		5	2.4	100	60	2.8	85C	TH
				2	250	100	4.8	2.5	200	100	2.5		
ECH4	123 614 570	G ₁	6	2	100		6.3	2.7	100	60	2.2	85C	TH
				2	250	100	6.5	2.6	100	PenLF	2.6		
ECH4G	127 546 310		6.3	2	100		6.3	2.7	100	60	2.2	A08	TH
				2	250	200	6.5	2.6	100	PenLF	2.6		
ECH11	642 371 450		6	2.0	100	0	5.0	2.4	100	60	2.8	F8	TH
				2.0	250	100	4.7	2.5	200	100	2.5		
ECH21	276 454 131		6	2	100		6.25	2.4	100	60	3.2	B8B	TH
				2	250	90	5.3	2.2	100	90	2.2		
ECH33	027 546 310	G ₁	6	2	100		5	2.4	100	60	2.8	A08	TH
				2	200	100	3	2.8	100	100			
ECH35	027 546 310	G ₁	6	2	100		5.4	2.2	100	60	2.8	A08	TH
				2	250	100	5	2.4	100	100	1.2		
ECH41	276 454 130		6	2	100		5	2.2	100	60	2.2	B8A	TH
				2	250	100	3	2	100	100	2.4		
ECH42	276 454 130		6	2	100		5	2.2	100	60	2.8	B8A	TH
				2	250	100	8	2	100	100	3.2		
ECH43	276 454 130		6	2	100		5	2.2	100	60	2.2	B8A	TH
				2	250	100	8	2	100	100	1.9		
ECH71	276 454 431		6	2	250		2		100	60		B8B	TH
				2	250	100	3	0.75	100	100			
ECH80	541 23* 674		6.3	2	250	75	3	0.75	100	80	0.75	B9A	TH
ECH81	541 237 164		6	3	100		5	2.3	100	60	2.3	B9A	TH
				2	250	100	6.5	2/4	150	100	2.4		

† See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
ECL11	452 371 460		6	{ 2.5 6.0	250 250	0 250	2.0 36	2.0 9.0	100 100	60 150	2.0 7.0	F8	TP
ECL80	641 237 154		6	{ 2.3 8.0	100 200	0 200	4 17.5	1.4 3.3	100 100	60 PenLF	1.4 3.0	B9A	TP
ECL81	451 237 614		6.3	{ 1.5 5.5	200 250		0.5 36	1.2 8.7	100 100	60 100	1.2	B9A	TH
ECL82	414 237 516		6.3	{ 0 16	100 200		3.5 35	2.5 6.4	100 100	60 100	2.5 6	B9A	TP
ECL83	641 237 154		6.3	{ 1.5 9.5	200 175		1.6 30	2.5 5.5	100 100	60 100	2.5 5.0	B9A	TP
ECL113	267 454 130		6	{ 1.0 3.5	150 250	0 250	2 25	1.6 8.5	100 100	60 150	1.6 8.5	B8A	TP
ED111	266 104 430		6.3	5	200		40	8	No Data Available			B8A	T
EDD11	742 301 460		6	8.0	200		3.5		200		3.5	F8	TT
EDD111	742 311 460		6	8.0	250		9.0	2.3	100		2.3	F8	TT
EE50	256 501 403		6.3	3.0	250	250	10	14	250	150	10.0	B9G	P
EEL71	274 554 631		6.3	6.5	250	250	24	6.5	100	100		B8G	PP
EEPI	023 150 560	G ₁	6.3	2.5	250	150	8	17	No Data Available			8SC	P
EEP71	C23 110 560	G ₁	6	3	225	100	8	2.2	100	100		8SC	P
EF1	023 110 560	G ₁	6	2	250	100	3	2.3	100	100	2.3	8SC	P
EF2	023 110 560	G ₁	6	2	250	100	4.5	2.2	100	100	2.2	D8SC	P
EF3	023 110 560	G ₁	6	2.5	250	100	8	1.8	100	100	1.8	8SC	P
EF5	023 110 560	G ₁	6	3	250	100	8	1.7	100	100	1.7	8SC	P
EF6	023 110 560	G ₁	6	2	250	100	3	2	100	100	2	8SC	P
EF7	023 110 560	G ₁	6	1.5	250	100	3	2.1	100	100	2.1	8SC	P
EF8	023 111 560	G ₁	6	2.5	250	250	8	1.8	100	PenLF	1.8	8SC	P
EF9	023 110 560	G ₁	6	2.5	250	100	6	2.2	100	100	2.2	8SC	P
EF11	602 301 450		6	2	250	100	6	2.2	100	100	2	F8	P
EF12	602 301 450		6	2	250	100	3	2.1	100	100	2	F8	P
EF12 spec.	602 301 450		6.3	2	250	100	3	1.7	100	100	1.5	F8	P
EF13	612 301 450		6	2	250	100	4.5	2.3	100	100	2	F8	P
EF14	612 350 140		6	4.5	200	200	12	7	100	150	6	F8	P
EF15	612 301 450		6	2	250	100	12	5.5	100	100	5	F8	P
EF22	265 104 130		6	2.5	250	100	6	2.2	100	100	2.2	B8B	P
EF25	023 110 560	G ₁	6	2	250	100	5	1.8	100	100	1.8	8SC	P
EF36	026 510 310	G ₁	6	2	250	100	3	1.8	100	100	1.8	A08	P
EF37	026 510 310	G ₁	6	2	250	100	3	1.8	100	100	1.8	A08	P
EF37A	026 510 310	G ₁	6	2	250	100	3	1.8	100	100	1.8	A08	P
EF38	126 510 310	G ₁	6	2.5	250	250	8	1.8	100	PenLF	1.8	A08	P
EF39	026 510 310	G ₁	6	2.5	250	100	6	2.2	100	100	2.2	A08	P
EF40	26* 145 130		6	2	250	150	3	1.8	100	150	1.8	B8A	P
EF41	261 154 130		6	2.5	250	100	6	2.2	100	100	2.2	B8A	P
EF42	260 154 130		6	2	250	250	10	9.5	100	PenLF	8.0	B8A	P
EF43	260 154 130		6	2	250	150	15	6.4	100	150	6	B8A	P
EF44	260 145 130		6.3	2	250	150	3	1.8	100	150	1.8	B8A	P
EF50	256 101 403		6	1.55	250	250	10	6.5	100	PenLF	6.0	B9G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EF51	261 154 130		6	2	250	250	14	9.5	100	PenLF	9.0	B8B	P
EF52	261 154 130		6	2	250	250	10	10	100	150	8	B8G	P
EF53	256 101 403		6	2	250	250	10	6.5	100	150	6.5	B9G	P
EF54	265 114 113		6	1.7	250	250	10	7.7	100	PenLF	7.0	B9G	P
EF55	256 101 403		6	4	250	150	10	7	100	100	6	B9G	P
EF70	412 163 510		6	2	100	100	3	2.5	100	100	2.5	B8D	P
EF71	412 163 510		6	2	100	100	13	5.5	100	100	4.5	B8D	P
EF72	412 163 510		6	1.4	100	100	7	5	100	100	5	B8D	P
EF73	412 653 160		6	2	100	100	7.5	5.5	100	100	5	B8D	P
EF74	412 653 160		6.3	1.4	100	100	7	3.1	100	100	3	B8D	P
EF80	141 230 651		6	2	175	175	10	7.2	100	100	6	B9A	P
EF81	541 236 000		6.3	2.5	250	125	6	2.2	100	100		B9A	P
EF82	*41 230 651		6	4.5	250	250	40	11	100	150	9	B9A	P
EF83	501 236 014		6.3	1.6	250	50	4	1.6	100	100	2.0	B9A	P
EF85	141 230 651		6	2	250	100	10	6	150	100	5	B9A	P
EF86	501 236 014		6	2	250	150	3	2.3	100	100	1.8	B9A	P
EF87	501 236 014		6.3	2.0	250	100	3.3	1.9	100	100		B9A	P
EF88	501 236 014		6.3	2.0	250	100	7	2.1	100	100		B9A	P
EF39	041 230 651		6	2.0	250	100	9.0	3.6	250	100	3.6	B9A	P
‡EF91	412 361 500		6	2 1.5	250 200	250 150	10 4	7.65 6.4	100 100	PenLF PenLF	5 5	B7G	P
EF92	412 361 500		6	2.5	250	200	8	2.5	100	PenLF	2.5		
EF93	412 365 100		6	1	250	100	11.6	4.5	150	100	4	B7G	P
EF94	412 365 100		6	1.0	250	150	10.6	5.2	100	150	5.2	B7G	P
EF95	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
EF96	412 365 100		6	1.5	250	150	6.5	5.0	100	100	5.0	B7G	P
EF111	612 350 140		6.3	2	250	75	6	2.2	No Data Available			F8	P
EF112	612 350 140		6.3	2	250	100	3	2.1	100	100		F8	P
EF172	112 540 360		6.3	2	250	100	5	3	100	100		B8A	P
EF174	112 540 360		6.3	3.5	200	200	12	9	100	100		B8A	P
EF175	112 540 360		6.3	2.1	250	100	12	4.5	100	100		B8A	P
EF190	412 365 100		6.3	2.0	200	150	9.5	6.2	100	100		B7G	P
EF410	26* *54 130		6.3	2	250	100	6	2.7	100	100		B8A	P
EF800	141 230 651		6.3	2	175	175	10	7.2	100	100		B9A	P
EF802	141 23* 651		6.3	1.8	175	175	12	8	100	100		B9A	P
EF804	101 230 654		6.3	2	250	150	3	2	100	100		B9A	P
EF804S	101 230 654		6.3	2	250	150	3	2	100	100		B9A	P
EF805S	141 230 651		6.3	1.8	250	75	8	5.7	100	80		B9A	P
EFF50	265 414 573		6	2	250	200	6	8	100	PenLF	7	B9G	PP
EFF51	265 414 573		6	2	250	200	6	8	100	PenLF	7	B9G	PP
EFM1	023 114 560		6	2	250	100	1.3		No Data Available			8SC	IP
EF20	256 145 130		6.3	2	250	200	5	12	100	100		B8G	P
EG420	802 300 000		4				120		REC		30mA	B4	R

(Appendix I.)

‡ See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EH1	023 145 560	G ₁	6	2	250	80	3	1.8	200	75	1.8	8SC	P
EH2	023 115 560	G ₁	6	3	250	100	4.2	1.4	100	100	1.4	8SC	P
EH90	412 365 100		6.3	1	100	30	1	1.1	No Data Available			B7G	H
EH900	412 365 100		6.3	0	150	80	1.0	1.1	100	90		B7G	H
EK1	123 164 570	G ₁	6	1.5 8.5	90 250		2 1.6		80 100			8SC	O
EK2	023 154 560	G ₁	6	2	250	75	2.8	1.8	100	60	2.1	8SC	O
EK3	023 154 560	G ₁	6	2	100	60	11	3.8	100	60	3.8	8SC	O
EK32	026 545 310	G ₁	6	2.0	250	75	1.5	1.5	100	60	2.1	A08	O
EK90	412 366 100		6	2	100		11	7	100		5	B7G	H
EL1	023 100 560	G ₁	6	18.5	250	250	32	2.6	100	PenLF	2.6	8SC	P
EL2	023 100 560	G ₁	6	18	250	250	32	2.8	100	PenLF	2.8	8SC	P
EL3	023 104 560		6	6	250	250	36	9	100	PenLF	9	8SC	P
EL3N	023 104 560		6.3	6	250	250	36	9	100	PenLF	8	8SC	P
EL3/375	023 104 560		6.3	6	250	250	36	9	100	PenLF	8	8SC	P
EL5/375	023 140 560		6.3	14	250	275	72	8.5	No Data Available			8SC	P
EL5	023 104 560		6	14	250	275	72	8.5	100	PenLF	8.5	8SC	P
EL6	023 104 560		6	4	250	250	72	14.5	100	PenLF	10	8SC	P
EL6 spec.	023 104 560		6.3	7	250	250	72	14.5	100	PenLF	10	8SC	P
EL8	023 104 560		6.3	7.5	250	250	20	5.5	100	PenLF		8SC	P
EL11	602 301 450		6	6	250	250	36	9	100	150	7	F8	P
EL11N	602 301 450		6.3	6	250	250	36	9	100	150	7	F8	P
EL12	602 301 450		6	7	250	250	72	15	No Data Available			F8	P
EL12 spec.	502 301 400	A ₁	6.3	19	400	350	42	10	No Data Available			F8	P
EL12/325	602 301 450		6.3	7	250	250	72	15	No Data Available			F8	P
EL12/375	602 301 450		6.3	7	375	250	72	15	No Data Available			F8	P
EL13	602 310 450		6.3	7.5	250	250	20	5.5	100	150	5	F8	P
EL20	265 104 130		6	34	300	300	12.5	3.7	100	100		B8B	P
EL22	265 004 130		6	7	250	250	44	9.5	100	PenLF	9	B8B	P
EL31	120 540 310	A	6	9	300	275	91	14	100	PenLF	10	A08	P
EL32	026 500 310	G ₁	6	18	250	250	32	2.8	100	PenLF	2.8	A08	P
EL33	026 540 310		6	6	250	250	36	9	100	PenLF	8	A08	P
EL34	126 540 310		6	13.5	250	250	75	11.0	100	100	8	A08	P
EL35	026 540 310		6	15.5	250	250	72	5	100	PenLF	5	A08	P
EL36	*2* 54* 310	A ₁	6	8.2	100	100	77	11	100	PenLF	10	A08	P
EL37	026 540 310		6	13.5	250	250	100	11	100	PenLF	10	A08	P
EL38	120 540 310	A	6	7	250	250	89	14.3	100	PenLF	10	A08	P
EL38N	120 540 310	A ₁	6	7	250	250	89	14.3	100	PenLF	10	A08	P
EL39	020 541 310	A ₁	6	23	175	125	45	6.5	100	100		A08	P
EL41	26* *54 130		6	7.0	250	250	36	10.0	100	PenLF	8	B8A	P
EL42	261 054 130		6	10.8	225	225	26	3.2	100	PenLF	3.2	B8A	P
EL43	260 154 130		6	3	250	250	36	10	100	PenLF	8	B8A	P
EL44	200 154 130	A	6	22.5	250	250	20	5	100	PenLF	5	B8A	P
EL5C	023 114 500	A	6	14	250	275	72	8.5	100	PenLF	8	8SC	P
EL51	023 104 500	A	6		400	300	44	7	100	150	7	8SC	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EL53	023 104 560		6	7.7	400	250	24	8	100	150	7	8SC	P
EL54	023 140 560		6	12.2	300	300	55	13	No Data Available			8SC	P
EL60	216 005 413		6	14.5	250	250	67	9	100	100	8	B9G	P
EL70	412 163 510		6	9	100	100	31	2.2	100	90	2.2	B8D	P
EL80	541 230 600		6.3	6.5	250	250	36	10	100	150	9	B9A	P
EL81	*41 23* *51	A	6	38.5	250	250	32.0	4.6	100	100	2.2	B9A	P
EL81F	*41 23* *51	A ₁	6.3	38.5	250	250	32	4.6	100	100	2.2	B9A	P
EL82	*41 23* 6*5		6.3	10.4	175	175	54	9	100	100		B9A	P
EL83	541 23* 600		6	5.5	250	250	36	10	100	150	9	B9A	P
EL84	*41 23* 6*5		6	7.3	250	250	48	11.3	100	150	10.0	B9A	P
EL85	441 231 615		6	10.8	225	225	26	3.2	100	150	3.2	B9A	P
EL86	*41 23* 6*5		6.3	12.5	175	175	70	10	100	100		B9A	P
EL88	041 230 651		6.3	4.5	200	200	33	9.7	100	100		B9A	P
EL89	041 230 651		6.3	6	250	250	38	10.5	100	100		B9A	P
EL90	412 365 400		6	12.5	250	250	45	4.1	100	150	4	B7G	P
EL91	412 360 500		6	13.8	250	250	16	2.6	100	PenLF	2.6	B7G	P
EL95	412 365 400		6.3	9	250	250	24	5.0	100	100		B7G	P
EL150	602 301 450		6.3	17	350	250	95	6.5	No Data Available			F8	P
EL171	102 541 360		6.3	12	250	250	40	9	No Data Available			B8A	P
EL172	102 541 360		6.3	7	250	250	72	15	No Data Available			B8A	P
EL180	141 223 651		6.3	2.0	250	150	25	12	100	100		B9A	P
EL803	541 231 600		6.3	3.5	200	200	36	10	100	100		B9A	P
EL804	041 230 005	A ₁	6.3	12	175	175	70	10	100	100		B9A	P
EL820	*41 23* *51	A	6	38.5	250	250	32.0	4.6	100	150	4.0	B9A	P
EL821	*41 23* 651		6	4.5	250	250	40	11	100	150	10	B9A	P
EL822	*41 23* 651		6	2.5	250	150	40	13	100	100	10	B9A	P
ELL1	423 174 560		6	20	250	250	15	1.7	100	PenLF	1.8	8SC	PP
ELP71	023 104 560		6	7	250	250	36	9	100	PenLF		8SC	P
ELP72	023 100 560	G ₁	6	17	250	250	36	2.5	100	PenLF		8SC	P
ELP73	023 100 560	G ₁	6	17	250	250	36	2.5	100	PenLF		8SC	P
EQ80	541 236 114		6	1	250	20	0.95	0.7	No Data Available			B9A	N
ER4	002 300 000	D ₁	4				3		D			B4	D
EW60	280 000 103		6				120		REC		30mA	B9G	R
EY51	023 000 000	D ₁	6						D			B3G	D
EY70	082 813 080		6				30		REC		17mA	B8D	R
EY80	**1 23* **8		6				120		REC		40mA	B9A	R
EY81	*** 23* **8	C	6.3				120		REC		40mA	B9A	R
EY82	**1 23* **8		6.3				180		REC		50mA	B9A	R
EY83	*** 23* **8	C	6.3						D			B9A	D
EY84	**1 23* ***	D ₁	6				120		REC		30mA	B9A	R
EY86	23* 232 *32	D ₁	6						D			B9A	R
EY87	23* 232 *32	D ₁	6.3						D			B9A	D
EY91	812 380 000		6				60		REC		20mA	B7G	R
EY92	002 360 100		6.3				60		REC		15mA	B7G	R
EYY13	230 238 090		6.3				120		REC		30mA	F8	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EZ1	023 180 090		6				30		REC		15mA	8SC	RR
EZ2	023 180 090		6				30		REC		15mA	8SC	RR
EZ3	023 180 090		6				60		REC		20mA	8SC	RR
EZ4	023 180 090		6				60		REC		20mA	8SC	RR
EZ11	902 300 180		6				30-0		REC		15mA	F8	RR
EZ12	902 300 180		6				60-0		REC		20mA	F8	RR
EZ22	208 009 130		6				60		REC		20mA	B8B	RR
EZ33	028 090 310		6				60		REC		20mA	A08	RR
EZ35	028 090 310		6				30		REC		45mA	A03	RR
EZ40	280 *09 130		6				30		REC		25mA	B8A	RR
EZ41	280 009 130		6				30-0		REC		30mA	B8A	RR
EZ80	9*1 23* 8**		6				30.0		REC		35mA	B9A	RR
EZ81	8*1 23* 9**		6				60-0		REC		25mA	B9A	RR
EZ82	8*1 23* 8**		6-3				30		REC		15mA	B9A	RR
EZ90	802 309 100		6-3				30		REC		15mA	B7G	RR
EZ91	802 309 100		6-3				30		REC		15mA	B7G	RR
F5	642 300 000		4	40	300		40	6	100		6	B4	T
F10	642 300 000		4	15	300		30	5-5	100		5-5	B4	T
F100	642 350 000		4	16	250	250	42	2-5	100	PenLF	2-5	B5	P
F109	264 300 000		1-5	14-5	175		6-2	11-5	100		11	UX4	T
F109	642 300 000		1-5	14-5	175		6-2	11-5	100		11	B4	T
F203	264 300 000		2-5	56	275		36	2	100			UX4	T
F203	642 300 000		2-5	56	275		36	2	150		2	B4	T
F209(A)	642 310 000		2-5	21	250		5	1	100		1	B5	T
F209	642 300 000		2-5	21	250		5-2	0-97	100			B4	T
F209	264 300 000		2-5	21	250		5-2	0-97	100			UX4	T
F215	264 130 000		2-5	6	150		6-5	2	100		2	UX5	T
F215	642 310 000		2-5	6	150		6-5	2	100		2	B5	T
F242	265 130 000	G ₁	2-5	1-3	200	100	1-5	0-9	200	100	0-9	UX5	P
F410	642 300 000		4	15	275		13-5	2-8	100		2-8	B4	T
F443	642 350 000		4	30	400	200	45	3-2	100	100	3-2	B5	P
F443N	642 350 000		4	30	400	200	45	3-2	100	100	3-2	B5	P
F460	642 310 000		4	2	250		10	5-5	200		5-5	B5	T
F704	642 300 000		7-5	84	400		55	2-1	100		2-1	B5	T
F707	642 300 000		7-5	84	400		55	2-1	100		2-1	B4	T
F707	264 300 000		7-5	84	400		55	2-1	100		2-1	UX4	T
F708	264 300 000		7-5		400		30	1-6	100		1-6	UX4	T
FC2	645 230 700	G ₁	2	{ 0	150	50	2-0		80		0.4	B7	O
				{ 0	150	75	0-95	0-2	125	75	0-8		
				{ 0	150	50	1-2		100		0-5		
FC2A	645 230 700	G ₁	2	{ 0	150	50	0-7	0-27	100	75	1-0	B7	O
				{ 0	150	50	2-0	1	100	90	1-3		
				{ 4	90	90	1-6	1	250	90	1-5		
FC4	645 231 700	G ₁	4	{ 4	250	90						B7	O
				{ 4	250	90							
				{ 4	250	90							
FC13	023 164 570	G ₁	13	{ 3	90	75	2	1-3	100		1-5	8SC	O
				{ 2	200	75	2-6	0-6	200	75	2-5		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
FC13c	645 231 700	G ₁	13	{ 3 2	90 200	75 75	2.0 2.6	1.3	80 200	75 75	1.2 2.5	B7	O
FC141	207 640 530	G ₁	1.4		90	90	0.55		80	90		M08	H
FH2118	165 452 300	G ₁	20	2	200	80	3		100	75		C7	P
FW1	893 200 000		4				30		REC		15mA	B4	RR
FW3	892 300 000		4				60		REC		30mA	B4	RR
FW4/500	982 300 000		4 (5)				120		REC		30mA	B5	RR
FW4/800	982 300 000		4 (5)				60		REC		30mA	B5	RR
FY	642 350 000		4	10	250	250	32	5	100	PenLF	5	B5	P
FZ1	023 180 090		13				30		REC		15mA	8SC	RR
G	264 300 000		5	3	175		0.2		100		0.2	UX4	T
G/25L6	026 540 310		25	8.25	200	125	46	8	100	90	8	A08	P
G/50C5	142 345 600		50	7.5	125	100	49	7.5	100	90	6	B7G	P
GB4	280 300 000		2.5				60		REC		20mA	UX4	R
G407	642 300 000		4	4	125		4	1.3	100		4	B4	T
G409	642 300 000		4	4	125		4	1.3	100		4	B4	T
G431	892 300 000		4				30		REC		15mA	B5	RR
G459	023 080 090		4				60		REC		20mA	8SC	RR
G460	892 300 000		4				60		REC		20mA	B4	RR
G470	892 300 000		4				30		REC		15mA	B4	RR
G504	892 300 000		4				15		REC		15mA	B4	RR
G660	023 190 080		6.3				30		REC		15mA	8SC	RR
G715	802 300 000		7.5				120		REC		30mA	B4	R
G1054	892 300 000		4				30		REC		15mA	B4	RR
G1064	892 300 000		4				30		REC		20mA	B4	RR
G1380	023 180 090		12				30		REC		15mA	8SC	RR
G1404	802 300 000		4				120		REC		30mA	B4	R
G1503	892 300 000		2.5				30		REC		15mA	B4	RR
G2004	892 300 000		4				60		REC		20mA	B4	RR
G2005	892 300 000		5				60		REC		20mA	B4	RR
G2080	802 310 000		20				60		REC		20mA	B5	R
G2504	892 300 000		4				60		REC		20mA	B4	RR
G4004	892 300 000		4				120		REC		30mA	B4	RR
G4100	802 300 000		4				120		REC		30mA	B4	R
G4120	892 300 000		4				60		REC		20mA	B5	RR
G4150	892 300 000		4				60		REC		20mA	B4	RR
G4180	892 300 000		4				120		REC		30mA	B4	RR
G4300	892 300 000		4				120		REC		30mA	B4	RR
G/5749	412 365 100		6	1.0	250	100	11	4.4	100	100	4.4	B7G	P
G/5750	412 366 400		6	2.0	100		11	7.0	100		6	B7G	H
G/6042	461 471 230		25	8	250		9	2.6	100		2.6	A08	TT
G/6059	041 230 651		6	3	250	100	2	1.22	100	100	1.2	B7G	P
G/6060	741 226 413		6	2.0	250		10	5.5	200		5.0	B9A	TT
G/6061	*41 230 651		6	13.0	300	225	35	3.75	100	150	3.7	B9A	P
G/6062	601 235 144		6	7.5	250	250	45	7.0	100	150	7.0	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
G/6066	412 389 600		6	3.0	250		1.0	1.2	150		1.2	B7G	DDT
G/6100	602 364 100		6	8.5	250		10.5	2.2	100		3.0	B7G	T
G/6132	*41 230 651		6	4.5	250	250	40	11.0	100	150	9	B9A	P
G/6157	**1 23* ***	D ₁	6				120		REC		30mA	B9A	R
G/6158	744 226 413		6	4.6	250		6.0	2.3	100		2.3	B9A	TT
G/6180	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
G/6443	**1 23* ***	D ₁	6				120		REC		33mA	B9A	R
G/6516	412 360 500		6	12.5	250	250	16	2.6	100	PenLF	2.6	B7G	P
GG1	288 009 930		4				30		REC		15mA	B8B	RR
GN24	892 300 000		4				30		REC		15mA	B4	RR
GR4	892 300 000		4				120		REC		30mA	B4	RR
GTIC	642 310 000		4		200		48	3K	No Data Available			B5	Thyratron
GY11	333 022 200	D ₁	2.5				30		REC		15mA	F8	R
GZ30	020 908 030		5				60		REC		20mA	A08	RR
GZ31	020 908 030		5				120		REC		30mA	A08	RR
GZ32	030 809 020		5 (5.7)				60		REC		50mA	A08	RR
GZ33	030 809 020		5				120		REC		30mA	A08	RR
GZ34	*30 809 020		5				120		REC		30mA	A08	RR
GZ40	28* **9 130		5				30		REC		17mA	B8A	RR
GZ41	28* **9 130		5				30		REC		26mA	B8A	RR
H2	642 300 000		2	1	150		2.5	0.8	150		0.8	B4	T
H4	642 300 000		4	4	125		4	1.3	125		1.3	B4	T
H4D	809 231 600	G ₁	4	2.5	200		5.5	2.7	150		2.7	B7	DDT
H12	642 300 000		2	1.3	100		0.6	1.0	100		1.2	Sm4	T
H13	023 100 060	G ₁	13	4	200		6	2.5	100		2.5	A08	T
H20	642 310 000		20	1.6	200		0.2	1.0	100		1.0	B5	T
H30	000 231 600	G ₁	13	1.5	250		7.5	6.0	100		6	B7	T
H42	000 231 600	G ₁	4	2	250		1	1.5	200		1.7	B7	T
H63	020 600 310	G ₁	6	2	250		1	1.5	100		1.5	A08	T
H141D	206 080 030	G ₁	1.4	1	90		0.1	0.25	80		0.25	M08	DT
H210	642 300 000		2	3	150		1.1	1.15	100		1.15	B4	T
H406D	542 300 000	A	4	1.5	175	75	4	0.8	100	80		B4	P
H407 spec.	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
H410D	642 300 000	A	4	1.5	175	75	3.5	0.8	100	75		B4	P
H412	642 300 000		4	9	125		5	1.2	125		1.2	B4	T
H607	642 300 000		6	1	100			0.45	100		0.45	B4	T
H1818D	542 310 000	A	20	2	200	100	3		100	100		B5	P
H1918D	542 310 000	A	20	2	200	60	4	1	100	60		B5	P
H2018D	542 310 000	A	20	2	200	60	4	1	100	60		B5	P
H2518D	542 310 000	A	20	2.5	225	110	3.5	2	100	100		B5	P
H2618D	542 310 000	A	20	2.5	250	100	5	2	100	100		B5	P
H4080D	542 310 000	A	4	1.5	200	75	4	2.5	100	100		B5	P
H4111D	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P
H4115D	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P
H4125D	542 310 000	A	4	2	200	100	6	1	100	100		B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
H4128D	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P
H4129D	542 310 000	A	4	2.5	250	100	5	2	100	100		B5	P
HAA91	182 310 900		12						D			B7G	DD
HABC80	8+1 239 146		19	3	250		1	1.2	100		1.3	B9A	DDDT
HAD	908 231 600	G ₁	13	2.5	200		3.3	2	150		2	B7	DDT
HBC90	412 389 600		12.5	3	250		1.0	1.2	100		1.2	B7G	DDT
HBC91	412 398 600		12.5	2	250		1.2	1.6	100		1.2	B7G	DDT
HCH81	541 237 464		12.6	{ 2.5	100	90	4	2	100	60	2	B9A	TH
					225		3	0.65	100		0.65		
HD2	642 300 000		2	5	200		5	1	150		1	B4	T
HD2	682 390 000	G ₁	2	2.5	150		3.5	1.3	100			B5	DDT
HD14	036 080 200	G ₁	1.4	0	90		0.13	0.22	100		0.28	A08	DT
HD21	682 390 000	G ₁	2	1.5	150		1.8	1.5	150		1.5	B5	DDT
HD22	682 390 000	G ₁	2	3	150		1.8	1.5	100		1.5	B5	DDT
HD23	682 390 000	G ₁	2	1	125		1	1.0	125		1.0	B5	DDT
HD24	682 390 000	G ₁	2	1.5	150		0.8	1.0	100		1.4	B5	DDT
HF61	26* *54 130		6.3	2.6	250	100	6	2.2	100	100	2.2	B8A	P
HF62	260 154 130		6.3	2	250	250	10	9	100	PenLF	8	B8A	P
HF85	141 230 651		12.5	2.3	200	125	11.4	6.1	100	90		B9A	P
HF93	412 365 100		12.5	1	250	100	11	4.4	100	100	4.3	B7G	P
HF94	412 365 100		12.5	1	250	150	10.6	5.2	100	100	3.9	B7G	P
HF121	26* 054 130		12.5	3	200	125	7.2	2.3	100	100	2	B8A	P
HK90	412 366 100		12.5	2	100		11	7	100		5	B7G	H
HL2	642 300 000		2	1.5	150		2.2	1.5	150		1.5	B4	T
HL2	023 004 060		2	1.5	150		2.2	1.5	150		1.5	8SC	T
HL2K	642 300 000		2	1.5	150		2.2	1.5	150		1.5	B4	T
HL2S	023 004 060		2	1.5	150		2.2	1.5	150		1.5	8SC	T
HL3	206 040 030		2	1.5	125		0.5	1.5	125		1.5	M08	T
HL4	642 310 000		4	4.5	250		5	3.5	150		3.5	B5	T
HL4g	000 231 600	G ₁	4	4.5	250		5	3.5	150		3.5	B7	T
HL4gs	023 100 060	G ₁	4	4.5	250		5	3.5	150		3.5	8SC	T
HL13	023 100 060	G ₁	13	3.7	200		5	3.3	150		3	8SC	T
HL13	000 231 600	G ₁	13	2.75	200		6	3.5	150		4	B7	T
HL13c	000 231 600	G ₁	13	3.7	200		5	3.3	150		4	B7	T
HL13g	023 004 060	G ₁	13	5.5	250		6	2.5	150		2.5	8SC	T
HL13s	023 100 060	G ₁	13	3	200		6	3.5	150		3.5	8SC	T
HL21	642 300 000		2	3	150		1.75	1.5	125		1.5	B4	T
HL21DD	682 390 000	G ₁	2	2	150		2	1.3	125		1.3	B5	DDT
HL22(Mazda)	206 040 030		2	2	150		2	1.3	125		1.3	M08	T
HL22DD	206 080 930	G ₁	2	2	150		2	1.3	125		1.3	M08	DDT
HL23	206 040 030		2	1.5	150		1.5	1.2	100		1.2	M08	T
HL23DD	206 080 930	G ₁	2	1.5	125		0.6	1.2	100		1.2	M08	DDT
HL41	216 040 030		4	3.1	250		2.2	3.4	150		3.1	M08	T
HL41DD	216 090 830	G ₁	4	3.1	250		2.2	2.5	100		2.4	M08	DDT
HL42DD	216 090 830	G ₁	4	0.25	200		2.8	2.9	100		2.5	M08	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
HL84	*41 23* 6*5		30	12.5	175	174	70	10	100	100		B9A	P
HL90	412 365 400		19	12.5	250	250	45	4.1	100	150	4	B7G	P
HL92	142 345 600		50	7.5	125	125	49	7.5	100	100	7	B7G	P
HL94	142 345 600		30	6.7	100	100	43	9.2	100	100	9.2	B7G	P
HL133	216 000 030	G ₁	13	3.3	200		6	2.9	200		2.9	M08	T
HL133DD	216 090 830	G ₁	13	2.5	175		1.45	2.5	150		2.3	M08	DDT
HL134DD	216 080 930	G ₁	13	5	250		7	2.5	100		2.5	M08	DDT
HL135	023 100 060	G ₁	13	3	200		6	3.5	150		3.5	8SC	T
HL210	642 300 000		2	1	100		1.1	0.7	100		1.0	B4	T
HL410	642 300 000		4	6	150		1.2	0.83	150		0.83	B4	T
HL607	642 300 000		6	1	100			1	100		1	B4	T
HL1320	000 231 600	G ₁	13	3.3	200		6	3	150		3	B7	T
HLA1	642 310 000		4	1	200		5	8	200		7	B5	T
HLA2	642 310 000		4	2.5	200		6	5.5	150		5.5	B5	T
HLBI	642 300 000		2	3	150		2	1.5	100		1.5	B5	T
HL/DD1320	809 231 600	G ₁	13	3	200		4.3	1.9	100		1.9	B7	DDT
HM20	642 310 000		20	3.3	225		6	2.5	100		2.3	B5	T
HN309	641 237 154		12.6	2	250		2.8	2.2	100	60	2.0	B9A	TP
				9	150	150	24	5.6	150	150	5.6		
HP2	446 230 700		2	1	125		8.5		125			B7	TT
† HP6	412 361 500		6	2	250	250	10	7.5	100	PenLF	5	B7G	P
				1.5	200	150	4	6.4	100	PenLF	5		
HP13	061 231 500	G ₁	13	1	250	100	8	3.5	250	100	3.5	B7	P
HP13s	023 110 560	G ₁	13	1	250	100	8	3.5	250	100	3.5	8SC	P
HP210	542 300 000	A	2	1.5	150	150	1.9	1.9	150	150	1.9	B4	P
HP210	041 230 500	A	2	1.5	150	150	1.9	1.9	150	150	1.9	B7	P
HP210C	041 230 500	A	2	1	150	150	1.9	1.9	150	150	1.9	B7	P
HP210nc	542 300 000	A	2	1	150	150	1.9	1.9	150	150	1.9	B4	P
HP210nc	041 230 500	A	2	1	150	150	1.9	1.9	150	150	1.9	B7	P
HP211C	041 230 500	A	2	1	150	150	2.6	1.7	150	150	1.7	B7	P
HP211c	542 300 000	A	2	1	150	150	2.6	1.7	150	150	1.7	B4	P
HP211	041 230 500	A	2	1	150	150	2.6	1.7	150	150	1.7	B7	P
HP215	542 300 000	A	2	1.5	150	80	1.5	1.2	150	75	1.2	B4	P
HP215	041 230 500	A	2	1.5	150	80	1.5	1.2	150	75	1.2	B7	P
HP415	041 231 500	A	4	2	250	100	8	2.7	100	100	2.7	B7	P
HP1018	160 152 300	G ₁	10	3	250	100	2.3	1.25	100	PenLF	1.25	C7	P
HP1118	160 152 300	G ₁	10	3	250	100	8.2	1.65	100	100	1.65	C7	P
HP2018	041 231 500	A	20	2	200	100	4	3.5	200	100	2.5	B7	P
HP2018	542 310 000	A	20	2	200	100	4	3.5	100	100	3.5	B5	P
HP2118	041 230 500	A	20	2	200	100	5	3.5	100	100	3.5	B7	P
HP2118	542 310 000	A	20	2	200	100	5	3.5	100	100	2.5	B5	P
HP4100	542 310 000	A	4	2	200	100	3	3.5	100	100	3.5	B5	P
HP4101	041 231 500	A	4	2	200	100	3.5	3.5	100	100	3.5	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
HP4101	542 310 000	A	4	2	200	100	3.5	3.5	100	100	3.5	B5	P
HP4101c	542 310 000	A	4	2	200	100	3.5	2.8	100	100	2.8	B5	P
HP4101c	041 231 500	A	4	2	200	100	3.5	2.8	100	100	2.8	B7	P
HP4105	542 310 000	A	4	2	250	100	4.5	3	100	100	3	B5	P
HP4105	041 231 500	A	4	2	250	100	4.5	3	100	100	3	B7	P
HP4106	041 231 500	A	4	2	200	100	5	3.5	100	100	3.5	B7	P
HP4106	542 310 000	A	4	2	200	100	5	3.5	100	100	3.5	B5	P
HP4106C	041 231 500	A	4	2	200	100	5	3.5	100	100	3.5	B7	P
HP4106C	542 310 000	A	4	2	200	100	5	3.5	100	100	3.5	B5	P
HP4115	041 231 500	A	4	2	200	100	4.3	3.2	100	100	3.2	B7	P
HP4115	542 310 000	A	4	2	200	100	4.3	3.2	100	100	3.2	B5	P
HP4115c	542 310 000	A	4	2	250	100	4.5	3.2	100	100	3.2	B5	P
HP4115c	041 231 500	A	4	2	250	100	4.5	3.2	100	100	3.2	B7	P
HR1	2** 3** *00	A	0.6						D			B7G	R
HR2	112 311 100	D ₁	4				5		D			B7G	R
HR2	642 300 000		2	2	150		12	0.6	125		0.6	B4	T
HR2S	023 004 060		2	2	150		12	0.6	125		0.6	8SC	T
HR3	112 311 100	D ₁	4				15		REC		10mA	B7G	R
HR4	112 311 100	D ₁	4				30		REC		15mA	B7G	R
HR5	112 311 100	D ₁	4				30		REC		15mA	B7G	R
HR6	112 311 100	D ₁	4				60		REC		20mA	B7G	R
HR7	020 000 030	D ₁	4				30		REC		15mA	A08	R
HR8	030 000 020	D ₁	4				30		REC		15mA	A08	R
HR9	0** 080 230	D ₁	4						D			A08	D
HR11	020 00 030	D ₁	4						D			A08	D
HR210	642 300 000		2	1.5	200		1	1.3	150		1.3	B4	T
HR406	642 300 000		4	3	200		1	1.5	150		1.5	B4	T
HR410	642 300 000		4	3	200		1	1.5	150		1.5	B4	T
HSD	809 231 600	G ₁	13	3	200		6.0	2.7	150		2.3	B7	DDT
HVR1	002 300 000	D ₁	2				5		REC		1.3mA	B4	R
HVR2	003 200 000	D ₁	4				3		REC		2.0mA	B4	R
HVR2A	003 200 000	D ₁	2 (2.5)				3		REC		2.0mA	B4	R
HVU1	002 300 000	D ₁	4				3		D			B4	R
HY24	264 300 000		2	45	175		20		100			UX4	T
HY61	254 130 000	A ₁	6	14	300	250	83	6.5	No Data Available			UX5	P
HY65	030 540 210	A ₁	6	45	350	200	63		100	100		A08	P
HY90	002 383 100		27.5				60		REC		25mA	B7G	R
HY113	264 030 000		1.4	4.5	50		0.4	0.25	No Data Available			UX5	T
HY115	364 520 000		1.4	1.5	50	20	0.03	0.06	No Data Available			UX5	P
HY125	364 520 000		1.4	3	50	50	0.9	0.3	No Data Available			UX5	P
HY615	020 000 310	A ₁ G ₁	6	35	300		20		100			A08	T
HY866	280 300 000		2.5				120		REC		30mA	UX4	R
HZ50	280 300 000		13				60		REC		20mA	UX4	R
IRV120/350s	023 180 090		4				60		REC		20mA	8SC	RR
IW2	893 200 000		4				30		REC		40mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
IW3	892 300 000		4				60		REC		50mA	B4	RR
IW4/350	892 300 000		4				60		REC		40mA	B4	RR
IW4/500	893 200 000		4 (5)				60		REC		20mA	B4	RR
K4	892 300 000		4				120		REC		30mA	B4	RR
K23A	682 390 000	G ₁	2	5.5	150		2.5	1.4	100		1.4	B5	DDT
K23B	682 390 000	G ₁	2	1.5	150		1.4	1.2	150		1.2	B5	DDT
K24	265 130 000	G ₁	2.5	1.5	175	75	2	0.8	100	75	0.8	UX5	P
K27	264 130 000		2.5	4.5	90		3	1	80		1	UX5	T
K30A	642 300 000		2	3	150		1.5	0.8	150		0.8	B4	T
K30B	642 300 000		2	7.5	150		4	0.9	100		0.9	B4	T
K30C	642 300 000		2	1.5	150		2	1.4	100		1.4	B4	T
K30D	642 300 000		2	3	150		4	1.5	100		1.5	B4	T
K30E	642 300 000		2	4.5	150		2	1.5	100		1.5	B4	T
K30g	642 300 000		2	7	150		6	3.5	100		3.5	B4	T
K30K	642 300 000		2	1.5	150		2.2	1.4	100		1.4	B4	T
K33A	064 234 700		2	0	150		3		150			B7	TT
K33B	446 230 700		2	1.5	125		3	2.1	125		2.1	B7	TT
K40B	542 300 000	A	2	0	150	75	2	1.5	100	75	1.5	B4	P
K40N	542 300 000	A	2	0	150	90	2.5	1.4	100	90	1.4	B4	P
K40N	041 230 500	A	2	0	150	90	2.5	1.4	100	90	1.4	B7	P
K50M	041 231 500	A	2	5	125	125	3	1.5	100	100	1.5	B7	P
K50N	064 235 500	G ₁	2	1.5	125	60	2	1.4	125	60	1.4	B7	P
K70B	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
K70D	642 350 000		2	2.4	125	150	5	4	100	100	4	B5	P
K77A	465 230 574		2	10.5	125	150	2.5	4	100	100	4	B9	PP
K77B	446 235 700		2	11.7	150	150	3.8		100	100		B7	PP
K80A	645 230 700	G ₁	2	0	150	50	2		80	60	0.4	B7	O
				0	150	75	0.95		125	75	0.8		
K80B	645 230 700	G ₁	2	0	150	150	2.1		100	60	0.1	B7	O
				0	150	150	0.7		100	75	1.0		
K435/10	642 300 000		4	3.0	300		50	5.0	100		5.0	B4	T
K450/50	642 300 000		4	50	400		120	5	100		5	B4	T
K1658	542 310 000	A ₁	7	25	400	225	50	3.2	No Data Available			B5	P
K1668	542 310 000	A ₁	7	25	400	225	50	3.2	No Data Available			B5	P
K1678	542 310 000	A ₁	7	25	400	225	50	3.2	No Data Available			B5	P
K1694	642 300 000		4	3.5	200		6	2.6	100		2.4	B4	T
KBC1	023 098 060	G ₁	2	4.5	150		2.5	1.0	100		1	8SC	DDT
KBC32	036 980 200	G ₁	2	0	100		2.4	1.2	100		1.2	A08	DDT
KCI	023 004 060		2	1.5	150		1.2	0.6	125		0.6	8SC	T
KC3	023 004 060		2	2.8	150		3	2.5	100		2.5	8SC	T
KC4	023 004 060		2	1.5	150		2.2	1.4	125		1.4	8SC	T
KC50	642 300 000		2	1	40		0.25	0.4	No Data Available			Sm4	T
KC51	642 300 000		2	2	40		1.25	0.5	No Data Available			Sm4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160						DATA FOR AVO VALVE TESTER			BASE	TYPE			
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V						
KCF30	037 546 200	G ₁	2	{ 1.0 2.5 0.5 5	100	0	3.7	1.6	100	60	1.7	}A08	TP				
KCHI	023 064 570	G ₁	2		125	80	1.5	0.9	100	75	0.9		}8SC	TH			
KDD1	023 074 460		2		90		3	1.5	80	60	1.5			}85C	TT		
KD50	652 300 000		2		90	60	1	0.9	100	60	0.9				}Sm4	T	
KE50	542 300 000	A	2	2	125	50	0.8	0.56	No Data Available			Sm4	P				
KFI	050 412 300	A	2	1	125	150	3	1.8	125	150	1.8	C7	P				
KF2	050 412 300	A	2	1	125	150	3	1.3	125	150	1.3	C7	P				
KF3	023 010 560	G ₁	2	1	90	90	1	0.5	80	90	0.5	8SC	P				
KF4	023 010 560	G ₁	2	1	90	90	1.2	0.7	80	90	0.7	8SC	P				
KF7	023 004 500	A	2	1.5	90	90	1.8	0.7	80	90	0.7	8SC	P				
KF8	023 004 500	A	2	1	90	90	1.5	0.6	80	90	0.6	8SC	P				
KF35	026 510 300	G ₁	2	1.5	125	60	1.45	1.08	125	60	1.08	A08	P				
KHI	023 051 560	G ₁	2	1.5	90	60	2.1	1.4	80	60	1.4	85C	P				
KK2	023 064 560	G ₁	2	1	90	50	2		80	60		8SC	O				
KK2G	026 546 300	G ₁	2	1.0	90	50	2.0		80	60		A08	O				
KK32	037 546 200	G ₁	2.0	{ 0 0 4.5 4.5	150	50	2.1		150	60	2.1	}A08	O				
KL1	642 350 000		2		150	50	0.7		150	60	0.7			}B5	P		
KL1	032 004 560		2		90	90	8	1.7	80	75	1.7					}8SC	P
KL2	023 004 560		2		90	90	11	1.8	80	75	1.8						
KL4	023 004 560		2	2.5	90	90	4.7	1.8	80	75	2.8	8SC	P				
KL5	032 004 560		2	4	90	90	4.8	1.4	80	75	1.4	8SC	P				
KL35	036 540 200		2	4.5	125	150	5.6	2.2	100	100	2.2	A08	P				
KLL3	423 564 570		2	12	150	150	8		100	100		8SC	PP				
KLL32	026 447 350		2	11.3	125	150	3.8	2.6	100	100	2.6	A08	PP				
KR5	264 530 000		6	9	150	150	14	1.9	100	100	1.9	UX5	P				
KR20	264 413 000		2.5	0	250		3.5	1.4	250		1.4	UX6	T				
KR22	264 413 000		6	0	250		3.5	1.4	250		1.4	UX6	T				
KR25	265 413 000		2.5	16.5	250	250	34	2.2	100	PenLF	2.2	UX6	P				
KR28	289 130 000		6				30		REC		15mA	UX5	RR				
KR31	281 300 000		10				120		REC		30mA	UX4	R				
KT2	642 350 000		2	4.5	150	150	7.5	2.5	100	100	2.5	B5	P				
KT8	542 310 000	A	6	16	250	250	72	6	100	100	6	B5	P				
KT8C	542 310 000	A	6	16	250	250	72	6	100	PenLF	6	B5	P				
KT16	026 540 230		1.4	4.5	90	90	8.8	1.9	No Data Available			A08	P				
KT21	642 350 000		2	2.5	150	125	5.3	5.3	100	100	5.3	B5	P				
KT24	642 350 000		2	3.5	150	125	5.0	3.2	100	100	3.2	B5	P				
KT30	045 231 600		13	12	250	250	40	3.9	100	PenLF	3.9	B7	P				
KT31	305 221 600		13	4	200	175	40	10	100		150	9	B7	P			
KT32	026 540 310	G ₁	26	7.6	125	150	75	9	100	100	8	A08	P				
KT33	326 540 210		13	13.2	200	200	60	10	100	100	9	A08	P				
KT33c	326 540 210		13	7	175	175	92	10	100	100	9	A08	P				
KT35	326 540 210		13	11.5	200	200	50	10	100	100	9	A08	P				

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
KT36	020 540 310	A	26	10.0	150	150	60	11.0	100	100	10.0	A08	P
KT41	045 231 600		4 (5)	4.4	250	250	40	10.5	100	PenLF	9	B7	P
KT42	045 231 600		4	16.5	250	250	34	2.5	100	PenLF	2.5	B7	P
KT44	041 231 500	A	4 (5)	25	250	250	85	6.25	100	PenLF	6.2	B7	P
KT45	041 231 500	A	4	25	250	250	85	6.3	100	PenLF	6.0	B7	P
KT55	*26 540 310		52	15	150	150	88.0	16	No Data Available			A08	P
KT61	026 540 310		6	4.4	250	250	40	10.5	100	PenLF	9	A08	P
KT63	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
KT66	026 540 310		6	15	250	250	65	6.3	100	PenLF	6.0	A08	P
KT67	256 001 403		6	9	250	175	80	13	100	100	10	B9G	P
KT71	026 540 310		48	9.8	175	175	70	10	100	100	9	A08	P
KT72	026 540 310		16	12.5	175	175	30	2.5	100	100	2.5	A08	P
KT73	026 540 310		6	12.5	175	175	35	2.5	100	100	2.5	A08	P
KT74	026 540 310		16	12.5	175	175	30	2.5	100	100	2.5	A08	P
KT76	026 540 310		15	13	175	175	35	2.5	100	100	2.5	A08	P
KT81	265 004 130		6	4.4	250	250	40	10.5	100	PenLF	9	B8B	P
KT88	026 540 310		6	30	250	250	57	10	No Data Available			A08	P
KT101	265 004 130		80	9.5	175	175	70	10	100	100	9	B8B	P
KTW61	026 510 310	G ₁	6	3	250	100	10	2.9	100	90	2.9	A08	P
KTW62	026 500 310	G ₁	6	3	250	100	8	2.85	100	100	2.8	A08	P
KTW63	026 510 310	G ₁	6	3	250	100	7.6	1.5	100	90	1.5	A08	P
KTW73	026 510 310	G ₁	6	3	250	100	6.5	1.7	100	90	1.7	A08	P
KTW74	026 510 310	G ₁	13	3	250	100	7.6	1.5	100	90	1.7	A08	P
KTZ41	061 231 500	G ₁	4	1.5	250	250	18	12	200	200	10	B7	P
KTZ63	026 510 310	G ₁	6	3	250	100	2	1.23	100	100	1.2	A08	P
KTZ73	026 500 310	G ₁	6	3	250	100	2	1.5	100	90	1.5	A08	P
KZ	802 310 000		20				60		REC		20mA	B5	R
L2	642 300 000		2	3.8	150		4	1.5	125		1.5	B4	T
L2/B	642 300 000		2	3.8	150		4	1.5	125		1.5	B4	T
L2D	642 310 000		2	4.5	150		2	1.5	100		1.5	B5	T
L2/DD	682 390 000	G ₁	2	3.8	150		4	1.6	100		1.6	B5	DDT
L4	642 300 000		4	16	250		20	3.2	100		3.2	B4	T
L11	642 300 000		1	12	100		2.8	0.57	100		0.57	B4	T
L12	642 300 000		2	3	40		2.2	0.8	No Data Available			5m4	T
L21	642 300 000		2	6	150		2.2	1.8	100		1.8	B4	T
L21DD	682 390 000	G ₁	2	3	150		5.2	1.8	100		1.8	B5	DDT
L22DD	206 080 930	G ₁	2	4.2	150		4	1.55	100		1.55	A08	DDT
L30	040 231 600		13	8	200		25	4.2	100		4.2	B7	T
L42MD	642 350 000		4	20	250	250	22	2.5	100	100		B5	P
L63	026 040 310		6	8	250		9	2.6	100		2.6	A08	T
L77	6*2 364 100		6	8.5	250		10.5	2.2	100		2.22	B7G	T
L210	642 300 000		2	0	150			0.92	100		0.92	B4	T
L408	642 300 000		4	3	150		5	1.5	125		1.5	B4	T
L410	642 300 000		4	4	150		4.3	1.5	100			B4	T
L412	642 300 000		4	1.5	200		3	1.2	200		1.2	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
L413	642 300 000		4	16	200		12	1.8	100		1.66	B4	T
L414	642 300 000		4	8	150		12	2.8	100		2.8	B4	T
L415	642 300 000		4	10	200		8	2	100		2	B4	T
L416D	643 200 000	G ₂	4	13	250	80	12	1.4	100	75		B4	P
L427D	642 350 000		4	42	300	200	20	1.5	100	100		B5	P
L486D	642 350 000		4	15	250	250	35	2.7	100	PenLF	2.7	B5	P
L491D	642 350 000		4	40	400	200	30	1.8	No Data Available			B5	P
L495	642 350 000		4	30				5				B5	P
L496D	642 350 000		4	17	250	250	36	2.5	100	100		B5	P
L497D	642 350 000		4	30	400	200	45	3.2	No Data Available			B5	P
L510D	642 350 000		5	17	200	150	12	1.3	100	100		B5	P
L2318	642 350 000		20	18	200	200	20	1.7	100	100		B5	P
L4150D	642 310 000	G ₂	4	15	250	250	24	2.5	100	100		B5	P
LA	364 520 000		6	12	175	175	22	2.2	100	100	2.2	UX5	P
LD210	642 300 000		2	4.5	150		3	1.3	125		1.3	B4	T
LD410	642 300 000		4	6	200		4	1.8	100		1.8	B4	T
LG5	218 090 130		6				120		REC		30mA	A08	RR
LG6	218 090 130		12				30		REC		15mA	B8B	RR
LG14	123 000 000	D ₁	6				5		D			B3G	R
LK430	642 300 000		4	32	250		20	1.9	100			B4	T
LK460	642 300 000		4	40	225		30	2.2	No Data Available			B4	T
LK4110	642 300 000		4	36	400		30	2.7	No Data Available			B4	T
LK4112	642 300 000		4	21.6	250		48	3.5	No Data Available			B4	T
LK4200	642 300 000		4	36	400		45	4	No Data Available			B4	T
LL2	642 300 000		2	2.5	150		3	2.6	125		2.6	B4	T
LL2s	023 004 060		2	2.5	150		3	2.6	125		2.6	8SC	T
LL4	642 310 000		4	10	350		18	3.5	125		3.5	B5	T
LL610	642 350 000		5	17	200	150	12	1.3	No Data Available			B5	P
LN152	641 237 154		6	2.3	100		4.0	1.4	100	60	1.4	B9A	TP
				6.7	175	175	15.0	3.2	100	100	3.0		
LN309	641 237 154		12.5	8.5	250		10.5	2.2	100	60	2.0	B9A	TP
				8.0	175	175	30	4.5	100	100	4.0		
LP2													
(FERRANTI)	642 300 000		2	4.5	150		10	3.6	100		3.6	B4	T
LP4	642 300 000		4	36	250		48	5.5	100		5.5	B4	T
LP25	642 300 000		4	31	400		50	7.5	100		6.9	B4	T
LP220	642 300 000		2	4.5	150		5	3.5	100		3.5	B4	T
LS6A	642 300 000		6	91	400		64	2.3	No Data Available			B5	T
LS7	642 300 000		4	4	150		21	2.4	100		2.4	B5	T
LS8	642 300 000		4	8	125			1.3	No Data Available			B4	T
LS8A	642 300 000		4	8	125		26	3	No Data Available			B4	T
LS9B	642 300 000		2	1.5	150		8	0.6	100		0.6	B4	T
LS826	246 310 000		6.3	1.1	100		7.5	5.0	100		5.0	B5B	T
LU4A	642 300 000		4	16	200		12	1.8	100		1.6	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
LZ319	645 237 114		9	{ 2.0 2.0	100 175		14 10	5 6	100 100	60 100	5.0 5.0	B9A	TP
M8079	192 310 800		6				5		D				B7G
M8081	672 344 100		6	0.85	100		8.5	5.3	100		5.3	B7G	TT
M8082	412 360 500		6	12.4	250	250	16	2.6	No Data Available			B7G	P
§ M8083	412 361 500		6	{ 2 1.5	250 200	250 150	10 4	7.65 6.4	100 100	150 150	5.0 5.0	B7G	P
M8096	601 235 144		6	7.5	250	250	45.0	7.0	100	150	7.0	B9A	P
M8097	812 314 600		6	2.8	200		7.5	2.8	100		2.8	B7G	DT
M8099	412 314 600		6	2	250		6.0	8.5	200		8.0	B7G	T
M8100	412 365 100		6	2.3	150	150	7	4.3	No Data Available			B7G	P
M8101	412 365 100		6	1.0	250	100	11.0	4.4	250	100	4.4	B7G	P
M8121	412 163 510		6	1.4	100	100	7.0	5.0	100	100	5.0	B8D	P
M8122	412 653 160		6	2.0	100	100	7.5	5.0	100	100	5.0	B8D	P
M8123	281 380 000		6				5.0		D			B8D	R
M8125	412 163 510		6	2.0	100	100	3.0	2.5	100	100	2.3	B8D	P
M8135	412 3** 651		6	4.5	250	250	40.0	11.0	100	150	10.0	B9A	P
M8136	741 226 413		6.3	8.5	250		8.5	2.2	100		2.0	B9A	TT
M8137	741 226 413		6	2.0	250		1.2	1.6	100		1.6	B9A	TT
M8138	802 309 100		6				30.0		REC		15mA	B7G	RR
M8156	462 603 160		6	2.0	100		13.0	5.5	100		5.5	B8D	T
M8157	265 511 413		6	30.0	300	250	25.0	1.9	100	100	1.9	B9G	P
M8161	412 361 500		6	2.5	250	200	8.0	2.5	100	PenLF	2.5	B7G	P
M8162	741 226 413		6	1.5	200		8.5	6.5	200		8.5	B9A	TT
M8195	501 236 014		6.3	1.0	250	100	3	1.85	100	100	1.8	B9A	P
MAZ41	*8* **9 230		4				30		REC		15mA	A08	RR
MCI	423 060 000		1.9	1.5	100		4	0.8	100		0.8	8SC	T
ME2	642 350 000		2	12	200	200	13		100	100		B5	P
ME25	642 350 000		4	30	400	300	60		100	100		B5	P
MH4	642 310 000		4	2	200		8	3.0	100		3.6	B5	T
MH40	642 310 000		4	3	200		2.7	2.4	100		2.4	B5	T
MH41	642 310 000		4	1.5	200		5.2	6	200		6	B5	T
MH206	645 230 600	G ₁	2	3	150	75	3.2		100	75		B7	H
MH1118	645 231 600	G ₁	10	3	200	100	3.5		100	90	0.6	B7	H
MH4105	645 231 600	G ₁	4	3	200	100	7.5		100	100		B7	H
MHD4	908 231 600	G ₁	4	4	200		2	1.9	100		1.9	B7	DDT
MHL4	642 310 000		4	8	250		8	2.5	100		2.5	B5	T
MHLD6	026 890 310	G ₁	6	5	200		11.5	3	100		3	A08	DDT
MKT4	045 231 600		4	11	250	200	32	3	100	100	3	B7	P
MKT4	642 310 000	S	4	11	250	200	32	3	100	100	3	B5	P
ML4	642 310 000		4	16	250		14	3.2	100		3.2	B5	T
ML6	642 310 000		6	8	200		24	3.8	100		3.8	B5	T
ML40	642 310 000		4	3	200			3	100		3	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
MM4V	542 310 000	A	4	1.5	200	125	6	2.5	100	100	2.5	B5	PP
MM20	542 310 000	A	20	0	200	100	6	3.5	100	100	3.5	B5	P
MO465	645 231 700	G ₁	4	1.5	75		2		80			B7	O
				1.5	250	75	1.6		100	75			
MO495	123 174 560	G ₁	4	8.5	90		2		80			8SC	O
				12	250	75	1.6		100	75			
MP2	642 300 000		2		150		12.5	3	100		3	B4	T
MP4	067 231 500	G ₁	4		250	150	8	2.5	100	100	2.5	B7	P
MP/Pen	045 231 600		4	16	250	250	30	3.5	100	100	3.5	B7	P
MP/Pen	642 310 000	S	4	16	250	250	30	3.5	100	100	3.5	B5	P
MPT4	045 231 600		4	9	250	200	32	3	100	100	3	B7	P
MPT4	642 310 000	S	4	9	250	200	32	3	100	100	3	B5	P
MR1	802 300 000		4				120		REC		30mA	B4	R
MR4	642 300 000		4	3	200		6	2.5	150		2.5	B4	T
MS4	542 310 000	A	4	1.5	250	75	2.4	1.1	250	75	1.1	B5	P
MS4B	542 310 000	A	4	1	200	75	3.4	3.0	100	75	3.0	B5	P
MS4c	542 310 000	A	4	1	200	75	3.4	3.2	200	75	3.2	B5	P
MSG/HA	542 310 000	A	4	1.5	200	80	2.1	2	100	75	2	B5	P
MSG/LA	542 310 000	A	4	1.5	200	75	5.2	3.75	100	75	3.75	B5	P
MSP4	041 231 500	A	4	1.8	200	100	3.4	2.4	100	75	3.5	B7	P
MSP4	542 310 000	A	4	1.8	200	100	3.4	2.4	100	75	3.5	B5	P
MSP4I	542 310 000	A	4	4	250	250	8.5	3.2	100	PenLF	3.2	B5	P
MSP4I	041 231 500	A	4	4	250	250	8.5	3.2	100	PenLF	3.2	B7	P
MS/Pen	041 231 500	A	4	1.5	200	100	4.8	2.8	100	100	2.8	B7	P
MS/Pen	542 310 000	A	4	1.5	200	100	4.8	2.8	100	100	2.8	B5	P
MS/PenA	542 310 000	A	4	2.5	200	150	9.0	4.0	100	150	4.0	B5	P
MS/PenA	041 231 500	A	4	2.5	200	150	9	4	100	150	4	B7	P
MS/PenB	061 231 500	G ₁	4	1.5	200	100	4.8	2.8	100	100	2.8	B7	P
MS/PenT	041 231 500	A	4	1.5	200	100	4.8	2.8	100	100	2.8	B7	P
MS/PenT	542 310 000	A	4	1.5	200	100	4.8	2.8	100	100	2.8	B5	P
MU1	002 300 000	D ₁	4				60		REC		20mA	B4	R
MU2	002 300 000	D ₁	2				5		D			B4	R
MU12	892 300 000		4				60		REC		25mA	B4	RR
MU12/14	892 300 000		4 (S)				60		REC		40mA	B4	RR
MU14	892 300 000		4				60		REC		40mA	B4	RR
MU4250	232 300 000	D ₁	4				120		REC		30mA	B4	R
MVSG	542 310 000	A	4	1.5	200	75	7.5	2.5	100	75	2.5	B5	P
MVSPen	542 310 000	A	4	2	250	125	5.1	2.3	200	100	2.3	B5	P
MVSPen	041 231 500	A	4	1.5	200	100	4.3	2.2	100	100	2.2	B7	P
MVSPenB	061 231 500	G ₁	4	1.5	200	100	4.3	2.2	200	100	2.2	B7	P
MX40	645 231 700	G ₁	4	1	150	75		1.5	150	75	0.6	B7	TH
				3	250	75	4.5	2.0	250	75	1.4		
MZ0S-20	642 300 000		6	12	350		45	4.2	100		4	B4	T
NI4	036 540 200		1.4	7.5	90	90	7	1.55	80	75	1.55	A08	P
NI5	026 540 230		1.4	7	90	90	7	1.55	80	75	1.55	A08	P
NI6	026 540 230		1.4	4.5	90	90	9.5	2.1	80	90	2.1	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
N17	264 536 200		1.4	7	90	75	7.4	1.58	80	60	1.58	B7G	P
N18	364 526 300		1.4	4.5	90	90	9.5	2.1	80	75	2	B7G	P
N19	365 024 300		1.4	4.5	90	90	7.7	2.0	80	75	2.0	B7G	P
N30	045 231 600		13	12	250	250	40	3.9	100	PenLF	3.9	B7	P
N31	205 331 600	G ₁	13	4.4	200	175	40	10	100	100	9	B7	P
N37	412 360 500		13	8.0	175	150	50	10.0	100	100	9.0	B7G	P
N40	045 231 600		4	3.5	250	250	32	2.9	100	150	2.9	B7	P
N41	045 231 600		4	3.5	250	250	32	10.0	100	PenLF	9	B7	P
N42	045 231 600		4	16.5	250	250	34	2.5	100	PenLF	2.5	B7	P
N43	005 231 600	G ₁	4 (5)	4.5	250	250	40	10	100	PenLF	9	B7	P
N63	026 540 310		6	16.5	250	250	34	2.5	100	150	2.5	A08	P
N66	026 540 310		6	15	250	250	85	6.3	100	150	6	A08	P
N77	412 360 500		6	12	250	250	20	2.6	100	PenLF	2.6	B7G	P
N78	412 360 500		6	5.5	250	250	35	10.0	100	150	9.0	B7G	P
N108	412 36* 500		40	8	175	150	50	10	100	100	9.0	B7G	P
N142	261 054 130		45	9.5	175	175	54.5	9.5	100	100	9.0	B8A	P
N144	412 360 500		6	12	250	250	20.0	2.6	100	PenLF	2.6	B7G	P
N145	261 054 130		40	6.3	175	150	29	7.5	100	100	7.0	B8A	P
N147	026 540 310		6	6	250	250	36	9	100	PenLF	8	A08	P
N148	265 004 130		6	12.5	250	250	45	4.1	100	100	4	B8A	P
N150	261 054 130		6	7	250	250	36	10	100	100	9	B8A	P
N151	261 054 130		6	13.5	250	250	22.5	2.9	100	100	2.9	B8A	P
N152	*41 23* *51	A	20	28	200	200	40.0	6.0	100	100	6.0	B9A	P
N153	541 231 600		15	2.3	175	175	36.0	10.0	100	100	9.0	B9A	P
N154	*41 23* 6*5		16	14.2	200	200	45	8.2	100	100	7	B9A	P
N155	441 231 615		6	10.8	225	225	26	3.2	150	100	3.2	B9A	P
N309	541 231 600		15	2.3	175	175	36.0	10.0	100	100	9.0	B9A	P
N329	*41 23* 6*5		16	14.2	200	200	45	8.2	100	100	7.0	B9A	P
N339	*41 23* *51	A	21.5	13	150	150	50.0	8.5	100	100	7.0	B9A	P
N349	*41 23* *51	A	20	12.0	150	150	5.0	8.5	100	100	7.0	B9A	P
N359	041 231 551	A	21.5	28	200	200	40	6	100	100	6	B9A	P
N709	*41 23* 6*5		6	7.3	250	250	48	11.3	100	150	10	B9A	P
N727	412 365 400		6	12.5	250	250	45.0	4.1	100	PenLF	4.0	B7G	P
NDD40	802 310 000		4						D			B4	D
NEP51	023 110 560		4	3	225	100	8	2.2	100	100		8SC	P
NF2	023 110 560	G ₁	12.5	2	200	100	3	2.1	100	100	2.1	8SC	P
NF3	023 110 560	G ₁	12.5	2	200	100	4.5	2.3	100	100	2.3	8SC	P
NG320	002 300 000	D ₁	2						D			B5	D
NG3020	002 300 000	D ₁	2				5		D			B4	R
NHP51	023 110 560	G	4	2.5	225	100	3.5	2	100	100		8SC	P
NIX2	*41 23* *51	A	21.5	28	200	200	40	6	100	100	6	B9A	P
NLP61	023 104 560		4	7	250	250	4	9	100	100		8SC	P
NLP62	020 314 560		4	14	250	250	72	9	No Data Available			8SC	P
NSS42	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P
NSS43	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
NSS183	542 310 000	A	20	2.5	200	100	3.5	2	100	100		B5	P
NT51	023 100 060	G	4	5	250		6	2.5	100		2.2	8SC	T
NVS4	542 310 000	A	4	2	200	100	6	1	100	100		B5	P
NW4	642 310 000		4	2.5	200		2.5	1	100		2.2	B5	T
OO	364 200 000		5	0	40		1	0.66	No Data Available			UX4	T
OOA	364 200 000		5	0	40		1.5	0.66	No Data Available			UX4	T
OI	364 200 000		5	4.5	90		2.5		80			UX4	T
OIA	364 200 000		5	4.5	90		2.5	0.72	80		0.72	UX4	T
OIAA	364 200 000		5	4.5	90		3.2	0.9	90		0.85	UX4	T
OIB	364 200 000		5	4.5	90		2.5	0.72	90		0.72	UX4	T
O15/40	642 300 000		4	35	400		40	4.5	100		4.5	B4	T
O84	642 300 000		4	4	125		4	1.3	100		1.2	B4	T
OBC3	041 896 230		12.5	2	250		1	1.1	150		1.1	A08	DDT
OBF2	206 581 930		9	2	200	100	6	1.8	100	100	1.7	A08	P
OCH4	217 544 630	G ₁	15	{ 2	100		3.5		100	60	3.5	A08	TH
					200	100	3	0.75	100	100	0.75		
OF1	026 510 310	G	6.3	3	250	100	8.5	1.75	100	100	1.7	A08	P
OF5	026 510 310	G	12.6	3	250	100	7	1.45	100	100	1.4	A08	P
OF9	206 501 130	G ₁	8.5	2.5	200	100	6	2.2	100	100	2	A08	P
OM1	020 080 310		30				120		REC		30mA	A08	R
OM3	028 190 310		6						D			A08	DD
OM4	026 980 310	G ₁	6	5	250		5.5	2.2	100		2.2	A08	DDT
OM5	026 510 310	G ₁	6	2	250	100	3	1.8	100	100	1.8	A08	P
OM5C	026 510 310		6	2	250	100	3	1.8	100	100	1.8	A08	P
OM6	026 510 310	G ₁	6	2.5	250	100	6	2	100	100	2	A08	P
OM7	026 510 310	G ₁	6	2.5	250	100	6	2	100	100	2	A08	P
OM9	026 500 310	G ₁	6	18	250	250	32	2.8	100	150	2.8	A08	P
OM10	027 546 310	G ₁	6	{ 2.0	100		5.4	2.2	100	60	2.8	A08	TH
					250	100	5.0	2.4	100	100	1.2		
OP41	045 231 600		4	12.5	250	250		9.1	100	100	8	B7	P
OP42	045 231 600		4	6.2	250	250		10.5	100	100	9	B7	P
OS18/600	023 114 500	A ₁	6	14	250	275	72	8.5	100	PenLF	8	8SC	P
OSW3105	041 896 230		6.3	2	250		0.9	1.1	100		1	A08	DDT
OSW3106	026 540 310		6.3	12.5	250	250	45	4.1	100	150	4	A08	P
OSW3107	020 809 030		5				60		REC		20mA	A08	RR
OSW3108	026 540 310		6.3	14	250	250	72	6	100	150	5	A08	P
OSW3109	028 190 300		6.3						D			A08	DD
OSW3111	021 415 360		6.3	3.0	250	100	9.2	2	100	100	2	A08	P
OSW3112	026 040 310		6.3	8	250		9	2.6	100		3	A08	T
OS6/300	642 350 000		4	20	300	150	22	2	100	100		B5	P
P2	642 300 000		2	10	150		19	3.5	100		3.5	B4	T
P4	642 300 000		4	21	250		30	2.8	100		2.8	B4	T
P6MO	023 104 560		6.3	14	250	250	72	9	100	100		8SC	P
PI2/250	642 300 000		4	44	250		60	6	100		6	B4	T
PI5/250	642 300 000		4	44	250		60	6	100		6	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
P15/250(S)	023 004 060		4	44	250		60	6	100		6	8SC	T
P24/450	642 300 000		7.5	70	400		55	2.1	100		2.1	B4	T
P25/400	642 300 000		6	100	350		70	3.7	100		3.7	B4	T
P25/500	642 300 000		6	90	400		65	3	100		3	B4	T
P26/500	642 300 000		4	100	400		62.5	4.2	100		4.2	B4	T
P27/500	642 300 000		4	27	400		62.5	8.5	100		8	B4	T
P30/500	642 300 000		4	100	400		60	4	100		4	B4	T
P41	216 040 030		4	11.8	250		16	4.5	100		4.5	M08	T
P43M	642 350 000		4	17	250	250	36	2.5	100	100		B5	P
P61	216 040 030		6	11.8	250		16	4.5	100		4.5	M08	T
P215	642 300 000		2	0	150			1.4	100		2.2	B4	T
P220	642 300 000		2	7.5	150		6	3.0	100		3	B4	T
P220A	642 300 000		2	14	150		15	2.7	100		2.7	B4	T
P222	642 300 000		2	7.5	150		6	3	100		3	B4	T
P225	642 350 000		2	4.5	150	150	5.6	2.2	100	100	2.2	B5	P
P240	642 300 000		2	24	150		18	1.1	100		3.7	B4	T
P240A	642 300 000		2	21	150		25	5	100		5	B4	T
P410	642 300 000		4	12	150		7	1.25	100		1.5	B4	T
P414	642 300 000		4	16	100		14	2.8	80		2.8	B4	T
P415	642 300 000		4	25	150		14	1.5	100		1.5	B4	T
P420	642 300 000		4	85	400		50	6	100		6	B4	T
P422	642 350 000		4	20	250	250	22	2.5	100	100		B5	P
P425	642 300 000		4	16.5	150		17	1.9	100			B4	T
P430	264 300 000		4	30	200		25	2.2	100		2.2	UX4	T
P434	032 004 560		4	17	250	250	36	2.5	100	100		8SC	P
P435	642 350 000		4	17	250	250	30	3	100	PenLF	3	B5	P
P440	642 350 000		4	30	400	200	45	5	No Data Available			B5	P
P440N	045 231 600		4	22.0	250	250	36	2.8	100	PenLF	2.8	B7	P
P441n	045 231 600		4	22	250	250	36	2.8	100	PenLF	2.8	B7	P
P455	264 300 000		4	15	250		30	5.5	100		5.5	UX4	T
P460	642 300 000		4	40	200		50	3.5	100		3.5	B4	T
P469	045 231 600		4	14	250	275	72	8.5	100	PenLF	7	B7	P
P495	045 231 600		4	6	200	200	32		100	100		B7	P
P496	045 231 600		4	6	200	200	32	9.5	100	100	8	B7	P
P520	642 350 000		5	17	200	150	12	1.3	100	100		B5	P
P625B	642 300 000		6	1	200			2.8	200		2.8	B4	T
P626	023 100 560	G ₁	6.3	22	250	250	36	2.5	100	100		8SC	P
P628	023 100 560	G ₁	6.3	17	250	250	36	2.5	100	100		8SC	P
P650	642 300 000		6	1	100		37	2.7	100		2.7	B4	T
P861	289 130 000		6				30		REC		15mA	UX5	RR
P1320	023 100 560		13	20	250	250	22	1.9	100	100		8SC	P
P2018	642 310 000		20	15	200		20	4	100		4	B5	T
P2060	023 140 560		24	19	200	100	40	3.15	100	90	3	8SC	P
P2460	642 310 000	S	24	19	200	100	40		100	90		B5	P
P3580	045 231 600		33	8.5	200	200	45	8	100	150	7	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
P4100	642 300 000		4	40	400		30		100			B4	T
PA1	642 310 000		4	10	200		40	5	100		5	B5	T
PA20	642 300 000		2	36	300		49	5.2	100		5	B4	T
PA40	642 300 000		4	90	400		200	10	100		9	B4	T
PABC80	†91 238 146		9.5	2.3	200		1.00	1.4	100		1.4	B9A	DDDT
PAB1	023 1†0 980		6						D			8SC	DDD
PB1	234 600 000		2	4.0	150		11.5	3.85	150		3.85	B4	T
PB495	892 300 000		4				30		REC		15mA	B4	RR
PBF2	026 895 310	G ₁	6	3	250	100	5.8	1.2	100	100	1.2	A08	DDP
PCO5-15	023 014 500	A ₁	4		400	250	40	1.25	No Data Available			8SC	P
PCC84	147 234 116		7.0	1.5	90		12.0	6.0	100		6.0	B9A	TT
PCC85	641 237 410		9	2.1	200		10	5.8	150		5.8	B9A	TT
PCC88	641 237 410		7	1.2	90		15	12.5	No Data Available			B9A	TT
PCF80	645 237 114		9	2	100		14.0	5.0	100	60	5.0	B9A	TP
				2.0	175	175	10.0	6.2	150	150	5.0		
PCF82	645 237 114		9.5	1.0	150	0	18	8.5	100	60	7.0	B9A	TP
				1.0	250	100	10	5.2	100	100	5.0		
PCL81	451 237 614		12.6	1.5	200		0.5	1.2	100	60	1.2	B9A	TP
				6.5	200	200	30	8.7	100	100			
PCL82	414 237 516		16	0	100		3	2.2	100	60	3	B9A	TP
				11	175	175	41	7.5	100	100	6		
PCL83	641 237 154		12.5	8.5	250	0	10.5	2.2	100	60	2.0	B9A	TP
				9.0	175	175	30	4.7	100	100	4.0		
PCL84	461 237 145		15	1.7	200		3	4	100	60	4	B9A	TP
				2.9	200	200	18	10	100	100			
PD220	446 230 700		2	1.15	150		0.8	0.9	150		0.9	B7	TT
PD220A	446 230 700		2	3	150		5.0	1.5	100		1.5	B7	TT
PDD2	264 589 130		6.3	6	250	250	36	9	100	100	8.5	A08	DDP
PEO4-10	023 114 500	A ₁	12		400	300	27	7.5	No Data Available			8SC	P
PEO5-15	023 114 500	A ₁	12				40	1.5	No Data Available			8SC	P
PEO6-4OP	123 114 500	A ₁	6	40	400	300	40	4	No Data Available			8SC	P
PEI-80	023 114 500	A ₁	12				40	2.5	No Data Available			8SC	P
PEI-100	245 611 300		12	33	400	250	40	6	No Data Available			B7A	P
Pen4DD	918 236 500	G ₁	4 (5)	6	250	250	36	9.5	100	PenLF	8	B7	DDP
Pen4V	642 310 000	G ₂	4	10	250	200	35	3.0	100	PenLF	2.8	B5	P
Pen4VA	642 310 000	G ₂	4	22	250	250	36	2.8	100	PenLF	2.8	B5	P
Pen4VA	045 231 600		4	20	250	250	36	2.8	100	PenLF	2.8	B7	P
Pen4VB	045 231 600		4	5.8	250	250	36	9.5	100	PenLF	8	B7	P
Pen4VX	642 310 000	S	4	15	350	200	22	3.5	100	150	3.5	B5	P
Pen13	023 100 560	G ₁	13	14	200	200	25	2.5	100	100	2.5	8SC	P
Pen13A	023 110 560	G ₁	33	8.5	200	200	45	8	100	100	6	8SC	P
Pen13C	045 231 600		13	11	250	250	32	6.5	100	PenLF	6	B7	P
Pen20	642 310 000	S	20	18	200	200	20	1.7	100	150	1.7	B5	P
Pen24	206 540 030		2	3.3	125	125	5	4	100	100	4	M08	P
Pen25	206 540 030		2	3.6	125	125	5	3	100	100	3	M08	P
Pen26	023 100 560	G ₁	24	19	200	100	40	3.1	100	60	3	8SC	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
Pen36A	145 231 600		35	8.5	200	200	45	8	100	150	7	B7	P
Pen36C	045 231 600		33	8.5	200	200	45	8	100	100	7	B7	P
Pen40DD	918 236 500	G ₁	44	8.5	200	200	45	8	100	100	7	B7	DDP
Pen44	216 540 030		4	11	300	275	70	10.6	100	PenLF	9	M08	P
Pen45	216 540 030		4	8.5	250	250	40	8.8	100	PenLF	8	M08	P
Pen45DD	216 590 830	G ₁	4	8.5	250	250	40	8.8	100	100	8	M08	DDP
Pen46	210 540 030	A	4 (5)	8.0	300	225	63	8.5	100	100	8	M08	P
Pen141	206 540 030		1.4	9	90	90	5.5	1.4	80	75	1.4	M08	P
Pen220	642 350 000		2	4.9	150	150	9	2.2	100	100	2.2	B5	P
Pen220A	642 350 000		2	9	150	150	18	2.2	100	100	2.2	B5	P
Pen230	642 350 000		2	4.5	150	125	6.0	2.2	150	125	2.2	B5	P
Pen231	642 350 000		2	2.5	125	125	5	4.4	100	100	5	B5	P
Pen383	216 540 030		38	10	175	175	64	10.5	100	100	9	M08	P
Pen384	216 450 030		38	7	125	125	40	7.8	100	100	12.0	M08	P
Pen425	642 350 000		4	25	300	200	20	1.7	100	100	1.7	B5	P
Pen428	045 231 600		4 (5)	13.8	250	250	72.0	8.5	250	200	7.0	B7	P
Pen453DD	216 590 830	G ₁	45	10	175	175	64	10.5	100	100	9	M08	DDP
Pen650	023 114 500	A	6	24	400	300	30	5	100	150	5	8SC	P
Pen1340	045 231 600		13	8.6	250	250	41	6.4	100	PenLF	6	B7	P
Pen2020	023 100 560	G ₁	20	19	200	100	40	3.1	100	60	3.1	8SC	P
Pen3520	045 231 600		35	8.0	200	200	40.0	7.3	100	100	7.0	B7	P
Pen3820	045 231 600		38	10	150	175	64	10.5	100	100	9	B7	P
PenA1	642 350 000		4	16.5	250	250	32	3	100	PenLF	3	B5	P
PenA4	045 231 600		4	5.8	250	250	36	9.5	100	PenLF	9	B7	P
PenA4	005 231 600	G ₁	4	5	250	250	40	9.1	100	100	8	B7	P
PenB1	642 350 000		2	4.5	150	150	8.5	2.5	100	100	2.5	B5	P
PenB4	045 231 600		4 (5)	14	250	275	72	8.5	100	PenLF	7	B7	P
PenDD61	869 231 500	G ₁	6	5.3	250	250	32.0	8.5	250	200	8.0	B7	DDP
PenDD1360	968 231 500	G ₁	13	5.3	250	250	32	8.2	100	100	8	B7	DDP
PenDD2530	869 231 500	G ₁	25	7.75	250	250	43	7.8	100	150	7.8	B7	DDP
PenDD4020	968 231 500	G ₁	40	7.75	250	250	43	7.8	100	100	7	B7	DDP
PenDD4021	968 231 500	G ₁	45	10	175	175	64	10.5	100	100	12	B7	DDP
PF9	026 510 310	G ₁	6	3.5	250	100	7.5	1.65	100	100	1.6	A08	P
PF462	041 230 500	A	2	1	150	150	3	1.85	150	150	1.85	B7	P
PF472	041 230 500	A	2	0.5	150	150	2.5	1.7	150	150	1.7	B7	P
PL33	026 540 310		19	5.3	250	250	32	9.0	100	PenLF	8	A08	P
PL36	*2* 540 310	A ₁	25	21.0	175	175	100	11.0	No Data Available			A08	P
PL38	120 540 310	A	30	5.5	200	200	75	13.5	100	PenLF	10	A08	P
PL81	*41 23* *51	A	21.5	28	200	200	30	6.0	100	100	6.0	B9A	P
PL81F	*41 23* *51	A ₁	21.5	28	200	200	30	6	100	100	6	B9A	P
PL82	041 230 605		16	14.2	200	200	45.0	7.6	100	100	7.0	B9A	P
PL83	541 231 600		15	2.3	175	175	36	10	100	100	9	B9A	P
PL84	*41 23* 6*5		15	12.5	175	175	70	10	100	100	9	B9A	P
PL820	041 231 551	A	21.5	22.0	175	175	45.0	6.2	100	100	6.0	B9A	P
PMO4	412 365 100		6.3	1.2	250	100	11	4.4	100	100	4	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PM05	412 365 100		6.3	2.3	150	150	7	4.3	100	100	4	B7G	P
PM07	412 361 500		6.3	2	250	250	10	7.5	100	150	5	B7G	P
PM1A	642 300 000		2	0	100		1	1.2	100		1.2	B4	T
PM1HF	642 300 000		2	3	150		1.5	0.8	100		0.8	B4	T
PM1HL	642 300 000		2	1.5	150		2.3	1.2	150		1.2	B4	T
PM1LF	642 300 000		2	6	125		3	0.9	100		0.9	B4	T
PM2	642 300 000		2	7	100		4	0.9	100		0.9	B4	T
PM2A	642 300 000		2	6	150		5	2	100		2	B4	T
PM2B	446 230 700		2	1	125		3	2.5	100		2.5	B7	TT
PM2BA	446 230 700		2	1	125		3	2.1	100		2.1	B7	TT
PM2DL	642 300 000		2	4.5	150		2	1.5	100		1.5	B4	T
PM2DX	642 300 000		2	5	150		2.3	1.05	100		1	B4	T
PM2HL	642 300 000		2	1.5	150		2.2	1.4	150		1.4	B4	T
PM3	642 300 000		4	0	100		2	1.05	100		1.0	B4	T
PM4DX	642 300 000		4	0	100		1.5	2	100		2	B4	T
PM12	542 300 000	A	2	0	150	75	4.0	1.1	100	75	1.1	B4	P
PM12A	542 300 000	A	2	1	150	75	2	1.5	100	75	1.5	B4	P
PM12M	542 300 000	A	2	1	150	90	1.4	1.4	150	90	1.4	B4	P
PM12V	542 300 000	A	2	0	150	90		0.75	100	90	0.7	B4	P
PM14	542 300 000	A	4	0	150	75	2.75	0.87	100	75	0.8	B4	P
PM22	642 350 000		2	10	150	150	15	1.3	100	100	1.3	B5	P
PM22A	642 350 000		2	4.5	150	150	5.6	2.2	100	100	2.2	B5	P
PM22C	642 350 000		2	16	150	150	23	3	100	100	3	B5	P
PM22D	642 350 000		2	2.4	150	150	5	3	100	100	3	B5	P
PM24	642 350 000		4	11	150	150	20	1.75	100	100	1.7	B5	P
PM24	642 310 000	S	4	11	150	150	20	1.75	100	100	1.7	B5	P
PM24A	642 350 000		4	22.5	300	200	20		100	100	2	B5	P
PM24B	642 350 000		4	40	400	300	30	2.1	100	100	2.1	B5	P
PM24C	642 350 000		4	20	400	200		3.0	100	100		B5	P
PM24D	642 350 000		4 (5)	35	400	200	50	4	100	100	4	B5	P
PM24DC	642 350 000		4 (5)	42	300	200	20	1.5	100	100	2	B5	P
PM24E	642 350 000		4	40	300	300	83	3.9	100	150	3.9	B5	P
PM24M	642 350 000		4	17	250	250	30	3	100	PenLF	3	B5	P
PM202	642 300 000		2	14	150		14	3.5	100		2.5	B4	T
PM252	642 300 000		2	0	100		32	3.7	100			B4	T
PM254	642 300 000		4	21	200		15		100			B4	T
PM256	642 300 000		6	27	250		20		100		2.4	B4	T
PN2	642 350 000		2	7.5	150	150	6		100	100		B5	P
PP2	642 300 000	S	2	5	150	150	7	2.1	100	100	2.1	B4	P
PP2	642 350 000		2	5	150	150	7	2.1	100	100	2.1	B5	P
PP2s	023 004 560		2	5	150	150	7	2.1	100	100	2.1	8SC	P
PP3/250	642 300 000		4	37	300		48	5.2	100		6.5	B4	T
PP4	642 350 000		4	15	250	250	36	3.0	100	PenLF		B4	P
PP4s	032 004 560		4	15	250	250	36	3.0	100	PenLF		8SC	P
PP4s	642 350 000		4	15	250	250	36	3.0	100	PenLF		B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PP5/400	642 300 000		4 (5)	32	400		62	8.2	100		6	B4	T
PP6As	023 104 560		6	18	250	250	32	2.85	100	PenLF	2.8	85C	P
PP6B	265 413 000		6		250	250	36	10	100	PenLF	9	UX6	P
PP6BG	026 540 310		6	6	250	250	36	10	100	PenLF	9	A08	P
PP6B5	026 540 310		6	6.0	250	250	36.0	9.0	100	PenLF	9	A08	P
PP6C	026 540 310		6	12	250	200	36	10	100	PenLF	9	A08	P
PP6E	045 231 600		6	17	500	275	72	8.5	100	PenLF	8	B7	P
PP13A	045 231 600		13	12	200	200	40	2.65	100	100	2.5	B7	P
PP13s	023 100 560	G ₁	13	14	200	200	25	3.5	100	100	3.5	85C	P
PP24	005 231 600	G ₁	24	19	200	100	40	3	100	75	3	B7	P
PP245	023 100 560	G ₁	24	19	200	100	40	3	100	75	3	85C	P
PP34	005 231 600	G ₁	35	6.5	200	200	45	8.5	100	100	8	B7	P
PP345	023 100 560	G ₁	35	6.5	200	200	45	8.5	100	100	8	85C	P
PP35	045 231 600		35	6.5	200	200	45	8.5	100	100	8	B7	P
PP36	145 231 600		35	6.5	200	200	45	8.5	100	100	8	B7	P
PP37	005 231 600	G ₁	35	9.5	200	100	45	8.5	100	75	8	B7	P
PP60	026 540 310		6	15	250	250	85	6.3	100	150	6.3	A08	P
PP215	642 350 000		2	4.5	90	90	8	1.7	100	90	1.7	B5	P
PP2155	032 004 560		2	4.5	90	90	8	1.7	100	90	1.7	85C	P
PP220	642 300 000		2	12	150		12.5	3	100		3	B4	T
PP222	642 350 000		2	6	150	150	12	2.5	100	100	2.5	B5	P
PP222	642 300 000	G ₂	2	6	150	150	12	2.5	100	100	2.5	B4	P
PP225	642 350 000		2	12	150	150	18	2	100	100	2	B5	P
PP225s	023 004 560		2	12	150	125	18	2	100	100	2	85C	P
PP415	642 350 000		4	12	200	200	12	1.8	100	150	1.8	B5	P
PP416	642 350 000		4	12	200	75	10	2	100	60	2	B5	P
PP430	642 350 000		4	25	200	200	20	2	100	100	2	B5	P
PP431	642 350 000		4	20	250	250	22	1.9	100	150	1.9	B5	P
PP2108	642 310 000	G ₂	20	18	200	200	20	2.5	100	100	2.5	B5	P
PP2018	045 231 600		20	18	200	200	20	2.5	100	100	2.5	B7	P
PP2101	364 520 000		2	3	150	150	7	2.1	100	100	2.1	UX5	P
PP3521	040 231 600		35	25	200		70	6.3	100		6	B7	T
PP4100	642 350 000		4	40	400	300	30	3	100	PenLF	3	B5	P
PP4101	642 350 000		4	14	250	250	36	3.5	100	PenLF	3.5	B5	P
PP4118	160 452 300		40	10	175	175	35	6.5	100	100	6	C7	P
PT	045 231 600		4	6	250	250	32.5	7.5	100	PenLF	7	B7	P
PT2	642 350 000		2	4.5	125	125	5.3	2.6	100	100	2.6	B5	P
PT2	642 300 000	G ₂	2	4.5	150	150	6.5	2.5	100	100	2	B4	P
PT2A	642 350 000		2	10.5	150	150	18		100	100		B5	P
PT2-K	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
PT4(M-O)	642 350 000		4	17	250	250	30	3.0	100	PenLF	2.85	B5	P
PT4/D	968 231 500	G ₁	4	6	250	250	32.5	7.5	100	PenLF	7	B7	DDP
PT4(Ferranti)	045 231 600		4	6	250	250	36	9.5	100	PenLF	7	B7	P
PT5	045 231 600		26	7	250	250	36	9	No Data Available			B7	P
PT10	045 231 600		4	7.5	250	250	40	9	100	PenLF	8	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PT12	204 531 102	A	10	15	250	250	62	6	100	PenLF	6	B9	P
PT15	542 310 000	A	6	25.0	300	300	2.8		100	100	1.2	B5	P
PT16	642 350 000		4	15	300	300	55	4.8	100	PenLF	4.8	B5	P
PT25	642 350 000		4	22	400	200	62	4	100	100	4	B5	P
PT25H	642 350 000		5	16	400	300	62.5	6.5	100	PenLF	5	B5	P
PT41	642 350 000		4	12.5	250	200	30	3	100	100	3	B5	P
PT41B	642 350 000		4	40	400	300	30	2.25	100	100	2.2	B5	P
PT225	642 350 000		2	6	150	150	8	2.3	100	100	2.5	B5	P
PT225	642 300 000	G ₂	2	6	150	150	8	2.3	100	100	2.5	B4	P
PT240	642 350 000		2	9	150	150	16	2.5	100	100	1.6	B5	P
PT250	642 350 000		2	15	250	250	40		100	PenLF		B5	P
PT425	642 350 000		4	7.5	150	150	15	2	100	100	2	B5	P
PTAD	968 231 500	G ₁	4	6	250	250	7	7	100	PenLF	7	B7	DDP
PTA	045 231 600		13	10	250	250	32	4	100	PenLF	4	B7	P
PTS	005 231 600	G ₁	26	5.5	250	250	40	6	100	PenLF	6	B7	P
PTS	045 231 600		26	8.2	250	250	32	6	100	PenLF	5	B7	P
PTSA	869 231 500	G ₁	26	5.5	200	200	40		100	PenLF		B7	DDP
PTSD	968 231 500	G ₁	26	5	250	200	40	6	100	PenLF	6	B7	DDP
PTZ	005 231 600	G ₁	40	5.5	250	200	40	7.5	100	PenLF	7	B7	P
PVO6-20	400 235 100	A	6	40	200	300	40	4	100	100	4	B7	P
PVO6-25	401 235 100	A	6	40	200	300	40	4	100	100	4	B7	P
PV1-35	401 235 100	A	12	25	250	200	40	2	100	100	2	B7	P
PV4	892 300 000		4				60				20mA	B4	RR
PV25	091 231 800		25				60				20mA	B7	RR
PV29	091 231 800		30				60				20mA	B7	RR
PV29s	123 180 090		30				60				20mA	8SC	RR
PV30	091 231 800		30				30				15mA	B7	RR
PV30a	123 180 090		30				30				15mA	8SC	RR
PV30S	123 190 080		30				60				20mA	8SC	RR
PV75/1000	892 300 000		4				30				17mA	B4	RR
PV100/2000	892 300 000		4				60				18mA	B4	RR
PV200/600	892 300 000		4				120				28mA	B4	RR
PV400	802 300 000		4				30				15mA	B4	R
PV430	892 300 000		4				15				9mA	B4	RR
PV475	892 300 000		4				15				11mA	B4	RR
PV480	802 300 000		4				30				16mA	B4	R
PV495	892 300 000		4				30				17mA	B4	RR
PV3018	190 812 300		30				60				20mA	C7	RR
PV4100	892 300 000		4				30				15mA	B4	RR
PV4200	892 300 000		4				60				27mA	B4	RR
PV4201	892 300 000		4				60				27mA	B4	RR
PV4300	892 300 000		4				60				20mA	B4	RR
PVB6	892 310 000		6				60				20mA	B5	RR
PX2	642 300 000		2	22	150		22	1.5	100		1.5	B5	T
PX4	642 300 000		4	43	300		43	6	100		6	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PX5	642 300 000		4	34	400		62.5	6.5	100		6.5	B4	T
PX25	642 300 000		4 (5)	31	400		40	7.5	100		7	B4	T
PX25A	642 300 000		4 (5)	100	400		62.5	3.7	100		6.9	B4	T
PX41	642 300 000		4	40	250		49	6	100		6	B4	T
PX230	642 300 000		2	15	150		17.5	3.5	100		3.5	B4	T
PX230SW	602 300 000	G ₁	2	15	150		18	3.5	100		3.5	B4	T
PX240	642 300 000		2	32	200		25	3	100		3	B4	T
PX2100	642 300 000		7.5	30	400		18	1.6	100		1.6	Sm4	T
PY31	020 080 310		17				120		REC		70mA	A08	R
PY32	028 08* 310		29				180		REC			A08	R
PY71	200 800 030	C	21				120		REC		30mA	B8B	R
PY80	001 230 008		19				180		REC		70mA	B9A	R
PY81	*** 23* **8	C	17				120		REC		60mA	B9A	R
PY82	**1 23* **8		19				180		REC		70mA	B9A	R
PY83	*** 23* **8	C	20				120		REC		70mA	B9A	R
PZ	264 530 000		2.5	16.5	250	250	31	2.5	100	PenLF	2.5	UX5	P
PZ03-3	401 235 000	A	4	25	300	125	25	1.4	100	100	1.4	B7	P
PZ05-15	401 235 000	A	4		400	150	40	1.25	100	100	1.2	B7	P
PZ30	029 183 210		26				120		REC		60mA	A08	RR
PZH	265 413 000		2.5	16.5	250	250	34	2.2	100	PenLF	2.2	UX6	P
QA2400	412 361 500		6	2.5	200	200	8.0	2.5	100	150	2.5	B7G	P
QA2401	6*2 364 100		6	8.5	250		10.5	2.2	100		2.22	B7G	T
QA2402	412 36* 500		6	13.5	250	250	16.0	2.6	100	150	2.6	B7G	P
† QA2403	412 361 500		6	2.0	250	250	10.0	7.5	100	150	5.0	B7G	P
				1.6	200	150	4.0	6.4	100	150	5.0	B7G	P
QA2404	192 310 800		6				3.0		D			B7G	DD
QA2405	241 657 143		6	14	250	150	30	3.9	100	100	3.9	B9G	PP
QA2406	471 226 413		6	2.0	250		10.0	5.5	100		5.0	B9A	TT
QA2407	802 309 100		6				30		REC		15mA	B7G	RR
QA2408	481 461 230		6	8.0	250		9.0	2.6	100		2.6	A08	TT
QB65	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
QB309	641 227 413		6	2	250		10	5.5	100		5	B9A	TT
QD77	182 310 900		6						D			B7G	DD
QE04-10	265 511 413		6.3	12	300	150	25	1.9	No Data Available			B9G	P
QE05	125 141 300	A ₁	6		200	200	100	7	No Data Available			A08	P
QE06-50	254 130 000	A ₁	6	14	300	250	83	6.5	100	100		UX5	P
QL77	6*2 364 100		6	8.5	250		10.5	2.2	100		2	B7G	T
QN77	412 360 500		6	12.5	250	250	16	2.6	100	PenLF	2.6	B7G	P
QPT2	476 235 700		2	9	150	150	3.3		100	100		B7	PP
QP21	446 235 700		2	4.5	150	150	11.0	2.3	100	100	2.3	B7	PP
QP22A	465 230 574		2	12	150	150	3	4	150	150	4	B9	PP
QP22B	446 235 700		2	11.7	150	150	3.8		100	100	3.1	B7	PP
QP25	207 544 630		2	6	125	125	10	3	100	100	3	M08	PP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
QP230	446 235 700		2	9.6	125	125	4.65	3	100	100	3	B7	PP
QP240	465 230 574		2	5.0	150	150	25	4	100	100	4	B9	PP
QQ03-12	601 235 144		6		300	250	45	7	No Data Available			B9A	P
QQCO4-15	263 724 540		6	14	200	200	20	2.0	No Data Available			B8B	P
QQE03-20	245 134 200		6	17	400	200	20	2.5	No Data Available			B7A	PP
QQEO4-20	245 134 200	A ₁ A ₂	6	26	400	250	30	3.0	No Data Available			B7A	PP
QQE06-40	245 134 200	A ₁ A ₂	6		400	250	30	3.4	No Data Available			B7A	PP
QQV03-10	414 226 573		6	10	200	150	30.0	3.3	No Data Available			B9A	PP
QQV04-20	241 531 420	A ₁ A ₂	6	23	400	200	25	4	No Data Available			B7A	PP
QQV06-40	245 134 200	A ₁ A ₂	6		400	250	30	3.4	No Data Available			B7A	PP
QQZ04-15	273 624 540		3	10	300	200	20	2	100	100	2	B8B	PP
QV03-12	601 235 144		6	7.5	250	250	45.0	7.0	100	150	7.0	B9A	P
QV04-7	265 511 413		6	30	300	250	25	1.9	100	100	1.9	B9G	P
QV04-12	601 235 144		6	7.5	250	250	45	7	100	150	7	B9A	P
QV04-20	241 531 420	A ₁ A ₂	6	22	400	200	25	4	100	100	4	A08	PP
QV05-25	254 130 000	A	6	12.5	300	250	83	6.5	100	150	6	UX5	P
QV06-20	125 141 130	A	6	30	200	200	100	7	No Data Available			A08	P
QW77	412 361 500		6	2.5	200	200	8	2.5	100	100	2.5	B7G	P
QZ77	412 361 500		6	2	250	250	10	7.6	100	100	5	B7G	P
R1	892 300 000		4				30		REC		15mA	B4	RR
R2	892 300 000		4				60		REC		30mA	B4	RR
R3	892 300 000		4 (5)				60		REC		50mA	B4	RR
R4	892 300 000		4				60		REC		40mA	B4	RR
R4a	892 300 000		4				60		REC		40mA	B4	RR
R4B	802 300 000		4				60		REC		40mA	B4	R
R10	112 311 100	D ₁	4				5		D			B7G	R
R11	002 300 000	D ₁	4				60		REC		20mA	B4	R
R12	023 000 000	D ₁	6						D			B3G	D
R13A	028 090 310		13				30		REC		15mA	A08	RR
R14	028 193 210		26				120		REC		60mA	A08	RR
R16	123 000 000		1.4						D			B3G	D
R17	** 23* ***	D ₁	6				120		REC		30mA	B9A	R
R18	** 23* ***	D ₁	6				120		REC		36mA	B9A	R
R19	230 232 032	D ₁	1.25						D			B9A	D
R41	892 300 000		4				60		REC		20mA	B4	RR
R42	892 300 000		4				60		REC		20mA	B4	RR
R43	892 300 000		4				180		REC		40mA	B4	RR
R52	030 809 020		5				60		REC		20mA	A08	RR
RE0	264 300 000		4	24	250		20	4	100		4	UX4	T
R236	026 510 300	G ₁	1.4	2	100	100	1	0.55	100	100	0.5	A08	P
R2018	642 310 000		20	2.5	200		2.5	3	100		3	B5	T
RA	892 310 000		13				30		REC			B5	RR
RA1	364 200 000		15	4.5	90		4.5	1.185	80		1.1	UX4	T
RB350/80	892 300 000		4				30		REC		15mA	B4	RR
RB500/120	892 300 000		4				60		REC		20mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
RB650/250	892 300 000		4				120		REC		30mA	B4	RR
RE034	642 300 000		4	3	200		2	1.2	100		1	B4	T
RE074	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
RE074N	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
RE084	642 300 000		4	4	150		4	1.5	100		1.5	B4	T
RE114	642 300 000		4	15	150		13	1.3	100		1.3	B4	T
RE134	642 300 000		4	17	250		12	2.0	100		1.9	B4	T
RE144	642 300 000		4	9	125		2	0.65	125		0.65	B4	T
RE304	642 300 000		4	32	250		20	1.9	100		1.6	B4	T
RE404	642 300 000		3.5		200			0.6	100		0.6	B4	T
RE604	642 300 000		4	45	250		40	2.5	No Data Available			B4	T
REN704	652 310 000	G ₁	4		100		2	1.1	100		1.1	B5	P
REN904	642 310 000		4	3.5	200		6	2.4	100		2.4	B5	T
REN914	642 310 000		4	1.5	200		0.2		100			B5	T
REN924	642 310 000	D ₁	4	3	200		6	2	100		2	B5	DT
REN1004	642 310 000		4		200			1.5	100		1.4	B5	T
REN1814	642 310 000		20	1.6	200		0.2	1.0	100		1.0	B5	T
REN1817D	652 310 000	G ₁	20		100	100		1.1	100	90	1.1	B5	P
REN1821	642 310 000		20	3	200		6	2.3	100		2.3	B5	T
REN1826	642 310 000	D ₁	20	3	200		6	1.8	100		1.8	B5	DT
RENS1204	542 310 000	A	4	2	200	60	4	1.0	100	60		B5	P
RENS1214	542 310 000	A	4	2.2	200	100	6	1.0	100	100		B5	P
RENS1264	542 310 000	A	4	2	200	100	3	2	100	100		B5	P
RENS1264B1	542 300 000	A	4	2	200	100	3	2	100	100		B4	P
RENS1274	542 310 000	A	4		200	100	3	2	100	100		B5	P
RENS1284	542 310 000	A	4	2	200	100	3	2.5	100	100		B5	P
RENS1294	542 310 000	A	4	2	200	100	4.5	2	100	100		B5	P
RENS1374D	642 310 000	G ₂	4	18	250	250	24	2.5	100	100		B5	P
RENS1818	542 310 000	A	20	2	200	100	3	2	100	100		B5	P
RENS1819	542 310 000	A	20		200	60	4	1	100	60		B5	P
RENS1820	542 310 000	A	20	2	200	60	4	1	100	60		B5	P
RENS1823D	642 310 000	G ₂	20	18	200	200	20	1.7	100	100		B5	P
RENS1884	642 310 000	G ₂	20	2	200	100	3	2.4	100	100		B5	P
RENS1894	642 310 000	G ₂	20	2.2	200	100	4	1.8	100	100		B5	P
RES094	542 300 000	A	4	2	200	75	4	7	100	75		B5	P
RES164	642 350 000		4	11.5	250	75	12	1.4	100	75		B5	P
RES174D	642 300 000	G ₂	4	19	250	150	12	1.3	100	100		B4	P
RES364	642 350 000		4	2.5	300	200	20	1.7	100	100		B5	P
RES374	642 350 000		4	42	300	200	20	1.5	No Data Available			B5	P
RES964	642 350 000		4	15	250	250	36	2.8	No Data Available			B5	P
RFG5	003 200 000	D ₁	6						D			F8	R
RFP8/14	041 231 500	A ₁	4	20	400	250	35	4	100	PenLF	4	B7	P
RFP8/14	542 310 000	A ₁	4	20	400	250	35	4	100	PenLF	4	B5	P
RG250/1000	002 300 000	D ₁	4				120		REC		30mA	B4	R
RG250/3000	280 300 000		2.5				120		REC		30mA	UX4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
RGN354	802 300 000		4				15		D			B4	R
RGN504	892 300 000		4				15		D			B4	RR
RGN564	802 300 000		4				30		REC		15mA	B4	RR
RGN1054	892 300 000		4				30		REC		15mA	B4	RR
RGN1064	892 300 000		4				30		REC		15mA	B4	RR
RGN1074	892 300 000		4				60		REC		20mA	B4	RR
RGN1304	802 300 000		4				60		REC		20mA	B4	R
RGN1503	892 300 000		2.5				30		REC		15mA	B4	RR
RGN2004	892 300 000		4				60		REC		20mA	B4	RR
RGN2504	892 300 000		4				60		REC		20mA	B4	RR
RH	061 231 500	G ₁	4	1.7	250	100	7.9	7	200	100	7.4	B7	P
RK10	265 300 000		7.5	100	350		50		100			UX4	T
RK15	264 300 000		2.5	33	250		22	2.35	100		2.3	UX4	T
RK16	264 130 000		2.5	28	250		26	2.6	100		2.6	UX5	T
RK19	200 300 000	D ₁ D ₂	7.5				120		REC		30mA	UX4	RR
RK21	200 300 000	D ₁	2.5				120		REC		30mA	UX4	R
RK24	364 200 000		2	13.5	175		8	1.6	100		1.6	UX4	T
RK39	254 130 000	A ₁	6	14	300	250	83	6.5	100	PenLF		UX5	P
RK60	200 300 000	D ₁ D ₂	5				120		REC		30mA	UX4	RR
RL7	265 114 113		6	1.7	250	250	10.0	7.7	100	150	7.0	B9G	P
RL16	241 600 003		6	2.5	250		10	6.5	100		5	B9G	T
RL18	241 600 003		6	2.6	250		10.0	6.5	100		6.4	B9G	T
RL37	244 664 413		6	1.5	250		10	9	100		7	B9G	T
RO337	892 300 000		2.5				30		REC		15mA	B4	RR
RO423	892 300 000		2.5				30		REC		15mA	B4	RR
RO431	892 300 000		4				60		REC		20mA	B4	RR
RC443	892 300 000		4				60		REC		20mA	B4	RR
RO446	892 300 000		4				30		REC		15mA	B4	RR
RO452	892 300 000		4				60		REC		20mA	B4	RR
RO457	892 300 000		4				60		REC		20mA	B4	RR
RO481	802 300 000		4				120		REC		30mA	B4	R
RO534	892 300 000		5				60		REC		20mA	B4	RR
RO771	802 300 000		7.5				120		REC		30mA	B4	R
RS	802 310 000		3				60		REC		20mA	B5	R
RS1009	245 134 200	A ₁ A ₂	6	25	400	250	30	3.4	No Data Available			B7A	PP
RS1019	245 134 200	A ₁ A ₂	6	20	40	250	20	2.5	No Data Available			B7A	PP
RRAF	642 300 000		4	2	125		4	1.45	100		1.4	B4	T
RRBF	642 300 000		4	2.5	125		10	1.25	100		1.2	B4	T
RSF	542 300 000	A	4	1	150	75	4.5	1.25	150	75	1.25	B4	T
RT1-2	642 300 000		4	2.6	125		26	2.5	100		2.5	B4	T
RT2	642 300 000		4	4	200		18	1.75	150		1.75	B4	T
RT3	642 300 000		4	2.3	300		15	2.85	100		2.8	B4	T
RTR4341	061 231 500	G ₁	21	2.2	125	8	8	8	100	125	8	B4	P
RTR4342	005 231 600	G ₁	21	5.8	125	125	48	9	100	125	8	B7	P
RV120/250	892 300 000		4				60		REC		20mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
RV120/350	892 300 000		4				60		REC		20mA	B4	RR
RV120/350S	023 080 090		4				60		REC		30mA	8SC	RR
RV120/500	892 300 000		4				60		REC		20mA	B4	RR
RV120/500S	023 080 090		4				60		REC		20mA	8SC	RR
RV200/600	892 300 000		4				120		REC		20mA	B4	RR
RV210	042 310 000	A ₁	4	53	400		70	5.8	No Data Available			B5	T
RX2I	200 030 000	D ₁	2.5				120		REC		30mA	UX5	R
RX215	389 200 000		2.5				5		D			UX4	RR
RZ	023 100 080		20				60		REC		20mA	8SC	R
SOI	264 300 000		15	40.5	175		21	1.5	100		1.5	UX4	T
SO2	264 300 000		7.4	88	400		55	2.1	100		2.1	UX4	T
S2	542 300 000	A	2	1	125	60	2.25	1.1	125	60	1.1	B4	P
S4V	542 310 000	A	4	1	200	75	1.5	1.15	100	75	1.1	B5	P
S4VA	542 310 000	A	4	1.5	200	100	2.75	2	100	100	2	B5	P
S4VB	542 310 000	A	4	1.5	200	125	4.6	2.5	100	100	2.5	B5	P
S11A	892 300 000		4				30		REC		15mA	B4	RR
S11D	892 300 000		4				60		REC		20mA	B4	RR
S12	542 300 000	A	2	1	100	30	2.5	0.7	No Data Available			Sm4	P
S21	542 300 000	A	2	0	125	75	3.6	1.1	100	75	1.1	B4	P
S22	542 300 000	A	2	0	125	75	4	1.75	125	75	1.75	B4	P
S23	542 300 000	A	2	1.5	150	75	2.8	1.1	150	75	1.1	B4	P
S24	542 300 000	A	2	1	150	75	3.2	1.4	150	75	1.4	B4	P
S30C	642 300 000		4	38	300		50	5	100		5	B4	T
S30D	642 300 000		2	38	300		50	5	100		5	B4	T
S207	542 300 000	A	2	1.5	200	100	3	0.7	100	100	0.7	B4	P
S208	542 300 000	A	2	0	200	100	2	0.8	100	100	0.8	B4	P
S209	023 010 560	G ₁	2	0.5	125	125	2.4	0.7	125	125	0.7	8SC	P
S210	642 300 000	G ₂	2	1.5	150	90	3	1.2	100	90	1.0	B4	P
S213	542 300 000	A	2	0.5	150	90	3	1.3	100	90	1.3	B4	P
S215	542 300 000	A	1	1.0	150	90		0.85	100	90	1.5	B4	P
S215A	542 300 000	A	2	1	150	60	2	1.1	150	60	1.1	B4	P
S215B	542 300 000	A	2	1	150	60	1.5	1.2	150	60	1.2	B4	P
S215VM	542 300 000	A	2	1.4	150	60	1.0	0.8	150	60	1.4	B4	P
S217	542 300 000	A	2	0.5	150	150	2.3	1.7	100	150	1.7	B4	P
S218	041 230 500	A	2	0.5	150	150	3	1.85	100	150	1.8	B7	P
S220	542 300 000	A	2		150	75	4	1.1	150	75	1.1	B4	P
S310A	265 113 000	G ₁	10	3	125	150	5.5	1.9	100	100	1.9	UX6	P
S311A	265 130 000	G ₁	10	15	125	150	30	2.8	100	100	2.8	UX5	P
S328A	265 113 000	G ₁	7.5	3	125	150	5.5	1.9	100	100	1.9	UX6	P
S239A	265 130 000	G ₁	7.5	15	125	150	30	2.8	100	100	2.8	UX5	P
S329L	265 113 000	G ₁	7.5	15	125	125	30	2.8	No Data Available			UX6	P
S406/7	542 300 000	A	4	2	200	100	1.5	1	100	100	1	B4	P
S408	542 300 000	A	4	1.5	175	75	4	0.7	100	75		B4	P
S409	542 300 000	A	4	1.5	175	75	4	0.8	100	75		B4	P
S410	542 300 000	A	4	1.5	175	75	4	1.0	100	75		B4	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
S415N	542 310 000	A	4	2	200	100	6	1	100	100	1	B5	P
S420	061 231 500	G ₁	4	3	250	250	11.5		100	200		B7	P
S430N	542 300 000	A	4	1.3	200	100	1.5	0.9	100	100	3	B5	P
S431N	542 310 000	A	4	1.5	225	100	3.0	2.0	100	100		B5	P
S432N	023 110 560	G ₁	4	3	225	100	2.5	2.2	100	100		8SC	P
S435n	542 310 000	A	4	2	200	100	3.0	2.3	100	100	2.3	B5	P
S440	061 231 500	G ₁	4	2.35	250	250	4.1	3.45	100	200	3.4	B7	P
S493	542 310 000	A	4	2	200	100	4		100	100		B5	P
S495	542 310 000	A	4	2	200	100	6	2.5	100	100	2.5	B5	P
S617	023 110 560	G ₁	6.3	3	225	100	2.5	2.2	100	100		8SC	P
S620	023 110 560	G ₁	6.3	2.5	225	100	3.5	2.0	100	100		8SC	P
S629	023 110 560	G ₁	6.3	2.5	225	100	3.5	2.0	100	100		8SC	P
SI323	061 231 500	G ₁	13	3	200	100	8	1.85	100	100	1.85	B7	P
SI323	023 110 560	G ₁	13	3	200	100	8	1.85	100	100	1.85	8SC	P
SI324	061 231 500	G ₁	13	2	200	100	3	2.37	100	100	2.3	B7	P
SI327	023 110 560	G ₁	13	2.5	250	100	3.5	2.0	100	100		8SC	P
SI328	023 110 560	G ₁	13	2	200	100	3	2.37	100	100	2.3	BSC	P
S2018	041 231 500	A	20	3	200	60	4	1.2	100	60	1.2	B7	P
S2018	542 310 000	A	20	3	200	60	4	1.2	100	60	1.2	B5	P
S2035N	542 310 000	A	20	2.5	225	100	3.5	2.0	100	100		B5	P
S2043	542 310 000	A	20	2.5	250	100	5	2.0	100	100		B5	P
S4020A	254 300 000		2	1	125		1.3	0.6	100		0.6	UX4	T
S4020B	642 300 000		2	1	125		1.3	0.6	100		0.6	UX4	T
S4021A	264 300 000		4	8	125		20	3	100		3	UX4	T
S4021B	642 300 000		4	8	125		20	3	100		3	B4	T
S4022AR	236 400 000		4	4.5	125		5	2.2	100		2.2	UX4	T
S4022B	642 300 000		4	4.5	125		5	2.2	100		2.2	B4	T
S4045A	642 350 000		5	70	250	75	45	1.45	100	60	1.45	B5	P
SD	892 310 000		5						D			B5	DD
SD2	642 300 000		2	1.5	150		2.2	1.4	150		1.4	B4	T
SD6	*82 310 *00		6				5		D		6mA	B7G	R
SD6I	123 000 000	D ₁	6						D			B3G	D
SD917A	402 013 060		6.3	3.6	100		1.4	2.7	100		2.7	B8A	T
SE211	542 300 000	A	2	1	150	75	1	1.5	150	75	1.5	B4	P
SE211C	542 300 000	A	2	1.0	150	75	1	1.5	150	75	1.5	B4	P
SE2018	542 310 000	A	20	3	200	60	4	1.2	100	60	1.2	B5	P
SE2118	542 310 000	A	20	24	200	100	3	3	100	60	3	B5	P
SG2	542 300 000	A	2		150	75	2.5	1	100	75	1	B4	P
SG215	542 300 000	A	2	1.5	150	75	2.7	1	100	60	1	B4	P
SG215A	542 300 000	A ₁	2	1.5	125	75	1.5	1.1	125	60	1.1	B4	P
SG215VM	542 300 000		2	0	125	75		1.4	125	80	1.4	B4	P
SG220	542 300 000	A	2	1.5	150	75	2.4	1.5	100	75	1.5	B4	P
SG220SW	652 300 000	G ₁	2	1.5	150	75	2.4	1.5	150	75	1.5	B4	P
SGA1	542 310 000	A	4		200	100	6	3	100	100	3	B5	P
SN954	082 813 080		6.3				30		REC		15mA	B8A	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
SN1039A	412 365 100		6.3	1.4	100	100	7.0	5.1	100	100	5	B7G	P
SP2	041 230 500	A	2	0	150	150	3	1.8	150	150	1.8	B7	P
SP2B	061 230 500	G ₁	2	1	150	150	2.6	0.8	150	150	0.8	B7	P
SP2B(S)	032 004 560		2	0.5	150	150	2.6	0.8	150	150	0.8	8SC	P
SP2D	061 230 500	G ₁	2	1	150	150	1.4	1.7	150	150	1.7	B7	P
SP2D	542 300 000	A	2	1	125	125	1.45	1.7	125	100	1.7	B4	P
SP2V	041 230 500	A	2	0	150	75	2.9	1.1	100	75	1	B7	P
SP4(TUNG)	061 231 500	G ₁	4	2	200	100	3	2.3	100	100	2.3	B7	P
SP4	542 310 000	A	4	2	200	100	3	2.3	100	100	2.3	B5	P
SP4A	041 231 500	A	4	2	250	100	3	2.4	100	100	2.4	B7	P
SP4(MUL)	041 231 500	A	4	2	200	100	3	2.3	100	100	2	B7	P
SP4B	061 231 500	G ₁	4	2.4	250	250	4	3.4	100	100	3.4	B7	P
SP4C	023 110 560	G ₁	4	2.4	250	250	4	3.4	100	100	3.4	8SC	P
SP4S	023 110 560	G ₁	4	2	250	100	3	2.5	100	PenLF	2.5	8SC	P
† SP6	412 361 500		6	2 1.5	250 200	250 150	10 4	7.5 6.4	100 100	PenLF PenLF	5 5	B7G	P
SP6S	023 110 560	G ₁	6	2	250	100	3	2	100	100	2		
SP13	061 231 500	A	13	2	200	100	3.3	2.2	100	100	2.2	B7	P
SP13	023 110 560	G ₁	13	2	200	100	3.3	2.2	100	100	2.2	8SC	P
SP13B	061 231 500	G ₁	13	1.5	200	200	2	4	100	150	4	B7	P
SP13C	061 231 500	G ₁	13	2.2	200	200	2.5	2.8	100	150	2.8	B7	P
SP13S	023 110 560	G ₁	13	2	150	100	3	2.4	100	100	2.4	8SC	P
SP20	542 310 000	A	20		200	100	4.5	3.5	100	100	3.5	B5	P
SP22	206 510 030	G ₁	2	1	125	125	1.1	1.2	125	100	1.2	M08	P
SP35	023 110 560	G ₁	35	8	200	200	41	7	100	PenLF	7	8SC	P
SP41	216 510 030	G ₁	4	1.5	200	200	10.9	8.5	100	150	8	M08	P
SP42	216 510 030	G ₁	4	1.3	200	125	20	8.4	100	100	8	M08	P
SP61	216 510 030	G ₁	6	1.5	200	200	10.9	8.5	100	150	8	M08	P
SP62	216 510 030	G ₁	6	1.25	200	100	16	9	200	100	8	M08	P
SP65	023 110 560	G ₁	6	2	250	100	3	2.1	100	100	2.1	8SC	P
SP141	206 500 030	G ₁	1.4	1	90	90	1.3	0.75	80	90	0.75	M08	P
SP181	216 510 030	G ₁	18	1.5	200	200	10.9	8.5	100	PenLF	8	M08	P
SP210	041 230 500	A	2	1	125	125	1.1	1.2	125	100	1.2	B7	P
SP215	041 230 500	A	2	1.5	150	80	2.1	1.6	100	75	1.6	B7	P
SP220	642 300 000		2	12	150		14	3	100		3	B4	T
SP1320	041 231 500	A	13	1.5	250	100	4.4	2.0	100	100	2	B7	P
SP2220	041 231 500	A	22	3	250	200	4.9	2.65	100	150	2.6	B7	P
SPT2	041 230 500	A	2	1	125	125	2.8	1.5	125	100	1.5	B7	P
SPT4A	041 231 500	A	4	1.5	250	100	2	2.3	200	100	2.3	B7	P
SPTA	061 231 500		13	2.5	200	100	2.2	1.4	100	100		B7	P
SPTS	041 231 500	A	13	1.5	250	100	2	3	100	100	3	B7	P
SR2	642 300 000		2	16	200		10	3	100		3	B4	T
SR4	642 310 000		4	20	250		20	4	100		4	B5	T
SRS4451	245 134 200	A ₁ A ₂	6	25	400	250	30	3.4	No Data Available			B7A	PP
SS210	542 300 000	A	2	1	150	75	0.6	1.4	150	75	1.4	B4	P
SS210C	542 300 000	A	2	1	150	75		1.4	150	75	1.4	B5	T

† See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
SS210DDT	682 390 000	G ₁	2	5-5	150		2-4	1-4	100		1-4	B5	DDT
SS210D	642 300 000		2	4-5	150		2	1-6	100		1-6	B4	T
SS210HF	642 300 000		2	4	150		1	0-75	100		0-75	B4	T
SS210HL	642 300 000		2	1-5	150		21-4	125			1-4	B4	T
SS220PA	642 300 000		2	6	150		8	3-5	100		3-5	B4	T
SS220P	642 300 000		2	12	150		6	1-5	100		1-5	B4	T
SS220SP	642 300 000		2	12	150		14	3-5	100		3-5	B4	T
SS240SP	642 300 000		2	12	150		15	3-5	100		3-5	B4	T
SS2018	542 310 000	A	20	3	200	100	3	3	100	90	3	B5	P
SU25	*2* 0** 3*0	D ₁	2						D			A08	D
SU45	112 311 100	D ₁	4				30		REC		15mA	B7G	R
SU61	023 000 000	D ₁	6						D			B3G	D
SU2130	002 300 000	D ₁	2				2		D			B4	R
SU2150	002 300 000	D ₁	2 (2-5)				2		D			B4	R
SU2150A	002 300 000	D ₁	2 (2-5)				5		D		2mA	B4	R
SU3130	002 300 000	D ₁	2						D			B4	D
SWG2	652 300 000	G ₁	2		150	75		1-5	100	75	1-5	B4	P
SW1	802 300 000		4				30		REC		15mA	B4	R
T2M05	672 344 100		6	{ 0-85 3	100		8-5	5-3	100		5-3	B7G	TT
T4D	123 000 000	D ₁	4		150		5	4-5	100		5-3		
TSD	123 000 000	D ₁	6						D			B3G	D
T13U	023 100 060	G ₁	13	4	200		5-9	2-6	100		2-6	85C	T
T41 (Mazda)	216 040 030		4		100		30	2KΩ	No Data Available			M08	Thyratron
T134	542 300 000	A	4	1	150	75	5	1-3	100	75		B4	P
T136	642 300 000		4	8	200		6	1-6	100		1-6	B4	T
T151	642 300 000	G ₂	4	15	200	150	12	1-8	100	100		B4	P
T204	023 004 060		2	1	125		1-8	0-6	125		0-6	85C	T
T435	023 100 060	G ₁	4	5	225		6	2-5	100		2-4	85C	T
T635	023 100 060	G ₁	6-3	16	250		20	3-2	100		3	85C	T
T1335	023 100 060	G ₁	13	4-5	225		6	2-5	100		2-4	85C	T
TB13	802 310 000		13						D			B5	D
TB032	642 300 000		2	30	150		12	1-5	100		1-5	B4	T
TB052	642 300 000		2	15	150		7	1-2	100		1-2	B4	T
TB062	642 300 000		2	10-5	150		13	2	100		2	B4	T
TB102	642 300 000		2	4	150		5	1-25	100		1-2	B4	T
TB122	642 300 000		2	4-5	150		6	3-5	100		3-5	B4	T
TB172	642 300 000		2	4-5	150		4	1-4	100		1-4	B4	T
TB282	642 300 000		2	1-5	150		2	1-3	125		1-3	B4	T
TB402	446 230 700		2	0	150		6		150			B7	TT
TB452	542 300 000	A	2	0	150	75	2	1-5	150	75	1-5	B4	P
TB552	542 300 000	A	2	0	150	75	4	1-5	150	75	1-5	B4	P
TB622	542 300 000	A	2	0	150	90	2	1-4	100	90	1-4	B4	P
TB9920	642 310 000		20	1-5	200		0-2	4	150		4	B5	T
TBC14	809 231 600	G ₁	4	7	250		4	2	100		2	B7	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
TBC113	809 231 600	G ₁	13	5	200		4	3-6	100		3-6	B7	DDT
TC05-25	642 300 000		4		400		65	2-2	No Data Available			B4	T
TC432	642 300 000	S	2	4-5	150	150	9-5	2-5	100	100	2-5	B4	P
TC432	642 350 000		2	4-5	150	150	9-5	2-5	100	100	2-5	B5	P
TD044	642 300 000		4	40	250		40	3	100		3	B4	T
TDD1C	023 189 060		13	5-0	200		4-0	2-0	100		2-0	B7	DDT
TDD2	682 390 000	G ₁	2	5-5	150		2-5	1-4	100		1-4	B5	DDT
TDD2A	682 390 000	G ₁	2	1-5	150		1-95	1-2	125		1-2	B5	DDT
TDD4	908 231 600	G ₁	4	7	250		4	2	100		2	B7	DDT
TDD13C	809 231 600	G ₁	13	5	200		4	2	100		2	B7	DDT
TDD25	809 231 600	G ₁	25	1	100		4	2	100		2	B	DDT
TE2	028 090 310		26				30		REC		15mA	A08	RR
TE3	028 090 310		12				30		REC		15mA	A08	RR
TE5	028 090 310		6-3				30		REC		15mA	A08	RR
TE094	642 310 000		4	16	200		12	1-3	100		1-3	B5	T
TE104	642 300 000		4	26	400		61	4	100		4	B4	T
TE244	642 310 000		4	3-5	200		6	2-4	150		2-4	B5	T
TE384	642 310 000		4	2	200		3	1-5	150		1-5	B5	T
TE424	542 310 000	A	4		200	100	3	2	100	100	2	B5	P
TE434	642 350 000		4	14	250	250	36		100	PenLF		B5	P
TE464	041 231 500	A	4		200	100	3	2-5	100	100	2-5	B7	P
TE474	041 231 500	A	4	1-5	200	100	4-5	2	100	100	2	B7	P
TE534	642 310 000	S	4	15	250	250	24		100	PenLF		B5	P
TE564	041 231 500	A	4	1-5	200	100	4-5	3-2	100	100	3-2	B7	P
TE634	045 231 600		4	22	250	250	36		100	100		B7	P
TE994	642 310 000		4	1-6	250		4	4	200		4	B5	T
TF64	061 231 500	G ₁	4	2-75	250	250	11	2	200	150	2	B7	P
TF104	642 300 000		4	36	400		61	4	100		4	B4	T
TH1	276 454 300		6-3	{	250				100	60		} B8B	TH
					250				100	100			
TH2	645 230 700	G ₁	2	{	150		0-95	1-2	100	60	1-2	} B7	TH
					250	75	4		125	60	0-7		
TH4	645 231 700	G ₁	4	{	150		6	1-2	150	60	1-2	} B7	TH
					200	100	3-5		200	75	3-0		
TH4A	645 231 700	G ₁	4	{	100		5	2-0	125	60	6	} B7	TH
					250	100	3-5		200	100	3-0		
TH4B	645 231 700	G ₁	4	{	100		9	3-8	100	60	5-5	} B7	TH
					250	100	3-25		200	100	3-5		
TH13C	645 231 700	G ₁	13	{	150		6	1-2	100	60	1-2	} B7	TH
					250	75	4-0	1-8	200	75	3-6		
TH21C	645 231 700	G ₁	21	{	125		6	1-2	100	60	1-2	} B7	TH
					250	75	4	1-8	200	75	3-0		
TH22C	645 231 700	G ₁	29	{	125		5	6	100	60	5	} B7	TH
					250	100	3-5		200	75	3-0		
TH29	645 231 700	G ₁	29	{	100		12-0	4-5	100	60	5	} B7	TH
					250	100	3-5		200	75	3-0		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
TH30	645 231 700	G ₁	30	{ 2	100		9.5	5.5	100	60	5.5	B7	TH
TH30C	645 231 700	G ₁	29	{ 2.5	125	100	3.5		100	100		B7	TH
TH31	217 640 530	G ₁	4	{ 3	100		10.2	4	100	60	5.3	M08	TH
TH41	217 640 530	G ₁	4	{ 3	250	100	3	3	100	90	3	M08	TH
TH41	217 640 530	G ₁	4	{ 3	100		10.2	4	100	60	5.3	M08	TH
TH41	217 640 530	G ₁	4	{ 3	250	100	3	3.1	100	100	3.1	M08	TH
TH62	027 546 310	G ₁	6	{ 2	100		4.4	2.4	100	60	2.2	A08	TH
TH62	027 546 310	G ₁	6	{ 2	250	100	3		200	100	1.2	A08	TH
TH233	217 640 530	G ₁	23	{ 2	100		14.0	2.1	100	60	4.0	M08	TH
TH233	217 640 530	G ₁	23	{ 2	150	100	2.6	3	100	90	3	M08	TH
TH2320	645 231 700	G ₁	23	{ 0	100		4.5	5.3	100	60	5.3	B7	TH
TH2320	645 231 700	G ₁	23	{ 3	150	100	3		100	100	3.8	B7	TH
TH2321	645 231 700	G ₁	23	{ 0	100		4.0	5.3	100	60	5.3	B7	TH
TH2321	645 231 700	G ₁	23	{ 2	150	100	2.6	3.0	100	100	3.0	B7	TH
TL54	045 231 600		4	{ 12.5	250	250	70		100	PenLF		B7	P
§ TMO5	672 344 100		6	{ 0.85	100		8.5	5.3	100		5.3	B7G	TT
§ TMO5	672 344 100		6	{ 3	150		5	4.5	100		5.3	B7G	TT
TM12	412 344 600		6.3	{ 1.5	150		15	12	100		12	B7A	T
TP4	571 231 640	G ₁	4	{ 3	125		1.5	1.4	100	60	1.4	B9	TP
TP4	571 231 640	G ₁	4	{ 5	250	200	5.5	1.6	200	PenLF	1.5	B9	TP
TP22	571 230 640	G ₁	2	{ 1	100		0.8	1.2	100	60	1.4	B9	TP
TP22	571 230 640	G ₁	2	{ 1	125	60	1.2	1.0	150	60	1.3	B9	TP
TP23	645 230 700	G ₁	2	{ 1.0	100		4.5	2.1	100	60	2.1	B7	TP
TP23	645 230 700	G ₁	2	{ 1.5	125	60	1.0	1.0	125	60	1.2	B7	TP
TP25	207 640 530	G ₁	2	{ 1.0	100	0	3.7	1.6	100	60	1.7	M08	TP
TP25	207 640 530	G ₁	2	{ 1.5	125	60	1.0	1.0	125	60	1.0	M08	TP
TP26	207 640 530	G ₁	2	{ 1.0	125		2.2	1.5	125	60	1.3	M08	TP
TP26	207 640 530	G ₁	2	{ 1.0	125	75	1.5	1.5	125	75	1.5	M08	TP
TP230	561 230 740	G ₁	2	{ 0	100		20.0	1.1	100	60	1.1	B9	TP
TP230	561 230 740	G ₁	2	{ 0	150	75	4.3	1.3	150	75	1.3	B9	TP
TP443	642 350 000		4	{ 22	250	250	36	5	100	PenLF	5	B5	P
TP1340	571 231 640	G ₁	13	{ 200	250		2.0	1.4	150	60	0.14	B9	TP
TP1340	571 231 640	G ₁	13	{ 6.0	250	250	6.5	2.1	100	100		B9	TP
TP2620	571 231 640	G ₁	26	{ 2.5	250		1.5	1.4	100	60	1.4	B9	TP
TP2620	571 231 640	G ₁	26	{ 4.0	250	200	6.5	3.4	100	150	3.4	B9	TP
T549	261 504 130		20	{ 4.5	225	150	15	6	100	100	5.2	B8B	P
T551	412 365 100		6	{ 2.3	150	150	7	4.3	100	100	4	B7G	P
§ T552	672 344 100		6	{ 0.85	100		8.5	5.3	100		5.3	B7G	TT
§ T552	672 344 100		6	{ 3	150		5	4.5	100		5.3	B7G	TT
T553	541 236 **1		18	{ 1.8	200	100	15	10	100	100	8	B9A	P
T554	541 236 **1		6.3	{ 1.7	200	125	10	9	100	100	8	B9A	P
T5E4	061 231 500	G ₁	4	{ 2.5	250	150	8	14.5	100	100		B7	P
T5P4	061 231 500	G ₁	4	{ 2.5	200	200	8.0	4.7	100	150	4.7	B7	P
TT4	642 310 000		4	{ 16	250		20	3.2	100		3.2	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
TT4A	642 310 000		4	9	250		20	4.1	100		4.1	B5	T
TT11	020 450 310	A	6	11	250	150	30	3.5	100	100	3.5	A08	P
TT12	204 531 102	A	19	13	250	250	72	6	100	100	6	B9G	P
TT14	204 051 103	A	6	13	250	250	72	6	100	100	6	B9G	P
TT15	241 657 143		6	14	250	150	30	3.9	100	100	3.9	B9G	PP
TT19	241 657 143		19	16.5	250	150	30	3.9	100	100	3.9	B9G	PP
TT20	245 134 200	A ₁ A ₂	6	17	400	200	20	2.5	No Data Available			B7A	PP
TV03-10	442 310 000	A ₁ A ₂	6	17	300		17	3.2	100		3	B5	TT
TW1	802 310 000		20				60		REC		20mA	B5	R
TW2	892 310 000		30				60		REC		20mA	B5	RR
TX4	645 231 700	G ₁	4	{ 5.0 1.5	150 300		9.0 5.5	1.5	150 200	60 90		B7	TH
TX21	645 231 700	G ₁	21	{ 2.0 1.5	150 250	90	15 5.5	2.5	100 200	60 75	1.5 3.0		
TX41	645 231 700	G ₁	4	{ 3 2.5	100 250	100	9 3.25	3.8	100 250	60 100	5	B7	TH
U4C	642 300 000		4	12	200		35	3.2	100		3.2	B4	T
U4E	642 300 000		4	40	400		45	4	No Data Available			B4	T
U4F	642 300 000		4	40	400		45	4	No Data Available			B4	T
U5	892 300 000		5				15		REC		15mA	B4	RR
U8	892 300 000		7.5				60		REC		20mA	B4	RR
U9	892 300 000		4				30		REC		15mA	B4	RR
U10	892 300 000		4				30		REC		15mA	B4	RR
U12	892 300 000		4 (5)				60		REC		20mA	B4	RR
U12/14	892 300 000		4 (5)				60		REC		30mA	B4	RR
U14	892 300 000		4				60		REC		20mA	B4	RR
U15	802 300 000		6				120		REC		30mA	B4	R
U16	002 300 000	D ₁	2				5		REC		5mA	B4	R
U17	002 300 000	D ₁	5				30		REC		15mA	B4	R
U18	892 300 000		4 (5)				120		REC		30mA	B4	RR
U18/20	892 300 000		4 (5)				120		REC		30mA	B4	RR
U19	002 300 000	D ₁	4 (5)				120		REC		40mA	B4	R
U19/23	002 300 000	D ₁	4				120		REC		30mA	B4	R
U20	892 300 000		4 (5)				60		REC		20mA	B4	RR
U21	002 300 000	D ₁	2				5		REC		5mA	B4	R
U22	200 000 030	D ₁	2 (3)				5		D			M08	R
U22FH	200 000 030	D ₁	2						D			M08	D
U23	002 300 000	D ₁	4 (5)				120		REC		30mA	B4	R
U24	030 000 200	D ₁	2				1.0		REC		2mA	A08	R
U25	023 000 000	D ₁	2						D			B3G	D
U26	391 221 800		13				60		REC		20mA	B7	RR
U29	002 300 000	D ₁	2				15		REC		30mA	B5	R
U30	391 221 800		13				60		REC		30mA	B7	RR
U30/250	802 300 000		4				30		REC		15mA	B4	R
U31	020 080 310		26				120		REC		50mA	A08	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
U33	002 300 000	D ₁	2				3		D			B4	R
U35	020 000 030	D ₁	1.4				2		D			A08	R
U37	023 000 000	D ₁	1.4				0.5		D			B2G	D
U41	*2* 0*0 3*0	D ₁	1.25				1		D			A08	D
U43	023 000 000	D ₁	6				0.5		D			B2G	D
U50	020 908 030		5 (5.7)				60		REC		30mA	A08	RR
U51	030 908 020		5				120		REC		30mA	A08	RR
U52	030 908 020		5 (5.7)				120		REC		30mA	A08	RR
U52it	008 090 230		5 (5.7)				120		REC		30mA	A08	RR
U54	030 908 020		5 (5.7)				120		REC		30mA	A08	RR
U60/500	892 300 000		4				60		REC		20mA	B4	R
U65/550	802 300 000		7.5				60		REC		20mA	B4	R
U70	028 090 310		6				30		REC		30mA	A08	RR
U71	020 080 310		30				60		REC		50mA	A08	R
U74	020 080 310		30				120		REC		30mA	A08	R
U76	020 080 310		30				120		REC		60mA	A08	R
U78	802 309 100		6				30		REC		30mA	B7G	RR
U81	009 008 230		6				60		REC		20mA	B8B	RR
U82	209 008 130		6				30		REC		30mA	B8B	RR
U84	009 **8 230		4				30		REC		15mA	B8B	RR
U101	280 008 130		50				120		REC		30mA	B8B	R
U107	281 008 300		40				60		REC		20mA	B7G	R
U134	028 190 310		13				60		REC		20mA	A08	RR
U120/500	892 300 000		2				120		REC		30mA	B4	R
U142	280 000 130		31				60		REC		20mA	B8A	R
U143	020 908 030		4				30		REC		15mA	A08	RR
U145	280 000 130		40				60		REC		60mA	B8A	R
U147	028 090 310		6				30		REC		30mA	A08	RR
U149	209 008 130		6				30		REC		15mA	B8B	RR
U150	280 009 130		6				30		REC		40mA	B8A	RR
U151	023 000 000	D ₁	6						D			B3G	D
U152	001 230 008		19				120		REC		70mA	B9A	R
U153	*** 23* **8	C	17				120		REC		60mA	B9A	R
U154	**1 23* **8		19				120		REC		70mA	B9A	R
U191	0** 080 230	C ₁	19						D			A08	R
U201	020 080 310		20				60		REC		60mA	A08	R
U251	*** 23* **8	C	15				120		REC		30mA	B9A	R
U281	020 080 310		28				120		REC		80mA	A08	R
U282	001 000 230	D ₁	28				120		REC		36mA	A08	R
U301	0** 080 230	C	30				120		REC		35mA	A08	R
U309	**1 23* **8		20				120		REC		70mA	B9A	R
U319	**1 23* **8		20				120		REC		70mA	B9A	R
U329	*** 23* **8	C	25				120		REC		60mA	B9A	R
U403	201 080 030		40				120		REC		70mA	M08	R
U404	280 *** 130		40				60		REC		60mA	B8A	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
U415	642 300 000		4	10.5	150		5	1.4	100		1.4	B4	T
U418	642 300 000		4	13	150		10	1.6	100		1.6	B4	T
U650	802 300 000		6				30		REC		15mA	B4	R
U709	8*1 23* 9**		6				60		REC		20mA	B9A	RR
U801	128 899 310		80				120		REC		30mA	A08	RR
U2140P	391 221 800		13				60		REC		20mA	B7	RR
U4020	802 310 000		40				120		REC		70mA	B5	R
UAA11	023 189 100		22				5		D			8SC	DD
UAA91	182 310 900		19				5		D			B7G	RR
UAA171	120 813 090		25				5		D			B8B	DD
UABC80	†81 239 146		28	1.0	100		0.8	1.45	100		1.45	B9A	DDDT
UAF21	265 814 130		20	2	250	100	6	2.8	100	100		B8A	P
UAF41	268 154 130		13	2	200	90	5	2	100	100	1.9	B8A	DP
UAF42	268 154 130		13	2	200	90	5	2	100	100	1.9	B8A	DP
UB41	201 908 130		19				5		D		6mA	B8A	RR
UB91	182 310 900		19						D			B7G	DD
UBC1	206 081 930	G ₁	13	1.7	200		3	2	150		2	A08	DDT
UBC41	264 098 130		14	1.6	175		1.5	1.65	150		1.65	B8A	DDT
UBC81	641 238 09*		14	1.5	175		1.5	1.6	100		1.4	B9A	DDT
UBF2	206 581 930	G ₁	12.5	2	250	100	5	1.8	100	150	1.8	A08	DDP
UBF11	892 361 450		20	2	200	75	5	1.8	200	75	1.8	F8	DDP
UBF15	892 361 450		27	2	250	100	12	5	200	100	5	F8	DDP
UBF80	541 236 891		17	2	200	125	5	2.2	100	100	2.0	B9A	DDP
UBF89	541 236 891		19	2	200	100	9	3.8	100	100	3.5	B9A	DDP
UBF171	892 541 360		20	3.2	250	75	6	1.8	100	75		B8B	DDP
UBL1	206 581 930	G ₁	55	11.5	200	200	55	8.5	100	100	8	A08	DDP
UBL3	023 189 560	G ₁	55	6	100	100	29	7.5	100	90	7	8SC	DDP
UBL21	264 598 130		55	13	200	200	55	8	100	100	7	B8B	DDP
UBL71	264 589 130		55	5.2	250	250	44	9.5	100	100	0.7	B8B	DDP
UC92	602 304 100		9.5	1.0	200		11.5	6.4	200		6.4	B7G	T
UCC84	147 234 116		21	1.5	90		12.0	6.0	100		6.0	B9A	TT
UCC85	641 237 410		26	2.1	200		10.0	5.8	100		5	B9A	TT
UCF12	642 371 450		20	1.0	100			3.0	100	60	3.0	F8	TP
				2.0	200	100	5.0	2.0	200	100	2.0		
UCF80	645 237 114		19	2.0	100		14.0	5.0	100	60	5.0	B9A	TP
				2.0	175	175	10.0	6.2	100	150	6.0		
UCH4	217 544 630	G ₁	20	2	100		6	3	80	60	3.2	A08	TH
				2	200	100	5.2	2.2	100	100	2.2		
UCH5	123 644 570	G ₁	20	2	100		6.3	2.7	100	60	2.2	8SC	TH
				2	250	100	6.5	2.6	100	150	2.6		
UCH11	642 371 450		20	2	100		5	2.4	100	60	1.8	F8	TH
				2	250	100	4.7	2.5	200	100	2.5		
UCH21	276 454 131		20	2	100		6.4	2.2	100	60	3.2	B8B	TH
				2	200	90	5.2	2.2	100	90	2.2		
UCH41	276 454 130		14	2	100		6.4	2.2	100	60	2.8	B8A	TH
				2	200	90	2.7	1.5	100	75	1.5		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
UCH42	276 454 130		14	{ 2.0 2.0	100 175		5 8	2.0 2.2	100 100	60 75	2.0 2.0	B8A	TH
UCH43	276 454 130		14	{ 2.0 2.0	100 175		5 8	2.0 2.2	100 100	60 75	2.0 2.0	B8A	TH
UCH71	276 454 131		20	{ 2.0 2.0	100 200		16.4 5.2	2.2 2.2	100 100	60 90	3.2 2.2	B8B	TH
UCH81	541 237 464		19	{ 0 2.6	100 200		13.5 7.6	3.7 2.4	100 100	60 100	3.7 2.4	B9A	TH
UCH171	642 544 370		20	{ 2.5	200	100	3 2		100 100	60 100		B8B	TH
UCL11	452 371 460		60	{ 2.0 8.5	200 200		2.0 45.0	2.1 9.0	150 100	60 100	2.0 7.0	F8	TP
UCL81	451 237 614		39	{ 1.5 7	200 200		0.5 30	1.2 8.7	100 100	60 100	1.2	B9A	TP
UCL82	414 237 516		50	{ 0 16	100 200		3.5 35	2.5 6.4	100 100	60 100	2.5 6.8	B9A	TP
UCL83	641 237 154		40	{ 1.5 9.5	200 175		2.4 30	2.5 5.5	150 100	60 100	2.0 5	B9A	TP
UD2	642 300 000		2	{ 12.0	150		14.0	2.5	100		2.5	B4	T
UDDL71	023 189 560	G ₁	44	10	200	200	60	9	100	100		8SC	DDP
UDH	802 310 000		20				60		REC		20mA	B5	R
UDPI2	023 180 560	G ₁	40	10	200	200	60	9	No Data Available			8SC	DP
UDPI3	026 580 310	G ₁	40	10	200	200	60	9	No Data Available			A08	DP
UDT1	023 189 060	G ₁	15	3	200		10.3	3	150		3	8SC	DDT
UE1	023 100 080		25				60		REC		20mA	S8C	R
UE2	123 180 090		50				60		REC		20mA	8SC	RR
UE13	020 080 310		25				60		REC		20mA	A08	R
UE100	208 0*0 130		50						REC			A08	R
UEL11	452 371 540		48	{ 0 6	100 200	30 200	2.4 22	1.6 5	100 100	60 100	1.6	F8	PP
UF5	023 110 560	G ₁	12.5	2.5	100	100	3.2	2.2	100	100	2.2	8SC	P
UF6	023 110 560	G ₁	12.5	20	100	100	3	1.8	100	100	1.8	8SC	P
UF8	206 511 130	G ₁	12	2	200	200		1.6	100	100		B8B	P
UF9	206 501 130	G ₁	12.5	2.5	200	100	6	2.2	100	100	2.2	A08	P
UF10	023 110 560	G ₁	12.5	2.4	200	100	5.5	2.35	100	100	2.3	8SC	P
UF11	602 301 450		15	2	200	75	6	2.2	100	100	2	F8	P
UF14	612 350 140		25	5	200	200	12	7	100	100	7	F8	P
UF15	612 301 450		25	2	200	100	12	5.5	100	100	5.5	F8	P
UF21	265 104 130		12.5	2.5	200	100	6	2.2	100	100	2.2	B8B	P
UF41	26* *54 130		12.5	3	200	125	7.2	2.3	100	150	2.3	B8A	P
UF42	260 154 130		21	2	175	175	10	8.5	100	150	8	B8A	P
UF43	260 154 130		21	2	170	125	15	6.3	100	100		B8A	P
UF80	141 230 651		19	2.0	170	170	10.0	7.4	100	100	7.0	B9A	P
UF85	141 231 651		19	2.0	170	100	9.7	5.9	200	100	6.0	B9A	P
UF89	041 230 651		12.6	2.0	200	200	11.1	3.8	175	100	4.4	B9A	P
UF172	112 540 360		20	2	200	100	4.5	3	100	100		B8B	P

VALVE	SELECTOR SWITCH No.	T.C.	VF	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
UF174	112 540 360		30	3	200	150	12	8	100	100		B8B	P
UF175	112 540 360		30	2	200	75	10	5.7	100	75		B8B	P
UH3	023 110 560		13	3	225	100	8	2.2	100	100		8SC	P
UH4	893 200 000		4				5		D			B5	RR
UHP51	023 110 560		13	2.5	225	100	3.5	2	100	100		8SC	P
UHP52	023 110 560		13	2.5	225	100	3.5	2	100	100		8SC	P
UL1	206 540 130		60	11.5	200	200	55	8.5	100	PenLF	8	A08	P
UL2	023 104 560		35	5	200	200	20	7	100	PenLF	6	8SC	P
UL11	602 310 450		45	14	200	75	6	2.2	100	75		F8	P
UL11	602 301 450		45	14	200	200	45	9	100	100		F8	P
UL12	602 301 450		60	8	200	125	75	12	No Data Available			F8	P
UL21	265 004 130		45	13	200	200	55	8	100	PenLF	7	B8B	P
UL22	265 004 130		46	10.0	175	175	61.0	9.0	100	100	8.0	B8B	P
UL41	26* *54 130		45	9	175	175	54.5	9.5	100	100	7	B8A	P
UL43	260 154 130		50	2.6	250	250	36	10	100	100		B8A	P
UL44	200 154 130	A	45	13.5	175	175	28.5	7.0	100	100	6.5	B8A	P
UL46	261 054 130		45	9	175	175	54.5	9.5	100	100	7	B8A	P
UL71	264 500 130		45	5.2	200	200	22	6.5	100	100		B8B	P
UL84	*41 23* 6*5		45	12.5	175	175	70	10	100	100	9	B9A	P
UL171	102 541 360		55	8.5	200	200	45	9	100	100		B8B	P
ULP	642 310 000		13	20	250		27	4	100		4	B5	T
ULP51	623 145 000		40	17	250	250	36	2.5	No Data Available			8SC	P
ULP61	023 100 560	G ₁	33	8	200	200	55	9	No Data Available			8SC	P
UP6	023 100 560	G ₁	35	8	200	200	55	9	100	100		8SC	P
UPI3	026 540 310		35	8	200	200	55	9	No Data Available			A08	P
UP35U	023 100 560	G ₁	35	8	200	200	55	9	No Data Available			8SC	P
UPX	642 310 000		25	34	250		38	7	100		7	B5	T
UP2	023 140 560		25	19	200	100	40	3	100	75	3	8SC	P
UQ80	541 236 114		12	1.0	250	20	0.95	7.0	No Data Available			B9A	N
URI	023 100 080		20				60		REC		60mA	8SC	R
UR1C	802 310 000		20				60		REC		60mA	B5	R
UR2	123 180 090		30				60		REC		70mA	8SC	RR
UR3	123 180 090		30				60		REC		65mA	8SC	RR
UR3C	091 231 800		30				60		REC		65mA	B7	RR
UT2	023 100 060	G ₁	15	5	100		6	3	100		3	8SC	T
UTH4	423 164 570	G ₁	17	{ 2.5	100		4	2.0	100	60	2.0	} 8SC	TH
					200	90	3	0.75	100	90			
					100		4	2	100	60	2.0		
UTH12	423 164 570	G ₁	17	{ 2.5	225	30	3	0.65	No Data Available			} 8SC	TH
UU2	892 300 000		4				30		REC		15mA	B4	RR
UU3	892 300 000		4				30		REC		30mA	B4	RR
UU4	892 300 000		4				60		REC		35mA	B4	RR
UU5	892 300 000		4 (5)				60		REC		20mA	B4	RR
UU6	208 090 030		4				60		REC		40mA	M08	RR
UU7	208 090 030		4				60		REC		20mA	M08	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
UU8	208 090 030		4				120		REC		50mA	M08	RR
UU9	290 008 130		6				30-0		REC		15mA	B8A	RR
UU10	892 300 000		4				60		REC		20mA	B4	RR
UU12	8*1 23* 9**		6				60		REC		25mA	B9A	RR
UU30/250	892 300 000		4				15		REC		10mA	B4	RR
UU60/250	892 300 000		4				30		REC		15mA	B4	RR
UU120/250	892 300 000		4				60		REC		20mA	B4	RR
UU120/350	892 300 000		4				60		REC		20mA	B4	RR
UU120/500	892 300 000		4				60		REC		20mA	B4	RR
UVG51	123 190 080		30				60		REC		20mA	85C	RR
UY1	388 028 120		50				120		REC		30mA	A08	R
UY1 (N)	388 028 120		50				120		REC		30mA	A08	R
UY2	023 180 000		26				30		REC		15mA	F8	R
UY3	023 100 080		50				120		REC		30mA	85C	R
UY4	023 100 080		35				30		REC		15mA	85C	R
UY11	802 300 100		50				120		REC		50mA	F8	R
UY21	280 80* 130		50				120		REC		70mA	B8B	R
UY22	280 808 130		26				60		REC		20mA	B8B	R
UY31	020 080 310		50				120		REC		30mA	A08	R
UY41	280 000 130		31				60		REC		60mA	B8A	R
UY42	280 *0* 130		31				60		REC		50mA	B8A	R
UY82	**1 23* **8		55				180		REC		35mA	B9A	R
UY85	**1 23* **8		38				120		REC		60mA	B9A	R
UY91	812 380 800		26				60		REC		20mA	B7G	R
UY92	**2 38* 100		26				60		REC		20mA	B7G	R
V2M70	802 309 100		6-3				30		REC		15mA	B7G	RR
V20s	023 100 080		20				60		REC		20mA	85C	R
V20	802 310 000		20				60		REC		20mA	B5	R
V20/7000	002 300 000	D ₁	4				15		REC		10mA	B4	R
V22/7000	000 010 100	D ₁	6-3				5		D			B8B	D
V25	081 231 900		25				60		REC		20mA	B7	RR
V30	802 310 000		30				120		REC		50mA	B5	R
V30/I	002 300 000	D ₁	2						D			B4	D
V41	*8* **9 230		4				30		REC		15mA	B8B	RR
V51	280 009 130		5				30		REC		15mA	B8A	RR
V61	28* **9 130		6-3				30		REC		15mA	B8A	RR
V99	263 400 000		3	4-5	90		2-5	0-42	580		0-4	UX4	T
V226	041 230 500	A	6	5	400	250	14	3	100	150	3	B7	P
V245	041 240 500	A	3		250	250	16	5	100	PenLF	5	B7	P
V248A	200 540 030	A	2	10	150	150	32	5-2	100	100	5	M08	P
V311	28* *** 130		31				60		REC		20mA	B8A	RR
V312	602 310 000	G ₁	4	4-8	250		6	2-3	100		2-3	B5	T
V339	000 231 600	G ₁	4		250			1-7	100		1-7	B7	T
V453	216 510 030	G ₁	4	1-8	250	100	4-5	2-0	100	100	2	M08	P
V503	642 300 000		4	85	400		100	4-5	100		4-5	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
V872	216 510 030	G ₁	6	4	200	200	6.7	3.35	100	150	3.3	M08	P
V884	412 361 500		6.3	2.5	250	200	8	2.5	100	PenLF	2.5	B7G	P
V914	892 310 000		4						D			B5	DD
V960	002 300 000		4						D			B5	DD
V960	002 300 000	D ₁	4				60		REC		20mA	B4	R
V1120	045 231 000	A	6	9.75	200	200	40	8.7	100	100	7	B7	P
V1120B	040 231 500	A	4 (5)	9.75	200	200	40	8.7	100	100	7	B7	P
V1906	002 300 000	D ₁	4 (5)				60		REC		20mA	B4	R
V1907	002 300 000	D ₁	4				60		REC		20mA	B4	R
V1928	112 311 100	D ₁	4				5		D			B7G	R
V2018	002 300 000	D ₁	20				30		REC		15mA	B4	R
V2118	802 310 000		20				60		REC		20mA	B5	R
V4200	802 300 000		4				120		REC		30mA	B4	R
VBFI	892 361 450		35	2	200	75	5	1.9	100	80	1.9	F8	DDP
VCI	023 100 060	G ₁	55	2	200		6	3	200		3	8SC	T
VCH11	642 371 450		40	{	100		4	2.0	100	60	2.0	}F8	TH
					225	90	3	0.65	100	90			
					100		2	2.4	100	60	2.4		
VCL11	452 371 460		90	{	100		2	2.4	100	60	2.4	}F8	TH
					200	200	12	5	100	100			
					200		5		100				
VDSB	542 310 000	A	16	1.0	200	75	5	3	100	75	3	B5	P
VDS	542 310 000	A	16	2	200	75		1.6	100	75	1.6	B5	P
VEG51	026 100 080		20			30	60		REC		20mA	8SC	R
VEL11	452 371 560		90	{	100	30	2.4	1.6	100	100		}F8	PP
					200	200	22	5	100	100			
VF3	023 110 560	G ₁	55	2.5	250	100	5	2	100	100		8SC	P
VF7	023 110 560	G ₁	55	2.5	250	100	3.5	2	100	150	6	8SC	P
VF14	612 350 140		60	4.5	250	250	12	7	100	100		F8	P
VG406	892 300 000		4				30		REC		15mA	B4	RR
VG410	892 300 000		4				30		REC		15mA	B4	RR
VG411	892 300 000		4				60		REC		20mA	B4	RR
VG420	892 300 000		4				60		REC		20mA	B4	RR
VG421	892 300 000		4				60		REC		20mA	B4	RR
VG2503	892 300 000		4				30		REC		15mA	B4	RR
VG2908	892 300 000		2.5				30		REC		15mA	B4	RR
VG3008	892 300 000		4				30		REC		15mA	B4	RR
VG3016	892 300 000		4				60		REC		420mA	B4	RR
VG3630	892 300 000		4				120		REC		28mA	B4	RR
VG5006	892 300 000		4				60		REC		20mA	B4	RR
VG5007	023 080 090		4				60		REC		20mA	8SC	RR
VG5107	802 300 090		4				60		REC		20mA	F8	RR
VH2	812 380 100		6				5		D			B7G	D
VH3	142 364 100		6	4.5	125		13	5	100		5	B7G	T
VH5	412 365 100		6	2	175	125	7.7	5.1	100	100		B7G	P
VHPI3	041 231 500	A	13	1.5	200	100	4	2	100	100	4	B7	P
VHT2	645 230 600	G ₁	2		125	75			100	75		B7	H

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
VHT2A	645 230 600	G ₁	2	0	125	50			100	60		B7	H
VHT4	545 231 600	G ₁	4	3	200	100	3.6		100	100		B7	H
VHTA	123 164 550	G ₁	13	1.5	250	100	3.2		100	100		8SC	H
VHTA	545 231 600	G ₁	13	1.5	200	100	3.2		100	100		B7	H
VHTS	645 231 500	G ₁	13	3	200	100	2.6		100	100		B7	H
VHTS	545 231 600	G ₁	13	3	200	100			100	100		B7	H
VLI	023 100 560	G ₁	55	14	200	200	25	2.2	100	100		8SC	P
VL4	023 100 560	G ₁	110	8.5	200	200	45	8	100	100		8SC	P
VLS61	002 300 000	D ₁	2				3		D			B4	R
VMI	2** 00* 300	D ₁	1.4						D			B7G	D
VM4V	542 310 000	A	4	1	200	80	14	2.4	200	75	2.4	B5	P
VMP4	041 231 500	A	4	2	250	100	3	3.5	150	100	3.5	B7	P
VMP4	542 310 000	A	4	1	250	100	5.0	3.5	200	100	3.5	B5	P
VMP4G	041 231 500	A	4	2	250	100	8	2.7	100	100	2.7	B7	P
VMS4	542 310 000	A	4	1	200	80	11	2.1	200	75	2.4	B5	P
VMS4B	542 310 000	A	4	1	200	80	5.2	2.4	200	75	2.9	B5	P
VO2	645 320 600	G ₁	2	0	150	90	1.8		150	90		B7	O
VO2S	023 064 560	G ₁	2	0	150	50	2.0		No Data Available			8SC	O
VO4	645 231 500	G ₁	4	1.5	250	75	1.6		100	75		B7	O
VO4S	023 154 560	G ₁	4	1.5	250	75	1.6		100	75		8SC	O
VO6	123 164 560	G ₁	6	3	100	100	4.6		100	100		8SC	O
VO13	645 231 500	G ₁	13	1.5	250	75	1.6		100	75		B7	O
VO13(S)	123 154 560	G ₁	13	1.5	250	75	1.6		100	75		8SC	O
VP2	041 230 500	A	2	1	150	150	3	1.5	150	150	1.5	B7	P
VP2B	061 230 500	G ₁	2	1-F	150	150	1.6	0.65	80	90	0.5	B7	P
(MUL)VP2B	065 231 500	G ₁	2	1.5	150	60	2	1.4	100	60	1.4	B7	H
VP2B	032 004 560		2	15	150	150	2.5	0.65	150	150	0.6	8SC	P
VP2BS	032 010 560	G ₁	2	1	150	150	2.5	0.65	150	150	0.6	8SC	P
VP2D	061 230 500	G ₁	2	1.5	150	75	1.3	2.0	150	75	2	B7	P
VP3	542 310 000	A	4	2	200	100	4.5	2.3	100	100	2.3	B5	P
VP4	041 231 500	A	4	2	200	100	4.5	2.3	100	100	2.3	B7	P
VP4A	542 310 000	A	4	2	200	100	4.25	2.5	100	100	2.5	B5	P
VP4A	041 231 500	A	4	2	200	100	4.25	2.5	100	100	2.5	B7	P
VP4B	061 231 500	G ₁	4	3	250	250	11.5	2	100	100	1.8	B7	P
VP4C	041 231 500	A	4	2	250	250	11.5	4	100	150	4	B7	P
VP4S	023 110 560	G ₁	4	2	250	100	8	1.8	100	90	1.8	8SC	P
VP4S	061 231 500	G ₁	4	3	250	100	8	1.8	100	90	1.8	B7	P
VP6	412 361 500		6	2.5	250	200	8	2.1	100	150	2.1	B7G	P
VP6	061 231 500	G ₁	6	3	250	100	7.5	1.7	200	100	1.7	B7	P
VP6S	023 110 560	G ₁	6	3	250	100	7.5	1.75	200	100	1.7	8SC	P
VPI2D	026 985 310	G ₁	13	3	250	125	9	1.1	100	100	1.1	A08	DDP
VPI3	041 231 500	A	13	1.5	200	100	6.3	3	100	100	3	B7	P
VPI3	061 231 500	G ₁	13	3	200	100	8	2.8	100	100	2.8	B7	P
VPI3A	023 110 560	G ₁	13	2	200	100	4	2.2	100	100	2.2	8SC	P
VPI3B	061 231 500	G ₁	13	2	200	200	9	2.2	200	200	2.2	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
VPI3C	061 231 500	G ₁	13	2	200	200	9	2.2	200	200	2.2	B7	P
VPI3K	061 231 500	G ₁	13	3	200	100	8	2	100	100	2	B7	P
VPI3S	061 231 500	G ₁	13	3	200	100	8	2.8	100	100	2.8	B7	P
VPI3S	023 110 560	G ₁	13	3	200	100	8	2.8	100	100	2.8	8SC	P
VP20	542 310 000	A	20	2	200	100	4	2.2	200	100	2.2	B5	P
VP21	041 230 500	A	2	1	150	60	1.8	1.1	150	60	1.1	B7	P
VP22	206 510 030	G ₁	2	1.5	125	60	1.2	0.8	100	60	0.8	M08	P
VP23	206 510 030	G ₁	2	1.5	125	60	1.4	1.0	100	60	1.0	M08	P
VP41	216 510 030	G ₁	4	2.7	250	250	7.7	2.0	100	150	2	M08	P
VP41	061 231 500	G ₁	4	3.3	250	250	11	2.0	100	200	3.1	B7	P
VPI33	216 510 030	G ₁	13	2.7	150	150	8	2.1	150	100	2.1	M08	P
VP210	041 230 500	A	2	1.5	125	60	1.1	0.82	100	60	0.8	B7	P
VP210	542 300 000	A	2	1.5	125	60	1.1	0.82	125	60	0.82	B4	P
VP215	542 300 000	A	2	1.5	150	75	2	0.7	150	75	1.25	B4	P
VP215	041 230 500	A	2	1.5	150	75	2	0.7	150	75	1.25	B7	P
VP215B	061 230 500	G ₁	2	1.5	125	125	1.5	1.0	125	100	1.2	B7	P
VP215C	041 230 500	A	2	1.5	125	125	1.5	1.0	125	100	1.2	B7	P
VPI320	041 231 500	A	13	2.7	250	100	5	2	100	100	2	B7	P
VPI321	041 231 500	A	13	2.8	200	200	7.4	2	150	150	2	B7	P
VPI322	061 231 500	G ₁	13	2.8	250	200	7.4	2	100	100	2	B7	P
VPTA	041 231 500	A	13	2	250	100	4.2	2.9	100	100	2.9	B7	P
VPTS	041 231 500	A	13	3	200	100	5.5	2.6	100	90	2.6	B7	P
VPT2	542 300 000	A	2	1.5	125	60	1.5	1.1	125	60	1.1	B4	P
VPT2	041 230 500	A	2	1.5	125	60	1.5	1.1	125	60	1.1	B7	P
VPT4	542 310 000	A	4	3	250	100	5.5	2	100	90	2	B5	P
VPT4	041 231 500	A	4	3	250	100	5.5	2	100	90	2	B7	P
VPT4B	041 231 500	A	4	3	250	100	6	3.2	100	90	3.2	B7	P
VS2	542 300 000	A	2	2.5	125	60	2	1.2	100	60	1.4	B4	P
VS24	542 300 000	A	2	1	150	75	2.8	1.5	150	75	1.5	B4	P
VS24K	542 300 000	A	2	1	150	75	2.8	1.5	150	75	1.5	B4	P
VS210	542 300 000		2	2.5	125	60	2.0	1.4	100	60	1.4	B4	P
VS215	542 300 000	A	2	1	150	75	6	0.75	150	75	1.0	B4	P
VSGA1	542 310 000	A	4	1.5	200	100	7	6.15	100	100	6	B5	P
VT1	642 310 000		4	5	200		5	2	100		2	B5	T
VT2	642 310 000		4	2	200		3	1.9	150		1.9	B5	T
VTP4	542 310 000	A	4	3	200	100	5.5	2	100	100	2	B5	P
VX2	061 235 500	G ₁	2	1	150	60	1		150	60		B7	H
VX2S	023 015 560	G ₁	2	1	150	60	1		150	60		8SC	H
VX4	515 231 600	G ₁	4	2	250	75	1.8		100	75		B7	H
VX4S	023 115 560	G ₁	4	2	250	75	1.8		100	75		8SC	H
VX6S	023 115 560	G ₁	6	3	250	100	1.85	4	100	100	4	8SC	P
VX13	515 231 600	G ₁	13	2	250	75	1.8		100	75		B7	P
VX13S	023 115 560	G ₁	13	2	250	75	1.8		100	75		8SC	H
VY1	023 100 080		55				60		REC		20mA	8SC	R
VY2	023 180 000		30				15		D			8SC	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
VY2N	023 100 080		30				15		D			8SC	R
W4	642 300 000		4	7.5	125		3	1.2	100		1.2	B4	T
W4-500	892 300 000		4				60		REC		20mA	B4	RR
W17	265 024 300		1.4	1	90	75	3.5	0.9	80	75	0.9	B7G	P
W21	041 230 500	A	2	1	150	125	2.3	1.0	150	100	1.4	B7	P
W21	542 300 000	A	2	1	150	125	2.3	1.0	150	100	1.4	B4	P
W30	041 231 500	A	13	1	250	250	12	4	250	250	4	B7	P
W31	041 231 500	A	13	3	250	100	8	2.7	100	90	2.7	B7	P
W42	061 231 500	G ₁	4	3	250	100	7.6	1.5	100	100	1.5	B7	P
W61	026 510 310	G ₁	6	3	250	75	8.5	2.9	100	75	2.9	A08	P
W63	026 510 310	G ₁	6	3	250	100	7.6	1.5	100	90	1.5	A08	P
W76	026 510 310	G ₁	13	3	250	100	7.6	1.5	200	100	1.5	A08	P
W77	412 361 500		6	2	200	200	8	2.5	100	150	2.5	B7G	P
W81	265 104 130		6	3.0	250	100	8	2.8	100	90	2.8	B8B	P
W101	265 104 130		19	3	250	100	8	2.8	100	90	2.8	B8B	P
W107	412 361 500		12.5	2.5	200	200	8	2.5	100	150	2.5	B7G	P
W142	261 154 130		12	3.0	250	250	7.2	2.2	100	150	2.2	B8A	P
W143	265 104 130		6	2.5	250	100	6	2.2	100	100	2.2	B8B	P
W145	260 154 130		13	2.5	175	100	7	2.3	100	100	2.3	B8A	P
W147	026 510 310	G ₁	6	2.5	250	100	6	2.2	100	100	2	A08	P
W148	265 140 130		6	2.5	250	150	9.5	2.8	100	150	3.8	B8B	P
W149	265 104 130		6	3	250	100	8.5	1.75	100	90	1.7	B8B	P
W150	261 154 130		6	2.5	250	100	6.0	2.2	100	150	2.2	B8A	P
W213	642 300 000		2	2.5	150		1	1.2	150		1.2	B4	T
W216	040 120 560		2	1.5	150	90	3	1.2	100	90	1.2	B7	P
W318	809 231 600	G ₁	4	2	100		3.5	2.5	100		2.5	B7	DDT
W406	642 300 000		4	7.5	125		3	1.2	100		1.2	B4	T
W411	642 300 000		4	2.5	125		3	2.2	100		2.2	B4	T
W412	642 300 000		4	7.5	125		3	1.2	100		1.2	B4	T
W415N	642 310 000		4	2.5	200		2.5	1.0	100		1.0	B5	T
W420	642 300 000		4	4	125		4	1.3	100		1.2	B4	T
W719	141 230 651		6	2.0	250	100	10.0	6.0	150	100	5.0	B9A	P
W729	141 230 651		6	2	175	175	8	5.7	100	100		B9A	P
W4080	642 310 000		4	2.5	200		2.5	1.0	100		1.0	B5	T
W4110	642 310 000		4	1.5	200		1.0	3	100		2.5	B5	T
W727	412 365 100		6	1.0	250	100	11.0	4.4	100	100	4.4	B7G	P
WD30	560 231 890	G ₁	13	1	250	100	7	2.6	250	100	2.6	B9	DDP
WD40	560 231 890	G ₁	4	1	250	100	7	3.5	100	100	3.5	B9	DDP
WD70	541 236 891		6	2.0	250	90	5.0	2.2	100	90	2.2	B9A	DDP
WD142	268 154 130		13	2	175	90	5	2.1	100	100	1.9	B8A	DP
WD150	268 154 130		6	2	250	100	5	2.1	100	100	2	B8A	DP
WD709	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
WE23	542 310 000	A ₁	4	2	200	100	3	2.5	100	100		B5	P
WE24	542 310 000	A ₁	4		200	100	3	2.5	100	100		B5	P
WE27	642 310 000		4	3.5	200		6	2.4	100		2.2	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
WE28	642 310 000	D ₁	4	1.5	200		1	2.5	100		2.2	B5	T
WE29	642 310 000		4	3	200		6	2	100		2.0	B5	DT
WE30	642 350 000		4	15	250	250	36	2.8	No Data Available			B5	P
WE51	892 300 000		4				30		REC		15mA	B4	RR
WE52	892 300 000		2				60		REC		20mA	B4	RR
WE350A	254 130 000	A ₁	6	12.5	400	250	83	6.5	100	PenLF	6	UX5	P
WE377	029 180 310		117				60		REC		20mA	A08	RR
WE403A	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
WT389	036 540 320		1.4	4.6	90	90	8	2	80	75	2	A08	P
WT390	026 040 310		6	{ 8	250		8	2	100		2	A08	T
					150		5.5		100	60			
WT210-0012	298 300 000		5				60		REC		20mA	UX4	RR
WT210-0013	289 300 000		5				120		REC		30mA	UX4	RR
WT210-0019	289 300 000		5				120		REC		30mA	UX4	RR
WT210-0021	028 090 310		6				30		REC		15mA	A08	RR
WT210-0025	029 180 310	117					60		REC		20mA	A08	RR
WT210-0029	025 040 310		6	{ 8	250		8	2	100		2	A08	T
							60		REC		20mA		
WT210-0037	126 458 310	117		5.2	100	100	43	5.3	100	90	5.3	A08	RP
WT210-0040	802 309 100		6				30		REC		15mA	B7G	RR
WT210-0007	026 540 310		6	18	350	250	54	5.2	100	PenLF	5.2	A08	P
WT210-006	029 180 310		6						D			A08	DD
WT210-0042	030 809 020		5				60		REC		20mA	A08	RR
WT210-0048	020 809 030		5				120		REC		30mA	A08	RR
WT210-0081	021 415 360		6	2	250	100	3	1.65	100	100	1.6	A08	P
WT210-0082	026 540 310		6	12.5	250	250	45	4.1	100	PenLF	4.1	A08	P
WT210-0083	216 498 130		6	2	250		2.3	1.6	200		1.6	B8B	DDT
WT210-0084	027 446 310		6	5	250		3	1.6	100		1.6	A08	TT
WT210-0085	412 365 400		50	7.5	125	100	49	7.5	100	90	6	B7G	P
WT210-0087	027 546 310	G ₁	6	{ 1	100		8	2.5	100	60	3	A08	TH
				{ 3	250	100	4	1.2	100	100	1.6		
WT210-0089	026 540 310		6	9	175	175	15	2.3	100	100	2.3	A08	P
WT210-0090	265 113 000	G ₁	6	3	250	100	2	1.22	100	100	1.2	UX6	P
WT210-0094	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
WT210-0108	461 471 230		6	31.5	150		125	7	100		7	A08	TT
WT210-0148	029 080 310		6				60		REC		20mA	A08	RR
WT-T102	020 809 030		5				60		REC		20mA	A08	RR
WT-T122	021 415 360		6	3	250	100	3	1.6	100	100	1.6	A08	P
WT-T123	026 540 310		6	12.5	250	250	45	4.1	100	PenLF	4.0	A08	P
WT-T124	216 498 130		6	2	250		2.3	1.6	200		1.6	B8B	DDT
WT-T125	027 446 310		6	5	250		3	1.6	100		1.6	A08	TT
WT-T126	412 365 400		50	7.5	125	100	49	7.5	100	90	6	B7G	P
WT-T128	027 546 310	G ₁	6	{ 1	100		8	2.5	100	60	3	A08	TH
				{ 3	250	100	4	1.2	100	100	1.6		
WT-T130	026 540 310	G ₁	6	9	175	175	15	2.3	100	100	2.3	A08	TH

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
WT-T131	265 113 000	G ₁	6	3	250	100	2	1.22	100	100	1.2	UX6	P
WT-T135	020 809 030		5				120		REC		30mA	A08	RR
X14	026 546 300	G ₁	1.4	0	90	50	1.8	0.5	80	60	0.5	A08	H
X17	266 424 300		1.4	4	75		4.5	1.2	80		1.4	B7G	H
X18	266 464 300		1.4	4	75		4	1.2	80		1.4	B7G	H
X21	645 230 600	G ₁	2	0	150	75			100	75		B7	H
X22	645 320 600	G ₁	2	0	150	75			100	75		B7	H
X23	645 231 700	G ₁	2	{ 1.5	100		2.1		100	60	1.1	{ B7	TH
					150	60	0.7		150	60	1.5		
					100		2.1		100	60	1.3		
X24	645 231 700	G ₁	2	{ 1.5	150	60	0.7		150	60	1.6	{ B7	TH
					150	75	7		100	75			
X30	645 231 600	G ₁	13	3	150	75	7		100	75		B7	H
X31	645 231 700	G ₁	13	{	150		2.2		100	60	2.0	{ B7	TH
					250	75	2.3		250	75	3.0		
X32	645 231 600	G ₁	13	3	150	75	7		100	75		B7	H
X41	645 213 700	G ₁	4	{ 6	150		5	1.4	150	60	1.8	{ B7	TH
					250	75	2.3	1.4	100	75	2.0		
X42	642 231 600	G ₁	4	3	250	100	7.0	2.0	100	100	2.0	B7	H
X61	027 546 310	G ₁	6	{ 2.0	100		5.4	2.2	100		2.2	{ A08	TH
					250	100	3.0	0.65	150	100	0.65		
X62	027 546 310	G ₁	6		250	125	5		100	100		A08	TH
X63	026 545 310	G ₁	6	3	250	100	6	1.6	100	100	1.6	A08	H
X64	026 540 310	G ₁	6	3	250	100	5.3	1.1	100	100	1.1	A08	H
X65	027 546 310	G ₁	6	{ 1	100		8	2.5	100	60	1	{ A08	TH
					250	100	4	1.2	100	100	0.5		
X66	027 546 310	G ₁	6	{ 1	100		8	2.5	100	60	1.3	{ A08	TH
					250	100	4	1.2	100	100	1.0		
X71	027 546 310	G ₁	15	{ 3	100				100	60	1.5	{ A08	TH
					250	100			150	100	3.0		
X73	026 546 310	G ₁	6	3	150	75			100	75		A08	H
X75	026 546 310	G ₁	15		150	75			100	75		A08	H
X76	027 546 310	G ₁	13	{ 1.0	100		8.0	2.5	100	60	0.6	{ A08	TH
					250	100	4.0	1.2	100	100	1.6		
X77	412 366 100		6	2	100		12	6.5	100		6.5	B7G	H
X78	542 376 400		6	{ 2.0	100		5.0	2.2	100	60	2.8	{ B7G	TH
					125	75	5.3	2.2	100	75	2.0		
X79	541 237 46*		6	{ 2	100		5	2.2	100	60	2.8	{ B9A	TH
					250	75	2.9		100	75	2		
X81	276 454 130		6	{ 1.0	100		4.8	1.4	100	60	1.65	{ B8B	TH
					250	100	4.0	2.0	100	100	2.0		
X99	264 300 000		3	4.5	90		2.5	0.42	80		0.4	UX4	T
X101	276 454 130	G ₁	19	{ 2	100		3		100	60		{ B8B	TH
					250	100	3		100	100			
X107	412 365 400		19		100	250	4					B7G	O
X108	542 376 400		19	{ 2	100		5	2.2	100	60	2.2	{ B7G	TH
					250	75	5.3	2.2	100	75	1.6		
X109	541 237 46*		19	{ 2	100		5	2.2	100	60	2.8	{ B9A	TH
					250	75	2.9		100	75			

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
X142	276 454 130		14	{ 2.0 2.0	100 175		5.0 8	2.0 2.2	100 100	60 75	2.2 2.0	B8A	TH
X143	276 454 131		6	{ 2 2	100 250		6.25 5.3	2.4 2.2	100 100	60 100	3.2 2.2		
X145	276 454 130		28	{ 3.3 2.5	100 175		6.0 8.0	2.0 2.5	100 100	60 100	3 2.5	B8A	TH
X147	027 546 310	G ₁	6	{ 2 2	100 250		5.4 5	2.2 2.4	100 100	60 100	2.8 1.2		
X148	276 454 130		6	{ 1 2	100 250		4.8 4.0	1.4 2.0	100 100	60 100	1.6 2.0	B8B	TH
X150	276 454 130		6	{ 2 2	100 250		5 8	2.6 2.2	100 100	60 100	2.8 3.5		
X719	541 237 651		6	{ 3.0 2.0	100 250		5.0 6.5	2.3 2.4	100 150	60 100	2.3 2.4	B9A	TH
X727	412 366 100		6	2	100		11.0	7	100		5		
X6030	020 880 330		3						D			B8B	D
XD	642 300 000		2	1.5	75		0.65	0.75	80		0.7	Sm4	T
XDI-5	642 300 000		1.5	0	50		0.45	0.4	No Data Available			Sm4	T
XD2-0V	642 300 000		2	1	50		0.45	0.56	No Data Available			Sm4	T
XFR1	652 430 000		1.25	0	40	40	3	2	No Data Available			B5A	P
XFR2	652 430 000		1.25	0	60	60	1.8	1.1	No Data Available			B5A	P
XFR3	624 300 000		1.25	5	125		4	1.7	125		1.7	B5A	T
XFW10	653 420 000		0.625	0	20	20			No Data Available			B5A	P
XFW30	653 420 000		0.625	0	20	20			No Data Available			B5A	P
XFW40	653 420 000		0.625	0	20	20			No Data Available			B5A	P
XFW50	653 520 000		0.625	0	20	20			No Data Available			B5A	P
XFY10	653 420 000		1.25	1.25	20	20	0.5	0.35	No Data Available			B5A	P
XFY11	653 420 000		1.25	0	20	20	0.3	0.42	No Data Available			B5A	P
XFY12	653 420 000		1.25	0.5	20	20	0.25	0.37	No Data Available			B5A	P
XFY14	653 420 000		1.25	6.5	60	60	3.1	0.65	No Data Available			B5A	P
XFY20	653 420 000		0.625	0	20	20			No Data Available			B5A	P
XFY21	653 420 000		1.25	0	20	20	0.38	0.41	No Data Available			B5A	P
XFY22	653 420 000		1.25	1.2	20	20	0.3	0.36	No Data Available			B5A	P
XFY23	653 420 000		1.25	2	20	20	0.4	0.34	No Data Available			B5A	P
XFY31	653 420 000		1.25	0	20	20	0.38	0.41	No Data Available			B5A	P
XFY32	653 420 000		1.25	1.5	20	20	0.36	0.32	No Data Available			B5A	P
XFY33	653 420 000		1.25	2	20	20	0.4	0.34	No Data Available			B5A	P
XFY34	653 420 000		1.25	4	40	40	1.5	0.6	No Data Available			B5A	P
XFY35	653 420 000		1.25	1.5	40	40	0.75	0.57	No Data Available			B5A	P
XFY41	653 420 000		1.25	1.2	30	30	0.30	0.38	No Data Available			B5A	P
XFY43	653 420 000		1.25	2	20	20	0.4	0.34	No Data Available			B5A	P
XFY51	653 420 000		1.25	0	20	20	0.2	0.32	No Data Available			B5A	P
XFY53	653 420 000		1.25	3	20	20	0.45	0.3	No Data Available			B5A	P
XHI-5	642 300 000		1.5	0	50		0.45	0.5	No Data Available			Sm4	T
XH2-0V	642 300 000		2	1	50		0.45	0.56	No Data Available			Sm4	T
XL	642 300 000		2	1.5	75		1.5	0.85	80		0.8	Sm4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
XL01-5	642 300 000		1-5	1-0	50		0-9	0-65	No Data Available			5m4	T
XL1-5	642 300 000		1-5	1	50		0-7	0-6	No Data Available			5m4	T
XL02-0V	642 300 000		2	1	50		1-1	0-92	No Data Available			5m4	T
XL2-0V	642 300 000		2	1	50		1-0	0-84	No Data Available			5m4	T
XP	642 300 000		2	4-5	100		9-5	1	80		1	5m4	T
XPI-5	642 300 000		1-5	4	50		1-8	0-8	No Data Available			5m4	T
XP2	642 300 000		2	4-5	75		4	1	80		1	5m4	T
XP2-0V	642 300 000		2	3	50		2	1-0	No Data Available			5m4	T
XR2	206 035 240		1-25	7-5	125	125	7	1-9	125	100		B8D	P
X5G	542 300 000	A	2	1-0	125	60	1-4	0-7	100	60	0-6	5m4	P
X5G1-5	542 300 000	A ₁	1-5	0	50	30	0-6	0-3	No Data Available			5m4	T
X5G2-0V	542 300 000	A	2	0	50	30	0-6	0-4	No Data Available			5m4	P
XV52-0V	542 300 000	A	2	0	50	30	0-4	0-33	No Data Available			5m4	P
XW075A	653 420 000		675	0	30	30	0-3	0-18	No Data Available			B5A	P
XW1-5	254 630 000		1-5	0	50	30	0-75	0-5	No Data Available			5m5	P
XW2-0V	254 630 000		2	0	50	50	0-96	0-6	No Data Available			5m5	P
XXB	206 447 320		1-4		90		4-5	1-3	90		1-3	B8B	TT
XXD	216 447 130		12-5	10	250		9	2-1	100		2-1	B83	TT
XXFM	264 189 130		6-3	2	225		1-5	1-5	100		1-4	B8B	DDT
XXL	260 004 130		6	8	250		8	2-3	100		2-3	B8B	T
XY	254 630 000		2	3	75	75	4-0	1-25	80	75	1-2	5m5	P
XY1-5	254 630 000		1-5	1-5	40	40	1-75	1	No Data Available			5m5	P
XY2-0V	246 530 000		2	2	50	50	1-75	1-4	No Data Available			5m5	P
XY14B	653 420 000		1-25	4-5	40	40	0-3	0-6	No Data Available			B5A	P
XY14CC	653 420 000		1-25	1-5	40	40	0-5	0-5	No Data Available			B5A	P
Y13	045 231 600		13	20	250	250	40	3-9	100	150		B7	P
Y220	642 300 000	5	2	4-5	150	150	10-5	2-5	100	100	2-5	B4	P
Y220	642 350 000		2	4-5	150	150	10-5	2-5	100	100	2-5	B5	P
Y230	642 350 000		2	3	150	150	5		100	100		B5	P
Z14	036 500 200	G ₁	1-4	1	90	90	0-5	0-6	80	90	0-7	A08	P
Z21	542 300 000	A	2	1	150	125	1-1	1-2	150	100	1-2	B4	P
Z21	041 230 500	A	2	1	150	125	1-1	1-2	150	100	1-2	B7	P
Z26	045 231 600		26	5-5	250	250	32	7-5	100	100	8-0	B7	P
Z62	026 510 310	G ₁	6	2	300	150	10	7-5	100	100	7-5	A08	F
Z63	026 510 310	G ₁	6	3	250	100	2-0	1-23	100	100	1-2	A08	P
Z66	026 510 310	G ₁	6	1-5	200	200	10-9	8-5	100	150	8-0	A08	P
Z73	026 510 310	G ₁	6	3	250	100	6-5	1-7	100	90	1-8	A08	P
‡ Z77	412 361 500		6	{ 1-5	250	250	10	7-5	100	PenLF	5-0	{ B7G	P
					200	150	4	6-4	100	PenLF	5		
Z90	256 101 403		6	2	250	250	10	6-0	100	150	6-0	B9G	P
Z142	260 154 130		21	2	175	175	10	8-5	100	150	8	B8A	P
Z145	261 514 130		22	1-8	200	200	10	9	100	150	7	B8A	P
Z150	260 154 130		6	2	250	250	10	9-5	100	150	8	B8A	P

VALVE	SELECTOR SWITCH No.	T.C.	VF	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
Z152	141 230 651		6	2.0	170	170	10.0	7.4	100	100	6.0	B9A	P
Z220	642 300 000	S	2	7.5	150	150	15	2.0	100	100	2.0	B4	P
Z220	642 350 000		2	7.5	150	150	15	2.0	100	100	2.0	B5	P
Z309	141 223 651		6	2	250	250	20	15	No Data Available			B9A	P
Z319	141 321 615		6	10.4	350	250	15.5	1.9	100	100	6	B9A	P
Z359	141 230 651		12	2	250	250	20	15	100	100		B9A	P
Z719	141 230 651		6	2	175	175	10	7.4	100	150	6	B9A	P
Z729	501 236 014		6	1	250	100	3	1.8	100	100	1.8	B9A	P
Z759	141 023 651		6	2	250	250	15	15	100	100		B9A	P
ZD	892 310 000		13						D			B5	DD
ZD17	208 564 300		1.4	1	90	90	2.7	0.64	80	90	0.6	B7G	DP
ZD152	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
IAE5	642 453 000		1.25	0	40	40	0.9	0.2	No Data Available				P
IAH4	652 430 000		1.25	0	40	40	0.75	0.75	No Data Available			B5A	P
IDN5	265 804 300		1.4	0	60	60	2.1	0.63	No Data Available			B7G	DP
IG3	*2* 0*0 3*0	D ₁	1.25						D			A08	D
IJ3	020 000 300	D ₁	1.25						D			A08	D
3A/167M	2*0 61* 430		6.3	4	200		10	30	No Data Available			B8B	T
3AZ4	020 809 030		5				60		REC		15mA	A08	RR
4DT6	412 365 100		4.2	2.2	150	100	11	0.8	150	100	2	B7G	P
5B/258M	215 144 130	A ₁	19	14	250	250	72	6	No Data Available			B8B	P
6AB6	026 740 310		6.3	{ 0	250		34	1.8	100		1.8	A08	TT
				{ 0	250		5		100				
6AC6	026 740 310		6.3	{ 0	175		45	2	100		2.0		
				{ 0	175		7		100			A08	TT
6AL7	426 89* 310		6	6	300				100			A08	DDDT
6AZ6	083 113 900		6						D			B8A	DD
6B5	267 413 000		6	{ 0	300		42	2.2	100			UX6	TT
				{ 0	300		9	0.6	100				
6CU8	175 231 446		6.3	{ 6	200		13	3.3	100	60	3	B9A	TP
				{ 2.2	200	150	9.5	6.2	100	150	6		
6CY7	7*4 236 411		6.3	{ 18.5	150		30	5.4	100			B9A	TT
				{ 3	250		1.2	1.3	100		1.4		
6DA4	**1 060 230		6.3				120		REC		30mA	A08	R
6DG7	041 230 651		6.3	20	250	100	11	4.4	100	100	5	B9A	P
6DQ5	421 541 350		6.3	25	175	125	110	10.5	No Data Available			A08	P
6DS5	412 365 100		6.3	8.5	250	200	29	5.8	100	100		B7G	P
6DT6	412 365 100		6.3	2.2	150	100	11	0.8	150	100	2	B7G	P
6SJ8G	027 546 310	G ₁	6	{ 3	150		5	1.6	100	60	1.6	A08	TH
				{ 3	250	100	1.3	1.2	100	100	1.2		
6SJ8EG	027 546 310	G ₁	6	{ 3	150		5	1.6	100	60	1.6	A08	TH
				{ 3	250	100	1.3	1.2	100	100	1.2		
8CY7	7*4 236 411		7.9	{ 18.5	150		30	5.4	100			B9A	TT
				{ 3	250		1.2	1.3	100		1.4		
9CL8	461 237 514		9.5	{ 0.75	125		15	8	100		7.5	B9A	TP
				{ 1	125	125	12	5.8	125	150	5		
11A6	264 147 300		10	1	100			3.1	100		3.1	A08	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
11A8	027 546 310		10	{ 1	100	100			100	100		A08	TP
11C5	026 040 310		10	1	100			2	100		2		T
11F6	026 540 310		10	1	100	150		2.5	100	PenLF	2.5	A08	P
11J7	026 500 310	G ₁	10	1	250	100		1.2	250	100	1.2	A08	P
11K7	026 500 310	G ₁	10	1	250	100		1.4	250	100	1.4	A08	P
11L6	026 540 310		10	1	100	150		6	100	PenLF	6	A08	P
11N7	026 447 310		10	1	100			3.1	100		3.1	A08	TT
14J8	027 546 310	G ₁	12.6	{ 1	100		8	2.5	100	60	2.5	A08	TH
17D4	**1 080 230		16.8	3	250	100	4	1.2	100	100	1		R
							120		REC		30mA	A08	
20D4	541 237 164		6.3	{ 0	100		15	3.5	100		3.3	B9A	TH
				2	250	100	7	2.8	100	100			
25AC5	026 040 310		25	0	175		4	3.8	100		3.5	A08	T
25B5	267 413 000		25	{ 0	100		45	2.2	100		2	UX6	TT
				0	100		7		100				
30C13	645 237 114		9	{ 2	100		14	5	100	60	5.1	B9A	TP
80A	298 300 000		5	2	175	175	10	6.6	100	150	6		RR
							60		REC		20mA	UX4	
410PT	642 350 000		4	1	100	150		2.5	100	PenLF	2.5	B5	P
451	892 300 000		1.8						REC			B4	RR
660T	642 300 000		6	1	100			7.4	100		7.5	B4	T
829B	245 134 200	A ₁ A ₂	6.3		300	250	25	1.9	No Data Available			B7A	PP
832	245 134 200	A ₁ A ₂	6.3		150	125	30	3.5	100	PenLF	3.5	B7A	PP
832A	245 134 200	A ₁ A ₂	6.3		150	125	30	3.5	100	PenLF	3	B7A	PP
5798	741 231 460		26	0	20		2.3	3.1	No Data Available				TT
5904	402 013 060		26	0	20			5	No Data Available				T
6169	462 113 640		6	1	175		11.5	6.5	100		6.5	A08	T
7032	412 365 100		6.3	2	250	100	4.5	1.8	100	100		B7G	H
824476	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
A214	642 300 000		2	3	150		4.5	1.3	100		3	B4	T
A2030N	642 310 000		20	3	200		6	2.3	100		2.3	B5	T
A2040N	642 310 000		20	1.6	200		0.2	3	100		1	B5	T
A2293	*1* 234 **6		6.3	23	150		100	12	No Data Available			B9A	P
B435N	642 310 000	D ₁	4	3.5	200		6	2	100		2	B5	DT
C543	642 350 000		4	1	100	150		2	100	PenLF	2	B5	P
D143	642 350 000		1	1	100	150		1.2	100		1.2	B5	P
D401	902 310 000	D ₁	4						D			B4	DD
DK31	027 546 300	G ₁	1.4	{ 1	80	60			80	60		A08	TH
				1	125	90			125	90			
DO42	819 236 500	G ₁	40	1	100	150		8	100	PenLF	8	B7	DDP
DT41	809 321 600	G ₁	4	1	100			3	100		3	B7	DDT
DT215	023 089 060	G ₁	2	4.5	125		25	1	100		1	8SC	DDT
DTV1	809 231 600	G ₁	13	1	100			3	100		3	B7	DDT
E90F	412 365 100		6.3	1.2	250	150	7.4	4.6	100	100		B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
E220B	446 230 700		2	0	150		1.5		100			B7	TT
ECC88	741 236 410		6.3	1.2	90		15	12.5	No Data Available			B9A	TT
EF89F	041 230 651		6.3	20	250	100	11	4.4	100	100	5	B9A	P
F/7001	412 365 100		6.3	0	125	125	35	4.8	100	100	4	B7G/F	P
G3060	123 190 080		30				60		REC		20mA	85C	RR
P226	023 004 560		2	5	125	125	7	2.1	80	75	2.9	85C	P
Pen220	642 310 000		2	4.5	125	125		2.2	100	100	2.5	B5	P
QQV07-40	245 134 200	A ₁ A ₂	6.3		300	250	25	1.9	No Data Available			B7A	PP
RE052	642 300 000		2	3	150		1	1	100		1	B4	T
RE054	642 300 000		4	4	125		4	1.3	100		1.3	B4	T
RE062	642 300 000		2	9	150		4	1	100		1	B4	T
RE074D	642 300 000		4	3	150		3.5	0.5	150		0.5	B5	T
RE076	642 300 000		6	9	150		4	1.5	100		1.4	B4	T
RE122	264 300 000		2	4.5	150		3	1.3	100		3	UX4	T
RE122	642 300 000		2	18	150		7	1.2	100		1.2	B4	T
RE124	642 300 000		4	18	150		11	1.6	100		1.6	B4	T
REN1104	642 310 000		4	16	200		12	1.3	100		1.3	B5	T
REN1822	642 310 000		20	18	200		15	1.6	100		1.6	B5	T
RENS1224	164 552 300	G ₁	4	1.5	200	125	3	0.58	100	100		C7	P
RENS1234	165 452 300	G ₁	4	2	200	75	3	1.8	100	75	1.8	C7	P
RENS1384	642 310 000	G ₂	4	22	250	250	36	2.8	100	PenLF	2.9	B5	P
RES105	642 300 000	G ₂	5	15	200	150	12	1.3	150	100	1.3	B4	P
RES212	642 350 000		2	4.5	150	125	6	2.2	150	100	2.2	B5	P
RES664D	642 350 000		4	40	400	200	30	1.9	100	100	1.9	B5	P
RGN1404	082 300 000		4				120		REC		20mA	B4	RR
RGN4004	892 300 000		4				120		REC		20mA	B4	RR
S410N	542 310 000	A ₁	4	2	200	60	4	1	100	60	1	B5	P
S412N	542 310 000	A ₁	4	1.3	200	100	1.5	1	100	100	1	B5	P
S415N	542 310 000	A ₁	4	2	200	100	6	1	100	100	1	B5	P
S423	023 110 560	G ₁	4	3	250	100	8	1.8	250	100	1.9	85C	P
S424	023 110 560	G ₁	4	2	250	100	3	2.1	250	100	2.1	85C	P
S430N	542 310 000	A ₁	4	2	200	100	3	2	100	100	2	B5	P
S434N	542 310 000	A ₁	4	2	200	100	4.5	2.3	100	100	2.3	B5	P
S2010N	542 310 000	A ₁	20	2	200	60	4	1	100	60	1	B5	P
S2012N	542 310 000	A ₁	20	2	200	60	4	1	150	60	1	B5	P
S2030N	542 310 000	A ₁	20	2	200	100	3	2	150	100	2	B5	P
T223	023 004 060		2	2.8	125		3	2.5	100		2.5	85C	T
T2	642 300 000		2	1	100			1	100		1	B4	T
TDD13	023 189 060	G ₁	13	1	100			2.9	100		2.9	85C	DDT
TD2	642 300 000		2	7	150		4	0.9	100		0.9	B4	T
TT210	023 074 460		2	0	125		1.5		80			85C	TT
T460	023 004 060		4	45	250		60	6	100		6	85C	T
TH2620	645 231 700	G ₁	26	1	100			5.3	100	60	5.3	B7	TH
				1	250	100		3.9	250	100	3.8		
TZ40	204 300 000	A ₁	7.5	1	100			0.4	100		0.4	UX4	T
U26	231 232 132	D ₁	2						D			B9A	D

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
UPI3	040 231 500	A ₁	13	1	200	100		3	200	100	3	B7	P
VO133	023 164 570	G ₁	13	{ 1	100			1.25	100	60	1.25	B7	TH
VPUI	060 231 500	G ₁	13	{ 1	200	75		1.75	200	75	1.75		
WHTS	745 231 600	G ₁	13	{ 1	150	200		3.5	250	200	3.5	B7	P
				{ 1	250	75		0.6	150	60	0.6	B7	TH
				{ 1	250	75		1.4	250	75	1.4		
XFY15	653 420 000		1.25	6.5	60	60	3	0.65	No Data Available			B5A	P
XFY54	653 420 000		1.25	2	20	20	0.34	0.28	No Data Available			B5A	P
XR6	412 163 510		6.3	1.4	100	100	7	5	100	100	5	B8D	P
XR7	412 653 160		6.3	2	100	100	7.5	5.5	100	100	5.5	B8D	P
XR8	462 603 160		6.3	2.5	100		8	4.2	100		4.2	B8D	T
ZD2	642 300 000		2	12	150		7	1	100		1.2	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
IAG4	653 420 000		1.25	3.6	40	50	2.4	1.0	No Data Available			B5A	P
IAG5	658 243 000		1.25	2.0	40	40	0.28	0.25	No Data Available			B5A	P
IAJ5	658 243 000		1.25		40	40	1.0	0.425	No Data Available			B5A	P
IAK4	652 430 000		1.25		40	40	0.75	0.75	No Data Available			B5A	P
IC3	266 464 300		1.4		60		3.0		No Data Available			B7G	H
IK3	020 000 300	D ₁	1.25						D			A08	D
2C50	461 471 230		12.6		200		18	2.9	100			A08	TT
3CE5	412 365 100		3.15	2.1	200	150	9.5	6.2	100	100		B7G	P
3CY5	412 365 100		2.9	1.0	125	75	10	8.0	100	80	8.0	B7G	P
3DK6	412 365 100		3.15	0.9	125	125	12	9.8	100	100	9.5	B7G	P
4DK6	412 365 100		4.2	{ 0.9 0.85	125 125	125 125	12 15	9.8 8.0	100 100	100	9.5 8.0	B7G	P
5CQ8	645 237 114		4.7	{ 1.0 2.0	125 125	125 125	12 12	5.8 4.0	125 100	125	1.95 4.0	B7G	TP
5CR8	641 237 514		4.7		125	125	13	7.7	100	100	7.7	B9A	
5EA8	645 237 114		4.7	{ 1.0 1.0	150 125	125 125	18 12	8.5 6.4	100 100	100	8.5 6.4	B9A	TP
5EH8	146 231 457		4.7	{ 1.0 1.0	125 125	125 125	13.5 12	7.5 6.0	100 100	100	7.5 6.0	B9A	TP
6B3	080 230 808		C						D			B9A	R
6CR5	154 231 541	A ₁	6.3	{ 22.5 2	250 125	150 125	65 12	6.0 4.0	100 100	100		B9A	P
6CR8	641 237 514		6.3	{ 2 2	125 125	125 125	13 12	7.7 4.0	100 100	100	7 4.0	B9A	TP
6CS8	641 237 514			0.9	125	125	13	7.7	100	100	7	B9A	TP
6CY5	412 365 100		6.3	{ 1.0 17.5	125 150	75	10 40	8.0 5.7	100 100	80	8	B7G	P
6DA7	704 236 411		6.3	8	250		9	2.6	100		2.6	B9A	TT
6DB5	514 234 1*6		6.3	9.6	200	125	46	8.0	100	100		B9A	P
6DC8	541 236 891		6.32	2	250	100	9.0	3.8	100	100		B9A	DDP
6DK6	412 365 100		6.3	{ 0.9 8	125 250	125	12	9.8 6.6	100 100	100	9.5	B7G	P
6DN7	461 471 230		6.3	9.5	250		34	7.4	100			A08	TT
6DT8	741 236 410		6.3	2.5	250		10	5.5	100		4	B9A	TT
6EA8	645 237 114		6.3	{ 1.0 1.0	150 125	125	18 12	8.5 6.4	100 100	100	8.5 6.0	B9A	TP
6EH8	146 231 457		6.3	{ 1.0 1.0	125 125	125	13.5 12	7.5 6.0	100 100	100	7.5 6.0	B9A	TP
6F20	141 230 651		6.3	2.0	175	175	10	6	100	100		B9A	P
6FH6	020 540 310	A ₁	6.3	22.5	250	150	75	6.0	100	100		A08	P
7EY6	026 540 310		7.2	{ 17.5 5	250 150	250	44 9.5	4.4 3.3	100 100	100 60		A08	P
8BH8	146 231 457		8.4	1.6	200	125	15	7.0	100	100		B9A	TP
8BN8	811 239 641		8.4	3	250		1.6	2.5	100		3.5	B9A	DDT
8BQ5	*41 23* 6*5		8	{ 7.3 8.5	250 250	250	48 10.5	11.3 2.2	100 100	150	10 2.0	B9A	P
8CS7	704 236 411		8.4	10.6	250		19	4.5	100		4	B9A	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
8EB8	146 231 457		8									B9A	TP
8SN7	461 471 230		8.4	{ 8 17.5	250 150		9 40	2.6 5.7	100 100		2.6	A08	TT
10C14	541 237 464		19	{ 0 2.6	100 200	125	13.5 7.6	3.7 2.4	100 100	60 100	3.7 2.4	B9A	TH
10DA7	704 236 411		10	{ 8 11	250 250		9 5.5	2.6 2.0	100 100		2.6	B9A	TT
10DE7	744 236 411		10	{ 17.5	150		35	6.6	100			B9A	TT
10L14	641 237 410		26	2.1	200		10	5.8	100		5	B9A	TT
10P18	*41 23* 6*5		45	12.5	175	175	70	10	100	100	9	B9A	P
12B3	080 230 808	C	12.6						D			B9A	R
12CR5	154 231 541	A ₁	12.6	22.5	250	150	65	6.0	100	100		B9A	P
12CS5	514 234 1*6		12.6	10	200	125	47	8.0	100	100		B9A	P
12DB5	514 234 1*6		12.6	9.6	200	125	46	8	100	100		B9A	P
12DT8	741 236 410		12.6	2.5	250		10	5.5	100		4.0	B9A	TT
12ED5	142 345 600		12.6	4.5	125	125	37	8.5	100	100	8	B7G	P
12R5	142 345 600		12.6	8.5	100	100	40	7.0	100	100	7	B7G	P
13E1	234 156 200		13	20	100				No Data Available			B7A	P
17CA5	142 345 600		17	4.5	125	125	36	9.2	100	100	8	B7G	P
17CU5	142 345 600		17	8	125	100	49	7.5	125	100	7.5	B7G	P
17H3	106 230 060		17.5						D			B9A	R
17L6	026 540 310		17.5	8.25	200	125	46	8	100	90	8	A08	P
17R5	142 345 600		17	{ 8.5 100	100 100	100	40 13.5	7.0 3.7	100 100	100 60	7.0 3.7	B7G	P
19D3	541 237 464		19	{ 0 2.6	100 200	125	13.5 7.6	3.7 2.4	100 100	60 100	3.7 2.4	B9A	TH
20A3	412 316 100		6		400		50	6K Ω	No Data Available			B7G	Thr
25CR5	154 231 541		25	22.5	250	150	65	6.0	100	100		B9A	P
35CD6	021 040 350	A ₁	35	30	175	175	75	7.7	100	100		A08	P
35D5	401 236 050		35	10.5	175	175	52	9.5	100	100		B9A	P
841	264 300 000		7.5	1.0	100			0.75	100		0.75	UX4	T
1222	265 403 100		6.3	18	350	250	54	5.2	100	PenLF	5.2	A08	P
1236A	333 882 220		1.9						D			A08	R
1238	245 671 430		28	3.5	30	30	12.5	3.4	No Data Available			B8B	PP
5645	612 430 000		6.3	2.8	100		5	2.7	100		2.7	B5B	T
5646	612 430 000		6.3	1.15	100		1.4	2.4	100		2.4	B5B	T
5702	652 311 400		6.3	2	125	125	7.5	5.0	100	100	5	B7F	P
5703	623 410 000		6.4	2.0	125		9	5	100		5	B5A	T
5704	623 100 000		6.3				5		D			B5A	R
5744	623 410 000		6.3	2	250		4	4	100			B5A	T
5784	652 311 400		6.3	2	125	125	5.2	3.2	100	100	3	B7F	P
5785	823 000 000		1.25						D			B3F	D
5871	026 540 310		6.3	12.5	250	250	45	4.1	100	PenLF	4	A08	P
6049	412 163 510		6.3	1.5	100	100	7.5	3.5	100	100	3.5	B8A	P
6206	412 163 510		6.3	1.3	100	100	7.5	4.5	100	100	4.5	B8A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6252	245 134 200		6.3	17	400	200	20	2.5	No Data Available			B7A	PP
6352	2** 382 930		1.5						D			B8A	D
6360	414 226 573		6.3	15	200	200	30	3.3	No Data Available			B7A	PP
6690	742 163 410		6.3	0.8	100		8	4.8	100		4.8	B8A	T
6788	412 163 510		6.3	1.4	100	100	0.8	1.15	100	100	1.15	B8A	P
6814	402 013 060		6.3		100		10	6	100		6	B8A	T
6913	741 226 413		6.3	5	150		11	4.6	100			B9A	TT
6973	504 234 156		6.3	15	250	250	46	4.8	100	100		B9A	P
7025	741 226 413		6	2	250		1.2	1.6	150		1.6	B9A	TT
7027	526 544 310		6.3		200	200			100	100		B8A	P
7227	*41 23* 651		27.5	2.5	30	30	8	5	No Data Available			B9A	P
DF63	652 430 000		1.25	2.5	90	90	1.25	0.45	80	90	0.6	B5A	P
DH118	264 089 130		13	1	100		0.8	1.4	100		1.4	B8A	DDT
DH718	264 089 130		6.3	3	250		1.0	1.3	100			B8A	DDT
DT215	682 390 000	G ₁	2	4.5	125		2.5	1.5	100		1.5	B5	DDT
DT436	809 231 600	G ₁	4	7	250		4	3.6	100		2.0	B7	DDT
DY70	230 000 000	D ₁	1.25						D			B3G	D
E220B	446 230 700		2	1	125		3	2.5	100		2.5	B7	TT
EC71	402 013 080		6.3		100		8.5	5.8	100		5.8	B8D	T
EF731	412 163 510		6.3		100		7.2	4.5	100		4.5	B8D	P
EF732	412 163 510		6.3	1.5	100	100	7.5	5	100	100	5	B8D	P
EL360	*2* 540 310	A ₁	6.3	7.7	100	100	100	14	No Data Available			A08	P
G2080	023 100 080		20				60		REC		15mA	B5C	R
G412ON	892 300 000		4				60		REC		40mA	B4	RR
GZ37	030 908 020		5(5.7)				120		REC		40mA	A08	RR
LN319	641 237 154		13	{	200		10	3.4	100			{	B9A
					175	175	32	6.5	100	100			
					100		14	5.0	100	60	5		
LZ329	645 237 114		9	{	175	175	10	6.2	100	100	5	{	B9A
					250		10.5	2.2	100		3		
M8080	602 364 100		6	8.5								B7G	T
M8136	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
M8162	741 226 413		6	2	250		10	5.5	200		5	B7G	TT
M8245	412 365 400		6	12.5	250	250	45	4.1	100	PenLF	4	B7G	P
N25	365 *24 300		1.4	5.2	90	90	5	1.4	80	75	1.4	B7G	P
N118	26* *54 130		40	6	150	150	30	7.5	100	100		B8A	P
N308	02* 54* 310	A ₁	25	9.5	100	100	100	13	No Data Available			A08	P
O202	645 230 700	G ₁	2	{	150	50	2.0		100		0.5	{	B7
					150	75	0.95	0.2	100	75	1.0		
					90	90	2	1	100	90	1.3		
O406	645 231 700	G ₁	4	{	250	90	1.6	1	250	90	1.5	{	B7
					200	90	8	3	200	75	1.6		
O1307	023 154 560	G ₁	4	1.5								8SC	P
OM5B	026 510 310	G ₁	6	2	250	100	3	1.8	100	100	1.6	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
P42I	642 350 000		4	11	200	75	12	1.6	100	75		B5	P
P42S	642 350 000		4	25	300	200	20	1.7	100	PenLF	1.7	B5	P
P440N	642 310 000		4		250	250	20	2.5	100	PenLF	2.8	B5	P
P44S	023 100 560		4	25	250	250	36	2.6	100	PenLF	2.8	8SC	P
P2020N	642 310 000	G ₂	20	18	200	200	20	1.7	100	100	1.7	B5	P
QQE03-12	414 226 573		6.3	15	200	200	30	3.3	No Data Available			B9A	PP
QQV02-6	414 226 573		6.3		150	150	25	10.5	No Data Available			B9A	PP
QQV03-20A	245 134 200	A ₁ A ₂	6.3		300	200	20	2.5	No Data Available			B7A	PP
QQV04-15	245 134 200	A ₁ A ₂	6.5	27	400	250	30	3.0	No Data Available			B7A	PP
QQV06-40A	245 134 200	A ₁ A ₂	6.3		400	250	30	3.4	No Data Available			B7A	PP
R5559	6*2 1*1 413		6.3	1.5	150		25	25	No Data Available			B9A	T
S217	041 230 500	A ₁	2	0.5	150	150	2.5	1.7	150	150	1.7	B7	P
S434N	041 231 500	A ₁	4	1.5	200	100	4.5	2	100	90	2	B7	P
S435N	041 231 500	A ₁	4	2	200	100	3	2.3	200	100	2.3	B7	P
SU42	803 000 020		4						D			A08	R
TH40I	174 652 300	G ₂	4	{ 2 2	150 75		11 2.5	2	100 80	60 75	2	{ C7 B9A	TH D
U49	230 232 032	D ₁	2						D				
U118	280 *** 130		40				60		REC		25mA	B8A	R
U339	0** 080 230		19				120		REC		35mA	A08	R
U718	29* **8 130		6.3				60		REC		25mA	B8A	RR
UF86	501 236 014		12.6	2	200	150	3	1.8	100	100	1.8	B9A	P
W118	260 154 130		13	2.5	175	100	7	2.3	100	100	2.5	B8A	P
W739	141 230 651		6.3	1.3	175	100	12	4.4	100	100	4	B9A	P
WD2	642 300 000		2	2.5	150		1.0	1.0	100		1.2	B4	T
X20	265 451 300		1.4		90	30			No Data Available			B7G	H
X118	276 454 130		28	{ 2.5 2.5	100 175		5 3	4 2.5	100 100		3.5 2.5	{ B8A B8B	TH TT
XR9	742 113 460		6.3	1.85	100		8.5	5	100		5		
YD2	642 300 000		2	4.5	150		6	3.0		100	2	B4	T
Z329	141 230 651		7.3	1.9	175	175	10	8.8	100	100		B9A	P
ZD25	2*8 564 300		1.4	1.5	60	60	0.17	0.17	No Data Available			B7G	DP
A2674	211 403 506		6	1.4	175	150	23.5	30	No Data Available			B9A	P
A2688	412 314 600		6	1.0	100		12	11.5	No Data Available			B7G	T
AC/SP3/RH	061 231 500	G ₁	4	1.5	250	100		7.5	100	100		B7	P
B109	741 236 410		26	1.5	175		10	6.2	100		6	B9A	TT
B729	741 236 410		6		200		10	3.4	100		3.4	B9A	TT
DH10I	264 *98 130		19	3	250		1.0	1.2	100			B8G	T
DH107	412 389 600		19	3	250		1.0	1.2	100			B7G	T
E80CF	645 237 114		6	{ 2 2	100 175		14 10	5 6.2	100 100		6	{ B9A B9A	TP TT
E182CC	741 221 436		6	2	125	175	36	15	No Data Available				

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EC56	*21 0*0 310	A ₁ G ₁	6	1.8	175		30	15	No Data Available			A08	T
EC57	*21 0*0 310	A ₁ G ₁	6	1.8	175		30	15	No Data Available			A08	T
ECC70	742 113 460		6	1.0	100		6.5	5.4	100		5.4	B8D	TT
ECC230	461 471 230		6	30	100		100	6.5	No Data Available			A08	TT
EF730	562 603 160		6	1.0	100	100	5.3	3.2	100	100	3.5	B8D	P
EF734	412 163 510		6	1.5	100	100	7.5	5	100	100	5	B8D	P
EL5	023 104 560		6	15	250	275	72	8.5	No Data Available			85C	P
EL71	412 163 510		6	8.5	100	100	30	4	100	100		B8D	P
G/6C4	602 364 100		6	8.5	250		10.5	2.2	100		3	B7G	T
GZ32	030 809 020		5(5-7)				60		REC		60mA	A08	RR
M8212	182 310 900		6				5		D			B7G	RR
N119	*41 23* 6*5		45	12.5	175	175	70	10	No Data Available			B9A	P
PCC89	147 234 116		7.2	1.2	90		15	12	No Data Available			B9A	TT
PY88	**23* **8	C	26				120		REC		40mA	B9A	R
PEN45AN	216 540 310		4	8.4	250	250	40	8.8	100	PenLF	8	M08	P
Pen453DD	216 590 830	G ₁	45	10	175	175	64	10.5	No Data Available			M08	DDP
IA8	327 546 280		1.4	0	90	90	1.2	0.75	80	90	0.75	A08	DTP
IH2	23* 232 *32	D ₁	1.4						D			B9A	D
3SB6	036 540 200	G ₁	1.4	0	90	60	1.45	0.67	80	60		A08	P
4BN4	142 361 400		4	2.2	150		9	7	100		7	B7G	T
4BZ6	412 365 100		4	1.0	100	125	14	8	125	125	7	B7G	P
5BW8	918 234 156		4.7	1.1	250	100	10.0	5.2	100	100		B9A	DDP
6CK4	424 060 310		6	28	250		40	5.5	No Data Available			A08	T
6DR7	644 237 411		6	{ 17.5 3 }	150 250		35 1.4	6.5 1.6	No Data Available			B9A	TT
6EH5	142 345 600		6	3.2	100	125	42	14.6	100	125		B7G	P
6EM5	504 234 106		6	18	250	250	35	5.1	100	100		B9A	P
6EW6	412 365 100		6	0.8	125	125	11	14	No Data Available			B7G	P
6F21	412 361 500		6	2.5	250	200	7.8	2.5	100	100		B7G	P
6H1	412 360 500		6	1.8	250	100		2.1	100	100	2	B7G	H
6LI3	741 226 413		6	2	250		1.2	1.6	100		1.6	B9A	TT
6LD13	641 238 09*		6	3	250			1.0	100			B9A	DDT
6PI7	412 360 500		6	13.5	250	250	16	2.6	No Data Available			B7G	P
6887	182 310 900		6						D			B7G	DD
6919	182 310 900		6				5		D			B7G	RR
7054	141 230 651		13.5	2.8	250	150	19	11.5	No Data Available			B9A	P
7055	182 310 900		13.5				5		D			B7G	RR
7056	412 365 100		13.5	2.2	200	150	9.5	6.2	100	100		B7G	P
7057	641 237 410		13.5	2.2	150		10	6.8	100			B9A	TT
7058	641 237 410		13.5	2	250		1.25	1.6	100			B9A	TT
7059	645 237 116		13.5	{ 1.0 0.9 1.5 1.6 }	150 250 150 200	100	18 10 9 15	8.5 5.2 4.9 7	100 100 100 100	60 100 60 100	{ 8 5 }	B9A	TP
7060	641 237 541		13.5			125						B9A	TP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
7061	504 234 156		13.5	10	200	200	36	4.2	100	100		B9A	P
7244	672 344 100		6	0.45	100		9	6	100		5	B7G	TT
7A5	265 **4 130		6	9	125	125	45	6	100	100		B8A	P
7EY6	026 540 310		7.2	17.5	250	250	44	4.4	No Data Available			A08	P
8D8	501 236 014		6	2	250	150	3	1.9	100	100		B9A	P
8EM5	504 234 106		8.4	18	250	250	35	5.1	100	100		B9A	P
10D2	192 310 800		19				5		D			B7G	RR
10F1	261 154 130		22	1.8	200	200	10	9.0	100	100		B8A	P
10F3	260 154 130		22	2.3	200	200	6	6.5	100	100		B8A	P
10FD12	541 236 891		19	1.5	200	200	11	4.5	100	100		B9A	DDP
10LD12	191 238 146		28	2.3	200		1.0	1.4	100			B9A	DDDT
12DQ7	141 223 651		6	2.1	200	125	26	10.5	100	100		B9A	P
12EH5	142 345 600		12	3.2	100	125	42	14.6	100	125		B7G	P
13DR7	644 237 411		13	{ 3 17.5	250		1.4	1.6	100	100		B9A	TT
					150		35	6.5	100	100			
25EH5	142 345 600		25	3.2	100	125	42	14.6	100	125		B7G	P
25Y4	*20 080 310		25				60		REC		20mA	A08	R
30L15	147 234 110		7	1.2	90		15	9	80		8	B9A	TT
80	398 200 000		5(5.7)				60		REC		20mA	UX4	RR
PT4D	869 231 500	G ₁	4	6	250	250	32	7.5	100	100		B7	DDP
S6F12	412 361 500		6	2	250	250	10	7.5	100	100		B7G	P
S6F17	412 361 500		6	6.25	250	250	64	8.3	100	100		B7G	P
TD05-12	*21 010 310	A ₁ G ₁	6		150		10.0	4.0	100			A08	T
TY86F	23* 232 *32	D ₁	7.5						D			B9A	R
U45	230 000 000	D ₁	6						D			B3G	R
U47	230 000 000	D ₁	2						D			B3G	R
U119	**1 23* **8		38				120		REC		30mA	B9A	R.
U381	**1 23* ***	D ₁					120		REC			B9A	R
	1 23* *	D ₁					120		REC			B9A	R
VP2D	061 230 500	G ₁	2	1.5	150	75	1.3	2.0	100	80		B7	P
VPT2	041 230 500		2	1.5	125	60	1.5	1.1	100	60		B7	P
VPT2	542 300 000	A ₁	2	1.5	125	60	1.5	1.1	100	60		B4	P
W25	265 *24 300		1.4	0	90	60	1.65	0.8	90	60		B7G	P
W119	141 230 651		13	1.3	175	100	13	4.4	100	100	4.4	B9A	P
X119	541 237 164		19	{ 0 2.2	100		13.5	3.7	100	60	3.5	B9A	TP
					175	100		2.3	100	100	2		
X148	276 454 130		6	{ 1 2	100		4.8	1.4	100	60	1.8	B8B	TH
					250	100	4	2	100	100	2.2		
XFR5	652 430 000		1.25	0	60	60	1.8	1.1	No Data Available			B5A	P
XFW20	652 430 000		0.625	0	20	20			No Data Available			B5A	P
XHPI.5	264 730 000	G ₁	1.5	{ 0 4.5	40		.5	0.5	No Data Available			SM5	TT
					40		1.7	0.72					
XW075B	653 420 000		0.625	0	30	30	.2	0.18	No Data Available			B5A	P
XY1.4A	653 420 000		1.4	4.5	40	40	1.75	0.5	No Data Available			B5A	P
XY1.4B	653 420 000		1.25	4.5	40	40	1.6	0.6	No Data Available			B5A	P
XY1.4C	653 420 000		1.25	1.5	40	40	0.5	0.5	No Data Available			B5A	P

APPENDIX I.

TEST DATA FOR TUNING INDICATORS

Tuning indicators are tested with the controls set according to the figures given in the table below; using the screen switch for obtaining the target voltage and inserting the anode load, as shown in column marked "Ra" by means of the link on the panel of the instrument. At the approximate bias given in the table the triode section should be at cut-off and the "eye" fully closed. On reducing the grid bias to zero the "eye" should open fully and the anode current should be approximately that given in the table. In the case of double sensitivity indicators giving multiple images corresponding to the different sensitivities, two sets of data (wherever possible) are given, the first set relating to the sensitive indication.

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA FOR TUNING INDICATORS					BASE
				Neg. Grid Volts	Anode Volts	Target Volts	Ia mA	Ra MΩ	
1M1	4*0 230 060		1.4	34	250	0	0.09	2.2	B8D
1M3	4*0 230 060		1.4	23	175	0	0.1	1	B8D
2E5	264 513 000		2.5	8	250	250	0.24	1	A08
2G5	264 513 000		2.5	22	250	250	0.24		UX6
6AB5	264 513 000		6	15.5	150	150	0.13	1	UX6
6AD6	026 540 310		6	{ 3 50	150 150			}	A08
6AF6	026 540 310		6	81	125	125			A08
6AF7	026 457 310		6	{ 4.5 15	200 200	200	0.16 0.15	1 1	A08
6BR5	41* 23* 6*5		6	14	200	200	0.4	0.5	B9A
6CD7	026 546 310		6	{ 4.2 12.5	250 250	250		1 1	A08
6E5	264 513 000		6	7.5	250	250	0.2	1	UX6
6G5	264 513 000		6	22	250	250	0.24	1	UX6
6H5	264 513 000		6	22	250	250	0.24	1	UX6
6M1	026 540 310		6	22.5	250	250	0.23	1	A08
6M2	*25 456 310		6	{ 4.0 2.0	250 250	250	0.12 0.25	0.2 0.1	A08
6N5	264 513 000		6	15.3	150	150	0.13	1	UX6
6T5	264 513 000		6	22	250	250		1	UX6
6U5/6G5	264 513 000		6	22	250	250	0.24	1	UX6
6X6	025 540 310		5		250	250			A08
10M1	026 540 310		18	19	175	175	0.16	1	A08
10M2	2*6 456 130		12.6	{ 3.0 20	200 200	200	0.1 0.19	0.2 0.1	A08
12U5	264 513 000		12.6	22	250	250	0.24	1	UX6
41ME	023 104 560		4	5	250	250		1	8SC
63ME	026 540 310		6	22	250	250	0.25	1	A08
64ME	026 457 310		6	{ 16 2.5	250 250	250		1 1	A08
65ME	41* 23* 6*5		6		250	250			B9A
1629	026 540 310		12.5	8	250	250	0.24	1	A08
4678	023 104 560		6	5	250	250	0.095	2	8SC
AC/ME	045 231 600		4	22	250	250	0.24	1	B7
AM1	023 104 560		4	5	250	250	0.095	2	8SC
DM21	026 540 030		1.4		90	90	0.025	2	A08
DM70	4*0 230 060		1.4	23	175	0	0.1	1	B8D

APPENDIX II.

Test Data for High Voltage Rectifiers.

The following procedure should be adopted when testing high voltage rectifiers.

Make insulation checks with valve cold and hot as stated in paragraphs 1 and 2 of the Abbreviated Working Instructions.

Then set Anode and Screen Voltage switches to their minimum value (i.e. 20) and Anode Current Controls to figure shown in Data column. With Circuit Selector set to TEST and Anode Selector at A₁ increase Anode Volts setting until indicating meter reads in a forward direction.

The setting of the Anode Voltage switch for a good valve should not exceed the figure given in column headed Anode Volts.

When checking full wave or voltage doubler rectifiers, check second Anode with Anode Selector at A₂.

NOTE the valve should be heated to working temperature before setting Circuit Selector to position TEST and only left at this position for sufficient time to take a reading.

VALVE	SELECTOR SWITCH No.	T.C.	Vf.	Anode Volts (Max.)	Ia mA (Min.)	Valve Holder	Type	REMARKS
1B3	020 000 300	A1	1.25	200	6	A08	R	
1Z2	232 232 300	A1	1.4			B7G	R	
2V3	020 000 300	A1	2.5 (3)			A08	R	
2V3G	020 000 300	A1	2.5 (3)			A08	R	
2X2	200 300 000	A1	2.5 (3)	100	10	UX4	R	
2Y2	200 300 000	A1	2.5	100	10	UX4	R	
3B24	320 200 000	A1	2.5	60	10	UX4	R	
6W2	230 000 000	A1	6	100	9	Nil	R	
225DU	072 323 600		2	40	20	B7	RR	Test A ₁ & A ₂
405BU	672 300 000		4	40	20	B4	RR	Test A ₁ & A ₂
732A	320 200 000	A1	2.5	60	10	UX4	R	
879	200 300 000	A1	2.5	100	10	UX4	R	
1876	123 000 700		4			8SC	R	
1877	002 300 000	A1	4	100	10	B4	R	
8016	020 000 300	A1	1.25	200	6	A08	R	
CE230	320 200 000	A1	2.5	60	10	UX4	R	
EY51	230 000 000	A1	6	100	9	Nil	R	
HVR2	002 300 000	A1	4	100	10	B4	R	
HVR2A	002 300 000	A1	2 (2.5)	100	10	B4	R	
R12	230 000 000	A1	6.3	100	9	Nil	R	
SU61	230 000 000	A1	6.3	100	9	Nil	R	
SU2150	002 300 000	A1	2 (2.5)	60	4	B4	R	
SU2150A	002 300 000	A1	2	200	50	B4	R	
U17	002 300 000	A1	4	40	35	B4	R	
U19	002 300 000	A1	4 (5)	40	70	B4	R	
U21	002 300 000	A1	2	60	4	B4	R	
U22	200 000 030	A1	2 (3)	60	4	M08	R	
U23	002 300 000	A ₁	4 (5)	40	100	B4	R	
U24	020 000 300	A1	2	20	0.5	A08	R	
U41	020 300 000	A1	1.25	200	6	A08	R	
U43	230 000 000	A1	6.3	100	9	Nil	R	
U151	230 000 000	A1	6.3	100	9	Nil	R	
V21/7000	002 300 000	A1	4	100	10	B4	R	
V960	002 300 000	A1	4	80	90	B4	R	
V1906	002 300 000	A1	4 (5)	60	100	B4	R	
V1907	002 300 000	A1	4	150	70	B4	R	
V1913	002 300 000	A1	4 (5)	40	100	B4	R	
V1920	002 300 000	A1	4 (5)	100	90	B4	R	
VL51	002 300 000	A1	4	100	10	B4	R	
CV317	322 322 222	A ₁	4	60	80	B9G	R	
CV121	002 300 000	A ₁	4 (5)	100	90	B4	R	

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA FOR TUNING INDICATORS					BASE
				Neg. Grid Volts	Anode Volts	Target Volts	Ia mA	Ra MΩ	
DM71	4*0 230 060		1.4	23	175	0	0.1	1	B8D
E130	026 540 310		6	15	250	250		1	A08
E1320	026 540 310		6	11	250	250	4	1	A08
EM1	023 104 560		6	5	250	250	0.095	2	8SC
EM3	023 104 560		6	18	200	200	0.176	1	8SC
EM4	023 164 560		6	{ 4.2 12.5	200 200	200 200		{ 1 1	8SC
EM11	026 546 310		6	{ 5 16	250 250	250 250		{ 1 1	A08
EM31	026 540 310		6	5	250	250		2	A08
EM34	026 456 310		6	{ 4.2 12.5	250 250	250 250	1.0	{ 1 1	A08
EM35	026 540 310		6	22	250	250		1	A08
EM71	251 064 130		6	20	250	250	0.5		B8B
EM80	41* 23* 6*5		6	14	250	250	0.37	0.5	B9A
EM81	41* 23* 6*5		6	10.5	250	250	0.37	0.5	B9A
EM84	4*1 235 6*6		6	22	250	250	0.45	0.47	B9A
EM85	401 235 606		6	14	250	250		0.47	B9A
EM840	4*1 235 6*6		6	22	250	250	0.45	0.47	B9A
FT4	026 540 310		4	6	250	250		1	A08
ME4S	023 104 560		4	5	250	250		2	8SC
ME6S	023 104 560		6	5	250	250		2	8SC
ME41	216 040 530		4	22.5	250	250	0.23	1	M08
ME91	216 040 530		9	17	150	150	0.135	1	M08
ME920	045 231 600		9	19	175	175	0.18	1	B7
PM5	206 546 130		6	{ 15 5	200 200	200 200		{ 1 1	A08
TV4	023 140 560		4	5	250	250		1	8SC
TK406	023 104 560		4	5.0	250	250	0.095	2	8SC
UM4	206 546 130		12.6	{ 4.2 12.5	200 200	200 200		{ 1 1	A08
UM11	206 546 130		15	{ 4.2 12.5	200 200	200 200		{ 1 1	A08
UM34	026 456 310		12.5	{ 4.2 12.5	250 250	250 250	1	{ 1 1	A08
UM80	41* 23* 6*5		19	14	200	200	0.35	0.5	B9A
UM81	41* 23* 6*5		19	14	200	200	0.4	0.5	B9A
VFT4	026 540 310		4	20	250	250		1	A08
VTF6	026 540 310		6	22	200	200	0.24	1	A08
VME4	045 231 600		4	22	250	250		1	B7
Y25	4*0 320 060		1.4	34	250		0.09	2.2	B8A
Y61	026 540 310		6	22	250	250	0.24	1	A08
Y62	026 540 310		6	22	250	250		1	A08
Y63	026 540 310		6	22	250	250	0.24	1	A08
Y64	026 540 310		6	22	250	250		1	A08
Y65	026 540 310		6	11	250	250		1	A08
119	41* 23* 6*5		19	14	200	200	0.35	0.5	B9A

VALVE	SELECTOR SWITCH No.	T.C.	Vf.	Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Base	Type	REMARKS	Civ. Equiv.
CV2010	762 344 100		6	1	100		8.5	5.6	Spec	TT	See Note J	
CV2011	741 226 413		6	2	250		1.2	1.6	Spec	TT	See Note J	
CV2013	041 230 651		6	4.5	250	250	40	11	Spec	P	See Note J	
CV2014	601 235 144		6	7.5	250	250	45	7	Spec	P	See Note J	
CV2015	256 101 403		6	7	250	250	10	6	B9G	P	See Note J	
CV2016	741 226 413		6	2	250		10.5	5.5	Spec	TT	See Note J	
CV2017	412 361 500		6	4	200	200	5.8	3.5	Spec	P	See Note J	
CV2020	412 365 100		6	2	150	125	7.5	5	Spec	P	See Note J	
CV2021	902 308 100		6				30		Spec	R	See Note J	
CV2022	441 230 561		6	12.5	250	250	45	4.1	Spec	P	See Note J	
CV2023	412 361 500		6	2.5	250	200	8	2.5	Spec	P	See Note J	
CV2024	412 366 100		6	2	100		11	7	Spec	H	See Note J	
CV2025	412 361 500		6	2 1.5	250 200	250 150	10 4	7.5 6.4	Spec	P	See Note J	
CV2101	040 230 650		1.25	0	75	75	2	1	B8D	P	See Note J	
CV2156	241 657 143		20	14	250	150	30	3.9	B9G	PP		
CV2204	346 000 000	H—	6	1	250		20	3	Disc seal	T	min slope	
CV2207	346 000 000	H—	6	1	250		20	3	Disc seal	T	min slope	
CV2231	*41 23* *51	A ₁	6	12.5	150	150	50	8.5	B9A	P		
CV2243	041 230 651		6	2	200	125	17	8.4	B9A	P		
CV2267	Not known		6				30		Spec	RR	See Note C	
CV2268	Not known		6	2	250	250	10	7.5	Spec	P	See Note C	
CV2277	041 230 651		25	2.5	20	20	14	4	B9A	P		
CV2838	Not known	A ₁ G ₁	2		60			0.3	Special	T	See Note C	
CV4036	001 230 000	D ₁	6				120		B9A(F)	R		
VU508	002 300 000	A ₁	(5)		40		100		B4	R		

APPENDIX III.

Test Data for 'Service' Type Valves

VALVE	SELECTOR SWITCH No.	T.C.	Vf.	Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Base	Type	REMARKS	Civ. Equiv.
CV16	234 000 000	A ₁	4	1	250		6	4.2	Disc seal	T	min slope See Note A	
CV53	234 000 000	A ₁	4	1	250		6	4.2	Disc seal	T	min slope See Note A	
CV82	234 000 000	A ₁	4	3	250		20	3.7	Disc seal	T	See Note A min slope	3A/141J
CV88	See Note C		6	0	250		4	5	Disc seal	T	See Note C	3A/148J
CV93	See Note C		1.4	0	20			0.7	Disc seal	T	See Note C	V625
CV105	020 000 030	D ₁	6				30		A08	R		
CV122	632 400 000		1.4	0	100			0.8	Special	T	See Note D	
CV132	412 361 500		6	1.8	250	100	6.3	2	B7G	H		
CV201	021 540 300	A ₁	(2.5)	10	250	150	25	3.3	A08	P		
CV229	623 400 000		1.4	0	100			0.8	Special	T	See Note D	
CV243	042 350 000		(5)	40	75	75	45	1.5	B5	P		4045A
CV273	346 000 000	H—	6	4	250		28	8.5	Disc seal	T		
CV354	346 000 000	H—	6	2	250		10	6.5	Disc seal	T		
CV384	642 300 000		(5)	30	400		62	7.5	B4	T		DET5
CV1155	642 300 000		4	0	75		0.7	0.2	B4	T		
CV1223	642 300 000		(5)	30	400		62	7.5	B4	T		DET5
CV1508	002 300 000	A ₁	(5)	40	100				B4	R		
CV1584	642 310 000		4	3.5	200		5.4	3.1	B5	T		
CV2000	412 361 500		6	{	2 250	250	10	7.5	B8D	P	See Notes J & E	
					2 200	150	4	6.4				
CV2001	412 361 500		6	{	2 250	250	10	7.5	B8D	P	See Notes J & E	
					1.5 200	150	4	6.4				
CV2002	412 360 500		6	13.5	250	250	16	2.6	Spec	P	See Note J	
CV2003	412 360 500		6	13.5	250	250	16	2.6	Spec	P	See Note J	
CV2004	192 310 800		6				5		Spec	RR	See Note J	
CV2005	192 310 800		6				5		Spec	RR	See Note J	
CV2007	741 226 413		6	8.5	250		10.5	2.2	Spec	TT	See Note J	
CV2008	412 300 600		6	2.2	150		10	8	Spec	TT	See Note J	
CV2009	412 314 600		6	1.5	250		10	8.5	Spec	T	See Note J	

