



// GITOPS BY EXAMPLE REPOS, PATTERNS, PROMOTION, PROCESSES

Johannes Schnatterer, Cloudogu GmbH




@ @schnatterer@floss.social

in in/jschnatterer

Version: 202411061213-f3622a4

Live example



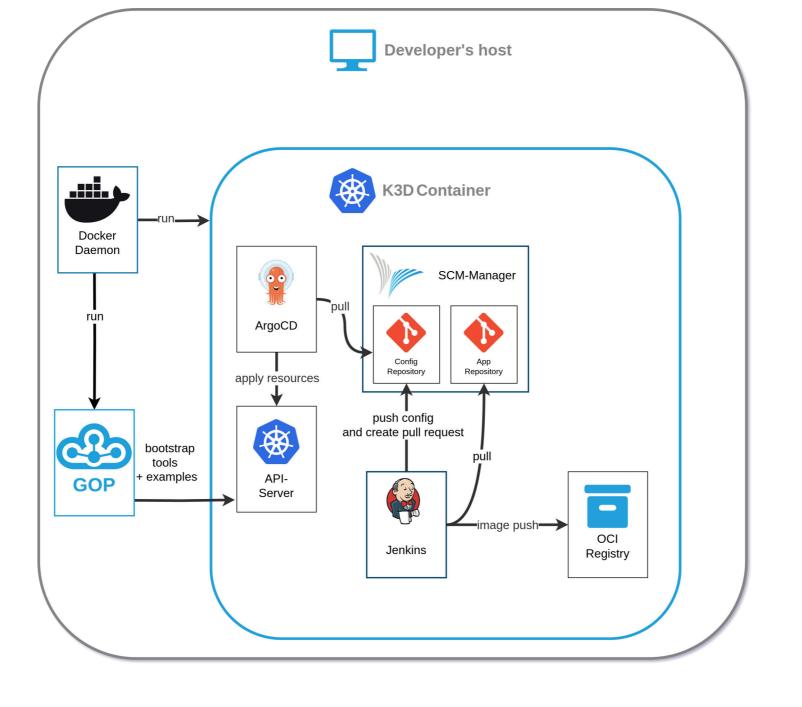

Meet GOP

a GitOps-based operational stack (platform)











```
VERSION='0.8.0'
bash <(curl -s \
  "https://raw.githubusercontent.com/cloudogu/gitops-playground/$VERSION/scripts/init-cluster.sh") \
   && docker run --rm -t -u $(id -u) \
    -v ~/.config/k3d/kubeconfig-gitops-playground.yaml:/home/.kube/config \
    --net=host \
    ghcr.io/cloudogu/gitops-playground:$VERSION --yes --base-url=http://localhost --ingress-nginx --argocd
# Other interesting options --monitoring --vault=dev --mailhog --cert-manager
```




Example 1: GOP

- 3
- Repo pattern: Per team 🖫 per app
- Operator pattern: Instance per Cluster (Hub and Spoke, Instance per Namespace)
- Operator:
- Bootstrapping: GOP (Helm, kubectl)
- Linking:
 Application
- Features:
 - Operate ArgoCD with GitOps
 - Solution for cluster resources
 - CI: Config update + replication, rendered Manifest 🕁
 - Env per app
 - Multi-tenancy: N tenants on 1 cluster (namespace envs)
- Source: Coloudogu/gitops-playground











App of Apps

Umbrella Chart



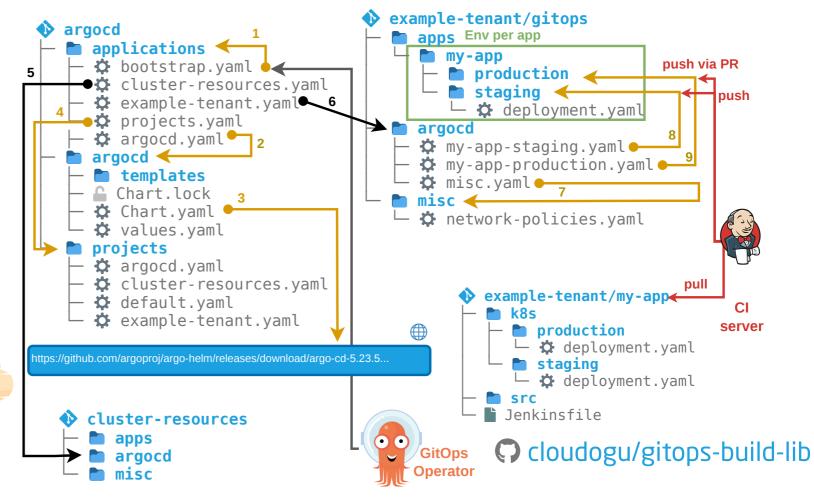

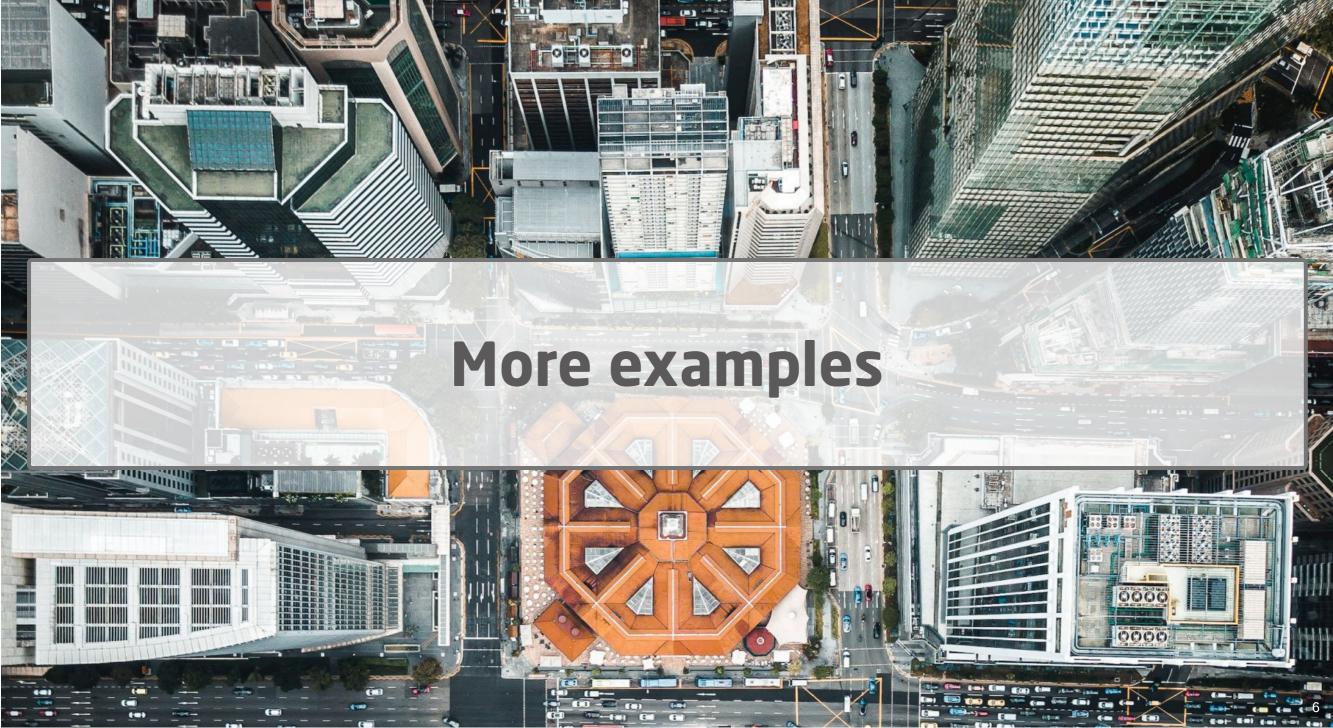

Example 2: ArgoCD autopilot



- Repo pattern: Monorepo
- Operator pattern:


Instance per Cluster / Hub and Spoke


- Operator: 🔮
- Bootstrapping: argocd-autopilot

ApplicationSet, k

- Features:
 - Operate ArgoCD with GitOps

- Source:

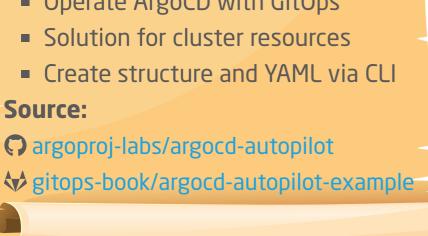


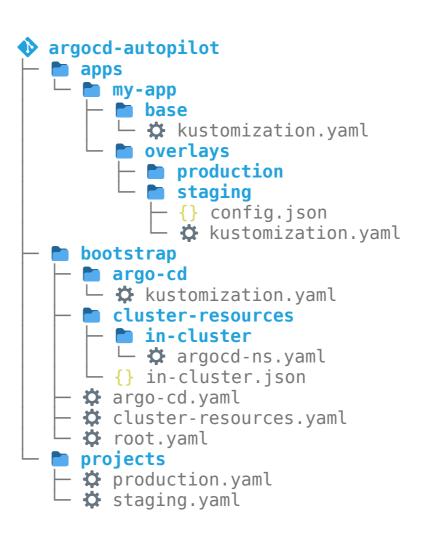


Example 3: Flux Monorepo




- Repo pattern: Monorepo
- Operator pattern: Instance per Cluster
- Operator: 🏖
- Bootstrapping: flux
- Linking:
 \$\script{Kustomization, \script{R}}
- Features:
 - Operate Flux with GitOps
 - Solution for cluster resources
- Source:
 - ¶ fluxcd/flux2-kustomize-helm-example#16
 - fluxcd.io/flux/guides/repository-structure
 - **♦** gitops-book/flux2-kustomize-helm-example

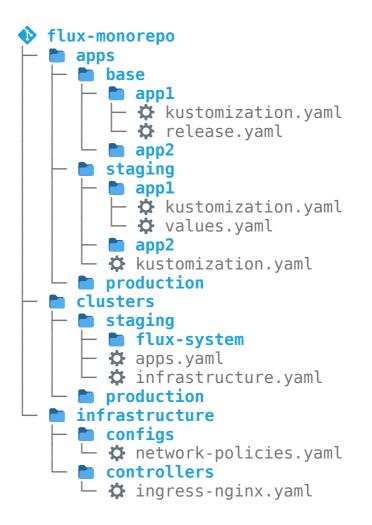

Example 4: Flux repo per team

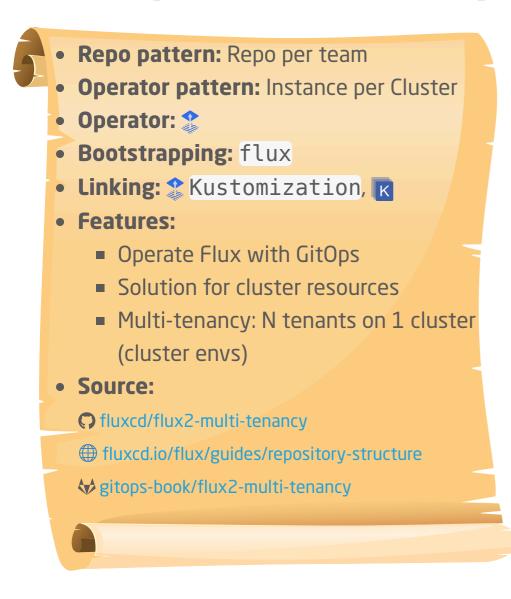


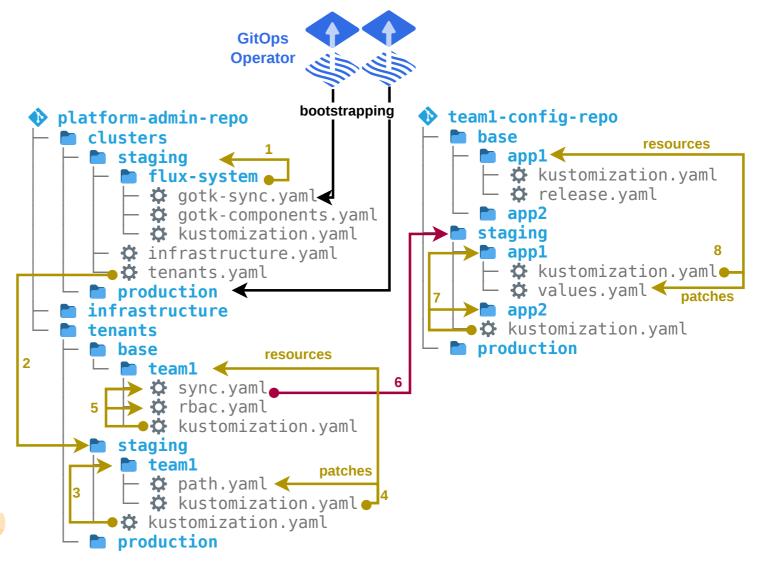


Example 5: ArgoCD and Flux alternative




- Repo pattern: Monorepo
- Operator pattern: Instance per Cluster
- Operator: 🛊 💲
- Bootstrapping: kubectl
- Linking: Application,
 ApplicationSet /
 - * Kustomization, k
- Features:
 - Solution for cluster resources
 - ArgoCD and Flux examples
- Source:
 - Christianh814/example-kubernetes-go-repo
 - C. Hernandez The Path to GitOps

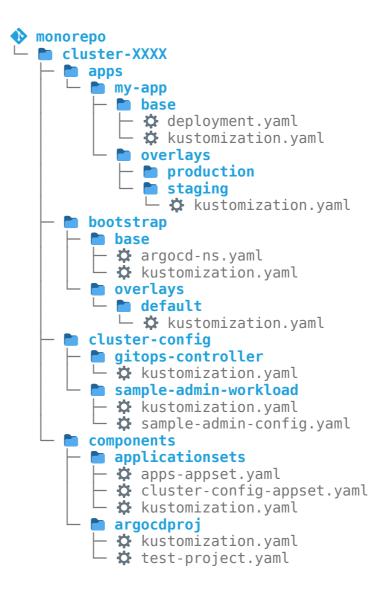



Example 6: Environment variations

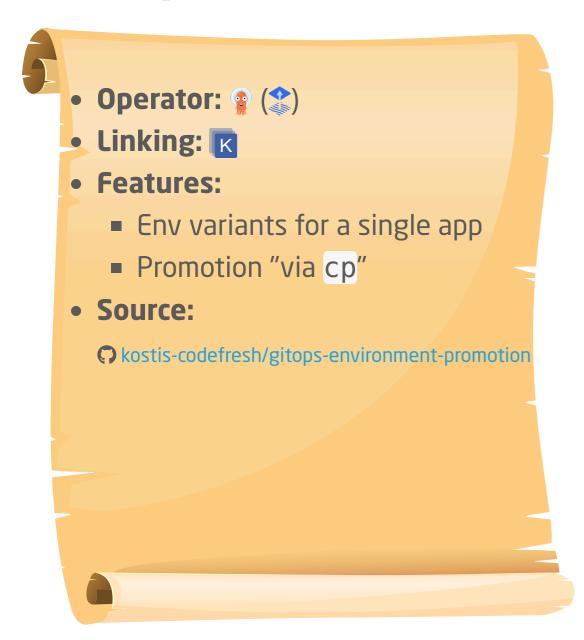

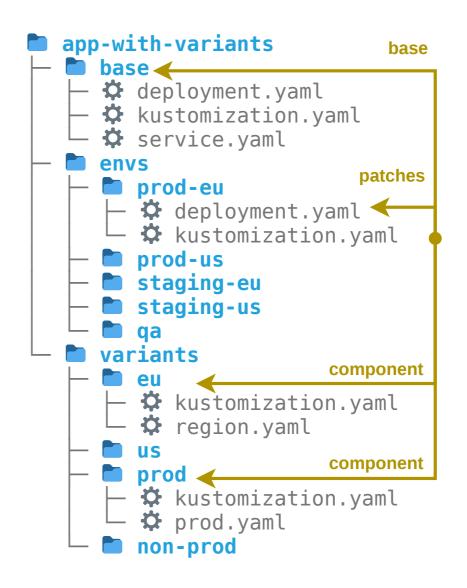

More patterns + further reading

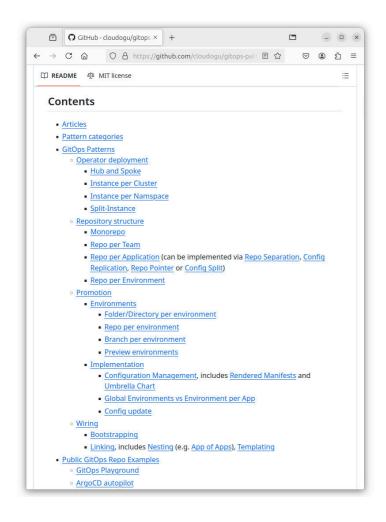

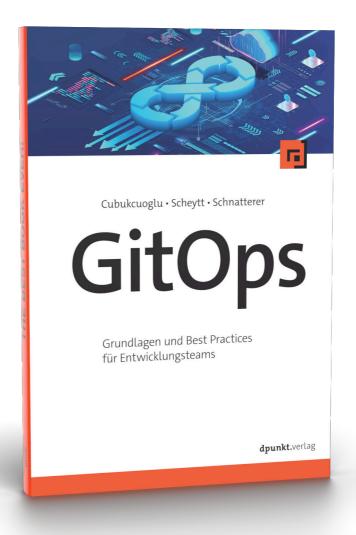



Johannes Schnatterer, Cloudogu GmbH

@ @schnatterer@floss.social in in/jschnatterer

Cloudogu/gitops-playground

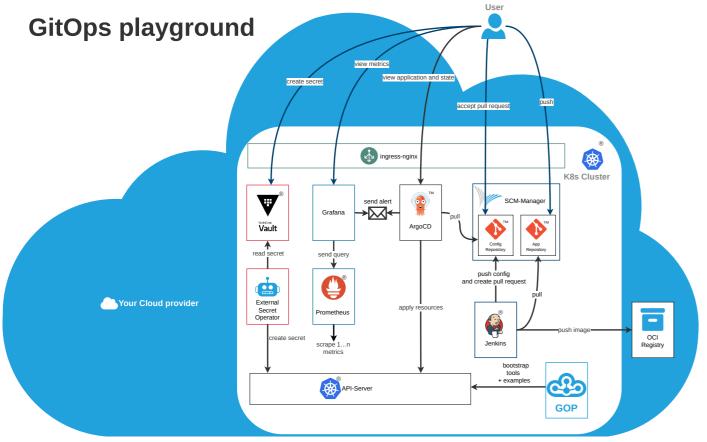




Image sources

- Live Example:
 - https://unsplash.com/photos/assorted-color-hot-air-balloons-during-daytime-DuBNA1QMpPA
- More examples:
 - https://unsplash.com/photos/XZc4f2XZc84
- coloured-parchment-paper background by brgfx on Freepik: https://www.freepik.com/free-vector/coloured-parchment-paper-designs_1078492.htm