


Layouts

Default Layout.....	1
---------------------	---

Tables

public.areas_conocimiento.....	2
public.ciudades.....	2
public.editoriales.....	2
public.estados.....	2
public.failed_jobs.....	3
public.formatos.....	3
public.idiomas.....	3
public.indices.....	4
public.migrations.....	4
public.model_has_permissions.....	4
public.model_has_roles.....	4
public.password_reset_tokens.....	5
public.password_resets.....	5
public.periodicidad.....	5
public.permissions.....	5
public.personal_access_tokens.....	5
public.revistas.....	6
public.role_has_permissions.....	7
public.roles.....	8
public.users.....	8

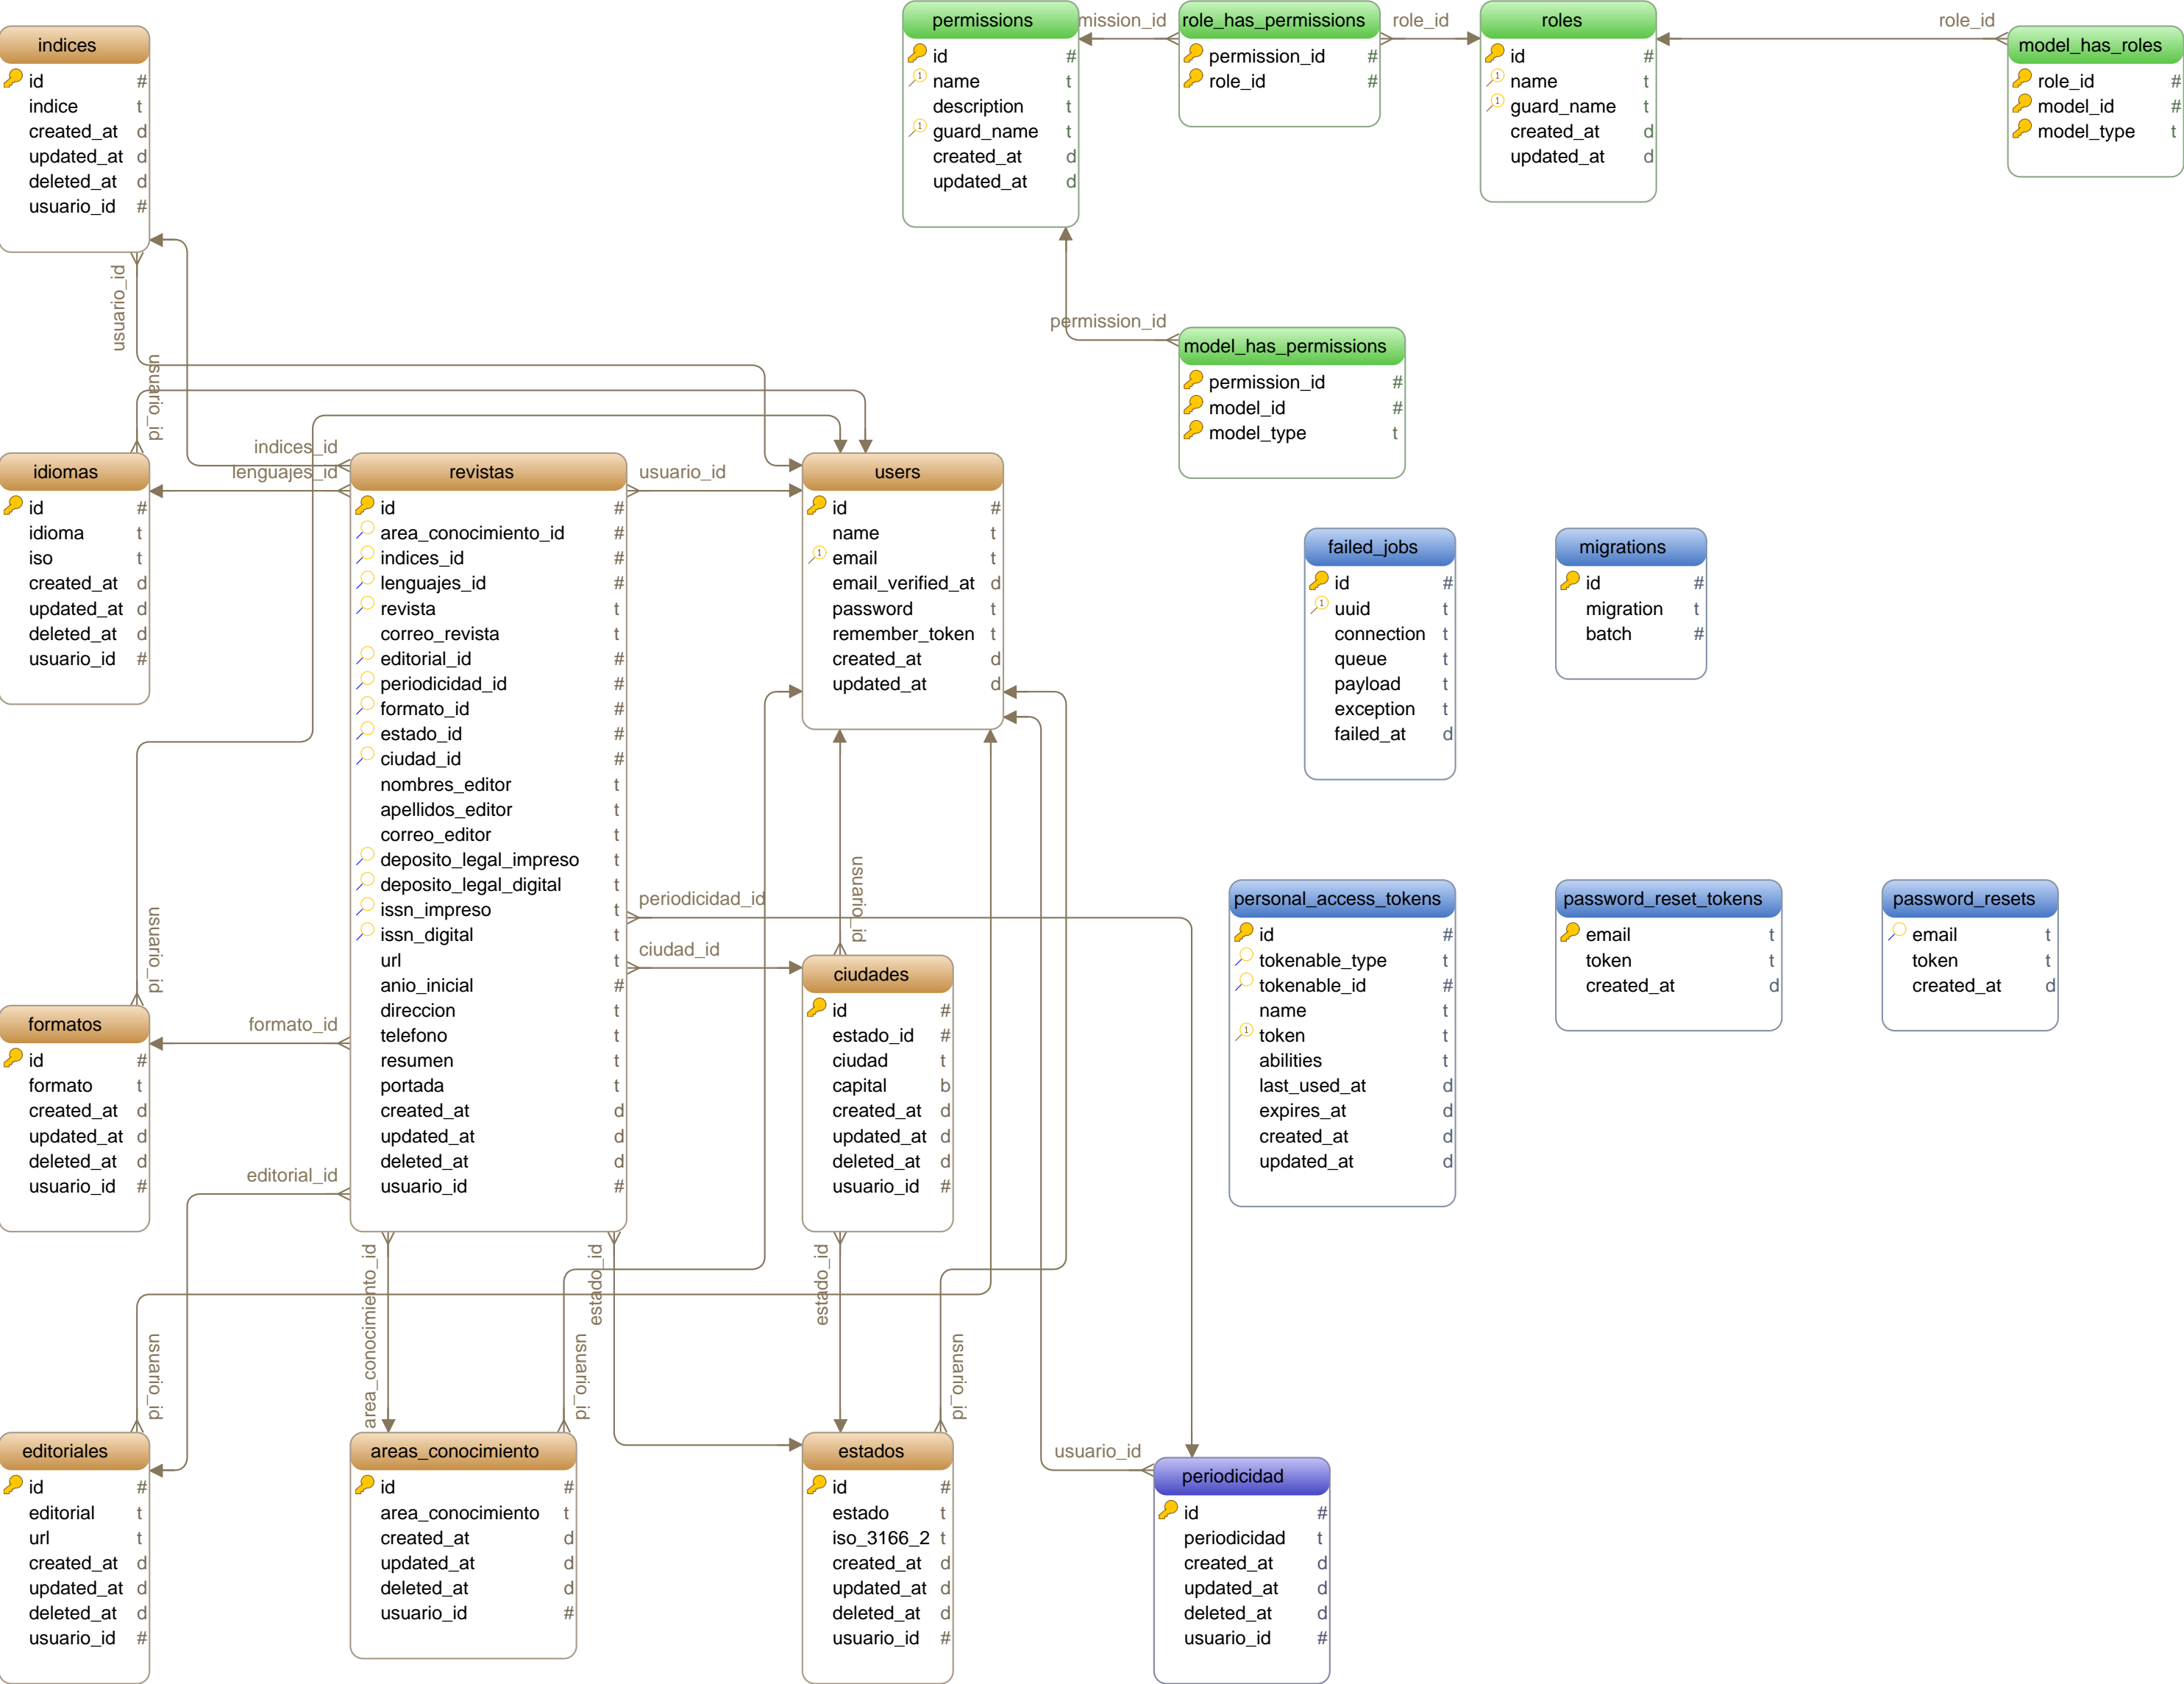

Default Layout

Table areas_conocimiento			
* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
*	area_conocimiento	varchar(255)	
*	created_at	timestamp	
	updated_at	timestamp	
	deleted_at	timestamp	
*	usuario_id	bigint	
Indexes			
Pk	areas_conocimiento_pkey	id	
Foreign Keys			
	areas_conocimiento_usuario_id_foreign (usuario_id) ref users (id)		

Table ciudades			
* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
*	estado_id	bigint	
*	ciudad	varchar(255)	
	capital	bool	
*	created_at	timestamp	
	updated_at	timestamp	
	deleted_at	timestamp	
*	usuario_id	bigint	
Indexes			
Pk	ciudades_pkey	id	
Foreign Keys			
	ciudades_estado_id_foreign (estado_id) ref estados (id)		
	ciudades_usuario_id_foreign (usuario_id) ref users (id)		

Table editoriales			
* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
*	editorial	varchar(150)	
	url	varchar(150)	
*	created_at	timestamp	
	updated_at	timestamp	
	deleted_at	timestamp	
*	usuario_id	bigint	
Indexes			
Pk	editoriales_pkey	id	
Foreign Keys			
	editoriales_usuario_id_foreign (usuario_id) ref users (id)		

Table estados

* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
*	estado	varchar(255)	
*	iso_3166_2	varchar(255)	
*	created_at	timestamp	
	updated_at	timestamp	
	deleted_at	timestamp	
*	usuario_id	bigint	
Indexes			
Pk	estados_pkey	id	
Foreign Keys			
	estados_usuario_id_foreign (usuario_id) ref users (id)		

Table failed_jobs

* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
* Unq	uuid	varchar(255)	
*	connection	text	
*	queue	text	
*	payload	text	
*	exception	text	
*	failed_at	timestamp	
Indexes			
Pk	failed_jobs_pkey	id	
Unq	failed_jobs_uuid_unique	uuid	

Table formatos

* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
*	formato	varchar(30)	
*	created_at	timestamp	
	updated_at	timestamp	
	deleted_at	timestamp	
*	usuario_id	bigint	
Indexes			
Pk	formatos_pkey	id	
Foreign Keys			
	formatos_usuario_id_foreign (usuario_id) ref users (id)		

Table idiomas

* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
*	idioma	varchar(25)	
*	iso	varchar(3)	
*	created_at	timestamp	
	updated_at	timestamp	
	deleted_at	timestamp	

Table idiomas

*	usuario_id	bigint	
Indexes			
Pk	idiomas_pkey	id	
Foreign Keys			
	idiomas_usuario_id_foreign (usuario_id)	ref users (id)	

Table indices

* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
*	indice	varchar(100)	
*	created_at	timestamp	
	updated_at	timestamp	
	deleted_at	timestamp	
*	usuario_id	bigint	
Indexes			
Pk	indices_pkey	id	
Foreign Keys			
	indices_usuario_id_foreign (usuario_id)	ref users (id)	

Table migrations

* Pk	id	integer GENERATED BY DEFAULT AS IDENTITY	
*	migration	varchar(255)	
*	batch	integer	
Indexes			
Pk	migrations_pkey	id	

Table model_has_permissions

* Pk	permission_id	bigint	
* Pk	model_id	bigint	
* Pk	model_type	varchar(255)	
Indexes			
Pk	model_has_permissions_pk ey	permission_id, model_id, model_type	
	model_has_permissions_model_id_model_type_index	model_id, model_type	
Foreign Keys			
	model_has_permissions_permission_id_foreign (permission_id)	ref permissions (id)	

Table model_has_roles

* Pk	role_id	bigint	
* Pk	model_id	bigint	
* Pk	model_type	varchar(255)	
Indexes			
Pk	model_has_roles_pkey	role_id, model_id, model_type	
	model_has_roles_model_id_model_type_index	model_id, model_type	

Table model_has_roles

Foreign Keys

	model_has_roles_role_id_foreign (role_id) ref roles (id)	
--	--	--

Table password_reset_tokens

* Pk	email	varchar(255)	
*	token	varchar(255)	
	created_at	timestamp	

Indexes

Pk	password_reset_tokens_pk_email	email	
----	--------------------------------	-------	--

Table password_resets

* Idx	email	varchar(255)	
*	token	varchar(255)	
	created_at	timestamp	

Indexes

	password_resets_email_index	email	
--	-----------------------------	-------	--

Table periodicidad

* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
*	periodicidad	varchar(20)	
*	created_at	timestamp	
	updated_at	timestamp	
	deleted_at	timestamp	
*	usuario_id	bigint	

Indexes

Pk	periodicidad_pkey	id	
----	-------------------	----	--

Foreign Keys

	periodicidad_usuario_id_foreign (usuario_id) ref users (id)	
--	---	--

Table permissions

* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
* Unq	name	varchar(255)	
*	description	varchar(255)	
* Unq	guard_name	varchar(255)	
	created_at	timestamp	
	updated_at	timestamp	

Indexes

Pk	permissions_pkey	id	
Unq	permissions_name_guard_name_unique	name, guard_name	

Table personal_access_tokens

* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
* Idx	tokenable_type	varchar(255)	
* Idx	tokenable_id	bigint	
*	name	varchar(255)	
* Unq	token	varchar(64)	
	abilities	text	
	last_used_at	timestamp	
	expires_at	timestamp	
	created_at	timestamp	
	updated_at	timestamp	
Indexes			
Pk	personal_access_tokens_pk	id	
Unq	personal_access_tokens_token_unique	token	
	personal_access_tokens_tokenable_type_tokenable_id_index	tokenable_type, tokenable_id	

Table revistas

* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
* Idx	area_conocimiento_id	bigint	
* Idx	indices_id	bigint	
* Idx	lenguajes_id	bigint	
* Idx	revista	varchar(50)	
*	correo_revista	varchar(25)	
* Idx	editorial_id	bigint	
* Idx	periodicidad_id	bigint	
* Idx	formato_id	bigint	
* Idx	estado_id	bigint	
* Idx	ciudad_id	bigint	
*	nombres_editor	varchar(20)	
*	apellidos_editor	varchar(20)	
*	correo_editor	varchar(25)	
Idx	deposito_legal_impreso	varchar(15)	
Idx	deposito_legal_digital	varchar(15)	
Idx	issn_impreso	varchar(8)	
Idx	issn_digital	varchar(10)	
*	url	varchar(50)	
*	anio_inicial	smallint	
*	direccion	text	
	telefono	varchar(11)	
*	resumen	text	
*	portada	varchar(255)	
*	created_at	timestamp	
	updated_at	timestamp	
	deleted_at	timestamp	
*	usuario_id	bigint	
Indexes			
Pk	revistas_pkey	id	

Table revistas

idx_revistas_full	id, area_conocimiento_id, indices_id, lenguajes_id, revista, editorial_id, periodicidad_id, formato_id, estado_id, ciudad_id, deposito_legal_impreso, deposito_legal_digital, issn_impreso, issn_digital	
revistas_area_conocimiento_id_index	area_conocimiento_id	
revistas_ciudad_id_index	ciudad_id	
revistas_deposito_legal_digital_index	deposito_legal_digital	
revistas_deposito_legal_impreso_index	deposito_legal_impreso	
revistas_editorial_id_index	editorial_id	
revistas_estado_id_ciudad_id_index	estado_id, ciudad_id	
revistas_estado_id_index	estado_id	
revistas_formato_id_index	formato_id	
revistas_indices_id_index	indices_id	
revistas_issn_digital_index	issn_digital	
revistas_issn_impreso_index	issn_impreso	
revistas_lenguajes_id_index	lenguajes_id	
revistas_periodicidad_id_index	periodicidad_id	

Foreign Keys

revistas_area_conocimiento_id_foreign (area_conocimiento_id) ref areas_conocimiento (id)	
revistas_ciudad_id_foreign (ciudad_id) ref ciudades (id)	
revistas_editorial_id_foreign (editorial_id) ref editoriales (id)	
revistas_estado_id_foreign (estado_id) ref estados (id)	
revistas_formato_id_foreign (formato_id) ref formatos (id)	
revistas_lenguajes_id_foreign (lenguajes_id) ref idiomas (id)	
revistas_indices_id_foreign (indices_id) ref indices (id)	
revistas_periodicidad_id_foreign (periodicidad_id) ref periodicidad (id)	
revistas_usuario_id_foreign (usuario_id) ref users (id)	

Table role_has_permissions

* Pk	permission_id	bigint	
* Pk	role_id	bigint	
Indexes			
Pk	role_has_permissions_pkey	permission_id, role_id	
Foreign Keys			
	role_has_permissions_permission_id_foreign (permission_id) ref permissions (id)		

Table role_has_permissions

	role_has_permissions_role_id_foreign (role_id) ref roles (id)	
--	---	--

Table roles

* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
* Unq	name	varchar(255)	
* Unq	guard_name	varchar(255)	
	created_at	timestamp	
	updated_at	timestamp	

Indexes

Pk	roles_pkey	id	
Unq	roles_name_guard_name_unique	name, guard_name	

Table users

* Pk	id	bigint GENERATED BY DEFAULT AS IDENTITY	
*	name	varchar(255)	
* Unq	email	varchar(255)	
	email_verified_at	timestamp	
*	password	varchar(255)	
	remember_token	varchar(100)	
	created_at	timestamp	
	updated_at	timestamp	

Indexes

Pk	users_pkey	id	
Unq	users_email_unique	email	