COMPETITIVE ASSESSMENT: FULL REPORT

Serverless Inference Assessment

Baseten, DeepInfra, and Nebius Token Factory, with implications for Akamai Cloud

PREPARED BY
Chris McConnell

EVIDENCE WINDOW
2026-09-28 to 2026-09-29 (UTC)

BUILT
2026-09-29 (UTC)

VERSION
0.1.0

Contents

0. Executive Brief 4

Key insights 4
Competitor snapshot 5
Recommendations for Akamai (docs 4a) 5
Evidence base 5

1. Product Positioning & Messaging Audit 6

1.1 Market narrative 6
1.2 Target personas 7
1.3 Claims versus reality 7
1.4 Messaging gaps an edge provider can exploit 9

2. Technical Architecture & Engine Mechanics 12

2.1 Model comparison and availability 12
2.2 Execution engines and runtimes 14
2.3 Memory and KV cache management 17
2.4 Routing and multi-region topology 19

3. Developer Experience (DX) & API Surface Evaluation 25

3.1 API uniformity and OpenAI compatibility 25
3.2 Control plane versus data plane 29
3.3 Architectural overlap with Akamai Cloud 30

4. Strategic Output: PM Brief & SE Field Guide, Part A: Product Management Brief 36

Starting position 36
Recommendation 1: Ship a published serving contract per model, and an SLA that matches the marketing 36
Recommendation 2: Make routing geography the product: anycast ingress, region pinning, and priced prefix caching 37
Recommendation 3: Right-size the catalog to the RTX PRO fleet, price on the contract rather than on parity, and sell service tiers 38
Sequencing 40

4. Strategic Output: PM Brief & SE Field Guide, Part B: Solutions Engineering Battlecard 43

Reference table (assessment template) 43
One-line positioning for live calls 44
Extended rows 44
Landmines: what a prospect will hear from each vendor, and the counter 45
Traps to set: questions that expose gaps across all three 46

5. Evidence Appendix 47
- Capture index 47
- Key numeric facts 48
- Observed header and error-body fingerprints 50
- Third-party sources and their caveats 51

6. Methodology and Limits 52
- Scope 52
- Method 52
- Reproduction 52
- What was not tested 53
- Known limits of the evidence 53
- AI use, tooling, and review process 53

Appendix: Evidence Tables 55

Connection-phase latency 56

DNS and CDN fingerprints 57

Status page components and incident statistics 59

DeepInfra public catalog analysis 72

Akamai Cloud (Linode API v4) regions 79

0. Executive Brief

Serverless inference landscape: Baseten, DeepInfra, Nebius Token Factory. Facts dated 2026-09-28, except probe captures (2026-09-29) and pages that block scripted clients, read in a browser on 2026-09-29. Detail and sources: docs 1 to docs 6. A short companion brief, `serverless-inference-assessment-brief-chris-mcconnell.pdf`, answers each deliverable in short form; this report holds the evidence and detail.

Key insights

> **The engine layer is commoditized: all 3 competitors serve on open engines, and all 3 run vLLM.**
>
> - Baseten and DeepInfra run vLLM, SGLang, TensorRT-LLM, and NVIDIA Dynamo; Nebius runs vLLM in production, with TensorRT-LLM in at least one proof of concept. All sit behind an OpenAI-compatible API, and Akamai's own LKE stack already offers vLLM and NVIDIA Dynamo (docs 3).
> - Differentiation sits in what is disclosed, where requests land, and how capacity is priced (docs 2).

> **Marketing outruns contracts: Baseten markets 99.99% uptime against a 99.9% SLA.**
>
> - DeepInfra markets "reliable" with no SLA.
> - Nebius markets sub-second TTFT that third-party data does not show on its serverless tier (docs 1).

> **None of the 3 places GPUs by user geography.**
>
> - DeepInfra answers from one /24 on its own network in the US.
> - Nebius answers from a single address on its own network in NL.
> - Baseten rents Google's front end, then hops to whichever cloud has capacity.

> **Akamai's opening is a published serving contract plus geography-aware routing, but the edge advantage is not automatic: 164 ms to first byte against 106 ms for Baseten.**
>
> - From one US vantage point, a minimal request to `api.linode.com` returns its first byte in 164 ms, against 106 ms for Baseten's Google front end and 465 ms for Nebius (latency).

Competitor snapshot

	Baseten	DeepInfra	Nebius Token Factory
Sells	Inference engineering depth and multi-cloud capacity	Lowest list price on owned GPUs	Owned EU capacity, fine-tune and serve
Buyer	ML platform lead at an AI-native scale-up	Developer optimizing cost per token	Regulated or EU enterprise
Strength	Fastest shared-API TTFT (0.19 s, gpt-oss-120b); deepest engine controls	Priced prefix caching, three service tiers, fullest public API spec	99.9% SLA on dedicated; EU residency on dedicated
Exploitable gap	99.99% marketed versus 99.9% contracted; 8 major incidents in 90 days	No SLA, no EU region, 31 of 102 models with undeclared precision	Serverless has no region guarantee; OpenRouter uptime 91 to 97%

Recommendations for Akamai (docs 4a)

1. **Publish a serving contract per model** (precision, served context, engine, TTFT target at a stated concurrency, deprecation notice) and a 99.9% SLA on the serverless tier from launch.
2. **Make routing geography the product**: OpenAI-compatible gateway at the edge, region pinning for residency, KV-aware routing, and priced prefix caching compatible with DeepInfra's fields.
3. **Size the catalog to the RTX PRO 6000 fleet** (20B to 120B class, MoE models with few active parameters), sell service tiers instead of engine knobs, and offer an export path to LKE. Do not lead with price: at list rates an RTX PRO 6000 produces a 70B-class token for about $0.48 per million against about $0.15 on DeepInfra's B200s, and Nebius lists the same RTX PRO 6000 at $1.80 per GPU-hour against Akamai's $3.00. Price mid-pack and sell the contract.

Evidence base

- Unauthenticated probes of each provider's API, DNS, origin ASN, status page, OpenAPI spec, and connection timing, reproducible with `make evidence` (docs 6).
- Vendor documentation, contracts, and pricing pages. All 203 cited URLs were checked for reachability on 2026-09-29, and 26 load-bearing quotes and prices were checked against the live pages.
- Third-party benchmarks (Artificial Analysis, OpenRouter, llmlatency.dev) used with their caveats (docs 5).

1. Product Positioning & Messaging Audit

Scope: Baseten, DeepInfra, and Nebius Token Factory as of 2026-09-28. Every marketing quote is verbatim from the vendor page cited. Every counter-fact is from a contractual document, a status page API, a third-party benchmark, or a capture in `evidence/derived/`.

1.1 Market narrative

Vector	Baseten	DeepInfra	Nebius Token Factory
Tagline	"Inference is everything" [B1]	"AI Inference: FAST, SIMPLE, RELIABLE, LOW-COST" [D1]	"Run open models at production scale" [N1]
One-line value prop	"The fastest model runtimes, cross-cloud high availability, and seamless developer workflows" [B1]	"Scale to trillions of tokens without breaking the bank" [D1]	"OpenAI-compatible API to start fast. Dedicated GPUs, post-training, and workload optimization when you scale" [N2]
Core frame	Inference engineering company. Sells a runtime (Baseten Inference Stack), a control plane (Truss, environments), and capacity brokered across 18 clouds and 87 clusters [B2]	Price and ownership company. "Built DeepInfra from the ground up, from GPU hardware to API layer"; owned GPUs in nine colocation sites [D2][D3]	Vertically integrated neocloud. Token Factory is the inference layer on Nebius-owned data centers; "serves the full workload lifecycle on one platform" [N3]
Lead product	Dedicated Inference (per GPU-minute). Model APIs (per token) added May 2025 as a second line [B3][P-STATUS]	Serverless per-token APIs. Dedicated GPU-hour deployments and DeepCluster are secondary [D4]	Serverless per-token plus Dedicated Endpoints (GA 2026-02-26) with fine-tuning and Data Lab [N4]
Proof points used	Named logos (Notion, Cursor, Writer, Vercel), case-study multipliers ("2-3x lower latency"), day-0 launches [B1][B4]	Price tables, "close to five trillion tokens a week", OpenRouter supply share [D5] [D6]	Prosus "up to 26x cost reductions", Revolut, Sword Health P99 "over 20 seconds to under 12", SemiAnalysis quote on ODM chassis TCO [N1][N5]
Capital position	Series F, $1.5B at up to $13B valuation, 2026-06-22 [B2]	Series B, $107M, 2026-05-04; NVIDIA and Supermicro investors [D3]	Parent NASDAQ: NBIS, Q2 2026 revenue $582.3M, AI cloud ARR $3.0B; Eigen AI acquisition about $643M for inference R&D [N6][N7]
Where the narrative is thin	"Cross-cloud high availability" is sold as a feature, yet 17 of 35 incidents in the last 90 days name a single cluster, region, cloud, or upstream provider in the title [P-STATUS]	"Reliable" carries no SLA of any kind; the terms promise "commercially reasonable efforts" and cap liability at six months of fees [D7]	"Production scale" for serverless carries a "no region guarantee" caveat and a 99% best-effort tier; the 99.9% SLA applies to dedicated endpoints only [N8] [N9]

Read across the three: Baseten sells engineering depth, DeepInfra sells unit price, Nebius sells owned capacity and European residency. None of the three sells proximity to the end user, which is the vector an edge network can own.

1.2 Target personas

Dimension	Baseten	DeepInfra	Nebius Token Factory
Economic buyer	VP Engineering or Head of ML Platform at an AI-native scale-up with revenue tied to model latency (Notion, Cursor, Writer, Abridge) [B1]	Founder or lead engineer at a token-volume-driven product (agents, chat, aggregators); DeepStart targets companies "founded in the last 2 years" with $250K to $10M raised [D8]	Head of AI Platform or CTO at a European or regulated enterprise (Revolut, Sword Health, Prosus) and frontier-adjacent labs needing owned GPU capacity [N1]
Hands-on user	ML engineer comfortable with a Python packaging tool (Truss), engine configuration, and rolling deployments [B5]	Application developer who swaps a base URL in the OpenAI SDK and never touches infrastructure [D9]	Application developer for serverless; platform engineer for dedicated endpoints and post-training [N10]
Entry motion	Product-led: deploy from the model library, then upgrade to Pro or Enterprise for KV-aware routing, disaggregation, and regional environments [B6]	Product-led: card on file, no free tier, pay per token; enterprise via DeepCluster (256 to 5,000 GPUs) [D10][D11]	Product-led with $1 trial credit; enterprise via sales for reserved capacity, SLA, custom DPA [N11][N9]
Buying trigger	Latency SLO on a custom or fine-tuned model that shared APIs cannot meet	Bill shock on a closed-model API; need the cheapest open-weight token	Data residency mandate; desire to fine-tune and serve on the same platform
Deal blocker to exploit	Price: H100 at $6.50 per hour and B200 at $9.98 per hour on list [B7]	No SLA, no EU region, no custom containers on serverless [D7][D12] [D13]	Serverless is EU-anchored and region-free; US users see roughly twice the edge latency of German users [N12]

1.3 Claims versus reality

Claim: "instant" or "blazing-fast" cold starts

Provider	Verbatim claim	What the documentation commits to	Independent evidence	Verdict
Baseten	"blazing-fast cold starts" (homepage) [B1]	The cold-start page gives no latency figures. Sync requests park for up to 1,200 s then return 500. Wake-up minutes are billable. Weight transfer via the Baseten Delivery Network is "2-3x faster" with no absolute figure [B8][B9][B10]	Model-cache docs cite SDXL "just under 10 seconds"; NVIDIA case study cites "5-10 seconds"; competitor claims 30 to 90 s for large models; status page logged "Slower than usual scale-ups for B200s" on 2026-07-31 [B11][B12][B13][P-STATUS]	Partially supported. Fast for cached small models; unquantified for 70B+ and priced while warming
DeepInfra	No cold-start claim on current site. Docs: "no idle GPU time, no minimums" [D9]	Serverless models are kept warm in a shared pool; contention is handled by 429, Flex waits of up to 10 minutes, and Priority admission at 1.5x price [D14][D15]	Founder statement from 2023: cold start "under 10 s". Live platform TTFT captured at 0.42 s across all traffic [D16][P-LIVE]	Not claimed. The design substitutes queueing for cold starts, so the risk is a 429 or a 10 minute Flex wait rather than a slow first token

Provider	Verbatim claim	What the documentation commits to	Independent evidence	Verdict
Nebius	"sub-second responses for interactive agents" for the Fast flavor [N13]	Serverless: no cold-start statement. Dedicated: "initial deployment can take several minutes"; scaling above minimum replicas "is not guaranteed indefinitely" [N14] [N15]	The June 2026 deprecation removed six `-fast` serverless SKUs (the August notice removed ten base SKUs and no `-fast` ones), so the tier the claim describes is now thin [N16][N17]	Unsupported for serverless. Applies only to dedicated endpoints with min replicas above zero

Claim: "99.99% availability"

Reference: 99.99% allows 4.4 minutes of downtime per 30 days; 99.9% allows 43.8 minutes.

Provider	Verbatim claim	Contract	Observed (status page API, last 90 days to 2026-09-29)	Verdict
Baseten	"99.99% uptime out of the box" (homepage); "Four nines of uptime" (Model APIs page) [B1] [B3]	Published SLA is 99.9% monthly, "commercially reasonable measures", credits capped at 40% of monthly fees, claims within 24 hours, upstream provider outages excluded [B14]	35 incidents (8 major). Model APIs: 12 incidents, 4 major totalling 299 minutes. Dedicated Inference: 17 incidents, 4 major totalling 86 minutes. Third-party monitor: 99.691% of the last 30 days with no declared impact [P-STATUS] [B15]	Unsupported. Marketing is one order of magnitude above the contract, and posted major-incident minutes alone exceed the 90-day 99.99% budget (13 minutes) by more than 20x for Model APIs
DeepInfra	"RELIABLE" (homepage) [D1]	No SLA for serverless. DeepCluster page cites "99.982% uptime SLA", which is the Tier 3 colocation figure [D7] [D11]	Status page reports API "100% over 88.8 of 90 days measured"; model-level outages of 8h01m and 6h19m on 2026-07-25 and 07-26 (gemma-4-31B-it-turbo); OpenRouter registry flagged a DeepInfra endpoint at 1% uptime in September [D17][D18]	Not claimed numerically. Platform API uptime is high; individual model endpoints fail for hours without a contractual remedy
Nebius	"99.9% SLA" (dedicated); "Best-effort 99% availability" (Starter) [N9]	Docs: "Self-service dedicated endpoints do not include a formal SLA unless covered by contract"; historical success "approximately 99.9%" [N15]	8 incidents titled Token Factory between 2026-02-18 and 2026-07-01 including two of roughly one day (batch inference, Data Lab). OpenRouter 30-day uptime: gpt-oss-120b 96.94%, Qwen3-235B 91.38% and "Degraded" [P-STATUS][N18]	Partially supported. The claim is honest about tiers, but serverless observed availability on OpenRouter sits well below 99%

Claim: "sub-second Time-To-First-Token"

Artificial Analysis figures use a 10k-token input and, for reasoning models, count thinking time, so they are an upper bound on pure TTFT. Same-model comparison where all three are listed:

Model	Baseten	DeepInfra	Nebius	Source
gpt-oss-120b TTFT	0.19 s	0.69 s	0.94 s	[T1]

Model	Baseten	DeepInfra	Nebius	Source
gpt-oss-120b output tokens/s	267	333	252	[T1]
DeepSeek V4 Pro output tokens/s	163	listed, price $0.59 blended	208	[T2]
GLM 5.3 Flash end-to-end p50 (600 paired requests, concurrency 1)	331 ms	1,827 ms	1,451 ms	[T3]
GLM 5.3 Flash operational failures	0.00%	4.00%	14.83%	[T3]

Provider	Verbatim claim	Verdict
Baseten	"fastest runtime available" (Model APIs page) [B3]	Supported on TTFT for shared APIs (fastest TTFT on gpt-oss-120b, lowest p50 in the paired test). Not supported on throughput, where it ranks mid-pack (10 of 18 on gpt-oss-120b) [T1]
DeepInfra	Live homepage counter, no fixed claim; blog claims "three speed tiers on the same weights" [D5]	Platform-wide TTFT captured live at 0.42 s [P-LIVE]. Per-model TTFT on shared endpoints is 0.5 to 0.9 s for non-reasoning models, so "sub-second" holds on average and fails at p99 (17 s in the paired test) [T3]
Nebius	"sub-second time-to-first-token, validated by internal and third-party benchmarks" [N13]	Unsupported on third-party data: 0.94 s on gpt-oss-120b and 0.99 to 2.33 s across reasoning models; edge TTFB from US Central is 217 ms before any inference work begins [T1][N12]

1.4 Messaging gaps an edge provider can exploit

1. None of the three publishes a complete per-model serving contract (quantization, served context, output cap, engine, TTFT target, deprecation policy). Nebius comes closest: its public `models_info` endpoint lists quantization, context window, and a tokens-per-second figure per flavor, but no engine, TTFT, or output cap, and 21 serverless SKUs were removed in three months without automatic rerouting [N19][N16][N17]. DeepInfra discloses quantization per model but 31 of 102 active text models carry no declaration [P-CATALOG]. Baseten discloses neither on its model pages.
2. None of the three sells latency by geography. Nebius is EU-anchored, DeepInfra is US-only with Toronto, Baseten offers `us` and `eu` pinning only [B16][D12][N12].
3. Marketing uptime and contractual uptime diverge by one order of magnitude in allowed downtime at Baseten and are absent at DeepInfra. A published SLA with per-model status components would be differentiated on its own.

Sources

Probe captures (this repository):

- [P-STATUS] evidence/derived/status-incidents.md, from `status.baseten.co`, `status.nebius.com`, and `status.linode.com` Statuspage APIs, 2026-09-29.
- [P-LIVE] `evidence/probes/deepinfra/live_metrics.body` and `live_metrics_2.body`, unauthenticated GET `https://api.deepinfra.com/v1/metrics/live`, two samples 30 s apart at 2026-09-29 18:21:52 and 18:22:22 UTC: `time_to_first_token` 0.417 s and 0.421 s, about 4,200 requests/s, 39.7M tokens/s.
- [P-CATALOG] evidence/derived/deepinfra-catalog.md, from `GET https://api.deepinfra.com/models/list`, 2026-09-29.

Baseten:

- [B1] https://www.baseten.co/
- [B2] https://www.baseten.co/blog/announcing-our-series-f/ (2026-06-22)
- [B3] https://www.baseten.co/products/model-apis/
- [B4] https://www.baseten.co/resources/customers/
- [B5] https://docs.baseten.co/reference/truss-configuration
- [B6] https://docs.baseten.co/engines/bis-llm/advanced-features
- [B7] https://www.baseten.co/pricing/
- [B8] https://docs.baseten.co/deployment/autoscaling/cold-starts
- [B9] https://docs.baseten.co/deployment/autoscaling/request-lifecycle
- [B10] https://www.baseten.co/blog/baseten-delivery-network-fast-cold-starts-big-models/ (2026-03-19)
- [B11] https://docs.baseten.co/development/model/model-cache
- [B12] https://www.nvidia.com/en-us/case-studies/baseten
- [B13] https://www.spheron.network/blog/baseten-alternatives/ (competitor source)
- [B14] https://www.baseten.co/service-level-agreement/
- [B15] https://checkupstream.com/status/baseten
- [B16] https://docs.baseten.co/deployment/regional-deployments (2026-09-10)

DeepInfra:

- [D1] https://deepinfra.com/
- [D2] https://deepinfra.com/about
- [D3] https://deepinfra.com/blog/deepinfra-series-b (2026-05-04)
- [D4] https://docs.deepinfra.com/private-models/custom-llms
- [D5] https://deepinfra.com/blog/best-open-source-llm-api-providers (2026-09-14)
- [D6] https://openrouter.ai/provider/deepinfra
- [D7] https://deepinfra.com/terms (effective 2026-08-17)
- [D8] https://deepinfra.com/deepstart
- [D9] https://docs.deepinfra.com/
- [D10] https://deepinfra.com/pricing
- [D11] https://deepinfra.com/deepcluster
- [D12] https://deepinfra.com/privacy (2026-08-15)
- [D13] https://docs.deepinfra.com/gpu-instances/overview
- [D14] https://deepinfra.com/blog/priority-service-tier (2026-06-29)
- [D15] https://deepinfra.com/blog/flex-service-tier (2026-07-14)
- [D16] https://news.ycombinator.com/item?id=34874029 (2023-02-24)
- [D17] https://status.deepinfra.com/
- [D18] https://github.com/Parametrix-insurance/openrouter-uptime

Nebius:

- [N1] https://nebius.com/services/token-factory
- [N2] https://dev.nebius.com/token-factory
- [N3] Nebius Q2 2026 shareholder letter, https://assets.nebius.com/assets/a6ecfd85-a6cb-4967-8ef7-9a25bd261f9c/SHLQ226.pdf (2026-08-12)
- [N4] https://nebius.com/blog/posts/dedicated-endpoints-and-custom-weights-hub (2026-02-26)

- [N5] https://nebius.com/customer-stories/swordhealth (2026-04-09)
- [N6] https://en.wikipedia.org/wiki/Nebius_Group
- [N7] https://nebius.com/newsroom/nebius-agrees-to-acquire-eigen-ai-strengthening-nebius-token-factory-as-a-frontier-inference-platform (2026-05-01)
- [N8] https://docs.tokenfactory.nebius.com/public-serverless.md
- [N9] https://nebius.com/services/token-factory/enterprise-grade-inference
- [N10] https://docs.tokenfactory.nebius.com/ai-models-inference/dedicated-endpoints/overview.md
- [N11] https://docs.tokenfactory.nebius.com/other-capabilities/billing-new.md
- [N12] https://llmlatency.dev/provider/nebius (2026-09-28)
- [N13] https://nebius.com/services/token-factory/inference-service
- [N14] https://docs.tokenfactory.nebius.com/ai-models-inference/dedicated-endpoints/deploy-api.md
- [N15] https://docs.tokenfactory.nebius.com/ai-models-inference/dedicated-endpoints/capacity-and-scaling
- [N16] https://docs.tokenfactory.nebius.com/june-2026-deprecation-notice.md
- [N17] https://docs.tokenfactory.nebius.com/august-2026-deprecation-notice.md
- [N18] https://openrouter.ai/api/v1/models/openai/gpt-oss-120b/endpoints and https://openrouter.ai/api/v1/models/qwen/qwen3-235b-a22b-2507/endpoints (2026-09-28)
- [N19] https://tokenfactory.nebius.com/api/public/models_info (2026-09-28)

Third-party benchmarks:

- [T1] https://artificialanalysis.ai/models/gpt-oss-120b/providers
- [T2] https://artificialanalysis.ai/models/deepseek-v4-pro/providers
- [T3] https://github.com/openbenchmarks-labs/inference (GLM 5.3 Flash, reviewed 2026-09-03)

2. Technical Architecture & Engine Mechanics

Scope: how each platform turns an HTTP request into tokens, as of 2026-09-28. Where a platform publishes configuration keys, the keys are quoted. Where it publishes nothing, the row says so.

2.1 Model comparison and availability

Catalog shape

Measure	Baseten	DeepInfra	Nebius Token Factory
Serverless LLM slugs	11 on Model APIs (DeepSeek V4 family, GLM 5.2 and 5.3 family, Kimi K3, Nemotron 3 Ultra, gpt-oss-120b). Llama and Qwen appear only in the deployable library [B1]	102 active text-generation models, 123 deprecated, 187 in the OpenAI-style listing; 385 entries across all modalities [P-CATALOG]	Roughly 25 serverless text models after the June and August deprecations removed 21 SKUs; 43 dedicated templates (33 text, 6 vision, 4 embedding) [N1][N2][P-OPENAPI]
Modalities on the per-token API	Chat, Anthropic Messages (beta), Whisper on Model APIs; TTS, STT, image, video, embeddings via dedicated library deploys [B1][B2]	Chat, completions, Responses, embeddings (28), rerank (4), image (47), video, TTS (15), ASR (8), music [P-CATALOG][P-OPENAPI]	Chat, completions, Responses, embeddings, rerank, image generation. No speech endpoints; Whisper request open for about a year [N3][P-OPENAPI]
Third-party model resale	Frontier Gateway routes to OpenAI, Anthropic, xAI, Vertex from the same key [P-OPENAPI]	26 of 102 active text models are partner-proxied, mostly closed (Claude, Gemini, Qwen Max, Seed) [P-CATALOG]	None. Open weights only
Newest model added	DeepSeek V4 Pro 0813 day-zero (2026-08-13); GLM-5.3 day-0; Kimi K3 day-0 (2026-07-27) [B3] [B4]	tencent/Hy4-preview 2026-09-25; DeepSeek V4.1 Flash 2026-09-10; MiMo V2.6 2026-09-22 [P-CATALOG]	"Day-one support" cited for Kimi K3, GLM-5.2, MiniMax M3, Nemotron 3 Ultra; Qwen3.8-2.4T day-0 on dedicated only [N4]
Deprecation behaviour	Six Model APIs retired 2026-09-25 with 12 days notice [B5]	"At least 1 week's advance notice"; requests to deprecated models are silently forwarded to a replacement model [D1][D2]	"Token Factory does not automatically reroute requests from deprecated models"; dedicated endpoints unaffected [N1]
Quantization disclosure	Per deployment; user chooses `quantization_type` (no_quant, fp8, fp8_kv, fp4, fp4_kv, fp4_mlp_only) [B6]	Per model in the public catalog: fp8 42, fp4 17, bfloat16 10, fp16 2, undeclared 31 of 102 active text models [P-CATALOG]	Per template flavor: fp8 33, fp16 8, fp4 4, int4 2, bf16 1 of 48 flavors [P-OPENAPI]

Flagship family coverage (open weights, per-token tier)

Family	Baseten Model APIs	DeepInfra serverless	Nebius serverless
DeepSeek V4 (Pro, Flash, V4.1 Flash)	Yes, all three, plus cached-input pricing [B1]	Yes, 10 DeepSeek SKUs including V3, V3.1, V3.2, R1-0528 [P-CATALOG]	Yes, V4 Pro 0813, V4 Flash 0731, V4.1 Flash [N5]
Kimi K3	Yes, 1M context [B1]	Yes, plus K2.6 [P-CATALOG]	Yes, NVFP4 with DSpark speculation [N6]

Family	Baseten Model APIs	DeepInfra serverless	Nebius serverless
GLM 5.x	5.2, 5.2 Fast, 5.3, 5.3 Fast, 5.3 Flash [B1]	5.2, 5.3 (fp4), 5.3 Flash (fp4), 4.6, 4.7 [P-CATALOG]	5.1, 5.2, 5.3, 5.3 Flash [N5]
gpt-oss-120b	Yes [B1]	Yes, three tiers (base bf16, Turbo, Ultra) [P-CATALOG]	Yes, fp4 [N7]
Qwen3.x	Not on Model APIs; library only [B1]	21 Qwen3-family SKUs including 3.8-2.4T (fp4), 3.5-397B, 3.6, 3.8-Flash [P-CATALOG]	3.5-397B, 3.8-27B, 3-235B-2507, 3-30B-2507 [N5]
Llama 3.x and 4	Library only (Llama 3.3 70B TRT-LLM) [B2]	7 SKUs: 3.3 70B Turbo (fp8, B200), 3.1 8B and 70B Turbo, Llama 4 Scout, Guard 4 [P-CATALOG]	Llama 3.3 70B removed from serverless 2026-08-31 [N2]
Nemotron 3	Ultra 550B [B1]	Ultra, Super 120B, Nano 30B, 3.5 Lightning, Content Safety [P-CATALOG]	Ultra, Super, Nano, 3.5 Lightning [N5]

How each vendor markets its models


Dimension	Baseten	DeepInfra	Nebius Token Factory
Catalog organization	Library filtered by task (LLM, transcription, TTS, image, embedding, computer use) with a "Trending models" section and publisher pages [B2]	Filters by category and by family, plus "featured", "Priority", and "Flex" badges [D20]	Three featured launches on the product page; public catalog of 25 models tagged by use (`code` , `function_calling` , `context_and_rag` , `reasoning`) [N8][N25]
Launch message	Day-0 is the headline: "day-0 support for Kimi K3" and "won't ruin launch day" [B4][B26]	Day-zero releases announced per model on the blog [D21]	Day-0 webinar and newsroom posts; lighter emphasis [N26]
Speed or price variants	Separate "Fast" SKUs at 1.5x price (GLM-5.3 Fast $2.10/$6.60 versus $1.40/$4.40) [B26]	Priority (+50%) and Flex (-20%) via `service_tier` ; legacy "Turbo" and "Ultra" survive as model-name suffixes [D9][P-CATALOG]	Base and Fast flavors by `-fast` suffix; the public catalog lists no `-fast` IDs today [N9][N25]
Per-model page shows	Developer, size, license, price; library cards name GPU and engine (vLLM on H100, TRT-LLM, B200). No quantization or throughput [B2]	Precision and context (for example "bfloat16, 131,072"), zero-retention flag, cached and uncached prices [D20]	Quantization, context window, and a tokens-per-second figure per flavor in the public JSON [N25]
Customer use cases named	Code completion (Cursor, Zed), clinical documentation (Abridge, OpenEvidence), voice agents and TTS (Speechify) [B7]	Agent platforms ("more than 30% of token volume driven by autonomous agents"), OpenRouter supply, long-horizon coding [D3]	Coding agents, AI search, fraud and risk (Revolut), digital health (Sword Health), video generation (Higgsfield) [N8]

Baseten markets launch speed and named logos, DeepInfra markets price and breadth, and Nebius markets curated frontier models on owned capacity. Only Nebius puts a throughput number next to each model, which is the closest any competitor comes to the serving contract in docs 4a.

2.2 Execution engines and runtimes

Engine lineage per provider

Provider	Serving engines in production (with evidence)	Proprietary layer
Baseten	TensorRT-LLM through Engine-Builder-LLM (internal name Briton) for dense Llama, Qwen, Mistral; vLLM as the default backend of BIS-LLM for MoE and large dense models; SGLang for day-0 DeepSeek-class launches; custom containers may run vLLM, SGLang, TGI, TEI, Triton, llama.cpp; NVIDIA Dynamo for Model APIs [B8][B9][B10]	BEI embedding engine; a custom C++ gRPC server that replaced Triton; "proprietary inference engine" for DeepSeek V4 Pro with native MXFP4 [B3] [B11]
DeepInfra	vLLM for "the bulk of the text-generation catalog"; SGLang; TensorRT-LLM plus NVIDIA Dynamo for KV-aware routing and disaggregated prefill and decode; NVFP4 via ModelOpt on B300 [D4][D5]	Maintained forks of vLLM, TensorRT-LLM, Dynamo, SGLang, and TGI under github.com/deepinfra; Rust tooling (deepctl, fastokens) [D6]
Nebius	vLLM in production ("supports the full set of vLLM parameters"; MiniMax-M3 "served on B200 via vLLM with EAGLE3"); TensorRT-LLM in at least one proof of concept; LMCache for long context; NVIDIA Groq 3 LPX adopted for a subset of models [N9][N6][N10][N11]	Custom cache-aware router; EAGLE-3 speculator training (SlimSpec, LK losses); Eigen AI kernels and sparsity work post-acquisition [N12][N13][N14]

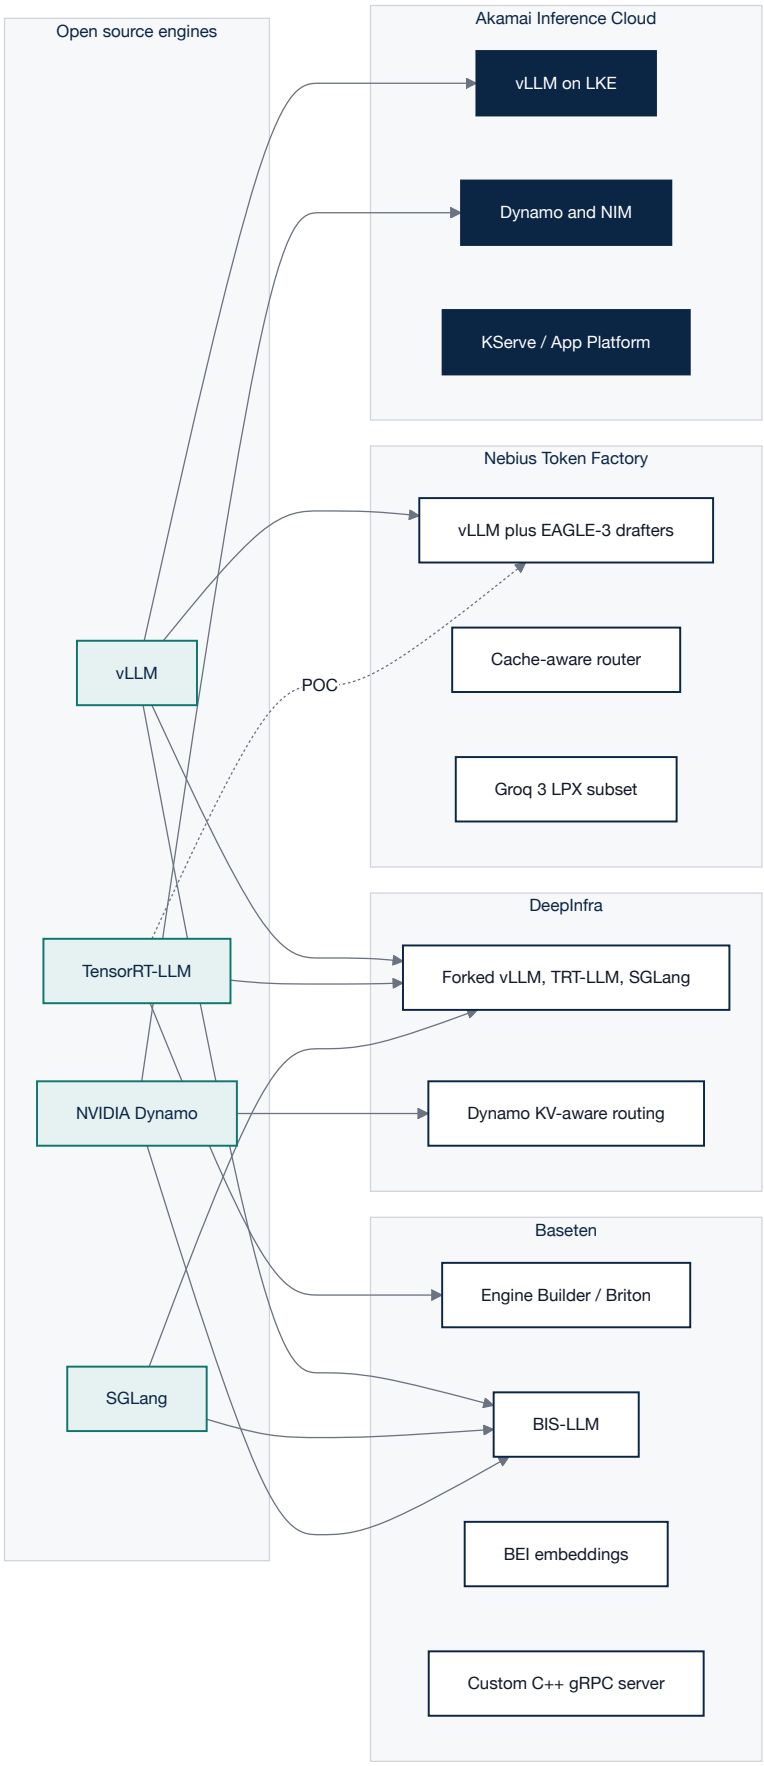

Shared lineage runs through the engine layer: all four platforms, Akamai included, run vLLM, and all but Nebius also run NVIDIA Dynamo. Differentiation therefore lives in what is exposed to the developer, the routing layer, and the capacity model, not in the engine.

TGI, named in the assessment brief, is no longer a live option. Hugging Face put Text Generation Inference in maintenance mode on 2025-12-11, shipped its last release (v3.3.7) on 2025-12-19, archived the repository on 2026-03-21, and recommends vLLM or SGLang instead [G1][G2]. None of the three competitors uses TGI for its managed engines today: Baseten's custom-server guide names vLLM, SGLang, and Triton (a custom container can still run TGI); DeepInfra's TGI fork was last pushed in December 2023 while its vLLM fork is active; Nebius docs carry no TGI reference [B27][D22][N9]. A new serverless product should not plan on it.

Mechanics: why batching decides serverless unit cost

Decode is memory-bandwidth bound: each generated token reads every active weight once, whether the step serves 1 sequence or 200. Batching amortizes that read, so tokens per GPU-second, and therefore price per token, scale with how many sequences share each step.

Technique	How it works	Trade-off exposed to the buyer
Static batching	Collect N requests, run them to completion together; short requests wait for the longest	Simple; high tail latency and idle slots. Not used by any of the three on shared tiers
Continuous (in-flight) batching	The scheduler admits and retires sequences at every decode step, so a finished sequence frees its slot immediately [R1]	Throughput rises with concurrency while per-request tokens/s falls. The operating point is the product decision: DeepInfra and Nebius encode it as a tier (Priority, Fast), Baseten as `max_batch_size` and scheduler policy
Chunked prefill	Long prompts are split into chunks interleaved with decode steps instead of stalling the batch [R2]	Keeps TTFT and inter-token latency stable for other users when one caller sends a 100K-token prompt; costs a little prefill efficiency
Admission control	When KV memory or batch slots run out, new requests queue or are rejected	Surfaces as 429 or 529 and `Retry-After` to the client; the tiering described below is admission control priced per request

How batching is exposed to the developer

Control	Baseten (dedicated)	DeepInfra	Nebius
Batch size	`build.max_batch_size` 1 to 2,048, default 256; `runtime.max_batch_size` (v2) [B6]	Dedicated only: `max_batch_size` "controls parallel request capacity; excess requests queue". Serverless: none [D7][P-OPENAPI]	None on serverless. Fast flavor is defined as "smaller batch sizes, increased compute allocation" [N9]
Token budget per step	`build.max_num_tokens` 65 to 1,048,576, default 8,192; `max_num_batched_tokens` and `enable_chunked_prefill` on BIS-LLM [B6][B9]	Not exposed	Not exposed
Scheduler policy	`batch_scheduler_policy` guaranteed_no_evict or max_utilization; `enable_chunked_context` default true [B6]	Not exposed	Not exposed
Concurrency per replica	`runtime.predict_concurrency` default 1; UI concurrency target; guidance 32 to 128 for vLLM [B12]	200 concurrent requests per model per account; 429 above [D8]	Dynamic rate limits in 15 minute windows, ceiling 20x base; `service_tier` flex or no-limit [N15]

Control	Baseten (dedicated)	DeepInfra	Nebius
Admission control	Backpressure policy `QUEUE_ON_FULL` or `REJECT_ON_FULL` (529 `request_backpressure_rejected`) [P-OPENAPI][B13]	`fail_fast` returns 429 immediately; Flex waits up to 10 minutes at 0.8x; Priority at 1.5x gets "protected admission" [D9][D10][P-OPENAPI]	429 with `Retry-After`; over-limit requests may still run flagged `x-ratelimit-over-limit: yes`; 529 documented as "Inference service overloaded" [N15][P-OPENAPI]
Autoscaling signal	`concurrency_target`, `target_utilization_percentage`, `target_in_flight_tokens` (early access), `scale_down_delay` default 900 s, scheduled autoscaling [P-OPENAPI][B14]	`min_instances` (0 allowed), `max_instances` on dedicated [D7]	`scaling.min_replicas` and `max_replicas`, up to 32 per flavor (8 on three flavors), per-minute billing [P-OPENAPI][N16]

Only Baseten exposes engine batching knobs. DeepInfra and Nebius sell batching as a service tier (price multiplier or flavor suffix), which is simpler for the developer and opaque for capacity planning.

2.3 Memory and KV cache management

Mechanics: where GPU memory goes

After the weights, the KV cache (keys and values for every token of every live sequence) is the largest consumer of GPU memory, and it grows with context length times concurrency. How a platform manages it sets the maximum concurrent sequences per GPU, which sets the price floor.

Technique	How it works	Effect
Paged KV cache (PagedAttention)	KV stored in fixed-size blocks mapped through a table, like virtual memory, instead of one contiguous buffer per sequence [R3]	Near-zero fragmentation; more sequences per GPU; enables block sharing between sequences
Prefix caching	Blocks for an identical prompt prefix (system prompt, tool definitions, prior turns) are reused across requests instead of recomputed; a radix tree indexes shared prefixes in SGLang [R4]	Cuts prefill compute and TTFT on agent and chat traffic. Only pays off if the next request lands on the replica holding the blocks, hence KV-aware routing and session affinity
KV-aware routing	The router scores replicas by cached-prefix overlap as well as load	Converts prefix caching from a per-replica accident into a fleet-level hit rate; the source of the cached-input discounts below
KV quantization and offload	Store KV at FP8 or FP4, or spill cold blocks to host memory	More context per GPU; small accuracy risk (Baseten warns FP8 KV degrades Qwen2)
Speculative decoding	A small draft model or extra heads (EAGLE, MTP) propose several tokens; the target model verifies them in one pass [R5]	2 to 3x lower inter-token latency at low concurrency; gains shrink as batch size grows because verification competes for the same compute
Disaggregated prefill and decode	Prefill (compute bound) and decode (bandwidth bound) run on separate GPU pools with KV transferred between them [R6]	Tunes each pool independently for TTFT versus tokens/s; needs a fast interconnect for the KV transfer

Legend: Documented = named in vendor docs with a configuration key or price; Implied = named in a blog or benchmark without a developer-facing control; Unknown = no public statement.

Technique	Baseten	DeepInfra	Nebius
Paged KV cache	Documented: `plugin_configuration.paged_kv_cache`, `use_paged_context_fmha`, `kv_cache_free_gpu_mem_fraction` default 0.9, host offload via `kv_cache_host_memory_bytes` [B6]	Implied: inherited from vLLM and TRT-LLM forks [D6]	Implied: vLLM parameters supported [N9]
Prefix caching	Documented: `enable_prefix_caching` on BIS-LLM; Model APIs bill cached input at roughly 10% of input price (GLM-5.3 $0.14 vs $1.40); `x-session-affinity` header keeps a session on one replica to preserve the prefix [B9][B15][B16]	Documented: automatic, "even a single character difference will invalidate the cache"; cache-read pricing on 51 of 102 active models, 17 of them at 0.2x input (range 0.0084x to 0.7x); explicit retention with `prompt_cache_key` and TTL 5m (1.25x write) or 1h (2.0x write), 1,024 to 8,192 token granularity by model [D11][D12][P-CATALOG]	Implied: server-side caching mentioned, `usage.prompt_tokens_details.cached_tokens` returned, but no cached-input price. Feature request with 31 votes "In Review" [N9][N17][N18]
KV-aware routing	Documented: Dynamo router via `b10_routing_config` (overlap score weight, temperature); Enterprise only; vendor claims 50% TTFT reduction on Qwen3 480B [B17][B18]	Documented in blog: Dynamo KV-aware routing and Rust `kv-local-indexer` fork [D5][D6]	Documented in blog: custom cache-aware router, cache hit 95% vs 62% under Kubernetes ClusterIP routing [N12]
Speculative decoding	Documented: Eagle, MTP, NGram via `speculative_config`; lookahead on Engine Builder; custom EAGLE-3 head training; DFlash 3x on Qwen3-8B [B17][B19][B20]	Unknown: no blog or doc; only fork descriptions [D6]	Documented: Fast flavor uses it; custom speculator training API (EAGLE-3, `spec-draft`); ZDR opt-in "disables data storage and Speculative Decoding" [N9][N19][N20]
Quantization policy	Documented: FP8 on L4, H100, H200, B200; FP4 variants require B200; warning that FP8_KV degrades Qwen2 [B21]	Documented: "all-in" on FP4 with NVFP4 via ModelOpt; FP8 "Turbo" variants; context served at FP4 can drop (DeepSeek V4 Pro at 66k in the vendor's own April benchmark) [D13][D14]	Documented per template: fp8 default, fp4 and int4 for Kimi and gpt-oss; "approximately 99% of the original model's quality" [P-OPENAPI][N9]
Disaggregated prefill and decode	Documented: `is_disaggregated` with prefill and decode worker counts; "available on a limited basis" [B17]	Documented in blog via Dynamo [D5]	Implied: chat-app architecture post describes it in a POC [N10]
Data retention tied to caching	KV cache "remains in GPU memory during inference" and is not persisted [B22]	Zero retention by contract; inputs "not stored to disk during inference" [D15][D16]	Default retention of inputs and outputs "solely for Speculative Decoding", stored in Finland [N20]


Two facts matter for a serverless product: DeepInfra has turned the KV cache into a priced, programmable resource (read rate, write rate, TTL, granularity), and Nebius has coupled a privacy setting to a performance feature, which forces regulated buyers to choose between residency and speed.

2.4 Routing and multi-region topology

Observed ingress (probe captures, 2026-09-29)

Provider	Inference hostname resolves to	Front-end fingerprint	Regions and residency controls
Baseten	`inference.baseten.co` to one Google Cloud address (AS396982, global load balancer range); `api.baseten.co` to three Amazon addresses (AS16509) [P-DNS]	`via: 1.1 google` on every inference response; management API on gunicorn [P-API]	Workload planes are Kubernetes clusters, one per cloud region, 87 clusters across 18 clouds; `--region us` or `eu` at push; gateway endpoints carry a region enum `UNRESTRICTED` or `EU`; regional environments for US, EU, UK, Australia by support request [B23][B24][P-OPENAPI] [B25]
DeepInfra	`api.deepinfra.com` to 14 addresses in one /24 announced by DeepInfra's own ASN (AS16581, DEEPINFRA-01) [P-DNS]	`server: uvicorn` (FastAPI); no CDN headers [P-API]	Eight US data centers plus Toronto (eStruxture colocation); no region parameter, no EU region; privacy policy states processing in the United States [D17][D18] [D19]
Nebius	`api.studio.nebius.com` and `api.tokenfactory.nebius.com` to the same single address announced by Nebius's own ASN (AS214415, Nebius B.V., registered NL) [P-DNS]	FastAPI with Swagger UI at `/docs`; no CDN headers; `x-request-id` on every captured response [P-API][N21]	Serverless is "Global" with "no region guarantee"; dedicated data planes at eu-north1 (H100, L40S), us-central1 (H200), eu-west1; region fixed by contract, "no multi-region routing or automatic failover" [N22] [N23][P-OPENAPI]
Akamai Cloud (baseline)	`api.linode.com` CNAME chain through `edgekey.net` to `akamaiedge.net` [P-DNS]	Akamai edge on the API, docs, and marketing hosts; `X-Akam-SW-Version`, `akaas` cookie [P-API]	33 core regions in the regions API, 22 advertising GPU Linodes; RTX PRO 6000 in 20 regions; 4,400+ edge PoPs [P-REGIONS] [A1][A2]

Request path

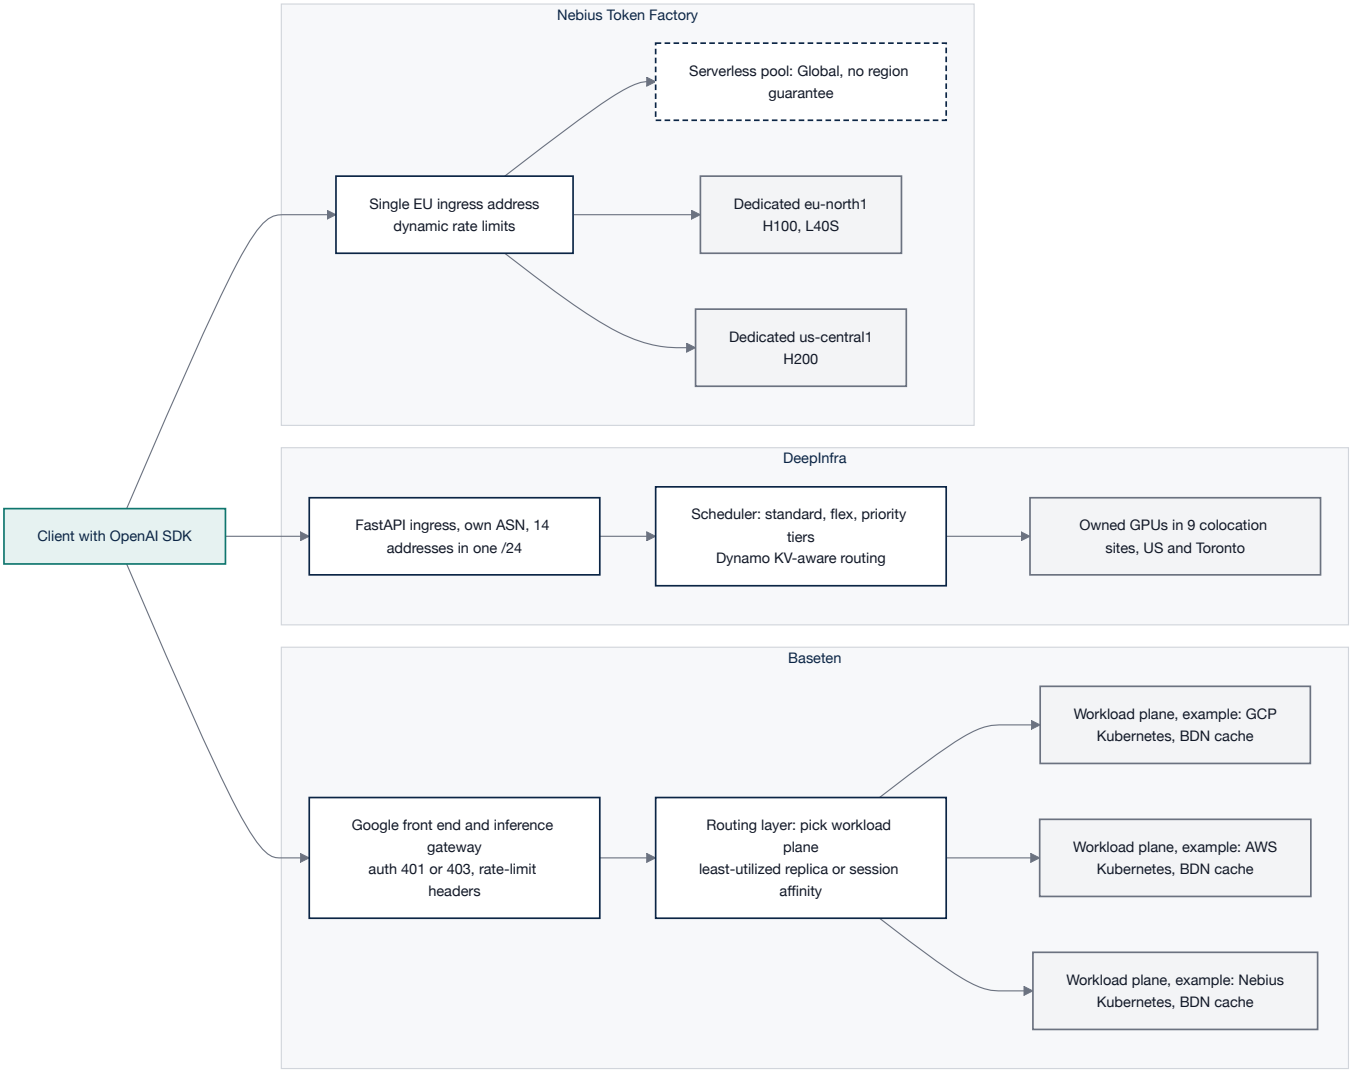

Measured connection phases (probe, one US vantage point, 2026-09-29)

Nine unauthenticated GETs per host to an unknown route, so each server returns an error with minimal work. No inference runs; these are a floor under TTFT, not a TTFT measurement [P-LAT].

Host	Origin network	TCP connect p50	TLS complete p50	TTFB p50 (unknown route)
`inference.baseten.co`	Google front end (AS396982)	23 ms	46 ms	106 ms
`api.deepinfra.com`	DeepInfra (AS16581)	36 ms	74 ms	112 ms
`api.linode.com` **(Akamai baseline)**	Akamai edge (AS20940)	36 ms	71 ms	164 ms
`api.tokenfactory.nebius.com`	Nebius (AS214415, NL)	142 ms	285 ms	465 ms

Nebius pays a transatlantic round trip on every connection from the US, consistent with the third-party TTFB table below. Baseten, DeepInfra, and Akamai sit within 60 ms of each other from a US vantage point. Akamai's extra 52 to 58 ms of TTFB arrives mostly after TLS completes (all of it against DeepInfra; 33 ms against Baseten, whose

TLS also completes 25 ms sooner), consistent with the hop from edge to the Linode API origin. The edge advantage therefore shows up against single-site competitors for users far from that site, not against Google's front end, and only if the inference gateway runs at the edge rather than behind it.

Latency implications

Fact	Consequence
Nebius serverless ingress is one European address; edge TTFB p50 100 ms from Germany, 217 ms from US Central, 446 ms from Sao Paulo, 513 ms from Tokyo [N24][P-DNS]	Round trip alone consumes a fifth to half of a "sub-second" TTFT budget outside Europe
DeepInfra ingress is US-only; no anycast or CDN fingerprint [P-DNS][P-API]	Same penalty in reverse for European and Asian users, with no residency option
Baseten fronts inference with Google's global front end, then hops to a workload plane in another cloud (AWS, GCP, Nebius, OCI) [P-API] [B23]	Two-hop path: edge terminates near the user, but the GPU may be a continent away; the `X-BASETEN-MODEL-PREDICTION-ATTEMPTS` header exposes internal retries [B13]
Akamai edge already terminates `api.linode.com` on Akamai's own network (AS20940), with 4,400+ PoPs claimed for AI Grid [P-DNS][A2]	Connection setup matches DeepInfra and trails Google's front end by 13 ms (TCP) and 25 ms (TLS); the rest of the 52 to 58 ms TTFB gap arrives after TLS, consistent with the edge-to-origin hop [P-LAT]. The ingress advantage is real for users far from a single-site competitor, and only materializes if gateway, auth, and cache run at the edge

Sources

Probe captures (this repository, 2026-09-29):

- [P-CATALOG] evidence/derived/deepinfra-catalog.md
- [P-OPENAPI] `evidence/derived/openapi-surface.md`
- [P-DNS] evidence/derived/dns-cdn.md
- [P-API] `evidence/derived/api-surface.md`
- [P-REGIONS] evidence/derived/akamai-regions.md
- [P-LAT] evidence/derived/latency.md

Baseten:

- [B1] https://docs.baseten.co/inference/model-apis/overview
- [B2] https://www.baseten.co/library/
- [B3] https://www.baseten.co/blog/inference-engineering-for-deepseek-v4-pro-0813/ (2026-08-13)
- [B4] https://www.baseten.co/blog/how-to-build-a-day-zero-api-for-kimi-k3/ (2026-07-27)
- [B5] https://www.baseten.co/resources/changelog/
- [B6] https://docs.baseten.co/engines/engine-builder-llm/engine-builder-config
- [B7] https://www.baseten.co/resources/customers/
- [B8] https://docs.baseten.co/examples/tensorrt-llm
- [B9] https://docs.baseten.co/engines/bis-llm/overview
- [B10] https://www.baseten.co/blog/how-we-made-the-fastest-gpt-oss-on-nvidia-gpus-60-percent-faster/ (2025-10-24)

- [B11] https://www.baseten.co/blog/how-we-built-production-ready-speculative-decoding-with-tensorrt-llm/
- [B12] https://docs.baseten.co/deployment/autoscaling/overview
- [B13] https://docs.baseten.co/deployment/autoscaling/request-lifecycle
- [B14] https://docs.baseten.co/deployment/autoscaling/overview
- [B15] https://www.baseten.co/pricing/
- [B16] https://docs.baseten.co/inference/model-apis/pricing-and-limits
- [B17] https://docs.baseten.co/engines/bis-llm/advanced-features
- [B18] https://www.baseten.co/blog/how-baseten-achieved-2x-faster-inference-with-nvidia-dynamo/ (2026-03-16)
- [B19] https://www.baseten.co/blog/how-to-train-custom-eagle-3-heads-for-speculative-decoding/
- [B20] https://www.baseten.co/blog/dflash-faster-llm-inference/
- [B21] https://docs.baseten.co/engines/performance-concepts/quantization-guide
- [B22] https://docs.baseten.co/observability/security
- [B23] https://docs.baseten.co/hosting-options/self-hosted
- [B24] https://docs.baseten.co/deployment/regional-deployments
- [B25] https://docs.baseten.co/deployment/regional-environments
- [B26] https://www.baseten.co/products/model-apis/
- [B27] https://docs.baseten.co/development/model/custom-server

DeepInfra:

- [D1] https://docs.deepinfra.com/models
- [D2] https://github.com/theopenco/llmgateway/pull/4222
- [D3] https://siliconangle.com/2026/05/04/deepinfra-lands-107m-funding-build-dedicated-inference-cloud-open-source-models/
- [D4] https://deepinfra.com/blog/priority-service-tier (2026-06-29)
- [D5] https://deepinfra.com/blog/deepinfra-nvidia-inference-stack (2026-06-30)
- [D6] https://github.com/orgs/deepinfra/repositories
- [D7] https://docs.deepinfra.com/private-models/custom-llms
- [D8] https://docs.deepinfra.com/account/rate-limits
- [D9] https://docs.deepinfra.com/chat/overview
- [D10] https://deepinfra.com/blog/flex-service-tier (2026-07-14)
- [D11] https://docs.deepinfra.com/chat/prompt-caching
- [D12] https://deepinfra.com/blog/prompt-cache-retention (2026-08-05)
- [D13] https://x.com/DeepInfra/status/1958603893908414537
- [D14] https://deepinfra.com/blog/deepseek-v4-pro-max-api-benchmarks-latency-throughput-cost
- [D15] https://deepinfra.com/terms
- [D16] https://docs.deepinfra.com/account/data-privacy
- [D17] https://deepinfra.com/blog/deepinfra-series-b
- [D18] https://www.globenewswire.com/news-release/2026/07/08/3324125/0/en/DeepInfra-Expands-AI-Inference-Capacity-with-First-International-Data-Center-in-Toronto.html
- [D19] https://deepinfra.com/privacy
- [D20] https://deepinfra.com/models

- [D21] https://deepinfra.com/blog/cosmos3-release
- [D22] https://github.com/deepinfra/text-generation-inference (fork, last push 2023-12-15)

Nebius:

- [N1] https://docs.tokenfactory.nebius.com/june-2026-deprecation-notice.md
- [N2] https://docs.tokenfactory.nebius.com/august-2026-deprecation-notice.md
- [N3] https://ideas.nebius.com/p/ne-hvataet-podderzhki-whisper
- [N4] Nebius Q2 2026 shareholder letter (2026-08-12)
- [N5] https://mastra.ai/models/providers/nebius and https://openrouter.ai/provider/nebius
- [N6] https://tokenfactory.nebius.com/endpoints
- [N7] https://openrouter.ai/api/v1/models/openai/gpt-oss-120b/endpoints
- [N8] https://nebius.com/services/token-factory
- [N9] https://docs.tokenfactory.nebius.com/ai-models-inference/overview
- [N10] https://nebius.com/blog/posts/the-invisible-architecture-behind-great-chat-apps (2025-12-15)
- [N11] https://nebius.com/blog/posts/nvidia-groq-3-lpx-nebius-token-factory (2026-08-24)
- [N12] https://nebius.com/blog/posts/routing-is-the-difference-between-scaling-and-stalling (2026-02-17)
- [N13] https://nebius.com/blog/posts/slimspec-faster-speculative-decoding-without-cutting-the-vocabulary (2026-07-20)
- [N14] https://nebius.com/blog/posts/nebius-and-eigen-ai-partner-to-accelerate-frontier-open-source-ai-inference (2026-03-17)
- [N15] https://docs.tokenfactory.nebius.com/ai-models-inference/rate-limits
- [N16] https://docs.tokenfactory.nebius.com/ai-models-inference/dedicated-endpoints/billing-policy.md
- [N17] https://docs.tokenfactory.nebius.com/api-reference/inference/create-chat-completion.md
- [N18] https://ideas.nebius.com/p/support-impliciteexplicite-prompt-caching
- [N19] https://docs.tokenfactory.nebius.com/post-training/custom-speculator.md
- [N20] https://docs.tokenfactory.nebius.com/legal/legal-quick-guide.md
- [N21] https://docs.tokenfactory.nebius.com/api-reference/introduction.md
- [N22] https://docs.tokenfactory.nebius.com/public-serverless.md
- [N23] https://docs.tokenfactory.nebius.com/ai-models-inference/dedicated-endpoints/control-data-plane.md
- [N24] https://llmlatency.dev/provider/nebius (2026-09-28)
- [N25] https://tokenfactory.nebius.com/api/public/models_info and https://tokenfactory.nebius.com/model-catalog (2026-09-28)
- [N26] https://nebius.com/events/webinar-kimi-k3

Upstream projects:

- [G1] https://github.com/huggingface/text-generation-inference (README: maintenance mode; repository archived 2026-03-21)
- [G2] https://huggingface.co/docs/inference-endpoints/engines/tgi

Research papers:

- [R1] Yu et al., Orca: A Distributed Serving System for Transformer-Based Generative Models, OSDI 2022, https://www.usenix.org/conference/osdi22/presentation/yu

- [R2] Agrawal et al., SARATHI: Efficient LLM Inference by Piggybacking Decodes with Chunked Prefills, https://arxiv.org/abs/2308.16369
- [R3] Kwon et al., Efficient Memory Management for Large Language Model Serving with PagedAttention, SOSP 2023, https://arxiv.org/abs/2309.06180
- [R4] Zheng et al., SGLang: Efficient Execution of Structured Language Model Programs, https://arxiv.org/abs/2312.07104
- [R5] Leviathan et al., Fast Inference from Transformers via Speculative Decoding, ICML 2023, https://arxiv.org/abs/2211.17192
- [R6] Zhong et al., DistServe: Disaggregating Prefill and Decoding for Goodput-optimized LLM Serving, OSDI 2024, https://arxiv.org/abs/2401.09670

Akamai:

- [A1] https://techdocs.akamai.com/cloud-computing/docs/gpu-compute-instances
- [A2] https://www.akamai.com/newsroom/press-release/akamai-launches-ai-grid-intelligent-orchestration-for-distributed-inference-across-4400-edge-locations (2026-03-16)

3. Developer Experience (DX) & API Surface Evaluation

Scope: what a developer touches, as of 2026-09-28. The compatibility matrix is built from three sources with different trust levels: public OpenAPI specifications parsed mechanically (`evidence/derived/openapi-surface.md`), unauthenticated HTTP captures (`evidence/derived/api-surface.md`), and vendor documentation. Each cell names which.

3.1 API uniformity and OpenAI compatibility

Endpoint surface

Surface	Baseten	DeepInfra	Nebius Token Factory
OpenAI base URL	`https://inference.baseten.co/v1` (Model APIs); `https://model-{id}.api.baseten.co/environments/production/sync/v1` (dedicated) [B1][B2]	`https://api.deepinfra.com/v1/openai` [D1]	`https://api.tokenfactory.nebius.com/v1`; legacy `api.studio.nebius.com` still answers identically [P-API][N1]
Chat, completions, embeddings	Chat on Model APIs; completions and embeddings on dedicated, engine-dependent [B1][B2]	All three, plus `/v1/responses`, images, audio, videos, files, batches, models [P-OPENAPI]	All three, plus `/v1/rerank`, `/v1/responses`, images, files, fine-tuning, datasets, dedicated endpoints [P-OPENAPI]
OpenAI Responses API	No	Yes, first seen in the 2026-09-29 capture: `/v1/responses` with `previous_response_id`, `reasoning`, `tools` (function, `web_search`), `service_tier`, `store`, `stream`, `background`; `GET` and `DELETE` on `/v1/responses/{response_id}` are declared as not-found handlers, so stored responses are not retrievable [P-OPENAPI]	Yes: `/v1/responses` with `previous_response_id`, `reasoning`, `tools`, `service_tier`, `store`; POST only, no retrieval path [P-OPENAPI]
Anthropic Messages	`/v1/messages` (beta) [B1]	`/anthropic/v1/messages` and `count_tokens`, mapping open models onto Claude Code slots [P-OPENAPI][D2]	No
Batch API	None documented; async predict with webhooks on dedicated (priority 0 to 2, up to 72 h in queue) [B3][B4]	OpenAI-compatible `/v1/files` and `/v1/batches`, 20% discount, 24 h window, 50,000 lines per file [P-OPENAPI] [D3]	`/v1/files` with `purpose=batch` exists but no `/v1/batches` path in the current spec; batch runs through Data Lab operations; the batch doc page returns 404 [P-OPENAPI][N2]

Surface	Baseten	DeepInfra	Nebius Token Factory
Public OpenAPI spec	Management API only: 160 paths, 211 operations at `api.baseten.co/v1/spec` [P-OPENAPI]	Full API: 140 paths, 169 operations at `api.deepinfra.com/openapi.json` [P-OPENAPI]	Inference API: 37 paths, 47 operations, version stamped `20260928-144ca2fd4`, Swagger UI at `/docs` [P-OPENAPI][P-API]

Chat completions parameter conformance (mechanical diff against the OpenAI request schema)

Measure	DeepInfra	Nebius	Baseten
Declared parameters	31	23	No public schema; docs list the OpenAI set plus `x-session-affinity` header [B1]
OpenAI parameters absent	15: `audio`, `function_call`, `functions`, `logit_bias`, `max_completion_tokens`, `metadata`, `modalities`, `parallel_tool_calls`, `prediction`, `prompt_cache_retention`, `safety_identifier`, `store`, `top_logprobs`, `verbosity`, `web_search_options` [P-OPENAPI]	13: `audio`, `function_call`, `functions`, `metadata`, `modalities`, `parallel_tool_calls`, `prediction`, `prompt_cache_key`, `prompt_cache_retention`, `safety_identifier`, `seed`, `verbosity`, `web_search_options` [P-OPENAPI]	Not verifiable without a key
Vendor extensions	11: `min_p`, `top_k`, `repetition_penalty`, `stop_token_ids`, `ignore_eos`, `continue_final_message`, `chat_template_kwargs`, `fail_fast`, `models` (ordered fallback list, up to 4), `prompt_cache_options` (TTL), `reasoning` [P-OPENAPI]	1: `extra_body` pass-through to vLLM [P-OPENAPI]	`x-session-affinity` request header; `Api-Key` auth scheme accepted alongside Bearer [B1]
Documented response codes on the chat route	200, 422 only [P-OPENAPI]	200, 400, 401, 402, 403, 404, 422, 429, 500, 503, 529 [P-OPENAPI]	400, 401, 402, 403, 404, 413, 429, 499, 500, 502, 503, 504, 529 in the errors guide [B5]

Notable: DeepInfra omits `top_logprobs`, `logit_bias`, and `parallel_tool_calls` from its chat schema while adding sampler controls the OpenAI SDK does not know. Nebius omits `seed`, which removes reproducibility, and `prompt_cache_key`, which matches the absence of cached-input pricing.

Streaming, errors, and headers (observed and documented)

Behaviour	Baseten	DeepInfra	Nebius
Missing credentials (observed)	HTTP 401, body `{"error":"please check the api-key you provided"}`; `GET /v1/models` returns plain text "No Authorization header provided" [P-API]	HTTP 401, body `{"error":{"message":"missing API key","type":"invalid_request_error","param":null,"code":"invalid_api_key"}}`, `www-authenticate: Bearer` [P-API]	HTTP 401, body `{"detail":"Couldn't authenticate. Reason: token is not present"}` [P-API]
Invalid credentials (observed)	HTTP 403 (OpenAI returns 401) with the same string body [P-API]	HTTP 401, OpenAI-shaped error object, `code: invalid_api_key` [P-API]	HTTP 401, FastAPI `detail` string [P-API]
Unknown route (observed)	HTTP 405 with empty body [P-API]	HTTP 404 `{"detail":"Not Found"}` [P-API]	HTTP 404 `{"detail":"Not Found"}` [P-API]
Error schema conformance	Not OpenAI-shaped: `{"error": "<string>"}` [B5][P-API]	OpenAI-shaped on the OpenAI route; FastAPI `detail` on native and 404 routes [P-API]	Not OpenAI-shaped: FastAPI `detail` [P-API]
Streaming usage	`stream_options.include_usage` yields a final chunk [B1]	Usage on the final chunk before `[DONE]` by default (`include_usage` defaults to true); `usage.estimated_cost` documented on non-streaming responses [D4][D18]	`stream_options.include_usage` yields usage in the final chunk [N3]
Rate-limit headers	`x-ratelimit-limit-requests`, `-remaining-requests`, `-limit-tokens`, `-remaining-tokens`, plus split `-uncached-input-tokens` and `-output-tokens` [B6]	None documented [D5]	`x-ratelimit-limit-*`, `-remaining-*`, `-reset-*`, plus `x-ratelimit-dynamic-scale-*`, `x-ratelimit-dynamic-period-*`, `x-ratelimit-over-limit`, `Retry-After` [N4]
Request identifier	`X-Baseten-Request-Id` on predict; `X-BASETEN-MODEL-PREDICTION-ATTEMPTS` exposes retries [B7][B8]	None documented; request IDs are visible only through `/v1/request-costs` [D6]	`x-request-id`, observed on every captured response [N1][P-API]
Overload signal	529 with optional `Retry-After` [B5]	429 "Rate limited"; Flex tier may wait up to 10 minutes then 429 [D5][D7]	529 "Inference service overloaded"; 402 on exhausted budget [P-OPENAPI][N4]
CORS on the inference route (observed)	OPTIONS returns 204 with `access-control-allow-methods: POST` and the request origin echoed [P-API]	OPTIONS returns 200 "OK" [P-API]	OPTIONS returns 204 [P-API]
Timeouts	Server-side default 1,200 s for predict and 1,200 s for parking; server-side tool calls need a client read timeout above 285 s [B8][B24]	Not documented; at-capacity requests queue unless `fail_fast` is set [D20]	Not documented [N1]

Streaming response format (documentation and OpenAPI spec)

No provider was called with a key, so every cell below is documented behavior, not observed.

Element	Baseten Model APIs	DeepInfra	Nebius Token Factory
Framing	Server-sent events; `[DONE]` terminator not stated [B24]	`data:` lines ending in `data: [DONE]` [D4]	Data-only SSE "terminated by a `data: [DONE]` message" [N3]
Chunk object	`chat.completion.chunk` [B24]	`chat.completion.chunk` [D4]	`chat.completion.chunk` [P-OPENAPI]
Reasoning in deltas	`reasoning_content` documented on the message; the delta schema lists only role, content, tool_calls [B24] [B25]	`reasoning_content` "in both the final message and each streaming delta" [D17]	Delta schema declares both `reasoning_content` and `reasoning` [P-OPENAPI]
Tool-call deltas	`tool_calls` in the delta schema [B24]	Not documented; the spec has no chunk schema [P-OPENAPI]	`tool_calls` in the delta schema [P-OPENAPI]
Usage chunk	Opt-in with `include_usage: true` [B24]	On by default; `continuous_usage_stats` opt-in [D8]	Opt-in; null on every chunk except the last [P-OPENAPI]
Error mid-stream	Stream ends early; web search emits a final `{"error": {...}}` data frame [B5][B29]	Not documented	Documented example: `data: {"error": {...}}` then `data: [DONE]` [P-OPENAPI]
Keep-alive	`: keep-alive` comment every 15 s, documented for server-side tool execution only [B24]	Not documented	Not documented

A client written against the OpenAI SDK handles all three for content and tool calls. Reasoning tokens diverge: a parser that reads only `reasoning_content` misses Nebius responses that use `reasoning`, and Baseten does not document where reasoning appears when streaming.

SDKs and client parameters

Element	Baseten	DeepInfra	Nebius Token Factory
Recommended client	OpenAI SDK with base URL and key swapped [B24]	OpenAI SDK pointed at `/v1/openai` [D1][D20]	OpenAI SDK with `base_url` set [N1]
First-party packages	`truss` (packaging), Baseten CLI, `baseten_performance_client` (Python, npm, Rust) for batched high-throughput calls [B9][B26]	`deepinfra` npm client for the native API; `deepinfra` pip package for sandboxes; `deepctl` [D19][D9]	None for inference; sandbox SDK only [N5]
Sampler extensions outside the OpenAI schema	`top_k` (default 50), `min_p`, `repetition_penalty`, `chat_template_args` via `extra_body` [B24][B25]	`top_k` (0 = off), `min_p`, `repetition_penalty`, `chat_template_kwargs`, `continue_final_message`, `ignore_eos` [D8]	`extra_body` pass-through (for example `guided_json`); `top_k` shown in examples [P-OPENAPI][N19]
Framework integrations listed	LangChain, LlamaIndex, LiteLLM, Vercel AI SDK, LiveKit, coding agents [B27]	LangChain `ChatDeepInfra`, LlamaIndex, Vercel `@ai-sdk/deepinfra`, CrewAI, AutoGen [D1]	LangChain `langchain-nebius`, LiteLLM, LlamaIndex, CrewAI, Google ADK, Pydantic, Strands, Agno [N18]

The extension names differ for the same function: `chat_template_args` at Baseten versus `chat_template_kwargs` at DeepInfra. Both control reasoning toggles on hybrid models, so agent frameworks carry per-provider shims for them.

Default runtime settings

Setting	Baseten	DeepInfra	Nebius Token Factory
`max_tokens` when omitted	4,096 [B24]	Conflicting docs: spec says min(context minus input, 65,536); guide says "hard cap of 16384 tokens for most models" [D8][D20]	8,192 [N3]
Served context versus model ceiling	"can differ from a model's advertised maximum"; reservation throttled to 49,512 tokens when unspecified [B1] [B24]	400 when context is exceeded; no served-versus-ceiling statement [D20]	Prompt plus `max_tokens` bounded by model context; no served-versus-ceiling statement [N3]
Default temperature	null (model default) [B24]	1.0 [D20]	1 [P-OPENAPI]
Serverless rate limit	Basic 15 RPM and 100K TPM unverified, 120 RPM verified; Pro 120 RPM and 1M TPM [B6]	200 concurrent requests per model [D5]	Example baseline 60 RPM and 400K TPM, rising 20% per 15 minute window to 20x [N4]
Dedicated autoscaling defaults	Min 0, max 1, window 60 s, scale-down delay 900 s, concurrency target 1, utilization 70% [B28]	`min_instances` and `max_instances` set by the user; 4 GPU limit per user [D10]	`min_replicas` and `max_replicas` required, no defaults [N20]

Default output caps differ by 2x to 16x across providers. A workload ported without an explicit `max_tokens` changes behavior, which is a conformance item for any new OpenAI-compatible endpoint.

3.2 Control plane versus data plane

Dimension	Baseten	DeepInfra	Nebius Token Factory
CLI	Truss (Python) for packaging plus Baseten CLI 1.0 (binary, `--output json`, `--jq`) for management, GA 2026-09-15 [B9][B10]	`deepctl` (Rust): auth, model list, deploy, infer, log query [D9]	None for inference; Sandboxes CLI and MCP server only; Nebius AI Cloud CLI for SSO federation [N5] [N6]
Deployment artifact	`config.yaml` (Truss): Python version, requirements, accelerator, `docker_server` with custom image, `weights` from hf, s3, gs, r2, azure; `trt_llm` and `bis_llm` engine blocks [B11]	Hugging Face repo ID plus GPU type and instance counts; no custom container on serverless or custom LLM; "Quantization is not currently supported (in progress)" [D10]	Template name plus flavor plus `gpu_type`, `gpu_count`, `region`, `scaling` via POST `/v0/dedicated_endpoints`; custom weights "in beta and available on request" [P-OPENAPI] [N7]
Management API	160 paths: models, deployments, environments, promotions with pause and resume, autoscaling schedules, chains, training, loops, volumes, gateway, routes, billing, audit logs [P-OPENAPI]	140 paths: dedicated models, LoRA, GPU rentals, sandboxes, agents, files and batches, billing, auth [P-OPENAPI]	37 paths: inference, files, fine-tuning, dedicated endpoints (v0), datasets, operations [P-OPENAPI]

Dimension	Baseten	DeepInfra	Nebius Token Factory
Environments and promotion	Development, production, custom environments; rolling promotion with pause, resume, cancel, force roll forward; canary deprecated [B12][P-OPENAPI]	Deploy IDs and model versions (`MODEL:VERSION`, `deploy_id:ID`); config history with restore [P-OPENAPI][D1]	Endpoint `enabled` toggle and PATCH; no environment concept [P-OPENAPI]
CI integration	GitHub Action `basetenlabs/action-truss-push` [B13]	None first-party	None first-party
Infrastructure as code	None	None	Terraform provider covers Nebius AI Cloud, not Token Factory [N8]
Identity and teams	Teams, restricted environments (403 to unauthorized keys), Viewer role, API keys prefixed `b10_` from 2026-10-01 [B14][B15]	GitHub, Google, Okta login; scoped JWTs; per-key spend limits [P-OPENAPI][D11]	Organizations, projects, groups; SAML SSO via cloud CLI; no SCIM; no spend limits documented [N9] [N10]

Observability exposed to the developer


Metric	Baseten	DeepInfra	Nebius
TTFT	Yes: time-to-first-byte p50 to p99 and Model API TTFT panels [B16]	Platform-wide only via public `/v1/metrics/live`; captured 0.42 s [P-LIVE]	Dedicated endpoints only, streaming requests only [N11]
Tokens per second	Yes, including decode TPS per BIS-LLM worker [B16]	Platform-wide only [P-LIVE]	Dedicated only [N11]
Queue delay	Async queue time and size; concurrent requests per replica [B16]	Not exposed; only `runtime_ms` in native responses [D12]	Not exposed
KV cache hit rate	Yes on BIS-LLM [B16]	Not exposed	Yes on dedicated [N11]
Cold start indicator	Replicas starting versus active; `cold_start="1"` log label [B16][B17]	Not applicable	Replica status Warning and Partially ready [N12]
Export	Prometheus endpoint (beta, six scrapes per minute per org), OTLP logs to Datadog, Grafana, Honeycomb, Sentry; OpenTelemetry tracing [B18] [B19]	None; logs via API and `deepctl log query` [D9]	Prometheus federation URL with 15 s minimum scrape [N13]

3.3 Architectural overlap with Akamai Cloud

The question is where the three competitors and Akamai Cloud share lineage, and where Akamai is structurally different. The evidence is header fingerprints, DNS chains, OpenAPI conventions, and documented stacks.

Layer	Baseten	DeepInfra	Nebius	Akamai Cloud (Linode API v4, Inference Cloud)
Serving engine	vLLM, SGLang, TensorRT-LLM, Dynamo [B20]	vLLM, SGLang, TensorRT-LLM, Dynamo [D13]	vLLM, TensorRT-LLM POC [N14]	vLLM, KServe, NVIDIA Dynamo, NIM pre-configured on LKE [A1]

Layer	Baseten	DeepInfra	Nebius	Akamai Cloud (Linode API v4, Inference Cloud)
Orchestration	Kubernetes, one cluster per cloud region; Calico and Cilium isolation [B21] [B22]	No public Kubernetes reference; Kata Containers microVMs for sandboxes [D14]	Kubernetes (routing benchmark against ClusterIP); Managed Kubernetes and Soperator products [N15]	LKE and LKE-Enterprise (Cilium CNI); App Platform installs KServe with Istio and Knative [A2][A3]
API framework fingerprint	Inference behind Google front end; management API on gunicorn [P-API]	FastAPI on uvicorn; `{"detail": ...}` errors [P-API]	FastAPI with Swagger UI; `{"detail": ...}` errors [P-API]	Linode API: `{"errors": [{"reason","field"}]}`; `X-RateLimit-Limit`, `X-RateLimit-Remaining`, `Retry-After` on 200, 401, and OPTIONS responses (absent on the captured 404) [P-API][A4]
Ingress and CDN	Google Cloud (inference) and AWS (management); no CDN vendor headers [P-DNS]	Own ASN (AS16581), one /24; no CDN [P-DNS]	Own ASN (AS214415), single NL-registered address; no CDN [P-DNS]	Akamai edge (`edgekey.net`, `akamaiedge.net`) on API, docs, and marketing hosts [P-DNS]
Docs platform	Mintlify on Vercel with Cloudflare cache (`cf-cache-status`) [P-API] [P-DNS]	Vercel (`server: Vercel`) [P-API]	Mintlify on Vercel [P-DNS]	ReadMe on Akamai edge; publishes `llms.txt` and an `agent-skills` discovery index [P-API]
Status page	Atlassian Statuspage, 6 product components [P-STATUS]	Custom Next.js page, per-model components, no public incident API [P-API][D15]	Atlassian Statuspage, 161 components grouped by region, Token Factory per region [P-STATUS]	Atlassian Statuspage, per-region and per-service components [P-STATUS]
Auth scheme	Bearer and legacy `Api-Key` [B1]	Bearer; scoped JWT [P-OPENAPI]	Bearer [P-OPENAPI]	Bearer personal access token or OAuth [A4][P-OPENAPI]
Machine-readable model catalog	Management API `/v1/model_apis` with `cost_per_million_input_tokens`, `rate_limits`, `release_date` (auth required) [P-OPENAPI]	Public: `/models/list` with quantization, deprecation, `replaced_by`, `is_partner`, per-tier pricing [P-CATALOG]	`/v1/models?verbose=true` (auth) and public dedicated templates with quantization and GPU by region [P-OPENAPI][N16]	Regions API advertises GPU capability per region; no model catalog exists yet [P-REGIONS]
Hosting relationship with Akamai	None found. Baseten runs on Nebius, AWS, GCP, OCI [B23]	None found [D16]	None found; only an ex-Akamai sales executive hire [N17]	Not applicable

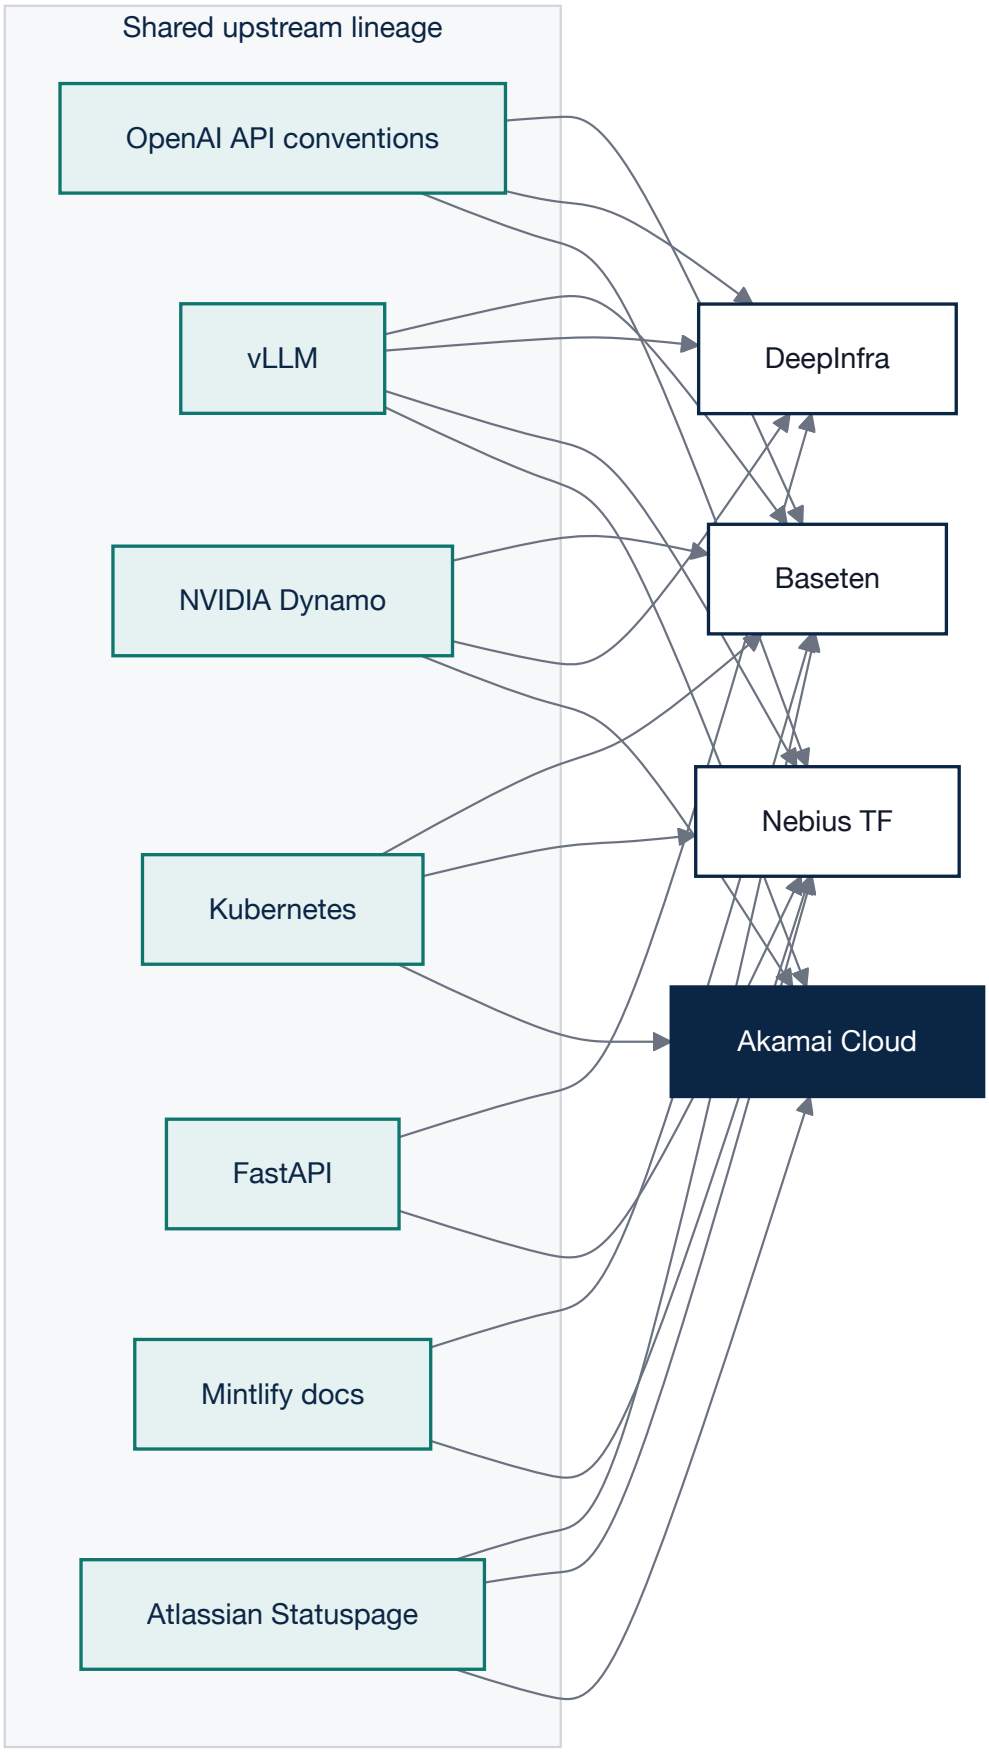

What the overlap means for an Akamai serverless product

1. Engine parity is free. vLLM and Dynamo on LKE already match the competitor engine layer, so the product decision is which knobs to expose (Baseten style) versus which tiers to sell (DeepInfra and Nebius style).

2. API conventions do not overlap. The Linode error envelope and capitalized rate-limit headers differ from the OpenAI error object and lowercase `x-ratelimit-*` headers every competitor uses. A serverless endpoint must speak the OpenAI dialect on the data plane while the control plane keeps Linode conventions, and the seam must be documented.
3. Ingress is where Akamai can lead, but does not yet. DeepInfra terminates TLS in one /24 and Nebius at one address, each in its own network; Baseten uses Google's global front end, which measured fastest on every connection phase from a US vantage point. Akamai terminates `api.linode.com` at its own edge and lands 58 ms behind Baseten on a minimal request: 25 ms in connection setup, the rest after TLS, consistent with the edge-to-origin hop [P-LAT]. The lead exists only if the inference gateway runs at the edge.
4. Nothing in any competitor's public surface references Akamai or Linode, so there is no channel conflict and no shared infrastructure to protect.

Sources

Probe captures (this repository, 2026-09-29):

- [P-OPENAPI] `evidence/derived/openapi-surface.md`
- [P-API] `evidence/derived/api-surface.md`
- [P-DNS] evidence/derived/dns-cdn.md
- [P-STATUS] evidence/derived/status-incidents.md
- [P-CATALOG] evidence/derived/deepinfra-catalog.md
- [P-REGIONS] evidence/derived/akamai-regions.md
- [P-LIVE] `evidence/probes/deepinfra/live_metrics.body`
- [P-LAT] evidence/derived/latency.md

Baseten:

- [B1] https://docs.baseten.co/inference/model-apis/overview
- [B2] https://docs.baseten.co/inference/calling-your-model
- [B3] https://docs.baseten.co/reference/inference-api/overview
- [B4] https://docs.baseten.co/inference/async
- [B5] https://docs.baseten.co/inference/errors
- [B6] https://docs.baseten.co/inference/model-apis/pricing-and-limits
- [B7] https://docs.baseten.co/development/model/custom-server
- [B8] https://docs.baseten.co/deployment/autoscaling/request-lifecycle
- [B9] https://docs.baseten.co/reference/cli/truss/overview
- [B10] https://docs.baseten.co/reference/cli/baseten/overview
- [B11] https://docs.baseten.co/reference/truss-configuration
- [B12] https://docs.baseten.co/deployment/deployments
- [B13] https://docs.baseten.co/deployment/ci-cd
- [B14] https://docs.baseten.co/organization/restricted-environments
- [B15] https://www.baseten.co/resources/changelog/
- [B16] https://docs.baseten.co/observability/metrics
- [B17] https://github.com/basetenlabs/truss/pull/2659
- [B18] https://docs.baseten.co/observability/export-metrics/overview
- [B19] https://docs.baseten.co/observability/tracing

- [B20] https://docs.baseten.co/engines/bis-llm/overview
- [B21] https://docs.baseten.co/hosting-options/self-hosted
- [B22] https://docs.baseten.co/observability/security
- [B23] https://www.baseten.co/blog/ai-video-nebius-baseten-inference-stack/
- [B24] https://docs.baseten.co/reference/inference-api/chat-completions
- [B25] https://docs.baseten.co/inference/model-apis/reasoning
- [B26] https://docs.baseten.co/reference/sdk/performance-client/overview
- [B27] https://docs.baseten.co/inference/integrations
- [B28] https://docs.baseten.co/deployment/autoscaling/overview
- [B29] https://docs.baseten.co/inference/model-apis/web-search

DeepInfra:

- [D1] https://docs.deepinfra.com/
- [D2] https://docs.deepinfra.com/integrations/anthropic
- [D3] https://docs.deepinfra.com/batch/introduction
- [D4] https://docs.deepinfra.com/chat/streaming
- [D5] https://docs.deepinfra.com/account/rate-limits
- [D6] https://docs.deepinfra.com/api-reference/logs-&-metrics/get-request-costs
- [D7] https://deepinfra.com/blog/flex-service-tier
- [D8] https://docs.deepinfra.com/api-reference/chat-completions/openai-chat-completions
- [D9] https://github.com/deepinfra/deepctl
- [D10] https://docs.deepinfra.com/private-models/custom-llms
- [D11] https://docs.deepinfra.com/api-reference/billing/set-key-limit.md
- [D12] https://docs.deepinfra.com/account/webhooks
- [D13] https://deepinfra.com/blog/priority-service-tier
- [D14] https://docs.deepinfra.com/sandboxes/overview
- [D15] https://status.deepinfra.com/
- [D16] https://www.edgeir.com/deepinfra-closes-107m-series-b-to-expand-global-ai-inference-cloud-20260514
- [D17] https://docs.deepinfra.com/integrations/microsoft-agent-framework
- [D18] https://docs.deepinfra.com/quickstart
- [D19] https://docs.deepinfra.com/apis/deepinfra-native
- [D20] https://docs.deepinfra.com/chat/overview

Nebius:

- [N1] https://docs.tokenfactory.nebius.com/api-reference/introduction.md
- [N2] https://docs.tokenfactory.nebius.com/data-lab/overview.md
- [N3] https://docs.tokenfactory.nebius.com/api-reference/inference/create-chat-completion.md
- [N4] https://docs.tokenfactory.nebius.com/ai-models-inference/rate-limits
- [N5] https://docs.tokenfactory.nebius.com/sandboxes/cli/index.md
- [N6] https://docs.tokenfactory.nebius.com/team-access/sso.md
- [N7] https://docs.tokenfactory.nebius.com/ai-models-inference/dedicated-endpoints/custom-weights.md
- [N8] https://registry.terraform.io/providers/nebius/nebius/latest

- [N9] https://docs.tokenfactory.nebius.com/team-access/org-projects.md
- [N10] https://ideas.nebius.com/
- [N11] https://docs.tokenfactory.nebius.com/ai-models-inference/observability.md
- [N12] https://docs.tokenfactory.nebius.com/ai-models-inference/dedicated-endpoints/lifecycle-and-status.md
- [N13] https://docs.tokenfactory.nebius.com/ai-models-inference/observability-api-integrations.md
- [N14] https://docs.tokenfactory.nebius.com/ai-models-inference/overview
- [N15] https://nebius.com/blog/posts/routing-is-the-difference-between-scaling-and-stalling
- [N16] https://docs.tokenfactory.nebius.com/api-reference/examples/list-of-models.md
- [N17] https://www.stocktitan.net/news/NBIS/nebius-names-dan-lawrence-to-lead-expansion-in-the-us-as-senior-vice-9al23hqigmjf.html
- [N18] https://docs.tokenfactory.nebius.com/integrations/overview
- [N19] https://docs.tokenfactory.nebius.com/api-reference/examples/text-generation
- [N20] https://docs.tokenfactory.nebius.com/ai-models-inference/dedicated-endpoints/operating

Akamai:

- [A1] https://www.akamai.com/products/akamai-inference-cloud-platform
- [A2] https://techdocs.akamai.com/cloud-computing/docs/lke-enterprise
- [A3] https://www.akamai.com/cloud/guides/deploy-llm-for-ai-inferencing-on-apl
- [A4] https://techdocs.akamai.com/linode-api/reference/errors and https://techdocs.akamai.com/linode-api/reference/rate-limits

4. Strategic Output: PM Brief & SE Field Guide, Part A: Product Management Brief

Audience: Akamai Cloud product management for serverless AI inference. Date: 2026-09-29. Competitor facts dated 2026-09-28, probe captures 2026-09-29; Akamai and Nebius price pages read in a browser on 2026-09-29.

Starting position

Fact	Source
No public per-token price list for Akamai serverless inference was found on akamai.com or techdocs as of 2026-09-29; a serverless inference platform is in development ("reliability workstreams for Akamai's serverless inference platform" in current job postings). Akamai Inference Cloud sells GPU hours (RTX PRO 6000 Blackwell at $3.00 per GPU-hour list, 96 GB GDDR7, 20 regions marked "limited deployment availability", every plan marked "Request access") plus a pre-configured Kubernetes stack (vLLM, KServe, NVIDIA Dynamo, NIM) on LKE	[A1][A2] [A7]
AI Grid (2026-03-16) adds an orchestrator that routes on "cost per token, time-to-first-token, and throughput" across 4,400+ edge locations, with semantic caching on Akamai Functions. The same release states "Akamai Inference Cloud is available today for qualified enterprise customers"	[A3]
GPU capacity in the first 20 cities was "sold out" before general availability; a $500M replenishment lands mostly in early 2027	[A4][A5]
The RTX PRO 6000 has no NVLink and 1,597 GB/s of memory bandwidth, 20% of a B200 and 48% of an H100 SXM; an 8-GPU server holds 768 GB. Trillion-parameter MoE models (Kimi K3 862B, Qwen3.8 2.4T) that headline competitor catalogs fit only at FP4 and only with PCIe-bound tensor parallelism	[A2][H3] [H4][N1]
Competitors cluster on the same engines (vLLM, Dynamo) and the same API dialect (OpenAI). Differentiation is in transparency, routing geography, and pricing tiers, see docs 2 and docs 3	[P-OPENAPI]

The recommendations below assume a serverless product built on the existing RTX PRO 6000 fleet and LKE, not on new HGX capacity.

Recommendation 1: Ship a published serving contract per model, and an SLA that matches the marketing

Problem observed

Competitor gap	Evidence
Baseten markets "99.99% uptime out of the box" while its SLA is 99.9%, credits are capped at 40%, and 8 major incidents hit in 90 days	[B1][B2][P-STATUS]
DeepInfra has no SLA and no credits for serverless; individual model endpoints were down 8 h and 6 h in July; deprecated models are silently redirected to a different model	[D1][D2][D3]
Nebius removed 21 serverless SKUs in three months with no automatic reroute; serverless carries "no region guarantee"; ZDR disables speculative decoding without a price change	[N2][N3][N4]
Quantization and served context are disclosed inconsistently: 31 of DeepInfra's 102 active text models declare no precision; DeepInfra's own benchmark served DeepSeek V4 Pro at a 66k context on FP4 while the vendor ceiling is 1M	[P-CATALOG] [D4]

Recommendation

Publish, per model and per region, a machine-readable serving contract in the `/v1/models` response and on a public catalog endpoint: weights hash and revision, precision (weights and KV), served context and output cap, engine and version, speculative decoding on or off, TTFT and tokens-per-second targets at a stated concurrency, deprecation date with a guaranteed 30 day notice, and the replacement policy (never silent). Pair it with a 99.9% monthly SLA that applies to the serverless tier from day one, with per-model and per-region status components, and credits that are automatic rather than claimed within 24 hours.

Why Akamai can win this

Akamai already runs a Statuspage with 250 components grouped by region and service and publishes `llms.txt` and an agent-skills index on techdocs, so the disclosure plumbing exists [P-STATUS][P-API]. The brand sells to enterprises that buy on contract terms; none of the three competitors does.

Metric and risk

Success metric	Risk
Every serverless model page shows all contract fields; SLA credits paid automatically; zero silent model substitutions in the first year	Publishing TTFT targets creates a public benchmark. Mitigate by stating concurrency and prompt length with each target and by starting with models whose numbers are strong on RTX PRO 6000

Recommendation 2: Make routing geography the product: anycast ingress, region pinning, and priced prefix caching

Problem observed

Competitor gap	Evidence
Nebius serverless ingress is one European address; edge TTFB p50 is 100 ms from Germany and 217 ms from US Central	[P-DNS][N5]
DeepInfra ingress is US-only with no region parameter and no EU option; GDPR listed as "in progress"	[P-DNS][D5] [D6]
Baseten offers `us` and `eu` pinning only, terminates at Google's front end, then hops to a GPU in another cloud; internal retries are exposed in a response header	[B3][B4][P-API]
Prefix caching is priced by Baseten (about 10% of input) and DeepInfra (0.2x read, explicit TTL) but not by Nebius, whose 31-vote request sits "In Review"	[B5][D7][N6]
KV-aware routing is Enterprise-only at Baseten and undocumented as a control at DeepInfra and Nebius	[B6][D8][N7]

Recommendation

1. Terminate the OpenAI-compatible endpoint on Akamai's anycast edge at every PoP, the same way `api.linode.com` already resolves through `akamaiedge.net` [P-DNS].
2. Add a `region` request field and `x-akamai-inference-region` response header. Default to nearest GPU region; honor pinning for residency (EU, US, UK, APAC) as a contractual commitment, which Nebius offers only on dedicated endpoints [N3].
3. Run NVIDIA Dynamo's KV-aware router across the 20 RTX PRO 6000 regions and make session affinity a documented header from day one, as Baseten does with `x-session-affinity` [B7].

4. Price cached input at 10% of input and offer explicit cache retention (5 minute and 1 hour TTL) with the same request fields DeepInfra uses (`prompt_cache_key`, `prompt_cache_options`), so agent frameworks already tuned for DeepInfra work unchanged [D7][P-OPENAPI].
5. Put the semantic cache from AI Grid in front of the KV cache at the edge, so identical prompts never reach a GPU [A3].

Why Akamai can win this

DeepInfra terminates in one US /24 and Nebius at one NL address, each on its own network; Baseten rents Google's front end and then hops to a GPU in whichever cloud has capacity. None of the three places GPUs by user geography. Akamai's edge plus 20 RTX PRO 6000 regions (22 GPU-capable regions in the public regions API) is a distribution advantage that engine parity cannot erase [P-REGIONS][A2][A3], but only if the gateway runs at the edge: from a US vantage point, a minimal request to `api.linode.com` returns its first byte in 164 ms against 106 ms for Baseten's Google front end, mostly because the Linode API origin sits behind the edge [P-LAT]. Zero egress fees remove the cost objection to multi-region replication [A1].

Metric and risk

Success metric	Risk
Edge TTFB p50 under 50 ms from the top 20 metros (today a minimal `api.linode.com` request measures 164 ms from one US vantage point [P-LAT]); TTFT on gpt-oss-120b within 2x of the Artificial Analysis leader (Baseten 0.19 s) as a hypothesis to validate on RTX PRO 6000 before it is published; cache hit rate above 60% on agent traffic	Cross-region KV routing adds a control-plane dependency. Mitigate by starting with region-local KV-aware routing and cross-region only for failover

Recommendation 3: Right-size the catalog to the RTX PRO fleet, price on the contract rather than on parity, and sell service tiers

Problem observed

Competitor gap	Evidence
Baseten's shared Model APIs cover 11 slugs and exclude Llama and Qwen; the deployable path needs a Python packaging tool and engine config	[B7][B8]
DeepInfra sells three tiers on the same weights (Flex 0.8x, standard, Priority 1.5x) plus batch at 0.8x, but hides batching controls and publishes no per-minute rate limits	[D9][D10] [D11]
Nebius sells Fast and Base flavors, but the June notice removed six `-fast` serverless SKUs, its public catalog lists no `-fast` IDs today, and it does not publish the price delta or dedicated hourly rates	[N2][N8] [N9]

Unit economics: cost per token, not cost per GPU-hour

A lower GPU-hour price does not mean a lower token price. The table divides each list GPU-hour price by NVIDIA's published maximum output throughput per GPU for the same model and sequence lengths (1,000 input and 1,000 output tokens). It is a cost floor at full batch utilization; real serving runs below it.

Model	GPU and list price	Output tokens/s per GPU	Cost per 1M output tokens	Source
Llama 3.3 70B	Akamai RTX PRO 6000, $3.00/h	1,724 (FP4)	$0.48	[H1][A2]

Model	GPU and list price	Output tokens/s per GPU	Cost per 1M output tokens	Source
Llama 3.3 70B	DeepInfra B200, $3.69/h	6,920 (FP4)	$0.15	[H1] [D12]
Llama 3.3 70B	DeepInfra H100, $2.20/h	2,209 (FP8)	$0.28	[H1] [D12]
Llama 3.3 70B	Baseten B200, $9.98/h	6,920 (FP4)	$0.40	[H1][B5]
Llama 3.3 70B	Nebius AI Cloud RTX PRO 6000, $1.80/h	1,724 (FP4)	$0.29	[H1] [N10]
Llama 3.3 70B	Nebius AI Cloud H100, $3.85/h	2,209 (FP8)	$0.48	[H1] [N10]
Llama 3.3 70B	Baseten H100, $6.50/h	2,209 (FP8)	$0.82	[H1][B5]
Qwen3 30B-A3B	Akamai RTX PRO 6000, $3.00/h	9,938 (FP4)	$0.084	[H1][A2]
Qwen3 30B-A3B	DeepInfra B200, $3.69/h	26,971 (FP4)	$0.038	[H1] [D12]

DeepInfra sells Llama 3.3 70B Turbo output at $0.32 per million tokens [P-CATALOG], below the $0.48 floor an RTX PRO 6000 reaches at Akamai's own list price. MLPerf Inference v5.1 shows the same ratio: an RTX PRO 6000 delivers about 0.26x the Llama 2 70B throughput of a B200 and 0.84x that of an H100 [H2]. Akamai's internal GPU cost sits below list and is not public, so the break-even is a number product management must compute; at list, price parity with DeepInfra on dense 70B models loses money. The gap narrows on small-active-parameter MoE models (2.2x on Qwen3 30B-A3B versus 3.2x on Llama 3.3 70B), which are bandwidth-light and suit GDDR7.

Akamai's own benchmark claim is consistent with this table once the comparison price is fixed. The GPU card counts blog reports "28% lower cost per million tokens" and "higher throughput (3,140 vs. 2,987 tokens/sec)" for one RTX PRO 6000 against an H100, "nearly identical cost per token" at two cards, and a 30% to 50% throughput advantage for NVLink H100/H200 systems at four cards [A6]. On the throughput figures above, an RTX PRO 6000 at $3.00 matches Nebius's $3.85/h H100 and is about 40% cheaper per token than Baseten's $6.50/h H100. The claim holds against typical H100 pricing; it does not hold against DeepInfra's $2.20/h H100 or any B200, and DeepInfra is the price reference buyers in this segment use.

The same card is also cheaper elsewhere: Nebius AI Cloud lists the RTX PRO 6000 on demand at $1.80 per GPU-hour, 40% below Akamai's $3.00, with spot capacity from $0.79 [N10]. Any Akamai per-token price built on the RTX PRO 6000 competes with a Nebius cost floor on identical hardware.

Recommendation

1. Catalog: launch with the 20B to 120B open-weight class where a single RTX PRO 6000 or a 2 to 4 GPU slice serves at FP8 or NVFP4 without NVLink penalties: gpt-oss-120b and 20b, Qwen3.x 27B to 35B, Gemma 4 31B, Nemotron 3 Nano, Super, and 3.5 Lightning, DeepSeek V4 Flash at NVFP4, Whisper, Qwen3 embeddings and rerankers. Add trillion-parameter MoE only on dedicated multi-node endpoints, and say so in the serving contract.
2. Tiers, not knobs: standard, flex (0.8x, bounded wait), priority (1.5x, protected admission), and batch (0.8x, 24 h) using DeepInfra's field names (`service_tier`, `fail_fast`) so switching costs a base URL change. Reserve engine-level configuration for dedicated endpoints on LKE.

3. API dialect: OpenAI chat and completions plus the Responses API (Nebius and DeepInfra have it, Baseten does not) and Anthropic Messages (Baseten and DeepInfra have it), with a public OpenAPI spec and a published conformance report against the OpenAI request schema, the same mechanical diff used in docs 3.
4. Portability as a feature: a documented "export to LKE" path that emits the vLLM and Dynamo manifests for the same model, so the serverless tier is an on-ramp to the GPU business rather than a lock-in. None of the three competitors offers a self-hosted exit for their per-token tier.
5. Pricing: do not lead with price on this fleet. Price near Nebius and Baseten (mid-pack) and sell the serving contract, region pinning, and edge routing as the reason to pay it. Reserve price-leader SKUs for small-active-parameter MoE models, where the RTX PRO 6000 gap to B200 is smallest, and revisit parity once HGX capacity from the replenishment lands.

Why Akamai can win this

The fleet is already deployed in 20 regions and demand has outrun supply [A2][A4]. Its constraint is memory bandwidth, not capacity per node, which is why the catalog leans on MoE models with few active parameters and why the pitch is contract and geography rather than unit price. The Kubernetes stack (vLLM, KServe, Dynamo) is the same one the competitors run, so the engineering risk is integration, not research [A1].

Metric and risk

Success metric	Risk
Ten launch models live with contract fields; 30-day developer activation from sign-up to first paid token above 40%; at least one published third-party benchmark (Artificial Analysis) showing Akamai in the top three on TTFT for gpt-oss-120b	Catalog looks narrow next to DeepInfra's 102 models. Mitigate with the export-to-LKE path for long-tail models and by adding partner-proxied frontier models only if the serving contract can be honored for them

Sequencing

Quarter	Deliverable	Dependency
Q4 2026	Serving contract schema, per-model status components, OpenAI-dialect gateway on the edge with `region` field, launch catalog of ten models in 3 GPU regions	Existing RTX PRO 6000 fleet, AI Grid orchestrator
Q1 2027	Flex, priority, batch tiers; cached-input pricing and explicit retention; Prometheus export; public OpenAPI spec	Dynamo KV-aware routing per region
Q2 2027	Responses API, Anthropic Messages, export-to-LKE, SLA credits automation; expand to all 20 RTX PRO regions as the replenishment lands	$500M capacity replenishment

Sources

Probe captures (this repository, 2026-09-29): [P-STATUS] evidence/derived/status-incidents.md; [P-CATALOG] evidence/derived/deepinfra-catalog.md; [P-DNS] evidence/derived/dns-cdn.md; [P-API] `evidence/derived/api-surface.md` ; [P-OPENAPI] `evidence/derived/openapi-surface.md` ; [P-REGIONS] evidence/derived/akamai-regions.md; [P-LAT] evidence/derived/latency.md.

Akamai:

- [A1] https://www.akamai.com/products/akamai-inference-cloud-platform

- [A2] https://techdocs.akamai.com/cloud-computing/docs/gpu-compute-instances and https://www.akamai.com/cloud/pricing/north-america
- [A3] https://www.akamai.com/newsroom/press-release/akamai-launches-ai-grid-intelligent-orchestration-for-distributed-inference-across-4400-edge-locations (2026-03-16)
- [A4] Akamai Q4 2025 earnings call, 2026-02-19, https://www.stockinsights.ai/us/AKAM/earnings-transcript/fy25-q4-a227
- [A5] Akamai Q2 2026 earnings call, 2026-08-06, https://www.fool.com/earnings/call-transcripts/2026/08/13/akamai-akam-q2-2026-earnings-call-transcript/
- [A6] Why GPU Card Counts Matter for Real AI Workloads, Akamai blog, https://www.akamai.com/blog/cloud/why-gpu-card-counts-matter-real-ai-workloads
- [A7] Akamai careers, Senior Site Reliability Engineer, https://jobs.akamai.com/en/sites/CX_1/job/2688

Akamai page captures read from an interactive browser on 2026-09-29: `evidence/manual/akamai-verification.md`.

Hardware and throughput:

- [H1] NVIDIA TensorRT-LLM performance overview (TRT-LLM 1.3.0rc28, updated 2026-09-21), output tokens per second per GPU, https://nvidia.github.io/TensorRT-LLM/latest/developer-guide/perf-overview.html
- [H2] MLPerf Inference v5.1 closed, Llama2-70B-99, per-GPU values divided from system totals: HPE DL380a 8x RTX PRO 6000 26,205.8 tok/s; NVIDIA 8x B200 101,527; Cisco 16x H100 62,351.6, https://mlcommons.org/2025/09/mlperf-inference-v5-1-results/ and https://github.com/mlcommons/inference_results_v5.1
- [H3] NVIDIA RTX PRO 6000 Blackwell Server Edition specifications, https://www.nvidia.com/en-us/data-center/rtx-pro-6000-blackwell-server-edition/
- [H4] NVIDIA DGX B200 and H100 specifications, https://www.nvidia.com/en-us/data-center/dgx-b200/ and https://www.nvidia.com/en-us/data-center/h100/

Baseten:

- [B1] https://www.baseten.co/
- [B2] https://www.baseten.co/service-level-agreement/
- [B3] https://docs.baseten.co/deployment/regional-deployments
- [B4] https://docs.baseten.co/deployment/autoscaling/request-lifecycle
- [B5] https://www.baseten.co/pricing/
- [B6] https://docs.baseten.co/engines/bis-llm/advanced-features
- [B7] https://docs.baseten.co/inference/model-apis/overview
- [B8] https://docs.baseten.co/reference/truss-configuration

DeepInfra:

- [D1] https://deepinfra.com/terms
- [D2] https://status.deepinfra.com/
- [D3] https://github.com/theopenco/llmgateway/pull/4222
- [D4] https://deepinfra.com/blog/deepseek-v4-pro-max-api-benchmarks-latency-throughput-cost
- [D5] https://deepinfra.com/privacy
- [D6] https://trust.deepinfra.com/compliance

- [D7] https://deepinfra.com/blog/prompt-cache-retention
- [D8] https://deepinfra.com/blog/deepinfra-nvidia-inference-stack
- [D9] https://deepinfra.com/blog/flex-service-tier
- [D10] https://deepinfra.com/blog/priority-service-tier
- [D11] https://docs.deepinfra.com/account/rate-limits
- [D12] https://deepinfra.com/pricing

Nebius:

- [N1] https://tokenfactory.nebius.com/endpoints
- [N2] https://docs.tokenfactory.nebius.com/june-2026-deprecation-notice.md and https://docs.tokenfactory.nebius.com/august-2026-deprecation-notice.md
- [N3] https://docs.tokenfactory.nebius.com/public-serverless.md
- [N4] https://docs.tokenfactory.nebius.com/legal/legal-quick-guide.md
- [N5] https://llmlatency.dev/provider/nebius
- [N6] https://ideas.nebius.com/p/support-impliciteexplicite-prompt-caching
- [N7] https://nebius.com/blog/posts/routing-is-the-difference-between-scaling-and-stalling
- [N8] https://docs.tokenfactory.nebius.com/ai-models-inference/overview
- [N9] https://tokenfactory.nebius.com/api/public/models_info
- [N10] Nebius AI Cloud GPU pricing, on-demand and spot, https://nebius.com/prices (2026-09-29)

4. Strategic Output: PM Brief & SE Field Guide, Part B: Solutions Engineering Battlecard

For technical prospect conversations. Facts dated 2026-09-28, probe captures 2026-09-29; re-check prices before quoting. Sources are in docs 1 to 3 and `evidence/derived/`.

Reference table (assessment template)

Evaluation Vector	Baseten	DeepInfra	Nebius (Token Factory)
Pricing Model	Two lines. Model APIs per token: GLM-5.3 $1.40 in / $4.40 out, cached input at 10%; gpt-oss-120b $0.10 / $0.50; Kimi K3 $3.00 / $15.00. Dedicated per GPU-minute: H100 $6.50/h, B200 $9.98/h; wake-up minutes billed; scale-to-zero default. Basic, Pro, Enterprise plans; SLA 99.9% with 40% credit cap	Per token, price leader: gpt-oss-120b $0.037 / $0.17; DeepSeek V4 Flash 0731 $0.06 / $0.18 with cache read at 0.25x; Llama 3.3 70B Turbo $0.10 / $0.32. Three tiers on the same weights: Flex 0.8x, standard, Priority 1.5x; batch 0.8x. Dedicated per GPU-hour: H100 $2.20, B200 $3.69, B300 $4.89. Card required, no free tier, no SLA	Per token, mid-pack: gpt-oss-120b $0.15 / $0.60; Kimi K3 $3.00 / $15.00; DeepSeek V4 Flash 0731 $0.14 / $0.28. Fast and Base flavors, delta unpublished. No cached-input discount. Batch at 50% off base. Dedicated endpoints per GPU-hour, per-minute granularity, rate card behind login; cloud H100 $3.85/h rising to $4.50 on 2026-10-01. $1 trial credit; 99.9% SLA on dedicated only
Cold-Start Strategy	Scale-to-zero with billable wake-up. Baseten Delivery Network caches weights on node NVMe, in-cluster peer cache, mirrored origin; image streaming; torch compile cache; `min_replica` warm floor; scheduled autoscaling. No published cold-start seconds (the cold-start docs page gives no latency figures); sync requests park up to 1,200 s	No cold start exposed to the caller. Shared warm pools for the catalog; contention handled by 429, `fail_fast`, Flex waits up to 10 minutes, or Priority admission. Low-usage models are deprecated and silently redirected. Dedicated deployments may scale to zero (`min_instances: 0`)	Serverless: shared "Global" pool, no cold-start statement, no region guarantee. Dedicated: "initial deployment can take several minutes", scale above min replicas "not guaranteed indefinitely", stopping may release unrecoverable capacity; keep `min_replicas` at 1 or more to avoid cold starts
Primary Sweet Spot (Use case and ideal customer)	Latency-sensitive custom or fine-tuned models at AI-native scale-ups (code completion, clinical dictation, TTS). Buyer wants engine control (TensorRT-LLM builder, speculative decoding, KV-aware routing) and multi-cloud failover without running Kubernetes	Highest-volume, lowest-price open-weight tokens for agents, chat, and aggregators. Buyer swaps a base URL in the OpenAI SDK, accepts FP4 and US-only processing, and needs no contract. Also the default supplier behind OpenRouter	European or regulated enterprises that need EU residency, a fine-tune-and-serve loop on one platform, and dedicated Blackwell capacity from an owner-operator. Buyer signs a DPA and a reserved-capacity contract

Evaluation Vector	Baseten	DeepInfra	Nebius (Token Factory)
Key Technical Limitation	Cost and opacity of the shared tier: 11 Model API slugs (no Llama, no Qwen); advanced engine features (KV-aware routing, disaggregation, token autoscaling) are Enterprise-only; region pinning is `us` or `eu` only; marketing 99.99% versus contractual 99.9%; inference error body is a bare string, not the OpenAI error object	No SLA, no EU region, no custom containers on serverless, no engine controls, no per-minute rate limits published, no request-ID header. Aggressive FP4 with 31 of 102 models undeclared; served context can be far below the model ceiling; silent deprecation redirects	Serverless has no region guarantee, no cached-input pricing, no speech, and no `-fast` SKU in the public catalog after the June removals, 21 serverless SKUs removed in three months; ZDR disables speculative decoding; dedicated H200 is us-central1 only and H100 is eu-north1 only; observability and TTFT metrics exist only on dedicated; OpenRouter 30-day uptime 96.9% (gpt-oss-120b) and 91.4% (Qwen3-235B)

One-line positioning for live calls

Vector	Baseten	DeepInfra	Nebius (Token Factory)
Pricing Model	Premium: per token on 11 shared models, per GPU-minute on dedicated at 2 to 3x DeepInfra list	Cheapest list price; tiers (Flex 0.8x, Priority 1.5x) on the same weights	Mid-priced per token; no cached-input discount; dedicated rate card behind login
Cold-Start Strategy	Scale to zero, cached weights, no published seconds, wake-up is billed	No cold start; queues and 429s instead	Shared pool with no statement; dedicated needs `min_replicas` of 1 or more
Sweet spot	Custom or fine-tuned models where latency is revenue	Highest-volume, lowest-cost open-weight tokens	EU residency plus fine-tune and serve on owned GPUs
Key limitation	Enterprise-only engine features; 99.99% marketed, 99.9% contracted	No SLA, no EU region, FP4 often undeclared	Serverless has no region guarantee; OpenRouter uptime 91 to 97%

Extended rows

Vector	Baseten	DeepInfra	Nebius (Token Factory)
Engines	TensorRT-LLM (Engine Builder), vLLM and SGLang (BIS-LLM), BEI, Dynamo, custom C++ gRPC server	vLLM, SGLang, TensorRT-LLM, Dynamo; own forks	vLLM with EAGLE-3; TensorRT-LLM POC; Groq 3 LPX subset
Quantization disclosure	User-selected per deployment	Per model in public catalog; 41% fp8, 17% fp4, 30% undeclared	Per dedicated template; 69% fp8; serverless per `/v1/models?verbose=true`

Vector	Baseten	DeepInfra	Nebius (Token Factory)
Regions	18 clouds, 87 clusters; pin `us` or `eu`; EU, UK, AU environments via support	8 US sites plus Toronto; no region choice	Serverless global (EU ingress); dedicated eu-north1, eu-west1, us-central1
Ingress fingerprint (captured)	`via: 1.1 google`; management on AWS	FastAPI on uvicorn, own ASN (AS16581), one /24	FastAPI, own ASN (AS214415), single NL-registered address
OpenAI conformance	Error body non-conformant; 403 on bad key	Best of three on the OpenAI route; Responses API first seen 2026-09-29; chat schema drops `top_logprobs`, `logit_bias`, `parallel_tool_calls`	Adds Responses API and rerank; drops `seed`; FastAPI error bodies
Rate-limit headers	Full OpenAI set plus uncached-input split	None documented	Full OpenAI set plus dynamic-scale headers
Observability	TTFT, TPS, queue, KV hit, replicas; Prometheus, OTLP, tracing	Platform-wide live metrics; usage and cost APIs; no per-request TTFT	Dedicated only: TTFT, TPS, KV hit, error rate; Prometheus federation
Custom model path	Truss config or custom Docker server; weights from HF, S3, GCS, R2, Azure	Hugging Face repo ID only; container only on GPU rentals	Template plus flavor; custom weights in beta on request
Status page	6 product components; 35 incidents in 90 days	Per-model components; no incident API	161 components by region; Token Factory per region; 8 incidents titled Token Factory, Feb 18 to Jul 1
Retention	Inputs and outputs not stored; KV in GPU memory only	Zero retention by contract	Retains inputs for speculative decoding unless ZDR is enabled

Landmines: what a prospect will hear from each vendor, and the counter

If the prospect says	Reply with
"Baseten has four nines out of the box"	The published SLA is 99.9%, credits are capped at 40%, and the status API shows 8 major incidents in 90 days. Ask for the SLA document and the per-model status history
"Baseten is the fastest"	True on TTFT for shared APIs (0.19 s on gpt-oss-120b). Ask what the same workload costs: H100 $6.50/h and B200 $9.98/h on dedicated, and Kimi K3 at $15 per million output tokens
"DeepInfra is the cheapest"	True on list price. Ask which precision is served (FP4 on many flagships), what context is actually served, and what the remedy is when a model endpoint is down for eight hours with no SLA

If the prospect says	Reply with
"DeepInfra is OpenAI compatible"	Best of the three on the OpenAI route, and still missing `top_logprobs`, `logit_bias`, `parallel_tool_calls` on chat completions, request-ID headers, and rate-limit headers. Ask for the OpenAPI spec and run the diff
"Nebius is EU-sovereign"	True for dedicated endpoints. Serverless is "Global" with "no region guarantee", and enabling zero retention disables speculative decoding. Ask which tier the quote is for
"Nebius has sub-second TTFT"	Third-party data shows 0.94 s on gpt-oss-120b and 1 to 2.3 s on reasoning models; US Central edge TTFB alone is 217 ms. Ask for a measured TTFT from the prospect's region

Traps to set: questions that expose gaps across all three

1. Ask for the served context length, output cap, precision, and engine of a model. Nebius publishes precision, context, and a tokens-per-second figure; none of the three publishes the output cap and engine alongside them on the serverless tier.
2. Ask for measured TTFT from the cities where the prospect's users sit. No competitor terminates at the edge or publishes geography-specific latency.
3. Ask what happens to live traffic when a model is deprecated. DeepInfra redirects silently, Nebius does not reroute, Baseten gave 12 days notice on six APIs.
4. Ask whether a region can be pinned with a residency commitment on the per-token tier. Only Baseten offers `us` or `eu`; Nebius requires dedicated; DeepInfra has no option.
5. Ask for the export path to self-host the same serving configuration. None of the three provides manifests; Akamai can with LKE.

5. Evidence Appendix

Two classes of evidence back the analysis: first-hand captures produced by the scripts in this repository, and public documents fetched on 2026-09-28, with pages that block scripted clients read in a browser on 2026-09-29. The per-document source lists sit at the end of docs 1, docs 2, docs 3, and docs 4a. This appendix indexes the captures and consolidates the numeric facts the battlecard depends on.

Capture index

Capture	Command	What it shows
`evidence/probes/<provider>/{models,noauth,badkey,options,notfound}.{headers,body,meta}`	`scripts/probe_providers.sh`	HTTP status, error body, and headers for unauthenticated and invalid-key requests on the OpenAI-compatible route of each provider
`evidence/probes/baseten/openapi.body`	GET `https://api.baseten.co/v1/spec`	Baseten management API specification, 160 paths
`evidence/probes/deepinfra/openapi.body`	GET `https://api.deepinfra.com/openapi.json`	DeepInfra full API specification, 140 paths
`evidence/probes/nebius/openapi.body`	GET `https://api.studio.nebius.com/openapi.json`	Nebius inference API specification, 37 paths, version `20260928-144ca2fd4`
`evidence/probes/akamai/openapi.body`	GET raw `linode/linode-api-docs` `openapi.json`	Linode API v4.215.0 specification, 308 paths
`evidence/probes/deepinfra/public_models.body`	GET `https://api.deepinfra.com/models/list`	385 catalog entries with quantization, deprecation, replacement, partner flag, tier pricing
`evidence/probes/deepinfra/models.body`	GET `https://api.deepinfra.com/v1/openai/models`	187 OpenAI-style model objects with metadata
`evidence/probes/deepinfra/live_metrics.body`	GET `https://api.deepinfra.com/v1/metrics/live`	Platform-wide tokens/s, TTFT, requests/s
`evidence/probes/nebius/dedicated_templates.body`	GET `https://api.tokenfactory.nebius.com/v0/dedicated_endpoints/templates`	43 templates, 48 flavors, quantization and GPU by region
`evidence/probes/{baseten,nebius,akamai}/status{,_incidents}.body`	Statuspage `summary.json` and `incidents.json`	Components and the 50 most recent incidents
`evidence/probes/akamai/regions.body`	GET `https://api.linode.com/v4/regions`	33 regions with capability flags
`evidence/probes/akamai/{llms_txt,agent_skills}.body`	GET techdocs `llms.txt` and `.well-known/agent-skills/index.json`	Machine-readable docs discovery on Akamai techdocs

Capture	Command	What it shows
`evidence/probes/<provider>/dns.txt`	`dig` A, AAAA, CNAME	Resolution chains for API, docs, marketing, and status hosts
`evidence/probes/<provider>/asn.txt`	`whois -h whois.cymru.com " -v <ip>"`	Origin ASN and registrant for every resolved address
`evidence/probes/<provider>/timing.txt`	`curl -w` timing variables, 9 samples per URL	DNS, TCP connect, TLS, and TTFB per inference host from one vantage point
`evidence/probes/<provider>/*.meta body_sha256`	`shasum -a 256` at capture	Hash of each body as received, before character normalization
`evidence/derived/*.md`	`scripts/summarize_probes.py`	Tables derived from the captures above

Key numeric facts

Fact	Value	Date	Source
Baseten incidents, last 90 days	35 (27 minor, 8 major)	2026-09-29	status.baseten.co incidents API, derived
Baseten Model APIs major-incident minutes, 90 days	299	2026-09-29	same
Baseten contractual SLA	99.9% monthly, 40% credit cap	2025-09-15 document	https://www.baseten.co/service-level-agreement/
Baseten marketed uptime	99.99%	2026-09-28	https://www.baseten.co/
Baseten Series F	$1.5B, up to $13B valuation	2026-06-22	https://www.baseten.co/blog/announcing-our-series-f/
Baseten H100 and B200 dedicated	$6.50/h and $9.98/h (from per-minute list)	2026-09-28	https://www.baseten.co/pricing/
Baseten GLM-5.3 Model API	$1.40 in, $0.14 cached, $4.40 out per 1M	2026-09-28	same
DeepInfra active text models, deprecated, partner-proxied	102, 123, 26	2026-09-29	`/models/list`, derived
DeepInfra quantization declared (active text)	fp8 42, fp4 17, bf16 10, fp16 2, none 31	2026-09-29	same
DeepInfra service tiers	Flex 0.8x, Priority 1.5x, batch 0.8x	2026-06 to 07	blogs cited in docs 2; catalog `rate_per_service_tier_*`
DeepInfra explicit cache write	1.25x (5 min), 2.0x (1 h); granularity 1,024 tokens (GLM-5.2, DeepSeek V4 Flash), 1,536 (Kimi K3), 8,192 (Nemotron 3 Ultra)	2026-08-05	catalog `rate_per_explicit_cache_write_token`
DeepInfra live platform TTFT	0.417 s and 0.421 s (about 4,200 req/s, 39.7M tok/s)	2026-09-29 18:21:52 and 18:22:22 UTC	`/v1/metrics/live`, two samples 30 s apart

Fact	Value	Date	Source
DeepInfra B200 and B300	$3.69/h and $4.89/h	2026-09-28	https://deepinfra.com/pricing
DeepInfra Series B	$107M	2026-05-04	https://deepinfra.com/blog/deepinfra-series-b
DeepInfra data centers	8 US plus Toronto	2026-07-08	GlobeNewswire release cited in docs 2
Nebius Statuspage components and groups	161 components, 7 region groups	2026-09-29	status.nebius.com summary API
Nebius incidents titled Token Factory	8 between 2026-02-18 and 2026-07-01 (12 when counted by component tag, latest 2026-08-19)	2026-09-29	status.nebius.com incidents API
Nebius dedicated templates	43 templates; flavors fp8 33, fp16 8, fp4 4, int4 2, bf16 1	2026-09-29	templates capture, derived (repository: `evidence/derived/openapi-surface.md`)
Nebius GPU by region (templates)	H200 in us-central1 (41 flavors), H100 in eu-north1 (20), L40S in eu-north1 (6)	2026-09-29	same
Nebius edge TTFB p50	100 ms Germany, 217 ms US Central, 446 ms Sao Paulo, 513 ms Tokyo	2026-09-28	https://llmlatency.dev/provider/nebius
Nebius OpenRouter 30-day uptime	96.94% gpt-oss-120b; 91.38% Qwen3-235B	2026-09-28	OpenRouter endpoints API
Nebius serverless SKUs removed	11 (June 22) plus 10 (Aug 31)	2026	deprecation notices
Nebius Q2 2026 revenue and AI cloud ARR	$582.3M and $3.0B	2026-08-12	Q2 2026 shareholder letter
Akamai RTX PRO 6000	$3.00/GPU-h list (x1; x2 $6.00, x4 $12.00, x8 $24.00), 96 GB GDDR7, 20 regions ("limited deployment availability"), all plans "Request access"	2026-09-29 browser capture, manual (repository: `evidence/manual/akamai-verification.md`)	https://www.akamai.com/cloud/pricing/north-america (blocks scripted clients) and https://techdocs.akamai.com/cloud-computing/docs/gpu-compute-instances
Nebius AI Cloud on-demand GPU-hour	RTX PRO 6000 $1.80; H100 $3.85 ($4.50 second column); B200 $7.15	2026-09-29	https://nebius.com/prices
Output tokens/s per GPU, Llama 3.3 70B, 1000/1000	RTX PRO 6000 1,724 (FP4); B200 6,920 (FP4); H100 2,209 (FP8)	2026-09-21	https://nvidia.github.io/TensorRT-LLM/latest/developer-guide/perf-overview.html
Akamai regions with GPU capability	22 of 33	2026-09-29	`/v4/regions` capture, derived
Inference ingress origin ASN	Baseten AS396982 (Google Cloud); DeepInfra AS16581 (own); Nebius AS214415 (own, NL); Akamai AS20940	2026-09-29	`asn.txt`, derived

Fact	Value	Date	Source
Connection TTFB p50, unknown route, one US vantage point	Baseten 106 ms, DeepInfra 112 ms, `api.linode.com` 164 ms, Nebius 465 ms	2026-09-29 18:21 to 18:23 UTC	`timing.txt`, derived
Akamai edge locations	4,400+	2026-03-16	AI Grid press release
Artificial Analysis gpt-oss-120b TTFT	Baseten 0.19 s, DeepInfra 0.69 s, Nebius 0.94 s	2026-09-28	https://artificialanalysis.ai/models/gpt-oss-120b/providers
Paired GLM 5.3 Flash test, e2e p50	Baseten 331 ms, DeepInfra 1,827 ms, Nebius 1,451 ms	2026-09-03	https://github.com/openbenchmarks-labs/inference
Availability budgets	99.99% = 4.4 min per 30 days; 99.9% = 43.8 min	constant	https://uptime.is/99.99

Observed header and error-body fingerprints

Provider	Route	Status	Body	Distinguishing headers
Baseten	POST chat, no key	401	`{"error":"please check the api-key you provided"}`	`via: 1.1 google`, `alt-svc: h3`
Baseten	POST chat, bad key	403	same	same
Baseten	GET unknown route	405	empty	same
Baseten	GET management, no key	403	`{"code": "PERMISSION_DENIED", "message": "Authorization error"}`	`server: gunicorn`
DeepInfra	POST chat, no key	401	`{"error":{"message":"missing API key","type":"invalid_request_error","param":null,"code":"invalid_api_key"}}`	`server: uvicorn`, `www-authenticate: Bearer`
DeepInfra	POST native inference, no key	401	`{"detail":"missing API key"}`	same
DeepInfra	GET unknown route	404	`{"detail":"Not Found"}`	`server: uvicorn` only
Nebius	POST chat, no key	401	`{"detail":"Couldn't authenticate. Reason: token is not present"}`	`x-request-id`, `access-control-allow-origin: *`, `vary: Origin`
Nebius	POST chat, bad key	401	`{"detail":"Couldn't authenticate. Reason: Unable authenticate"}`	same
Nebius	GET `/docs`	200	Swagger UI page referencing fastapi.tiangolo.com	same
Akamai (Linode)	GET profile, no key	401	`{"errors": [{"reason": "Invalid Token"}]}`	`Retry-After: 60`, `access-control-allow-origin: *`

Provider	Route	Status	Body	Distinguishing headers
Akamai (Linode)	GET unknown route	404	`{"errors": [{"reason": "Not found"}]}`	`access-control-allow-origin: *`; no `Retry-After` or rate-limit headers
Akamai (techdocs)	HEAD docs	301	none	`link: rel="api-catalog"`, `rel="agent-skills"`, `x-ratelimit-limit: 100`
Akamai (www)	HEAD marketing	403 to a scripted client	HTML	`X-Akam-SW-Version`, `akaas_production` cookie, mPulse `expect-ct`

Third-party sources and their caveats

Source	Used for	Caveat
Artificial Analysis provider pages	TTFT, throughput, blended price	10k-token default input; reasoning-model "latency" includes thinking; provider coverage varies by model
openbenchmarks-labs/inference	Paired-request latency and failure rate	Single model (GLM 5.3 Flash), concurrency 1, 600 requests
OpenRouter endpoints API	30-day uptime per provider endpoint	Reflects OpenRouter's traffic and health checks only
llmlatency.dev	Edge TTFB by region	Network-only measurement; no inference
CheckUpstream, StatusGator	Impact-declared uptime	Aggregators of vendor-declared status; not independent monitoring
Vendor blogs quoting competitor numbers (DeepInfra benchmarks, Spheron)	Cross-checks only	Flagged as competitor-authored wherever cited

6. Methodology and Limits

Scope

Three providers in scope: Baseten, DeepInfra, Nebius Token Factory. Akamai Cloud (Linode API v4, Inference Cloud, AI Grid) is the baseline for the overlap analysis. Cut-off date for all facts: 2026-09-28, except the probe captures (2026-09-29 18:21 to 18:23 UTC) and the Akamai and Nebius pages that block scripted clients, read in a browser on 2026-09-29 and recorded in `evidence/manual/`. The source check also ran on 2026-09-29. Every row in docs 5 carries its own date.

Method

Step	What was done	Output
Public document review	Vendor docs, pricing pages, changelogs, terms and SLA documents, engineering blogs, press releases, investor letters, GitHub organizations, third-party benchmarks	Source lists at the end of docs 1 to 4a
Unauthenticated probes	`scripts/probe_providers.sh`: GET, POST with no key and with a fixed invalid key, OPTIONS, HEAD, and `dig` against API, docs, marketing, and status hosts; public OpenAPI specs and catalog endpoints	`evidence/probes/`
Network ownership and timing	Same script: origin-ASN lookup of every resolved address (Team Cymru whois); nine `curl` timing samples per inference host and URL; SHA-256 of every body as received	`asn.txt`, `timing.txt`, `.meta`
Derivation	`scripts/summarize_probes.py`: incident statistics (windows end at capture time), catalog statistics, DNS and ASN fingerprints, OpenAPI path lists, chat-parameter diff against the OpenAI request schema, connection latency	`evidence/derived/`
Synthesis	Claims paired with contract text and observed data; verdicts assigned as Supported, Partially supported, Unsupported, or Not claimed	docs 1 to 5

Reproduction

```
make evidence                          # probe (about 90 seconds, no credentials) and
        summarize
make report                            # rebuild the brief and full-report PDFs if an input
        changed
./scripts/probe_providers.sh --debug   # also writes a support bundle under /var/tmp/akamai-
        validation/
```

`dist/serverless-inference-assessment-full-report-chris-mcconnell.pdf` is a build artifact of `docs/*.md`, `evidence/derived/*.md`, `evidence/manual/browser-checked-urls.tsv` and `evidence/probes/*/*.meta` (cover date range), `CHANGELOG.md` (cover version), and `scripts/build_report.sh` with `scripts/report/*`. Those are prerequisites of the target, so editing any of them makes the next `make report` rebuild the PDF, and `make rebuild-report` forces a build. The brief, `dist/serverless-inference-assessment-brief-chris-mcconnell.pdf`, is built the same way from `brief/*.md` with the same cover, version, and styling, and no evidence appendix.

All scripts accept `-h` or `--help`. JSON captures are stored with non-ASCII characters escaped (`\uXXXX`), so parsed values match the response exactly; `body_sha256` in each `.meta` file hashes the bytes as received.

What was not tested

Not tested	Reason	Effect on conclusions
Authenticated requests, streaming chunk shapes, `usage` objects, tool-call streaming	No accounts were created and no spend was incurred, per the assessment brief	Streaming and usage conformance rows rely on vendor docs, marked as such
Cold-start timing	Requires a paid dedicated deployment scaled to zero	Cold-start verdicts rely on vendor docs, case studies, and status history
TTFT and throughput	Requires keys and a controlled load generator	Third-party benchmarks used, with caveats listed in docs 5
Multi-vantage latency	Probes ran from one US host	`latency.md` measures connection phases from one location only; geography claims rely on llmlatency.dev
DeepInfra incident history	The DeepInfra status page is a custom Next.js site without a public incident API	DeepInfra availability rows use its 90-day component summary and aggregator snapshots
Incidents older than the 50 most recent	Statuspage public API returns 50 incidents	Baseten's 90-day window is complete (oldest returned 2026-05-26); Nebius (2026-02-18) and Linode (2026-04-24) windows are complete for 90 days
Nebius price page and catalog	JavaScript-rendered behind login	Prices taken from Nebius cookbooks, the public templates API, and third-party trackers, each dated

Known limits of the evidence

- Status-page minutes are vendor-declared and measure incident duration, not customer-visible error rate. "Availability if major minutes were full downtime" is a bound, not a measurement.
- Origin ASN identifies the announcing network, not the physical site. An anycast address (Google front end, Akamai edge) terminates near the client regardless of where the GPU runs.
- OpenAPI specs describe what a vendor documents, not necessarily what the server enforces.
- The DeepInfra live metric is two samples, 30 s apart, of a platform-wide counter.
- Artificial Analysis and OpenRouter numbers change daily; the values are snapshots with dates.

AI use, tooling, and review process

An AI coding assistant was used for source research, script writing, and first drafts. Scope, method, and conclusions were set by the author, and nothing was accepted without a check against primary evidence.

The assistant was also used to review current public Akamai technical publications (State of the Internet: Apps, APIs, and DDoS 2026, AI Inference Efficiency) so this report's format stays consistent with them. Only a structural convention was adopted: the Key insights page in docs 00. No Akamai logo, brand colors, typefaces, or text were reused. Company and product names identify what was assessed and remain trademarks of their owners.

Review steps:

- Audited the draft line by line against the assessment brief before any changes, and approved the fix plan first.
- Cross-checked every number in the docs against the raw captures, then did it again after editing. The second pass found 11 more errors.

- Checked every cited URL (203) and 26 key quotes and prices against the live pages with `make check-sources`; results in `evidence/derived/source-check.md`.
- Read Akamai pricing, region, and product pages from an interactive Chrome session, because the site blocks scripted access; page text and findings are in `evidence/manual/`.

What the checks changed:

- DeepInfra and Nebius run their own networks (AS16581, AS214415). The earlier Cogent and Hetzner attributions came from guessing by IP prefix and were wrong.
- A paraphrase of Baseten's docs had been shown as a quote. It was reworded.
- The first latency comparison timed endpoints doing different amounts of work. Re-measured on equal terms, Akamai's lead over the others mostly disappeared.
- NVIDIA's throughput data showed the RTX PRO 6000 can't match DeepInfra's per-token price at list rates. Recommendation 3 was rewritten around that.

Appendix: Evidence Tables

Generated by `scripts/summarize_probes.py` from the raw captures in `evidence/probes/`. The full API surface and OpenAPI path lists are omitted here and remain in the repository: `evidence/derived/api-surface.md`, `evidence/derived/openapi-surface.md`.

Connection-phase latency

Source: timing.txt per provider, written by the probe script. Each row is an unauthenticated GET that returns before any inference, so the numbers measure DNS, TCP connect, TLS handshake, and gateway time-to-first-byte from one vantage point. They are a floor under TTFT from that location, not a TTFT measurement. Compare hosts on the unknown-route rows: each returns an error with minimal server work. The model and region list rows include the time to build a full response body.

Vantage: unspecified (timezone MDT).

Provider	URL	Remote IP	Samples	HTTP	Connect p50 (ms)	TLS done p50 (ms)	TTFB p50 (ms)	TTFB min to max (ms)
akamai	https://api.linode.com/v4/this-route-does-not-exist	23.211.124.199	9	404	36	71	164	139 to 232
akamai	https://api.linode.com/v4/regions	23.211.124.199	9	200	36	71	385	367 to 509
baseten	https://inference.baseten.co/v1/this-route-does-not-exist	35.244.129.243	9	405	23	46	106	98 to 117
baseten	https://inference.baseten.co/v1/models	35.244.129.243	9	401	22	44	105	95 to 115
deepinfra	https://api.deepinfra.com/v1/openai/this-route-does-not-exist	38.101.151.16	9	404	36	74	112	108 to 477
deepinfra	https://api.deepinfra.com/v1/openai/models	38.101.151.16	9	200	36	74	209	197 to 802
nebius	https://api.tokenfactory.nebius.com/v1/this-route-does-not-exist	213.239.161.19	9	404	142	285	465	464 to 467
nebius	https://api.tokenfactory.nebius.com/v1/models	213.239.161.19	9	401	142	286	427	422 to 429

DNS and CDN fingerprints

Resolved with dig at capture time. Network owner comes from an origin-ASN lookup (Team Cymru whois, asn.txt). CDN and hosting labels come from the CNAME chain. Where no ASN record exists, an address-prefix heuristic is used and marked as such.

Provider	Host	Chain	Addresses	Origin ASN	Hosting fingerprint
akamai	api.linode.com	loadbal-api.rin1.linode.com -> api.linode.com.edgekey.net -> e26254.dsca.akamaiedge.net	2 IPv4, 23.211.124.199 to 23.211.124.208	AS20940 AKAMAI-ASN1 - Akamai International B.V., NL (US)	Akamai edge (edgekey/akamaiedge)
akamai	techdocs.akamai.com	techdocs.akamai.com.edgekey.net -> e185847.dscx.akamaiedge.net	2 IPv4, 23.45.123.41 to 23.45.123.42	AS20940 AKAMAI-ASN1 - Akamai International B.V., NL (US)	Akamai edge (edgekey/akamaiedge)
akamai	www.akamai.com	www.akamai.com.edgekey.net	2 IPv4, 23.45.123.5 to 23.45.123.37	AS20940 AKAMAI-ASN1 - Akamai International B.V., NL (US)	Akamai edge (edgekey/akamaiedge)
akamai	status.linode.com	8dn0wstr1chc.stspg-customer.com	4 IPv4, 108.138.94.17 to 108.138.94.107	AS16509 AMAZON-02 - Amazon.com, Inc., US (US)	Atlassian Statuspage (CloudFront)
baseten	inference.baseten.co	(direct A record)	1 IPv4: 35.244.129.243	AS396982 GOOGLE-CLOUD-PLATFORM - Google LLC, US (US)	none
baseten	api.baseten.co	(direct A record)	3 IPv4, 16.145.45.198 to 44.226.28.245	AS16509 AMAZON-02 - Amazon.com, Inc., US (US)	none
baseten	docs.baseten.co	cname.vercel-dns.com	2 IPv4, 66.33.60.130 to 76.76.21.61	AS16509 AMAZON-02 - Amazon.com, Inc., US (US)	Vercel (Next.js hosting)
baseten	www.baseten.co	cname.vercel-dns.com	2 IPv4, 66.33.60.129 to 76.76.21.22	AS16509 AMAZON-02 - Amazon.com, Inc., US (US)	Vercel (Next.js hosting)
baseten	status.baseten.co	8dp3vkb2h71c.stspg-customer.com	4 IPv4, 143.204.160.2 to 143.204.160.96	AS16509 AMAZON-02 - Amazon.com, Inc., US (US)	Atlassian Statuspage (CloudFront)
deepinfra	api.deepinfra.com	(direct A record)	14 IPv4, 38.101.151.13 to 38.101.151.30	AS16581 DEEPINFRA-01 - Deep Infra Inc., US (US)	none
deepinfra	deepinfra.com	(direct A record)	1 IPv4: 76.76.21.21	AS16509 AMAZON-02 - Amazon.com, Inc., US (US)	none
deepinfra	status.deepinfra.com	(direct A record)	1 IPv4: 100.50.38.141	AS14618 AMAZON-AES - Amazon.com, Inc., US (US)	none

Provider	Host	Chain	Addresses	Origin ASN	Hosting fingerprint
nebius	api.studio.nebius.com	(direct A record)	1 IPv4: 213.239.161.19	AS214415 NebiusPA10 - Nebius B.V., NL (NL)	none
nebius	api.tokenfactory.nebius.com	(direct A record)	1 IPv4: 213.239.161.19	AS214415 NebiusPA10 - Nebius B.V., NL (NL)	none
nebius	docs.tokenfactory.nebius.com	cname.mintlify-dns.com -> cname.vercel-dns.com	2 IPv4, 66.33.60.130 to 76.76.21.61	AS16509 AMAZON-02 - Amazon.com, Inc., US (US)	Mintlify docs (on Vercel); Vercel (Next.js hosting)
nebius	nebius.com	(direct A record)	1 IPv4: 150.171.110.151	AS8075 MICROSOFT-CORP-MSN-AS-BLOCK - Microsoft Corporation, US (US)	none
nebius	status.nebius.com	qtd87qzrvchh.stspg-customer.com	4 IPv4, 52.85.129.52 to 52.85.129.111	AS16509 AMAZON-02 - Amazon.com, Inc., US (US)	Atlassian Statuspage (CloudFront)

Status page components and incident statistics

Source: Atlassian Statuspage summary.json and incidents.json captured by the probe script (DeepInfra does not expose a Statuspage API; see api-surface.md).

Incident minutes are start to resolved as posted by the provider. Statuspage returns the 50 most recent incidents, so a 90 day window may be truncated where noted. Windows end at the capture time of incidents.json. An incident tagged on several components with the same name (for example one per region) counts once per name. Reference downtime budgets per 30 days: 99.99% = 4.4 min, 99.95% = 21.9 min, 99.9% = 43.8 min, 99.5% = 219 min.

akamai: Linode (https://status.linode.com)

Components: 250 total, 8 groups, 242 leaf. Page updated 2026-09-29T18:06:06.990Z.

Incidents returned: 50 (oldest 2026-04-24). Window end: 2026-09-29T18:23:01Z.

Last 30 days

Incidents: 4 (minor: 3, none: 1). Resolved incident-minutes summed across incidents: 2733.

Component	Incidents	Minutes	Major incidents	Major minutes	Availability if major minutes were full downtime
Cloud Manager and API	3	2298	0	0	100.000%
AP-Northeast-2 (Tokyo 2)	1	2053	0	0	100.000%
AP-South (Singapore)	1	2053	0	0	100.000%
AP-Southeast (Sydney)	1	2053	0	0	100.000%
AP-West (Mumbai)	1	2053	0	0	100.000%
AU-MEL (Melbourne)	1	2053	0	0	100.000%
BR-GRU (São Paulo)	1	2053	0	0	100.000%
CA-Central (Toronto)	1	2053	0	0	100.000%
CL-SCL (Santiago)	1	2053	0	0	100.000%
CO-BOG (Bogota)	1	2053	0	0	100.000%
DE-FRA-2 (Frankfurt 2)	1	2053	0	0	100.000%

Component	Incidents	Minutes	Major incidents	Major minutes	Availability if major minutes were full downtime
DE-HAM (Hamburg)	1	2053	0	0	100.000%
ES-MAD (Madrid)	1	2053	0	0	100.000%
EU-Central (Frankfurt)	1	2053	0	0	100.000%
EU-West (London)	1	2053	0	0	100.000%
FR-MRS (Marseille)	1	2053	0	0	100.000%
FR-PAR (Paris)	1	2053	0	0	100.000%
FR-PAR-2 (Paris 2)	1	2053	0	0	100.000%
GB-LON (London 2)	1	2053	0	0	100.000%
ID-CGK (Jakarta)	1	2053	0	0	100.000%
IN-BOM-2 (Mumbai 2)	1	2053	0	0	100.000%
IN-MAA (Chennai)	1	2053	0	0	100.000%
IT-MIL (Milan)	1	2053	0	0	100.000%
JP-OSA (Osaka)	1	2053	0	0	100.000%
JP-TYO-3 (Tokyo 3)	1	2053	0	0	100.000%

Last 90 days

Incidents: 22 (minor: 9, none: 13). Resolved incident-minutes summed across incidents: 29618.

Component	Incidents	Minutes	Major incidents	Major minutes	Availability if major minutes were full downtime
(no component tagged)	3	16011	0	0	100.000%
US-SEA (Seattle)	5	10280	0	0	100.000%
US-MIA (Miami)	4	9566	0	0	100.000%
IN-BOM-2 (Mumbai 2)	3	9566	0	0	100.000%
IN-MAA (Chennai)	3	9566	0	0	100.000%

Component	Incidents	Minutes	Major incidents	Major minutes	Availability if major minutes were full downtime
US-Central (Dallas)	3	9566	0	0	100.000%
US-DEN (Denver)	3	9566	0	0	100.000%
US-East (Newark)	3	9566	0	0	100.000%
US-HOU (Houston)	3	9566	0	0	100.000%
US-IAD (Washington)	3	9566	0	0	100.000%
US-IAD-2 (Washington 2)	3	9566	0	0	100.000%
US-LAX (Los Angeles)	3	9566	0	0	100.000%
US-ORD (Chicago)	3	9566	0	0	100.000%
US-Southeast (Atlanta)	3	9566	0	0	100.000%
US-West (Fremont)	3	9566	0	0	100.000%
IT-MIL (Milan)	4	3556	0	0	100.000%
AP-Northeast-2 (Tokyo 2)	2	3340	0	0	100.000%
AP-South (Singapore)	2	3340	0	0	100.000%
AP-Southeast (Sydney)	2	3340	0	0	100.000%
AP-West (Mumbai)	2	3340	0	0	100.000%
AU-MEL (Melbourne)	2	3340	0	0	100.000%
BR-GRU (São Paulo)	2	3340	0	0	100.000%
CA-Central (Toronto)	2	3340	0	0	100.000%
CL-SCL (Santiago)	2	3340	0	0	100.000%
CO-BOG (Bogota)	2	3340	0	0	100.000%

Incident log (most recent 50)

Created (UTC)	Impact	Minutes	Components	Title
2026-09-25T15:09	minor	72	Cloud Manager and API	Service Issue - Cloud Manager and API
2026-09-21T17:13	minor	2053	AP-Northeast-2 (Tokyo 2), AP-South (Singapore), AP-Southeast (Sydne...	Emerging Service Issue - Cloud Manager and API
2026-09-21T16:50	none	435	Hosted DNS Service	Emerging Service Issue - [DNS] - [eu-west]
2026-09-07T10:38	minor	173	Cloud Manager and API	Service Issue - Cloud Manager and API
2026-08-28T10:26	none	438	Linode.com, US-SEA (Seattle)	Service Issue - US-SEA (Seattle, WA)
2026-08-24T21:52	none	198	US-SEA (Seattle) Object Storage	Service Issue - Object Storage - US-SEA
2026-08-21T17:23	none	276	US-SEA (Seattle)	Service Issue - US-SEA (Seattle, WA)
2026-08-10T17:15	none	15926		Upstream Issues - Ubuntu
2026-08-14T20:13	minor	77	IT-MIL (Milan)	Connectivity Issue - IT-MIL (Milan) data center
2026-08-13T18:46	none	340	Cloud Manager and API	Emerging Service Issue - API - All Regions
2026-08-13T21:13	minor	132	US-IAD (Washington) Linode Kubernetes Engine	Service Issue - Linode Kubernetes Engine Enterprise (LKE-E)- IAD2 (Washington)
2026-08-13T16:16	minor	98	US-IAD (Washington) Linode Kubernetes Engine	Service Issue - Linode Kubernetes Engine (IAD2)
2026-08-13T14:00	none	-1547		Service Issue - Linode Kubernetes Engine Enterprise (LKE-E) - Seattle (SEA1)
2026-07-31T17:49	none	6225	IN-BOM-2 (Mumbai 2), IN-MAA (Chennai), US-Central (Dallas), US-DEN ...	Upstream Loss - Some Paths (in-maa/in-bom-2 to US Region)
2026-07-28T18:14	none	1093	AP-Northeast-2 (Tokyo 2) Block Storage, AP-South (Singapore) Block ...	Service Issue - Host Job Performance Degradation - Several Regions
2026-07-20T01:52	minor	139	IT-MIL (Milan)	Connectivity Issue - Linodes in Milan, Italy
2026-07-18T03:34	minor	62	FR-PAR (Paris) Object Storage, US-IAD (Washington) Object Storage, ...	Service Issue - Object Storage
2026-07-16T01:24	none	0	US-MIA (Miami)	Connectivity Issue - US-MIA (Miami
2026-07-14T12:21	minor	425	Cloud Manager and API	Service Issue - Linode API/CLI
2026-07-13T18:29	none	85		Service Issue - Host Jobs - All Regions
2026-07-09T16:57	none	83	Cloud Manager and API	Emerging Service Issue - Cloud Manager
2026-06-26T17:35	minor	16971	Akamai Cloud Pulse (ACLP) - Metrics	Service Issue - ACLP Metrics

Created (UTC)	Impact	Minutes	Components	Title
2026-07-06T18:04	none	1287	AP-Northeast-2 (Tokyo 2), AP-South (Singapore), AP-Southeast (Sydne...	Emerging Service Issue - Managed Databases - All Regions
2026-05-13T21:02	minor	77380	AP-Northeast (Tokyo 2) Linode Kubernetes Engine, AP-Northeast-2 (To...	[Fragnesia] Linux Privilege Escalation Vulnerability
2026-05-08T13:40	minor	85021	AP-Northeast (Tokyo 2) Linode Kubernetes Engine, AP-Northeast-2 (To...	[DirtyFrag] Linux Privilege Escalation Vulnerability
2026-07-01T17:21	none	66	Cloud Manager and API	Service Issue - Linode Automated Networking
2026-06-30T18:54	minor	268	SG-SIN-2 (Singapore 2) Block Storage	Service Issue - Block Storage - Singapore Expansion, SP (sg-sin-2)
2026-06-26T17:14	none	139	US-IAD (Washington)	Connectivity Issue - US-IAD
2026-06-24T18:53	none	1476	AP-Northeast-2 (Tokyo 2), AP-South (Singapore), AP-Southeast (Sydne...	Emerging Service Issue - GPU Instances - All Regions
2026-06-25T14:33	none	248	AP-Northeast-2 (Tokyo 2), AP-South (Singapore), AP-Southeast (Sydne...	Emerging Service Issue - Migrations
2026-06-24T16:27	none	0		Service Issue - Debian Package Availability
2026-06-16T14:29	none	169	US-MIA (Miami)	Emerging Service Issue - Networking - US-MIA (Miami)
2026-06-16T08:56	minor	258	Longview	Service Issue: Longview
2026-06-16T03:44	none	142		Emerging Service Issue - Linode Migrations
2026-06-02T01:26	maintenance	9729	Linode.com	Linode Community Maintenance
2026-06-05T14:23	none	35	AP-Northeast (Tokyo 2) Linode Kubernetes Engine, AP-South (Singapor...	Emerging Service Issue - LKE Enterprise - All Regions
2026-06-03T14:22	none	1529		Emerging Service Issue - Support Phone Line
2026-06-03T08:58	minor	1454	US-East (Newark) Block Storage	Service Issue - Block Storage Newark, US
2026-05-29T18:23	none	0	GB-LON (London 2) Object Storage	Service Issue - Object Storage
2026-05-22T11:22	minor	5453	FR-PAR (Paris)	Service Issue - Paris (FR-PAR3)
2026-05-19T19:48	none	279		Emerging Service Issue - GPU Deployment
2026-05-16T00:42	none	61	AP-Northeast (Tokyo 2) Linode Kubernetes Engine, AP-Northeast-2 (To...	Service Issue - [Linodes and Linode Kubernetes Engine (LKE)] - [All Regions]
2026-05-15T02:24	none	88		Investigating - Linode VM Migration Delays (All Regions)
2026-05-13T09:42	minor	295	NL-AMS (Amsterdam)	Connectivity Issue - NL-AMS
2026-05-12T17:12	minor	470	AP-West (Mumbai), IN-MAA (Chennai)	Connectivity Issue - AP-West (Mumbai) and IN-MAA (Chennai)

Created (UTC)	Impact	Minutes	Components	Title
2026-05-12T21:00	none	0		Service Issue - ACLP Logs
2026-05-01T17:51	minor	6028	AP-Northeast (Tokyo 2) Linode Kubernetes Engine, AP-Northeast-2 (To...	(Copy Fail) Linux Kernel Local Privilege Escalation Vulnerability [CVE-2026-31431]
2026-04-28T17:17	minor	7825	IN-MAA (Chennai)	Service Issue - Connectivity Issues - Chennai (IN-MAA)
2026-04-29T09:22	minor	598	AP-South (Singapore) Object Storage, AU-MEL (Melbourne), AU-MEL (Me...	Object Storage Key creation and validation failing with error 403 in multiple data centers
2026-04-24T19:27	minor	5509	AP-Northeast (Tokyo 2) Linode Kubernetes Engine, AP-Northeast-2 (To...	Service Issue - Linode Kubernetes Engine (LKE)

baseten: Baseten (https://status.baseten.co)

Components: 6 total, 0 groups, 6 leaf. Page updated 2026-09-29T11:06:11.723-07:00.

Incidents returned: 50 (oldest 2026-05-26). Window end: 2026-09-29T18:21:45Z.

Last 30 days

Incidents: 11 (major: 5, minor: 6). Resolved incident-minutes summed across incidents: 349.

Component	Incidents	Minutes	Major incidents	Major minutes	Availability if major minutes were full downtime
Dedicated Inference	6	214	4	86	99.800%
Model APIs	3	103	1	55	99.873%
Model Management API	2	32	0	0	100.000%
Web Application	1	21	0	0	100.000%

Last 90 days

Incidents: 35 (major: 8, minor: 27). Resolved incident-minutes summed across incidents: 1385.

Component	Incidents	Minutes	Major incidents	Major minutes	Availability if major minutes were full downtime
Model APIs	12	608	4	299	99.769%
Dedicated Inference	17	453	4	86	99.933%
Model Management API	6	324	0	0	100.000%

Component	Incidents	Minutes	Major incidents	Major minutes	Availability if major minutes were full downtime
Web Application	3	124	0	0	100.000%

Incident log (most recent 50)

Created (UTC)	Impact	Minutes	Components	Title
2026-09-29T01:12	major	13	Dedicated Inference	Elevated 500s in Single us-central Region
2026-09-28T18:07	minor	21	Model Management API, Web Application	Metrics degradation in UI and API. **Inference not affected**
2026-09-24T11:35	minor	82	Dedicated Inference	Intermittent 5xx for a subset of models in 1 US Central cluster
2026-09-24T00:23	major	42	Dedicated Inference	Elevated inference 500s for a subset of models deployed in 1 US-East cluster
2026-09-21T11:34	major	7	Dedicated Inference	Elevated inference 500s for a subset of models deployed in GCP central1
2026-09-21T06:31	minor	11	Model Management API	Metrics degradation in UI and API. **Inference not affected**
2026-09-20T00:19	major	55	Model APIs	Kimi K3 Model API outage
2026-09-14T18:22	minor	45	Dedicated Inference	Elevated errors for models in a single India-based cluster
2026-09-14T09:21	minor	42	Model APIs	Partial outage on Kimi K3 model API inference (non-US only)
2026-09-09T10:42	minor	6	Model APIs	Partial outage on Nemotron Ultra Model API. **Dedicated Inference is not affected**
2026-08-30T23:38	major	24	Dedicated Inference	Elevated inference 500s for models in a single US-based cluster
2026-08-27T14:17	minor	14	Dedicated Inference	Elevated errors for models in a single US cluster due to provider outage
2026-08-25T09:17	minor	41	Model APIs	Elevated errors for deepseek-ai/DeepSeek-V4-Flash-0731 on Model APIs. **Dedicated Inference is not affected**
2026-08-25T05:34	minor	41	Dedicated Inference	Elevated inference 500s for models in an EU cluster due to provider outage
2026-08-18T18:23	minor	37	Model APIs	Elevated errors for moonshotai/Kimi-K3 for US-pinned traffic on Model APIs. **Dedicated Inference is not affec
2026-08-18T12:04	minor	77	Model APIs	Elevated errors for moonshotai/Kimi-K3 for US-pinned traffic on Model APIs. **Dedicated Inference is not affec
2026-08-18T10:24	minor	12	Model APIs	Elevated errors for moonshotai/Kimi-K3 for US-pinned traffic on Model APIs. **Dedicated Inference is not affec
2026-08-18T09:27	minor	48	Model APIs	Elevated errors for moonshotai/Kimi-K3 for US-pinned traffic on Model APIs. **Dedicated Inference is not affec
2026-08-17T09:56	minor	46	Model APIs	Elevated errors for moonshotai/Kimi-K3 for US-pinned traffic

Created (UTC)	Impact	Minutes	Components	Title
2026-08-17T06:11	minor	24	Model Management API, Web Application	Metrics degradation in UI and API. **Inference not affected**
2026-08-01T16:57	minor	43	Dedicated Inference	Elevated inference 502s for a subset of models in a single US cluster
2026-07-31T16:52	minor	29	Dedicated Inference	Elevated inference 502s for a subset of models in a single US cluster
2026-07-31T09:46	minor	12	Dedicated Inference	Slower than usual scale-ups for B200s
2026-07-22T10:49	minor	33	Dedicated Inference	Elevated inference failures for models in an EU cluster
2026-07-22T10:45	minor	19	Dedicated Inference	Slower than usual scale-ups in 1 us-central cluster
2026-07-18T15:40	major	32	Model APIs	GLM 5.2 Model API partial outage due to provider network failure
2026-07-17T17:22	minor	6	Dedicated Inference	Elevated inference errors in 1 Canada cluster due to provider network outage
2026-07-16T02:06	minor	79	Model Management API, Web Application	Elevated errors in accessing the Baseten UI. **Inference is not affected**
2026-07-12T17:04	major	127	Model APIs	Partial Outage on Model APIs
2026-07-09T07:07	minor	14	Dedicated Inference	Elevated inference 500s for models deployed in 1 US-east cluster
2026-07-08T09:50	minor	115	Model Management API	Metrics degradation in UI and API. **Inference not affected**
2026-07-06T14:08	minor	14	Dedicated Inference	Elevated inference 500s , network outage in our cloud provider in Delaware
2026-07-02T19:59	major	86	Model APIs	Elevated errors for GLM 5.2 on Model APIs. **Dedicated Inference is not affected**
2026-07-02T17:21	minor	16	Dedicated Inference	Elevated inference 500s for a subset of models deployed in 1 cluster
2026-07-02T15:00	minor	74	Model Management API	Degraded metrics performance in dashboard and API. **Inference is not affected**
2026-07-01T03:30	major	59	Dedicated Inference	Elevated errors in a single EU cluster
2026-06-29T11:26	minor	35	Model APIs	Elevated error rates on GLM 5.2 Model APIs. **Dedicated Inference is not affected**
2026-06-26T23:35	minor	15	Dedicated Inference	Elevated inference 500s for models in 1 cluster due to cloud provider outage
2026-06-26T16:41	minor	74	Model Management API	Elevated model deployment failures. **Inference is not affected**
2026-06-26T15:00	major	14	Dedicated Inference	Elevated errors for dedicated inference in a subset of clusters
2026-06-22T17:10	minor	44	Dedicated Inference, Model Management API	Slower than usual scale-ups. High failure rate for new model deploys. Existing replicas aren't impacted.
2026-06-18T05:46	minor	104	Dedicated Inference, Model APIs	Elevated errors for models in 1 Austin-based cluster affecting some models on B200s

Created (UTC)	Impact	Minutes	Components	Title
2026-06-16T21:40	minor	83	Dedicated Inference	Elevated errors for models in 1 Sweden-based cluster
2026-06-15T09:14	minor	44	Dedicated Inference	Elevated errors for models in a single EU cloud provider
2026-06-13T11:25	minor	44	Dedicated Inference	Elevated errors for models in a single cloud provider
2026-06-04T19:10	major	19	Dedicated Inference	Elevated errors in a single US-East cluster
2026-06-04T13:53	minor	66	Dedicated Inference	Elevated latencies for a subset of models in a US-East cluster
2026-06-03T07:56	minor	135	Dedicated Inference	Slower than usual scale-ups for some models using H100s
2026-05-29T12:31	minor	33	Dedicated Inference	Elevated async inference errors in a single cluster
2026-05-26T09:21	minor	14	Dedicated Inference	Slower than usual scale-ups in 1 India cluster

deepinfra: no Statuspage JSON

No Statuspage JSON available.

nebius: Nebius (https://status.nebius.com)

Components: 161 total, 7 groups, 154 leaf. Page updated 2026-09-29T18:06:51.299Z.

Incidents returned: 50 (oldest 2026-02-18). Window end: 2026-09-29T18:22:40Z.

Last 30 days

Incidents: 9 (major: 7, minor: 1, none: 1). Resolved incident-minutes summed across incidents: 2191.

Component	Incidents	Minutes	Major incidents	Major minutes	Availability if major minutes were full downtime
Managed Service for SkyPilot	1	1473	1	1473	96.589%
Object Storage	1	297	1	297	99.313%
Compute Cloud	3	259	2	235	99.456%
Virtual Private Cloud (Networking)	2	207	2	207	99.522%
Monitoring	1	89	1	89	99.795%

Component	Incidents	Minutes	Major incidents	Major minutes	Availability if major minutes were full downtime
Identity and Access Management	1	58	0	0	100.000%
Managed Service for Kubernetes®	1	15	1	15	99.965%
(no component tagged)	1	0	1	0	100.000%

Last 90 days

Incidents: 19 (major: 14, minor: 3, none: 2). Resolved incident-minutes summed across incidents: 4004.

Component	Incidents	Minutes	Major incidents	Major minutes	Availability if major minutes were full downtime
Managed Service for SkyPilot	3	2860	3	2860	97.794%
Compute Cloud	8	1943	6	1841	98.580%
Object Storage	4	1786	4	1786	98.622%
Virtual Private Cloud (Networking)	5	1618	5	1618	98.751%
Token Factory	3	1490	3	1490	98.851%
Managed Service for Kubernetes®	3	1401	3	1401	98.919%
Managed Service for MLflow	2	1386	2	1386	98.931%
Managed Service for PostgreSQL®	2	1386	2	1386	98.931%
Serverless AI	2	1386	2	1386	98.931%
Monitoring	4	311	4	311	99.760%
Logging	2	197	2	197	99.848%
Identity and Access Management	2	151	1	93	99.928%
Standalone Applications	2	93	1	93	99.928%
API	1	93	1	93	99.928%
Audit Logs	1	93	1	93	99.928%
Billing	1	93	1	93	99.928%

Component	Incidents	Minutes	Major incidents	Major minutes	Availability if major minutes were full downtime
Container Registry	1	93	1	93	99.928%
Managed Soperator	1	93	1	93	99.928%
Management Console	1	93	1	93	99.928%
Marketplace	1	93	1	93	99.928%
Mysterybox	1	93	1	93	99.928%
Network Block Storage	1	93	1	93	99.928%
(no component tagged)	3	0	2	0	100.000%

Incident log (most recent 50)

Created (UTC)	Impact	Minutes	Components	Title
2026-09-23T05:20	major	192	Compute Cloud, Virtual Private Cloud (Networking)	Network issues in eu-west2
2026-09-22T08:55	major	0		Object storage unavailable in eu-west1
2026-09-17T16:26	major	43	Compute Cloud	Compute services are partially unavailable for customers
2026-09-17T10:46	none	58	Identity and Access Management	Resuming IAM accounts is unavailable
2026-09-16T16:52	major	89	Monitoring	[eu-west1] Metrics for resources in this region are partially unavailable
2026-09-16T10:45	major	297	Object Storage	[us-central1] Object Storage is partially unavailable
2026-09-14T15:00	major	1473	Managed Service for SkyPilot	Managed Service for SkyPilot: cluster creation and update requests failing in eu-north1
2026-09-09T12:17	minor	24	Compute Cloud	Unstable compute VM create
2026-09-01T16:11	major	15	Managed Service for Kubernetes®, Virtual Private Cloud (Networking)	Connectivity issues for newly created worker nodes
2026-08-19T10:43	major	1293	Compute Cloud, Managed Service for Kubernetes®, Managed Service for…	Region us-central1 partial degradation
2026-08-17T11:00	minor	0		Issues logging to the Management Console
2026-08-15T18:25	major	197	Compute Cloud	Partial InfiniBand unavailability

Created (UTC)	Impact	Minutes	Components	Title
2026-08-12T13:30	major	26	Monitoring, Virtual Private Cloud (Networking)	External VPC connectivity issues
2026-08-05T14:27	none	78	Compute Cloud	Creation of new VMs is broken
2026-07-27T18:30	major	93	API, Audit Logs, Billing, Compute Cloud, Container Registry, Identi...	Network issues
2026-07-22T03:00	major	0		[eu-north1] Network timeouts affecting multiple services
2026-07-14T22:10	major	22	Compute Cloud	InfiniBand switch failure affecting GPU workloads in the eu-north1-c fabric in the eu-north1 region
2026-07-03T14:50	minor	0	Standalone Applications	Managed SkyPilot OIDC Login is unavailable
2026-07-01T22:33	major	104	Logging, Monitoring, Object Storage, Token Factory	Monitoring, Object Storage and Token Factory services are partially unavailable
2026-06-30T13:24	minor	4	Compute Cloud, Network Block Storage	New virtual machines are not being created
2026-06-24T14:08	major	97	Object Storage	Object Storage service partially unavailable in US-CENTRAL1 region
2026-06-16T20:02	minor	32	Compute Cloud	One InfiniBand switch failure
2026-06-15T18:27	minor	21	Virtual Private Cloud (Networking)	Network Connectivity Issues
2026-06-10T20:56	none	153	Compute Cloud	Compute instances startup issues
2026-06-09T10:30	minor	-175		Some public IPs unreachable in eu-north1
2026-06-04T09:46	major	88	Logging, Monitoring, Object Storage	Network Connectivity Issues
2026-06-02T10:53	minor	1453	Virtual Private Cloud (Networking)	Unable to allocate new public IPv4 addresses in eu-north1
2026-05-29T21:22	none	-58		Power issues
2026-05-19T13:45	minor	115	Compute Cloud	Unable to perform operations on a small subset of virtual machines
2026-05-13T18:45	minor	140	Compute Cloud	InfiniBand performance degradation
2026-05-07T21:03	none	24	Management Console	Nebius console is unavailable
2026-05-06T12:39	major	1146	Managed Service for Kubernetes®	Managed Kubernetes operations can take longer than expected
2026-04-29T15:36	major	989	Token Factory	Partial unavailability of external models in Token Factory
2026-04-24T09:46	minor	43	Token Factory	Partial degradation of Dedicated Endpoints in Token Factory

Created (UTC)	Impact	Minutes	Components	Title
2026-04-20T07:26	minor	1549	Token Factory	TokenFactory DataLab unavailability
2026-04-20T08:05	minor	25	Monitoring	Metrics for VMs are unavailable
2026-04-15T08:50	minor	96	Token Factory	TokenFactory , Some Serverless Models Partially Unavailable in us-central1 Region
2026-04-10T02:00	minor	0		Degraded logs, metrics and audit trails availability
2026-04-07T11:50	minor	74	Token Factory	Observability data partially unavailable for Dedicated Endpoints in TokenFactory
2026-04-01T13:58	minor	60	Identity and Access Management	Slower project and tenant creation
2026-03-26T10:20	major	36	Managed Service for Kubernetes®	Managed k8s is partially unavailable for customers
2026-03-24T23:30	major	0		Storage Metrics Ingestion Failure
2026-03-23T20:15	major	87	Token Factory	Observability data partially unavailable in TokenFactory
2026-03-10T15:47	major	542	Compute Cloud, Managed Service for Kubernetes®, Managed Service for...	Power issues during planned maintenance
2026-03-05T17:49	minor	42	Compute Cloud	Some VMs scheduling can take more than 45 minutes
2026-03-02T18:45	major	77	Compute Cloud	Power issues in us-central1
2026-02-26T14:40	major	616	Compute Cloud, Managed Service for Kubernetes®, Managed Service for...	Power issues in eu-north1
2026-02-20T22:35	major	55	API, Audit Logs, Billing, Compute Cloud, Container Registry, Identi...	Network issues in us-central1
2026-02-18T18:26	major	1294	Token Factory	Batch inference unavailability in Token Factory
2026-02-18T13:26	major	185	Managed Service for Kubernetes®	Partial unavailability of Managed Kubernetes LoadBalancers

DeepInfra public catalog analysis

Source: unauthenticated GET https://api.deepinfra.com/models/list and GET https://api.deepinfra.com/v1/openai/models, captured by the probe script.

Entries: 385 total in models/list, 231 active, 187 in the OpenAI-style models endpoint.

Active models by type

Type	Active
text-generation	102
text-to-image	47
embeddings	28
text-to-video	24
text-to-speech	15
automatic-speech-recognition	8
reranker	4
zero-shot-image-classification	2
text-to-music	1

Text generation: 102 active, 123 deprecated

Declared quantization (active text generation)

Quantization	Models
fp8	42
None	31
fp4	17
bfloat16	10

Quantization	Models
fp16	2

Partner (proxied third-party) models: 26 of 102 active text models

ByteDance/Seed-1.8, ByteDance/Seed-2.0-code, ByteDance/Seed-2.0-mini, ByteDance/Seed-2.0-pro, MiniMaxAI/MiniMax-M2.7-Turbo, Qwen/Qwen3-Max, Qwen/Qwen3-Max-Thinking, Qwen/Qwen3.7-Max, Qwen/Qwen3.8-Flash, Qwen/Qwen3.8-Max, anthropic/claude-fable-5, anthropic/claude-haiku-4-5, anthropic/claude-opus-4-7, anthropic/claude-opus-4-8, anthropic/claude-opus-5, anthropic/claude-opus-5-5, anthropic/claude-sonnet-4-6, anthropic/claude-sonnet-5, google/gemini-2.5-flash, google/gemini-2.5-pro, google/gemini-3.1-flash-lite, google/gemini-3.1-pro, google/gemini-3.5-flash, google/gemini-3.7-flash, google/gemma-4-31B-it-Ultra, openai/gpt-oss-120b-Ultra

Capability tags (active text generation)

Tag	Models
openai	102
json	99
tools	93
structured-output	92
cc-native	75
reasoning	67
flex	59
multimodal	50
non-reasoning	37
priority	37
no-free-anon	27
ocr	23
featured	22
can-disable-reasoning	20

Tag	Models
input-video	15
input-audio	11
b200	5
disable-penalty	4
batch	1

Pricing fields present (active text generation)

Field	Models
cents_per_input_token	102
cents_per_output_token	102
type	102
rate_per_service_tier_flex	59
rate_per_input_token_cached	51
rate_per_service_tier_priority	37
discount	7
full	7
explicit_cache_granularity_tokens	4
rate_per_explicit_cache_write_token	4
short	3

Cached-input read multiplier (x input price): 51 of 102 active text models

Minimum 0.0084, median 0.2000, maximum 0.7000.

Multiplier	Models
0.0084	1
0.02	1
0.03	1
0.0318	1
0.05	1
0.0504	1
0.0769	2
0.1	2
0.1248	2
0.1333	1
0.1684	1
0.1842	1
0.1867	1
0.2	17
0.2222	2
0.25	5
0.2538	1
0.3333	1
0.3571	1
0.4889	1
0.5	3
0.52	1
0.55	1

Multiplier	Models
0.5556	1
0.7	1

Service tier multipliers (priority, flex)

Priority x	Flex x	Models
None	None	43
1.5	0.8	37
None	0.8	22

Newest 30 active text generation models by create_ts

Added	Model	Quantization	Partner	Context	In $/M	Out $/M	Cached read x
2026-09-25	tencent/Hy4-preview	fp8	False	1048576	0.834	2.501	0.05035971
2026-09-23	anthropic/claude-opus-5-5	None	True	1000000	4.000	20.000	0.05
2026-09-22	XiaomiMiMo/MiMo-V2.6-Pro	fp8	False	1048576	0.430	0.870	0.00837209
2026-09-22	XiaomiMiMo/MiMo-V2.6-Flash	fp8	False	1048576	0.140	0.280	0.02
2026-09-14	Qwen/Qwen3.8-Flash	None	True	1000000	0.113	0.382	0.12477876
2026-09-10	deepseek-ai/DeepSeek-V4.1-Flash	fp8	False	1048576	0.200	0.600	0.03
2026-09-08	inclusionAI/Ling-3.0-flash-VL	fp16	False	131072	0.060	0.180	0.2
2026-09-03	inclusionAI/Ling-3.0-flash-Fin	fp4	False	262144	0.060	0.180	0.2
2026-09-03	deepseek-ai/DeepSeek-V4-Flash-Vision-Exp	fp8	False	1048576	0.440	1.320	0.03181818
2026-08-28	zai-org/GLM-5.3	fp4	False	1048576	0.900	4.000	0.22222222
2026-08-26	zai-org/GLM-5.3-Flash	fp4	False	1048576	0.150	0.500	0.2
2026-08-24	ibm-granite/granite-4.2-30b	None	False	131072	0.160	0.650	0.25

Added	Model	Quantization	Partner	Context	In $/M	Out $/M	Cached read x
2026-08-24	ibm-granite/granite-4.2-8b	None	False	131072	0.060	0.250	0.25
2026-08-24	ibm-granite/granite-4.2-3b	None	False	131072	0.030	0.120	0.25
2026-08-17	Qwen/Qwen3.8-27B	None	False	262144	0.200	2.500	0.25
2026-08-14	deepseek-ai/DeepSeek-V4-Pro-0813	fp8	False	1048576	1.300	2.600	0.07692308
2026-08-14	google/gemini-3.7-flash	None	True	1000000	0.750	3.750	None
2026-08-12	Qwen/Qwen3.8-2.4T-A95B	fp4	False	262144	2.000	6.000	0.1
2026-08-10	meta-models/Muse-Glimmer-30B	None	False	131072	0.300	1.200	0.13333333
2026-08-04	inclusionAI/Ling-3.0-flash	None	False	131072	0.060	0.180	0.2
2026-08-03	nvidia/NVIDIA-Nemotron-3.5-Lightning	None	False	262144	0.060	0.160	0.5
2026-08-03	Qwen/Qwen3.8-Max	None	True	256000	1.650	4.951	0.12484848
2026-07-31	deepseek-ai/DeepSeek-V4-Flash-0731	fp8	False	1048576	0.060	0.180	0.25
2026-07-31	thinkingmachines/Inkling-Small	fp8	False	524288	0.450	1.200	0.22222222
2026-07-27	moonshotai/Kimi-K3	None	False	1048576	2.850	14.250	0.1
2026-07-27	openai/gpt-oss-120b-Ultra	fp8	True	131072	0.200	0.950	None
2026-07-27	google/gemma-4-31B-it-Ultra	fp8	True	131072	0.270	0.760	None
2026-07-27	anthropic/claude-opus-5	None	True	1000000	5.000	25.000	None
2026-07-21	thinkingmachines/Inkling	fp8	False	524288	0.950	4.050	0.16842105
2026-07-07	tencent/Hy3	fp4	False	262144	0.130	0.530	0.25384615

Flagship open-weight families (active text generation)

Family	Count	Models
DeepSeek	10	deepseek-ai/DeepSeek-R1-0528, deepseek-ai/DeepSeek-V3, deepseek-ai/DeepSeek-V3.1, deepseek-ai/DeepSeek-V3.2, deepseek-ai/DeepSeek-V4-Flash, deepseek-ai/DeepSeek-V4-Flash-0731, deepseek-ai/DeepSeek-V4-Flash-Vision-Exp, deepseek-ai/DeepSeek-V4-Pro, deepseek-ai/DeepSeek-V4-Pro-0813, deepseek-ai/DeepSeek-V4.1-Flash

Family	Count	Models
Llama	7	NousResearch/Hermes-3-Llama-3.1-405B, NousResearch/Hermes-3-Llama-3.1-70B, meta-llama/Llama-3.3-70B-Instruct-Turbo, meta-llama/Llama-4-Scout-17B-16E-Instruct, meta-llama/Llama-Guard-4-12B, meta-llama/Meta-Llama-3.1-70B-Instruct-Turbo, meta-llama/Meta-Llama-3.1-8B-Instruct-Turbo
Qwen3	21	Qwen/Qwen3-14B, Qwen/Qwen3-235B-A22B-Instruct-2507, Qwen/Qwen3-30B-A3B, Qwen/Qwen3-32B, Qwen/Qwen3-Coder-480B-A35B-Instruct-Turbo, Qwen/Qwen3-Max, Qwen/Qwen3-Max-Thinking, Qwen/Qwen3-Next-80B-A3B-Instruct, Qwen/Qwen3-VL-235B-A22B-Instruct, Qwen/Qwen3-VL-30B-A3B-Instruct, Qwen/Qwen3.5-27B, Qwen/Qwen3.5-35B-A3B, Qwen/Qwen3.5-397B-A17B, Qwen/Qwen3.5-9B, Qwen/Qwen3.6-27B, Qwen/Qwen3.6-35B-A3B, Qwen/Qwen3.7-Max, Qwen/Qwen3.8-2.4T-A95B, Qwen/Qwen3.8-27B, Qwen/Qwen3.8-Flash, Qwen/Qwen3.8-Max
gpt-oss	4	openai/gpt-oss-120b, openai/gpt-oss-120b-Turbo, openai/gpt-oss-120b-Ultra, openai/gpt-oss-20b
Kimi	2	moonshotai/Kimi-K2.6, moonshotai/Kimi-K3
GLM	5	zai-org/GLM-4.6, zai-org/GLM-4.7, zai-org/GLM-5.2, zai-org/GLM-5.3, zai-org/GLM-5.3-Flash
gemma	7	google/gemma-3-12b-it, google/gemma-3-27b-it, google/gemma-3-4b-it, google/gemma-4-26B-A4B-it, google/gemma-4-31B-it, google/gemma-4-31B-it-Ultra, google/gemma-4-31B-it-turbo
Nemotron	5	nvidia/NVIDIA-Nemotron-3-Super-120B-A12B, nvidia/NVIDIA-Nemotron-3-Ultra-550B-A55B, nvidia/NVIDIA-Nemotron-3.5-Lightning, nvidia/Nemotron-3-Nano-30B-A3B, nvidia/Nemotron-Content-Safety-3.5
Mistral	3	mistralai/Mistral-Nemo-Instruct-2407, mistralai/Mistral-Small-24B-Instruct-2501, mistralai/Mistral-Small-3.2-24B-Instruct-2506
MiniMax	2	MiniMaxAI/MiniMax-M2.7-Turbo, MiniMaxAI/MiniMax-M3
granite	3	ibm-granite/granite-4.2-30b, ibm-granite/granite-4.2-3b, ibm-granite/granite-4.2-8b

Models tagged b200: deepseek-ai/DeepSeek-R1-0528, deepseek-ai/DeepSeek-V3, meta-llama/Llama-3.3-70B-Instruct-Turbo, meta-llama/Llama-4-Scout-17B-16E-Instruct, meta-llama/Meta-Llama-3.1-70B-Instruct-Turbo

Akamai Cloud (Linode API v4) regions

Source: unauthenticated GET https://api.linode.com/v4/regions captured by the probe script.

Regions: 33. Regions advertising the GPU Linodes capability: 22.

Region	Label	Country	Site type	GPU Linodes	Kubernetes	NETINT VPU	Placement Group
ap-northeast	Tokyo 2, JP	jp	core		yes		yes
ap-south	Singapore, SG	sg	core	yes	yes		yes
ap-southeast	Sydney, AU	au	core		yes		yes
ap-west	Mumbai, IN	in	core		yes		yes
au-mel	Melbourne, AU	au	core		yes		yes
br-gru	Sao Paulo, BR	br	core		yes		yes
ca-central	Toronto, CA	ca	core	yes	yes		yes
de-fra-2	Frankfurt 2, DE	de	core	yes	yes	yes	yes
es-mad	Madrid, ES	es	core		yes		yes
eu-central	Frankfurt, DE	de	core	yes	yes		yes
eu-west	London, UK	gb	core		yes		yes
fr-par	Paris, FR	fr	core	yes	yes		yes
fr-par-2	Paris 2, FR	fr	core	yes	yes		yes
gb-lon	London 2, UK	gb	core	yes	yes	yes	yes
id-cgk	Jakarta, ID	id	core	yes	yes		yes
in-bom-2	Mumbai 2, IN	in	core	yes	yes		yes
in-maa	Chennai, IN	in	core	yes	yes	yes	yes
it-mil	Milan, IT	it	core		yes		yes

Region	Label	Country	Site type	GPU Linodes	Kubernetes	NETINT VPU	Placement Group
jp-osa	Osaka, JP	jp	core	yes	yes		yes
jp-tyo-3	Tokyo 3, JP	jp	core	yes	yes		yes
nl-ams	Amsterdam, NL	nl	core	yes	yes		yes
se-sto	Stockholm, SE	se	core	yes	yes		yes
sg-sin-2	Singapore 2, SG	sg	core	yes	yes		yes
us-central	Dallas, TX	us	core		yes		yes
us-east	Newark, NJ	us	core	yes	yes		yes
us-iad	Washington, DC	us	core		yes		yes
us-iad-2	Washington 2, DC	us	core	yes	yes		yes
us-lax	Los Angeles, CA	us	core	yes	yes	yes	yes
us-mia	Miami, FL	us	core	yes	yes	yes	yes
us-ord	Chicago, IL	us	core	yes	yes	yes	yes
us-sea	Seattle, WA	us	core	yes	yes		yes
us-southeast	Atlanta, GA	us	core	yes	yes		yes
us-west	Fremont, CA	us	core		yes		yes

All capability strings seen: ACLP Logs Datacenter LKE-E, Backups, Block Storage, Block Storage Encryption, Block Storage Migrations, Cloud Firewall, Disk Encryption, GPU Linodes, Kubernetes, Linode Interfaces, Linodes, Maintenance Policy, Managed Databases, Metadata, NETINT Quadra T1U, NodeBalancers, Object Storage, Placement Group, Premium NodeBalancers, Premium Plans, StackScripts, VPCs, Vlans