

```

% Send a call to the scheduling agent and start the polling agent.
proc(main, conc(constraintsGathered(schedAgent, budgetMeeting), pMain)).


% SCHEDULING AGENT
% Both by email and by polling - does not make domain sense but added here for the demonstration
proc(constraintsGathered(sa, m), [constraintsGatheredByEmail(sa, m), constraintsGatheredByPoll(sa, m)]).

% Perform a simple call
proc(constraintsGatheredByEmail(sa, m),
    pi(ca, [?(and([communicationAgent(ca), meeting(m), schedulingAgent(sa)])), constraintsGatheredByEmail(ca, sa, m)]).

% Perform the message dispatch action for a server
proc(constraintsGatheredByPoll(sa, m),
    pi(pa, [?(pollingToolAgent(pa)), constraintsGatheredByPoll_Request_Send(pa, sa, m)]).

% Message dispatch action. Execute adds it to the queue of messages to be sent.
prim_action(constraintsGatheredByPoll_Request_Send(_,_,_)).
poss(constraintsGatheredByPoll_Request_Send(_,_,_), true).
initially(constraintsGatheredByPoll_Request_Send_Sat(_,_,_), false).
causes_val(constraintsGatheredByPoll_Request_Send(pa, sa, m),
    constraintsGatheredByPoll_Request_Send_Sat(pa, sa, m), true, true).
prim_fluent(constraintsGatheredByPoll_Request_Send_Sat(_,_,_)).

```

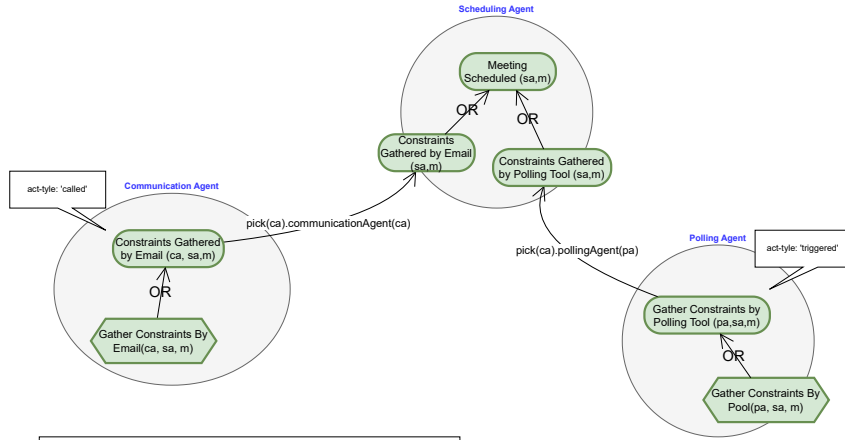

```

% COMMUNICATION AGENT
% Normal procedure call. In istar-OT-X activation style was marked as 'called'
proc(constraintsGatheredByEmail(ca, sa, m), gatherConstraintsByEmail(ca, sa, m)).

prim_action(gatherConstraintsByEmail(_,_,_)).
poss(gatherConstraintsByEmail(_,_,_), true).
initially(gatherConstraintsByEmail_Sat(_,_,_), false).
causes_val(gatherConstraintsByEmail(ca, sa, m),
    gatherConstraintsByEmail_Sat(ca, sa, m), true, true).
prim_fluent(gatherConstraintsByEmail_Sat(_,_,_)).

```

```

% POLLING AGENT
% Message based trigger. In istar-OT-X activation style was marked as 'triggered'
% Agent needs a server if there is at least one triggered goal. The goal is added
% without parameters. Parameters will come from the exogenous event.
proc(pMain, conc(constraintsGatheredByPollingTool)).

% The exogenous action that triggers the goal, by turning the [action_name]_Sat fluent true.
exog_action(constraintsGatheredByPoll_Request_Receive(_,_,_)).
causes_val(constraintsGatheredByPoll_Request_Receive(pa, sa, m),
    constraintsGatheredByPoll_Request_Receive_Sat(pa, sa, m),
    true, true).
prim_fluent(constraintsGatheredByPoll_Request_Receive_Sat(_,_,_)).

% Action for marking consumption of exogenous action by turning the [action_name]_Consumed fluent true.
prim_action(constraintsGatheredByPoll_Request_Receive_Consume(_,_,_)).
poss(constraintsGatheredByPoll_Request_Receive_Consume(_,_,_), true).
causes_val(constraintsGatheredByPoll_Request_Receive_Consume(pa, sa, m),
    constraintsGatheredByPoll_Request_Receive_Consumed(pa, sa, m),
    true, true).
prim_fluent(constraintsGatheredByPoll_Request_Receive_Consumed(_,_,_)).

% Goal translation.
% Will be pursued if there is a received message (the _Sat fluent) that has not been consumed (the _Consumed fluent)
proc(constraintsGatheredByPollingTool,
    [
        pi(pa, pi(sa, pi(m, [?(and([pollingToolAgent(pa),
            schedulingAgent(sa),
            meeting(m),
            constraintsGatheredByPoll_Request_Receive_Sat(pa, sa, m), % has been received
            neg(constraintsGatheredByPoll_Request_Receive_Consumed(pa, sa, m)) % not consumed yet
            ])),
            constraintsGatheredByPoll_Request_Receive_Consume(pa, sa, m), % consume first!
            gatherConstraintsByPool(pa, sa, m)
        ])))
    ])
).
prim_action(gatherConstraintsByPool(_,_,_)).
poss(gatherConstraintsByPool(_,_,_), true).

```