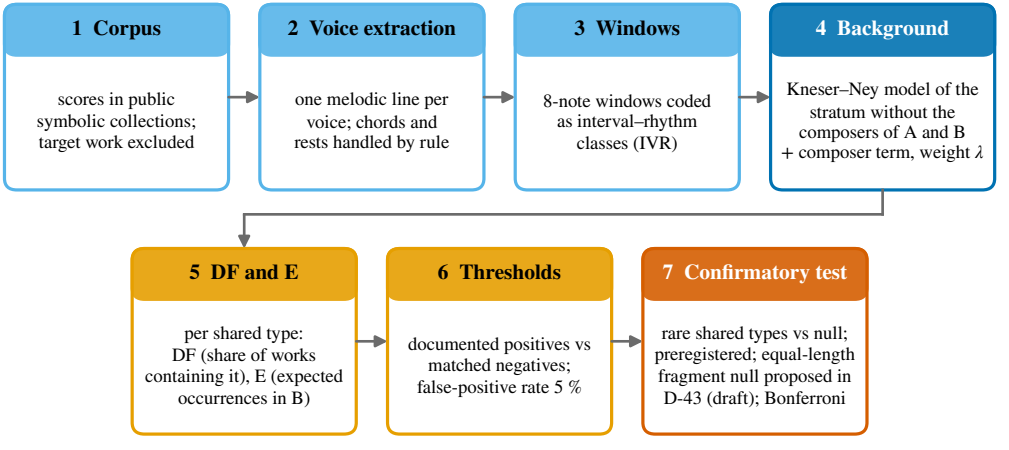
1 Corpus
scores in public symbolic collections; target work excluded
2 Voice extraction
one melodic line per voice; chords and rests handled by rule
3 Windows
8-note windows coded as interval–rhythm classes (IVR)
4 Background
Kneser–Ney model of the stratum without the composers of A and B + composer term, weight λ
5 DF and E
per shared type: DF (share of works containing it), E (expected occurrences in B)
6 Thresholds
documented positives vs matched negatives; false-positive rate 5 %
7 Confirmatory test
rare shared types vs null; preregistered; equal-length fragment null proposed in D-43 (draft); Bonferroni