Aderant

BETTER TOGETHER

# Expert Back Office powered by CMS.NET

# Time API

Reference Guide (January 2018)

This document contains proprietary and confidential information of Aderant Holdings, Inc. (“Aderant”)

Aderant makes no representations or warranties with respect to the contents of this document publication and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose.

The contents of this manual are believed to be current and accurate as of its date of publication. Changes to this manual between reprintings and other important information about the software product are made or published in release notes, and you are urged to obtain the current release notes for the software product.

We welcome user comments and reserve the right to revise this publication and/or make improvements or changes to the products or programs described in this publication at any time, without notice.

Aderant

BETTER TOGETHER

---

Copyright © 2018, Aderant Holdings, Inc. All rights reserved.

Aderant, Aderant Expert, and the Aderant logo are registered trademarks or trademarks of Aderant Holdings, Inc. Other brand and product names are trademarks or registered trademarks of their respective owners, and may include trademarks owned by subsidiaries and affiliated entities of Aderant Holdings, Inc.

Printed in the United States of America. No part of this publication may be reproduced in any form without the prior written consent of Aderant Holdings, Inc.

**Aderant North America**

The Pointe

500 Northridge Road, Suite 800

Atlanta, Georgia 30350

Tel: +1.404.720.3600

Fax: +1.404.720.3601

info@aderant.com | www.aderant.com

# Table of Contents

**Browser Time API Overview ..... 1**

Objectives of This Guide ..... 1

Scope and Limitations of This Reference ..... 1

Intended Audience ..... 1

Disclaimer ..... 2

**Business Logic Components (BLCs) ..... 3**

Time Entry BLCs/DACs ..... 3

Action DAC ..... 10

Activity DAC ..... 12

**Visual Components (VCs) ..... 14**

Multi-view Shell - multiviewshell ..... 14

Detailed Entry Form ..... 18

Timer View ..... 18

**Getting Support ..... 20**

# Browser Time API Overview

The Browser Application Programming Interface (API) Reference set supplies building blocks that allow client developers to create custom ADERANT Expert Browser applications, automate processes, and vary deployment models. This Reference set is made up of two parts, and it is intended that these two elements of the API Reference be used together:

- The Browser Common Elements API Reference provides guidelines on consuming Business Logic Components and Visual Components and details on those API elements that are used/consumed by multiple applications. You will want to use this Reference whether you will be working with just one or all six of the application APIs.
- The six Browser applications API references which provide API detail specific to the Browser applications to assist you in customizing those applications.

The Browser Time API provides several visual components (VCs) and business logic components (BLCs) that encapsulate and deliver ADERANT Expert functionality. The Browser Time BLCs provide access to transactional time entry objects such as entering time, editing time entries and releasing. The Browser Time VCs provide access to all the Time functionality in discrete self-contained pages.

- To learn more about visual components, see the Visual Components section of your Browser Common Elements API Reference.
- To learn more about business logic Components, see the Business Logic Components (BLCs) section of your Browser Common Elements API Reference.

## Objectives of This Guide

The Browser Time Application Programming Interface (API) Reference is intended to supply building blocks that, along with Browser Common Elements API Reference, allow client developers to create custom applications, automate processes, and vary deployment models.

## Scope and Limitations of This Reference

This Reference will provide information and instruction on specific elements of the Browser Time API. While this document provides some information relating to the Common Elements API Reference and may reference APIs of other Browser applications and their functions, it is not intended as a guide to those APIs. See the Common Elements API Reference or the appropriate Browser application API for details on those items. It is intended that the Conflicts Browser API Reference be used in conjunction with the Common Elements API Reference.

## Intended Audience

The API Reference serves the needs of client developers wishing to extend, customize or modify ADERANT Expert functionality and its deployment. Developers working with this API must be familiar with the Back Office CS (client/server) database.

## Disclaimer

The code samples and other examples provided in this document are provided “as is” without warranty of any kind. ADERANT cautions RECIPIENT to determine for self the suitability of the use of the code samples and other data provided as examples of functionality in this document for any purpose. To the extent permitted by law or statute, ADERANT disclaims all warranties, either expressed or implied, including the warranties of merchantability and fitness for a particular purpose. To the extent permitted by law or statute in no event shall ADERANT or its suppliers be liable for any damages whatsoever including direct, indirect, incidental, consequential, loss of business profits or special damages, even if ADERANT or its suppliers have been advised of the possibility of such damages.

# Business Logic Components (BLCs)

Business Logic Components (BLCs) provide the underlying functionality of the ADERANT Expert applications. BLCs are divided into two types: those used to **retrieve** data and those used to **affect** it. Those that retrieve data, providing read-only access to the data, are more specifically referred to as Data Access Components (or DACs).

## Time Entry BLCs/DACs

This topic covers all Time Entry-related BLCs and DACs, including details for corresponding BLCs in the .NET and web service platforms. To understand the difference between .NET BLCs and their web service equivalents, please see .NET Business Logic Components.

TimeEntry BLCs and DACs use TimeEntryData classes to manipulate data in the TAT_TIME table. For information on data classes and standard functions of .NET BLCs, please see Data Classes.

The prototypes, descriptions and examples provided here use C# syntax for .NET BLCs and Web Service Definition Language for web service BLCs. Syntax for other languages may vary.

### Location

| Assembly | Namespace |
|---|---|
| TimeCOM.dll | Solution6.Cio.Time |

### TimeEntryBLC/TimeEntryService.asmx

This information applies to equivalent BLCs for both the .NET and web services platforms, except where noted. See Business Logic Components (BLCs) for descriptions.

### Methods

```
public int Create(TimeEntryDataCreate data)
.NET Only: public int Create(TimeEntryDataCreate data, bool lockOnCreate)
public void Update(int timeEntryUno, TimeEntryDataUpdate data)
public void Delete(int timeEntryUno)
public void Release(int timeEntryUno)
WS Only: public void ReleaseWithText(int timeEntryUno, string narrativeText, string
prebillText)
public void Unrelease(int timeEntryUno)
public void SetPrintedFlag(int timeEntryUno, bool flagValue)
```

### .NET Events

```
public event CreatingDelegate Creating
public event CreatedDelegate Created
public event UpdatingDelegate Updating
public event UpdatedDelegate Updated
public event DeletingDelegate Deleting
public event DeletedDelegate Deleted
public event ReleasingDelegate Releasing
```

```
public event ReleasedDelegate Released
public event UnreleasingDelegate Unreleasing
public event UnreleasedDelegate Unreleased
```

### .NET Delegates

```
public delegate void CreatingDelegate(TimeEntryDataCreate data)
public delegate void CreatedDelegate(int timeEntryUno, TimeEntryDataCreate
data)
public delegate void UpdatingDelegate(int timeEntryUno, TimeEntryDataUpdate
data)
public delegate void UpdatedDelegate(int timeEntryUno, TimeEntryDataUpdate
data)
public delegate void DeletingDelegate(int timeEntryUno)
public delegate void DeletedDelegate(int timeEntryUno)
public delegate void ReleasingDelegate(int timeEntryUno, string narrativeText,
string prebillText)
public delegate void ReleasedDelegate(int timeEntryUno, string narrativeText,
string prebillText)
public delegate void UnreleasingDelegate(int timeEntryUno)
public delegate void UnreleasedDelegate(int timeEntryUno)
```

### COM+ Event Interface

```
public interface ITimeEntryEvents
{
   void Creating(TimeEntryDataCreate data);
   void Created(int timeEntryUno, TimeEntryDataCreate data);
   void Updating(int timeEntryUno, TimeEntryDataUpdate data);
   void Updated(int timeEntryUno, TimeEntryDataUpdate data);
   void Deleting(int timeEntryUno);
   void Deleted(int timeEntryUno);
   void Releasing(int timeEntryUno, string narrativeText, string prebillText);
   void Released(int timeEntryUno, string narrativeText, string prebillText);
   void Unreleasing(int timeEntryUno);
   void Unreleased(int timeEntryUno);
}
```

### COM+ Event Class

```
Solution6.Cio.Time.TimeEntryEvents
```

### TimeEntryDAC/TimeEntryService.asmx

This information applies to equivalent BLCs for both the .NET and web services platforms, except where noted. See .NET BLCs for descriptions.

### Methods

```
public TimeEntryData Initialize()
.NET only: public TimeEntryData Initialize(int timekeeperUno)
WS only: public TimeEntryData InitializeEmplUno(int timekeeperUno)
WS only: public TimeEntryDataCreate InitializeDataCreate()
public TimeEntryData ReadSingle(int timeEntryUno)
public TimeEntryData[] Read(string filter)
```

```
WS only: public TimeEntryDataCreate GetDataCreate(TimeEntryData data)
WS only: public TimeEntryDataUpdate GetDataUpdate(TimeEntryData data)
The TimeEntry entity is used to create filters for the Read and ReadKeys
methods.
```

### TimeEntryData

See Business Logic Components (BLCs) for descriptions.

### Methods

```
public TimeEntryDataCreate GetDataCreate()
public TimeEntryDataUpdate GetDataUpdate()
```

For properties, see below.

### TimeEntryDataCreate

For properties, see below.

### TimeEntryDataUpdate

For properties, see below.

### Properties

The following table shows the data type for each TimeEntryData property. When the data is retrieved from the TAT_TIME table, the column name and data class are indicated. When the data is retrieved from a foreign table, the appropriate DAC is provided instead.

| Parameter | Data Type | Column | Data | Data Create | Data Update | DAC |
|---|---|---|---|---|---|---|
| ActionCode | string | ACTION_CODE | Y | Y | Y | |
| ActionDescription | string | ACTION_CODE.ACTION_DESC | Y | | | |
| ActionMinimumTime | decimal | ACTION_CODE.MIN_TIME | Y | | | |
| ActivityCode | string | ACTIVITY_CODE | Y | Y | Y | |
| ActivityCount | int | ACTIVITY_COUNT | Y | | | |
| ActivityDescription | string | ACTIVITY_CODE.ACTIVITY_DESC | Y | | | |
| AdjAuEmployeeUno | int | ADJ_AU_EMPL_UNO | Y | | | |
| AdjCode | string | ADJ_CODE | Y | | | |
| AdjDeEmployeeCode | string | ADJ_DE_EMPL_UNO.EMPLOYEE_CODE | Y | | | |
| AdjDeEmployeeUno | int | ADJ_DE_EMPL_UNO | Y | | | |

| Parameter | Data Type | Column | Data | Data Create | Data Update | DAC |
|---|---|---|---|---|---|---|
| AuEmployeeUno | int | AU_EMPL_UNO | Y | | | |
| BaseAmount | Decimal | BASE_AMT | Y | | | |
| BaseHours | Decimal | BASE_HRS | Y | Y | Y | |
| BillableFlag | string | BILLABLE_FLAG | Y | | | |
| BilledAmount | Decimal | BILLED_AMT | Y | | | |
| BilledEmployeeCode | string | BILLED_EMPL_UNO.EMPLOYEE_CODE | Y | | | |
| BilledEmployeeName | string | BILLED_EMPL_UNO.EMPLOYEE_NAME | Y | | | |
| BilledEmployeeOffice | string | BILLED_EMPL_UNO.OFFC | Y | | | |
| BilledEmployeeUno | int | BILLED_EMPL_UNO | Y | | | |
| BilledHours | Decimal | BILLED_HRS | Y | | | |
| BilledTaxAmount | Decimal | BILLED_TAX_AMT | Y | | | |
| BilledTaxPercent | Decimal | BILLED_TAX_PCT | Y | | | |
| BillPrint | string | BILL_PRINT | Y | | | |
| BillSortSequence | int | BILL_SORT_SEQ | Y | | | |
| BillTranUno | int | BILL_TRAN_UNO | Y | | | |
| CalculateWip | string | CALC_WIP | Y | Y | Y | |
| ClientCode | string | MATTER_UNO.CLIENT_UNO.CLIENT_CODE | Y | | | |
| ClientMatterCode | string | MATTER_UNO.CLNT_MATT_CODE | Y | | | |
| ClientName | string | MATTER_UNO.CLIENT_UNO.CLIENT_NAME | Y | | | |
| CurrencyCode | string | CURRENCY_CODE | Y | Y | Y | Currency DAC |
| DepartmentCode | string | DEPT | Y | | | |
| DisbursementUno | int | DISB_UNO | Y | | | |

| Parameter | Data Type | Column | Data | Data Create | Data Update | DAC |
|---|---|---|---|---|---|---|
| DoeStatus | string | DOE_STATUS | Y | | | |
| Druno | int | DRUNO | Y | | | |
| EntryEmployeeCode | string | ENTRY_EMPL_UNO.EMPLOYEE_CODE | Y | | | |
| EntryEmployeeName | string | ENTRY_EMPL_UNO.EMPLOYEE_NAME | Y | | | |
| EntryEmployeeUno | int | ENTRY_EMPL_UNO | Y | | | |
| EntryStatus | string | ENTRY_STATUS | Y | | | |
| HoldDate | DateTime | HOLD_DATE | Y | Y | Y | |
| ImportNumber | int | IMPORT_NUM | Y | | | |
| LastModified | DateTime | LAST_MODIFIED | Y | | | |
| LatestPeriod | int | LATEST_PERIOD | Y | | | |
| LocationCode | string | LOCATION_CODE | Y | Y | Y | Location DAC |
| LocationDescription | string | LOCATION_CODE.LOCATION_DESC | Y | | | |
| MatterAllowTime | string | MATTER_UNO.TB_MATTER_UNO.ALLOW_TIME | Y | | | |
| MatterCode | string | MATTER_UNO.MATTER_CODE | Y | | | |
| MatterLanguageCode | string | MATTER_UNO.LANGUAGE_CODE | Y | | | |
| MatterLanguageDescription | string | MATTER_UNO.LANGUAGE_CODE.LANGUAGE_DESC | Y | | | |
| MatterName | string | MATTER_UNO.MATTER_NAME | Y | | | |
| MatterTimeClass | string | MATTER_UNO.TB_MATTER_UNO.TIME_CLASS | Y | | | |
| MatterTimeInc | string | MATTER_UNO.TB_MATTER_UNO.TIME_INC | Y | | | |
| MatterUno | int | MATTER_UNO | Y | Y | Y | MatterDAC |

| Parameter | Data Type | Column | Data | Data Create | Data Update | DAC |
|---|---|---|---|---|---|---|
| MatterUseUnits | string | MATTER_UNO.TB_MATTER_UNO .USE_UNITS | Y | | | |
| MergeTimeUno | int | MERGE_TIME_UNO | Y | | | |
| NarrativeText | string | NAR_TEXT_ID | Y | Y | Y | |
| OfficeCode | string | OFFC | Y | | | |
| OriginalTaskNumber | int | ORIGTASK_NUM | Y | | | |
| Period | int | PERIOD | Y | | | |
| PhaseTaskCode | string | PHTASK_UNO.PHTASK_CODE | Y | | | |
| PhaseTaskDescription | string | PHTASK_UNO. | Y | | | |
| PhaseTaskUno | int | PHTASK_UNO | Y | Y | Y | PhaseTask DAC |
| PostDate | DateTime | POST_DATE | Y | | | |
| PrebillText | string | PB_TEXT_ID | Y | Y | Y | |
| Printed | string | PRINTED | Y | Y | Y | |
| ProfitCenter | string | PROF | Y | | | |
| RankCode | int | RANK_CODE | Y | | | |
| RateMethod | string | RATE_METHOD | Y | | | |
| Source | string | SOURCE | Y | Y | Y | |
| SplitNumber | int | SPLIT_NUM | Y | | | |
| StandardAmount | Decimal | STD_AMT | Y | | | |
| StartTime | DateTime | START_TIME | Y | | | |
| TaskPlanCode | string | MATTER_UNO.TB_MATTER_UNO .TASK_PLAN_CODE | Y | | | |
| Taxable | string | TAXABLE | Y | | | |
| TimekeeperCode | string | TK_EMPL_UNO.EMPLOYEE_COD E | Y | | | |
| TimekeeperName | string | TK_EMPL_UNO.EMPLOYEE_NAM | Y | | | |

| Parameter | Data Type | Column | Data | Data Create | Data Update | DAC |
|---|---|---|---|---|---|---|
| | | E | | | | |
| TimekeeperOffice | string | TK_EMPL_UNO.OFFC | Y | | | |
| TimekeeperUno | int | TK_EMPL_UNO | Y | Y | Y | Personnel DAC |
| TimeUno | int | TIME_UNO | Y | | | |
| ToBillAmount | Decimal | TOBILL_AMT | Y | Y | Y | |
| ToBillEmployeeUno | int | TOBILL_EMPL_UNO | Y | | | |
| ToBillHours | Decimal | TOBILL_HRS | Y | Y | Y | |
| TransactionDate | DateTime | TRAN_DATE | Y | Y | Y | |
| TransferModUno | int | TRANS_MOD_UNO | Y | | | |
| Transferred | string | TRANSFERRED | Y | | | |
| WipStatus | string | WIP_STATUS | Y | | | |

### Locking Considerations

None.

### Security Considerations

Check Execute rights before executing a DAC or BLC method. See FunctionalSecurityService for further details.

| Module | Rights Name |
|---|---|
| DAC Methods:<br>CMS.Net Time Entry Application<br>1,50000,50700 | Execute |
| BLC Methods:<br>CMS.Net Time Entry Application/CMS.Net Time Entry Business Logic Components/CMS.Net Time Entry BLC<br>1,50000,50700,50702,50703 | Execute<br>Create<br>Edit<br>Delete<br>Release |

## Action DAC

This topic covers the Action DAC, including details for corresponding DACs in the .NET and web service platforms. To understand the difference between .NET BLCs and their web service equivalents, please see the Business Logic Components section of the Common Elements API Reference.

The Action DAC uses the **ActionData** class to manipulate data in the TAL_ACTION table. For information on data classes and standard functions of .NET BLCs, please see the Business Logic Components section of the Common Elements API Reference.

The prototypes, descriptions and examples provided here use C# syntax for .NET BLCs, and web service definition language (WSDL) for web service BLCs. Syntax for other languages may vary.

### Location

| Assembly | Namespace |
|---|---|
| TimeCOM.dll | Solution6.Cio.Time |

### ActionDAC/ActionService.asmx

This information applies to equivalent DACs for both the .NET and web services platforms:

#### *Methods*

```
public ActionData ReadSingle(string actionCode)
public ActionData[] Read(string filter)
```

Entity: Action

### ActionData - Properties

The following table shows the data type and column name for each ActionData property stored in TAL_ACTION.

| Property | Data Type | Column |
|---|---|---|
| ActionCode | string | ACTION_CODE |
| ActionDesc | string | ACTION_DESC |
| Billable | string | BILLABLE |
| CostBaseAmt | string | COST_BASE_AMT |
| CostCode | string | COST_CODE |
| CostTobillAmt | string | COST_TOBILL_AMT |
| CurrencyCode | string | CURRENCY_CODE |
| ExpandUno | int | EXPAND_UNO |

| Property | Data Type | Column |
|---|---|---|
| Inactive | string | INACTIVE |
| LastModified | DateTime | LAST_MODIFIED |
| MinTime | decimal | MIN_TIME |
| MoveTimeEntry | string | MOVE_TIME_ENTRY |
| NarText | string | NAR_TEXT |
| NarTextOption | string | NAR_TEXT_OPTION |
| PbText | string | PB_TEXT |
| PbTextOption | string | PB_TEXT_OPTION |
| ProdCode | string | PROD_CODE |
| RateMult | double | RATE_MULT |
| RetainTeHours | string | RETAIN_TE_HRS |
| Taxable | string | TAXABLE |
| UnitRate | decimal | UNIT_RATE |
| UnitTime | decimal | UNIT_TIME |
| UnitValue | decimal | UNIT_VALUE |
| Universal | string | UNIVERSAL |

### Locking Considerations

None.

### Security Considerations

Check **Execute** rights before executing a DAC. See the Functional Security section of the Common Elements API Reference for further details.

| Module | Rights Name |
|---|---|
| CMS.Net Time Entry Application 1,50000,50700 | Execute |

## Activity DAC

This topic covers the Activity DAC, including details for corresponding DACs in the .NET and web service platforms. To understand the difference between .NET BLCs and their web service equivalents, please see the Business Logic Components section of the Common Elements API Reference.

The Activity DAC uses the **ActivityData** class to manipulate data in the TBL_ACTIVITY table. For information on data classes and standard functions of .NET BLCs, please see see the Business Logic Components section of the Common Elements API Reference.

The prototypes, descriptions and examples provided here use C# syntax for .NET BLCs, and web service definition language (WSDL) for web service BLCs. Syntax for other languages may vary.

### Location

| Assembly | Namespace |
|---|---|
| TimeCOM.dll | Solution6.Cio.Time |

### ActivityDAC/ActivityService.asmx

This information applies to equivalent DACs for both the .NET and web services platforms:

#### *Methods*

```
public ActivityData ReadSingle(string activityCode)
public ActivityData[] Read(string filter)
```

Entity: Activity

### ActivityData - Properties

The following table shows the data type and column name for each ActivityData property stored in TBL_ACTIVITY.

| Property | Data Type | Column |
|---|---|---|
| ActivityCode | string | ACTION_CODE |
| ActivityDesc | string | ACTIVITY_DESC |
| Inactive | string | INACTIVE |
| LastModified | DateTime | LAST_MODIFIED |

### Locking Considerations

None.

### Security Considerations

Check **Execute** rights before executing a DAC. See the Functional Security topic in the Common Elements API Reference for further details:

| Module | Rights Name |
| --- | --- |
| CMS.Net Time Entry Application 1,50000,50700 | Execute |

# Visual Components (VCs)

Time for Web Browser consists of three visual components (VCs).

- Multi-View Shell
- Detailed Entry Form
- Timer View

## Multi-view Shell - multiviewshell

The multi-view shell will be an ASP.Net webform derived from the class VisualComponentPage.

**Parameters**

| Parameter Name | Applies to | Allowed Values | Req'd | Default Value | Notes |
|---|---|---|---|---|---|
| View | All views | List, Calendar, Grid | No | Time application preference | This parameter is used to override the application preference for the default view displayed. |
| lockTimekeeper | All views | Y or N | No | N | Used to enable or disable the timekeeper control. |
| timekeeperCode | All views | string | No | Time application preference | Working timekeeper employee code |
| mode | All views | View, Edit | No | Edit | UI is read-only in view mode. |
| periodTarget | All views | yyyy-mm-dd | No | Today's workstation date | The date that defines the period to be shown. |
| periodSize | Grid, List | For Grid: Weekly, Biweekly, SemiMonthly<br><br>For List: Daily, Weekly, Biweekly, Monthly, Quarterly | No | Time application preference | Size of the display period. |
| userFilter | List | string enclosed in | No | none | QBE filter expression used to restrict which time entries are |

| Parameter Name | Applies to | Allowed Values | Req'd | Default Value | Notes |
|---|---|---|---|---|---|
| | | round brackets | | | displayed. This is case sensitive—an exact QBE filter expression must be specified based on the TimeEntry entity. |
| lockNavigation | All views | Y or N | No | N | Setting to Y prevents navigation to a different period than the current display period. |
| toolbarExclude | All views | comma separated string | No | none | A list of toolbar item ids to be removed from the toolbar. This is case sensitive. Exact id must be specified—see table below. |

### Toolbar IDs

Setting the **toolbarExclude** parameter in conjunction with the IDs listed here removes specific toolbar functionality. The following table lists the valid toolbar IDs:

| Toolbar ID | Notes |
|---|---|
| Calendar | The Calendar View |
| List | The List View |
| Grid | The Grid View |
| ViewChooser | The View Chooser |
| NewTimeEntry | Insert a Time Entry |
| EditTimeEntry | Edit a Time Entry |
| Release | Release a Time Entry |
| NewExpenseEntry | Insert an Expense Entry |
| QuickFilter | The quick filter combo box |
| Filter | The advanced filter |
| TagAll | Selects all time entries |
| TagInvert | Invert selected |
| TagClear | Clear all selected |
| Copy | Copy Selected |

| Toolbar ID | Notes |
|---|---|
| Release | Release Selected in the List |
| Print | Print the list |
| SpellCheck | Perform a spell check |
| SearchReplace | Perform a Search And Replace |
| Delete | Delete Selected |
| Timekeeper | The set of controls for changing the working timekeeper |

### Functional Security

Note functional security will be enforced for the following visual component:

| Module | Rights Name |
|---|---|
| CMS.Net Time Entry Application 1,50000,50700 | Execute |

### Relative URL

http://<servername>/CMSNet/Time/architecture/multiviewshell.aspx

### *Multi View Shell*

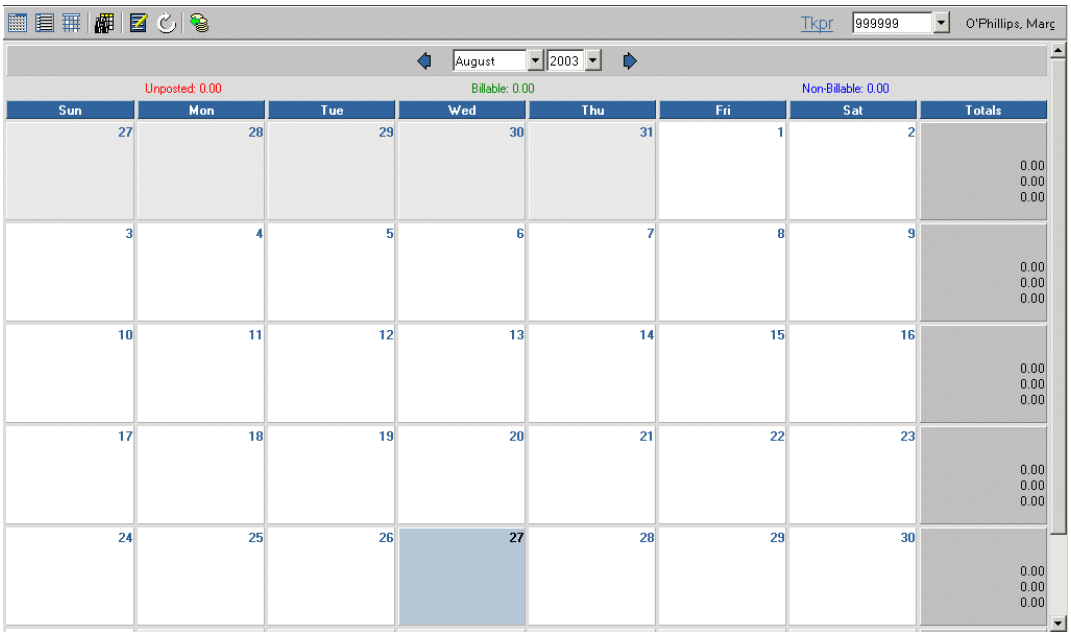

### Relative URL

http://<servername>/CMSNet/Time/architecture/multiviewshell.aspx?view=grid

### *Multi View Shell = Grid*

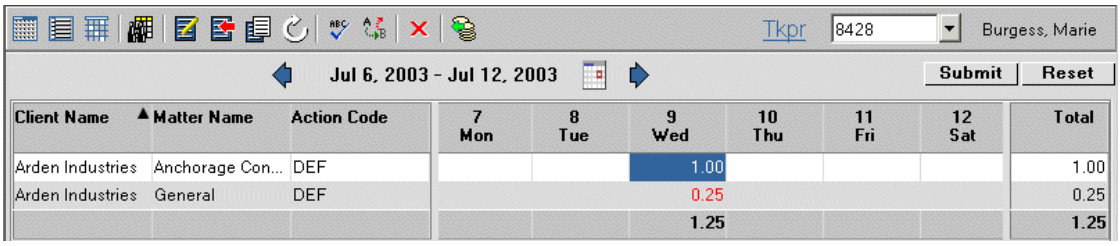


### Relative URL

http://<servername>/CMSNet/Time/architecture/multiviewshell.aspx?view=list

### *Multi View Shell = List*

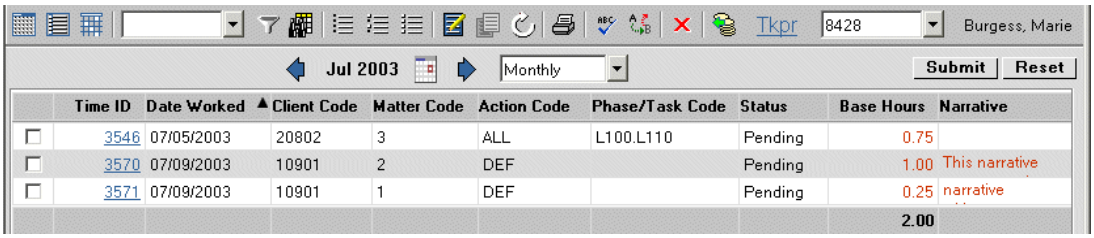


### Relative URL

http://<servername>/CMSNet/Time/architecture/multiviewshell.aspx?view=calendar

### *Multi View Shell = Calendar*

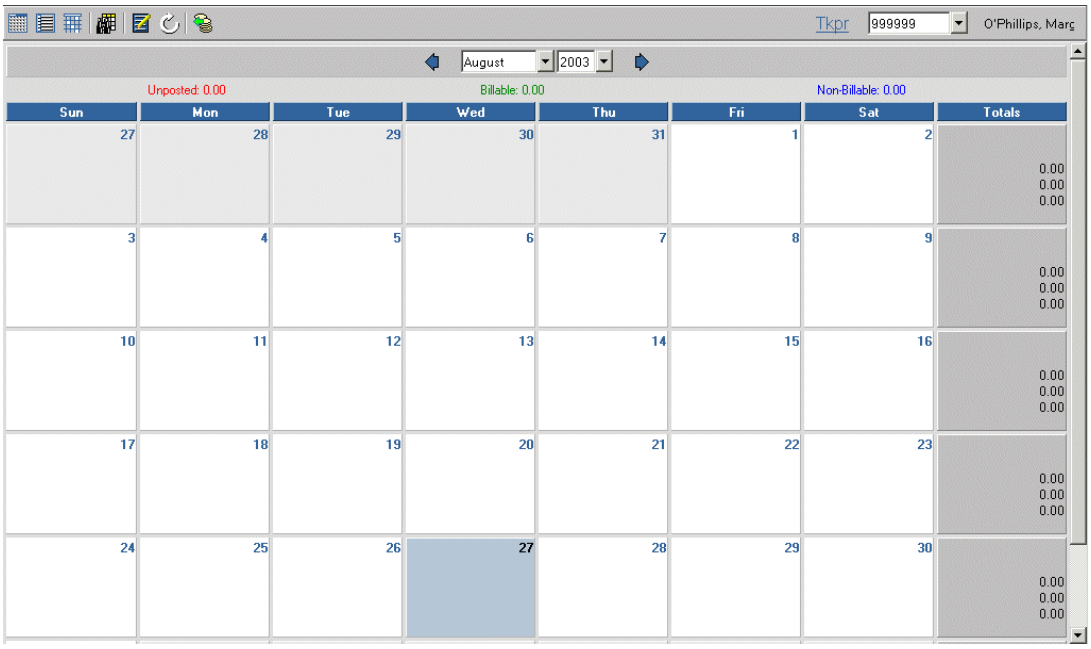

## Detailed Entry Form

This allows the user to enter and edit time entries.

### Parameters

| Parameter Name | Allowed Values | Req'd | Default Value | Notes |
|---|---|---|---|---|
| dateWorked | yyyy-mm-dd | No | Today's date | Initializes transaction date to specified date |
| mode | New, Edit, View | No | New | New – insert new time entry. If the TimeID VC parameter is also specified, new time entry form is initialized with time entry data belonging to the TimeID.<br>Edit – edit an existing time entry provided that the TimeID VC parameter is specified.<br>View – view an existing time entry provided that the TimeID VC parameter is specified. |
| timeID | numeric | No | none | Time entry uno used in conjunction with the mode parameter. |

### Functional Security

Note functional security will be enforced for the following visual component:

| Module | Rights Name |
|---|---|
| CMS.Net Time Entry Application 1,50000,50700 | Execute |

### Relative URL

http://<servername>/CMSNet/Time/detailedentry/detailedentryform.aspx

## Timer View

This enables the user to user a timer to record time entries.

### Parameters

| Parameter Name | Region | Type | Req'd | Notes |
|---|---|---|---|---|
| timekeeperCode | String | No | Default timekeeper in timer view preference.<br>If missing, the Login timekeeper | Sets the working timekeeper context for creating new timers. |

### Functional Security

Note functional security will be enforced for the following visual component:

| Module | Rights Name |
|---|---|
| CMS.Net Time Entry Application 1,50000,50700 | Execute |

### Relative URL

http://<servername>/CMSNet/Time/Timerview/timerview.aspx

# Getting Support

If you have any difficulty, we recommend that you obtain assistance from the following sources.

### Support Portal

The Content tab of the Support Portal contains the following information:

- Release documents (Release Notes and Installation Guides).
- Product documentation (User, Administration, Customization, and Application Setup Guides).
- Knowledge Base articles relating to the installation, customization and use of the product.

To access these documents:

1. Access the Support Portal at *www.myaderant.com*

   **Note:** If you do not have login details for the Support Portal, please contact Aderant Support.

2. Click the **Content** tab.

   **Tip:** If the Content tab is not visible, click the unlabeled tab on the far right (only has a +), then click Content in the All Tabs list.

3. In the **Search in** field select **All Libraries** and enter words that may be in the title of the document.
4. Click **Go!**
5. Use the left pane to filter your results further. For example, you can filter by Installation Guide in the Content Type filter, or AE 8.1 in the Version filter.

### User Help in Aderant Applications

Press *F1* in any application to launch the user help for the application.

### Aderant Technical Help in Visual Studio

Administration and Customization help is available by clicking on the Aderant toolbar in Visual Studio.

### Telephone Support

If the online help or our Support Portal do not answer your questions, Aderant Support representatives are available by phone.

| | |
|---|---|
| Americas Region | +1 850 224 2004 |
| Australia (within Australia) | 1800 236 285 |
| New Zealand (within NZ) | 0800 849 000 |
| Europe & Middle East | UK +44 (0) 20 7038 9696 |
| | Netherlands +31 88 400 0300 |