

CMPS 251

Read Chapter 15

Read/Write Files



Dr. Abdelkarim Erradi

Computer & Engineering Science Dept.

QU

Outline

- **Read / Write Text File**
- **Read / Write JSON File**

Read / Write Text File



Overview

- Data stored in a program variables is lost when the program ends
- To store data between program runs, we use files
- Java has MANY ways to read and write files
 - We will focus on the most commonly used ways

Use Java `java.nio.file` package

- **Represent file paths**

`Paths.get`

- **Read file**

`Files.lines`

- **Write file**

`Files.write`

- **Explore folders**

`Files.list`, `Files.walk`, ...

Paths

- **Paths** class provides a way to represent a file path and get path info
- **Get Path with Paths.get**
 - `Path p1 = Paths.get("some-file");`
 - `Path p2 = Paths.get("/usr/local/ae/some-file");`
 - `Path p3 = Paths.get("C:\\Users\\ae\\some-file");`
 - Notice the double backslashes because a backslash is used to escape next char in Java strings.
- **Paths have convenient methods**
 - `toAbsolutePath`, `getFileName`, `getParent`, `getRoot`
...

Example

```
public static void main(String[] args) {  
    Path path = Paths.get("data/countries.json").toAbsolutePath();  
    System.out.printf("Absolute Path: %s%n", path);  
    System.out.printf("getFileName: %s%n", path.getFileName());  
    System.out.printf("getParent: %s%n", path.getParent());  
    System.out.printf("getRoot: %s%n", path.getRoot());  
}
```

```
Absolute Path: D:\cmps251\cmps251-content\Examples\10.FileIO\data\countries.json  
getFileName: countries.json  
getParent: D:\cmps251\cmps251-content\Examples\10.FileIO\data  
getRoot: D:\
```

Read File Content

- You can read all lines into Stream in 1 method call
`Stream<String> lines = Files.lines(somePath);`
- Example:
 - Get Middle East countries from countries.txt file and save them to me-countries.txt file

```
String inputFileName = "data/countries.txt";
String outputFileName = "data/me-countries.txt";
List<String> countries =
    Files.lines(Paths.get(inputFileName))
        .filter(c -> c.contains("Middle East"))
        .map(c -> c.split(";")[0])
        .sorted()
        .collect(Collectors.toList());

System.out.println(countries);
Files.write(Paths.get(outputFileName), countries);
```


Benefits of **Files.lines**

- **Files.lines** return a Stream
 - Much faster + memory savings
 - Does not store entire file contents in one huge list, but allow processing each line read from the file
 - You can stop partway through, and rest of file is never processed (due to lazy evaluation of Streams). E.g., using **.findFirst()**
- You can use many convenient stream methods (we studied earlier)

Files.write

- You can write all lines in one method call
 - `List<String> lines = ...;`
 - `Files.write(somePath, lines);`
- **By default** the file is created if it does not exist or get overwritten if it exists
- To allow creating the file if it does not exist or append to it if it exists then you can use **OpenOption**

```
import static java.nio.file.StandardOpenOption.CREATE;
import static java.nio.file.StandardOpenOption.APPEND;
...
OpenOption[] options = new OpenOption[] { CREATE, APPEND };
...
Files.write(Paths.get(outputFileName), countries, options);
```

Example

- Write a list of Strings to a file

```
Path path = Paths.get("data/testFile.txt");  
List<String> lines =  
    List.of("Line One", "Line Two", "Final Line");  
Files.write(path, lines);
```

List / Walk a Folder

- **Files.list** : get files in a folder

```
Files.list(Paths.get(folder))  
    .forEach(System.out::println);
```

- **Files.walk** : returns a stream of files/folders by recursively walking the file tree rooted at a given path

```
String path = "D:\\cmps251\\cmps251-content";  
Files.walk(Paths.get(path))  
    .map(System.out::println);
```

Writing Formatted Text to a File

- Class **PrintWriter** (from package **java.io**) defines methods to create and write to a text file
 - To open the file Declare a *variable* using **PrintWriter** constructor, pass file path as argument
 - Wrap in a **try** and **catch** blocks to handle any **IOException** such as a new file cannot be created
- Use **println** / **printf** method to write to the file
- Close the file when done

Writing Formatted Text to a File: Example

```
PrintWriter out = new  
PrintWriter("data/MyFormattedFile.txt");  
out.println("This is being written to a file.");  
  
for (int i = 0; i < 10; i++) {  
    out.printf("%d\n", i);  
}  
  
out.close();
```

Read / Write JSON File



JSON Data Format

- **JSON** (JavaScript Object Notation) is a very popular **lightweight data format** to transform an object to a **text** form to ease storing and transporting data
- **Jackson ObjectMapper** library could be used to transform an object to json or transform a json string to an object

Transform an instance of Surah class to a JSON string:

```
ObjectMapper jsonMapper = new ObjectMapper();  
Surah surah = new Surah(1, "الفاتحة", "Al-Fatiha", 7, "Meccan");  
String surahJSON = jsonMapper.writeValueAsString(surah);
```

Surah

- id: int
- name: String
- englishName: String
- ayaCount: int
- type: String



```
{  
  "id": 1,  
  "name": "الفاتحة",  
  "englishName": "Al-Fatiha",  
  "ayaCount": 7,  
  "type": "Meccan"  
}
```


Read JSON file

```
ObjectMapper jsonMapper = new ObjectMapper();
String filePath = "data/surahs.json";
try {
    Surah[] surahsArray = jsonMapper.readValue(
        new File(filePath), Surah[].class);
    List<Surah> surahs = Arrays.asList(surahsArray);
} catch (Exception e) {
    System.out.println(e.getMessage());
}
```




You may use <https://codebeautify.org/json-to-java-converter> to generate a Java class from a json string!

Write object to a JSON file

```
public static void saveStudents(Student[] students) {  
    ObjectMapper jsonMapper = new ObjectMapper();  
    String filePath = "data/students.json";  
    // Write students array to a json file  
    try {  
        jsonMapper.writeValue(new File(filePath), students);  
    } catch (IOException e) {  
        e.printStackTrace();  
    }  
}
```

Steps to use Jackson ObjectMapper

- Create a subfolder named **lib** under your project folder
- Download the followings library into **lib** subfolder
 - <https://repo1.maven.org/maven2/com/fasterxml/jackson/core/jackson-databind/2.10.1/jackson-databind-2.10.1.jar>
 - <https://repo1.maven.org/maven2/com/fasterxml/jackson/core/jackson-annotations/2.10.1/jackson-annotations-2.10.1.jar>
 - <https://repo1.maven.org/maven2/com/fasterxml/jackson/core/jackson-core/2.10.1/jackson-core-2.10.1.jar>
- Right-click your project and select **configure Build Path...**
- Click **Classpath** then click **Add JARS...** select the jars from your project **lib** subfolder (see image below)

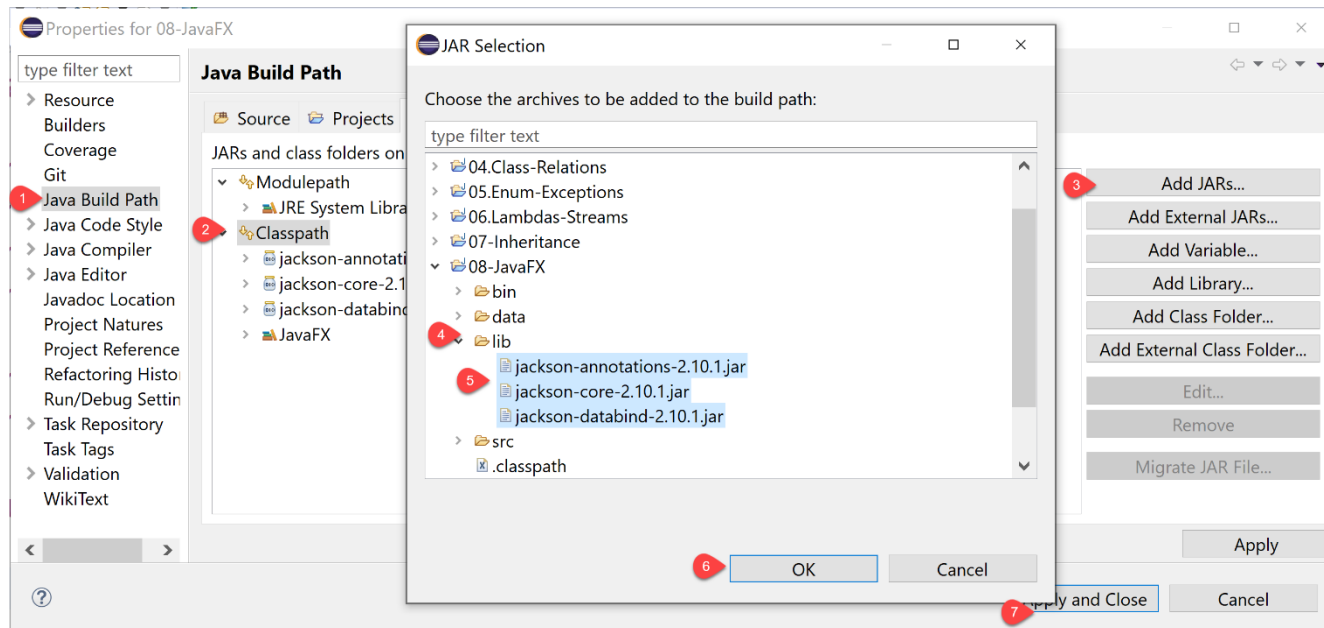

Jackson ObjectMapper vs. Gson

- ObjectMapper supports reading and writing JSON files for a Class with JavaFX properties
- ObjectMapper supports inheritance hierarchy.
See posted Member example:

```
@JsonTypeInfo(use=JsonTypeInfo.Id.NAME,  
    include=JsonTypeInfo.As.PROPERTY, property="@type")  
@JsonSubTypes({  
    @Type(value = Student.class, name = "Student"),  
    @Type(value = Faculty.class, name = "Faculty")  
})  
  
public abstract class Member {  
    ...  
}
```

Summary

- **Use Path to refer to file location**

```
Path somePath = Paths.get("/path/to/file.txt");
```

- **Read all lines into a Stream**

```
Stream<String> lines = Files.lines(somePath);
```

- Can use stream methods such filter, map, distinct, sorted, findFirst, etc.
- You get benefits of lazy evaluation
- Can output as List with collect(Collectors.toList())

- **Write List into a file**

```
Files.write(somePath, someList);
```

- **Use PrintWriter for more formatted output**
- **Use Jackson ObjectMapper for reading/writing json files**