

CMPS 312

Read Chapters
3, 5 & 9




Views & Layout

Dr. Abdelkarim Erradi
CSE@QU

Outline

1. Activity
2. Views
3. Constraint Layout

Activity

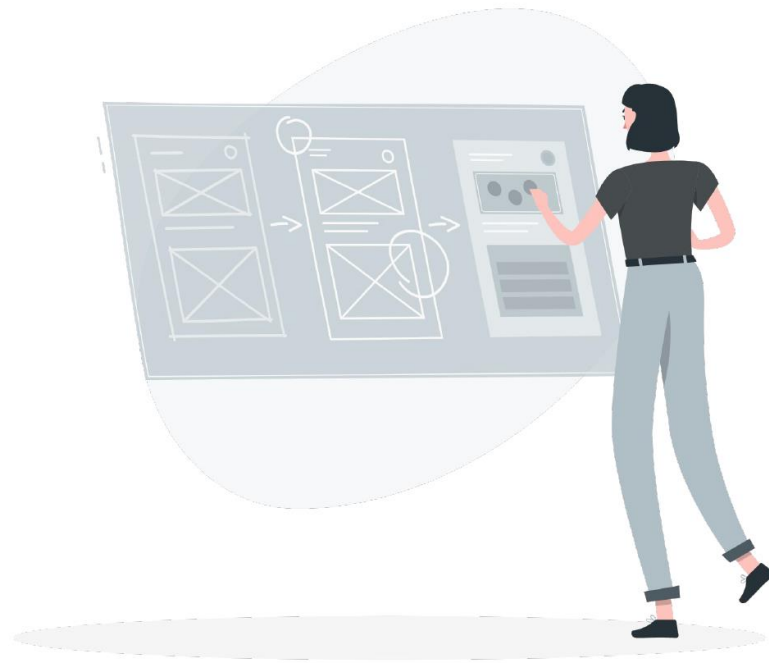


Activity

- **Activity** provides the UI that the user interacts with
 - Allow the user to do something such as order groceries, send email
 - Has layout (.xml) file & Activity class (aka **UI Controller**)
 - This allows a **clear separation** between the UI and the app logic
- Connecting the activity UI Controller with the layout is done in the **onCreate** method
- Activity class (**UI Controller**) defines listeners to handle events:
 - User interaction events such press a button or enters text in an EditText
 - External events such as screen rotation or receiving a notification


Activity Lifecycle

An activity has essentially **four** states:

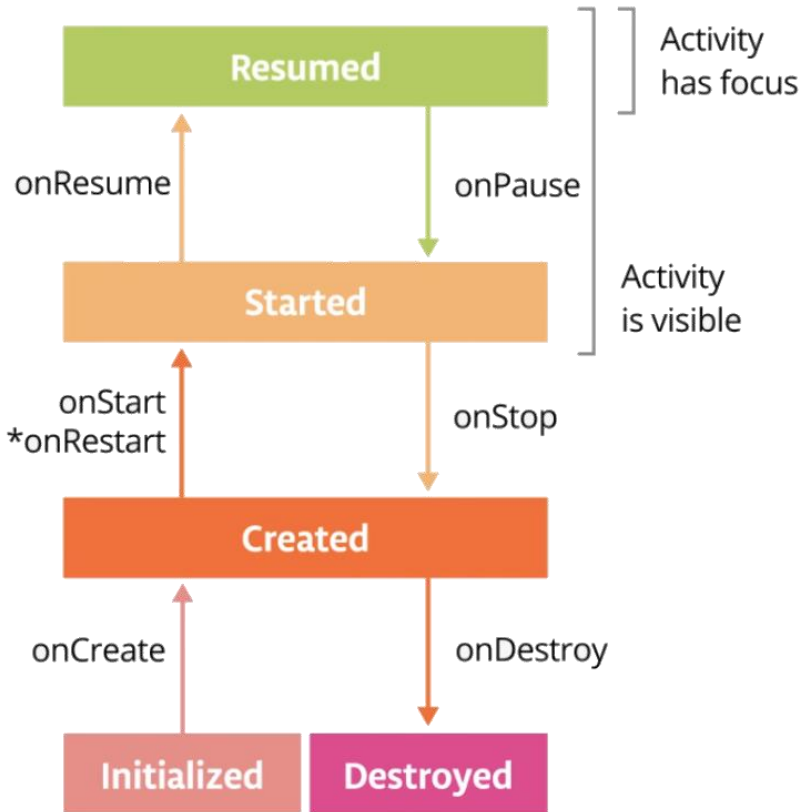


- **Resumed** if the activity is in the foreground of the screen (has focus)
- **Started** if the activity has lost focus but is still visible (e.g., beneath a dialog box).
 - When the user returns to the activity, it is **resumed**
- **Created** if the activity is completely obscured by another activity.
 - When the user navigates to the activity, it must be **restarted** and restored to its previous state.
- **Destroyed** when the user closes the app or if the activity is killed (when memory is needed or due to `finish()` being called on the activity)

Activity Lifecycle

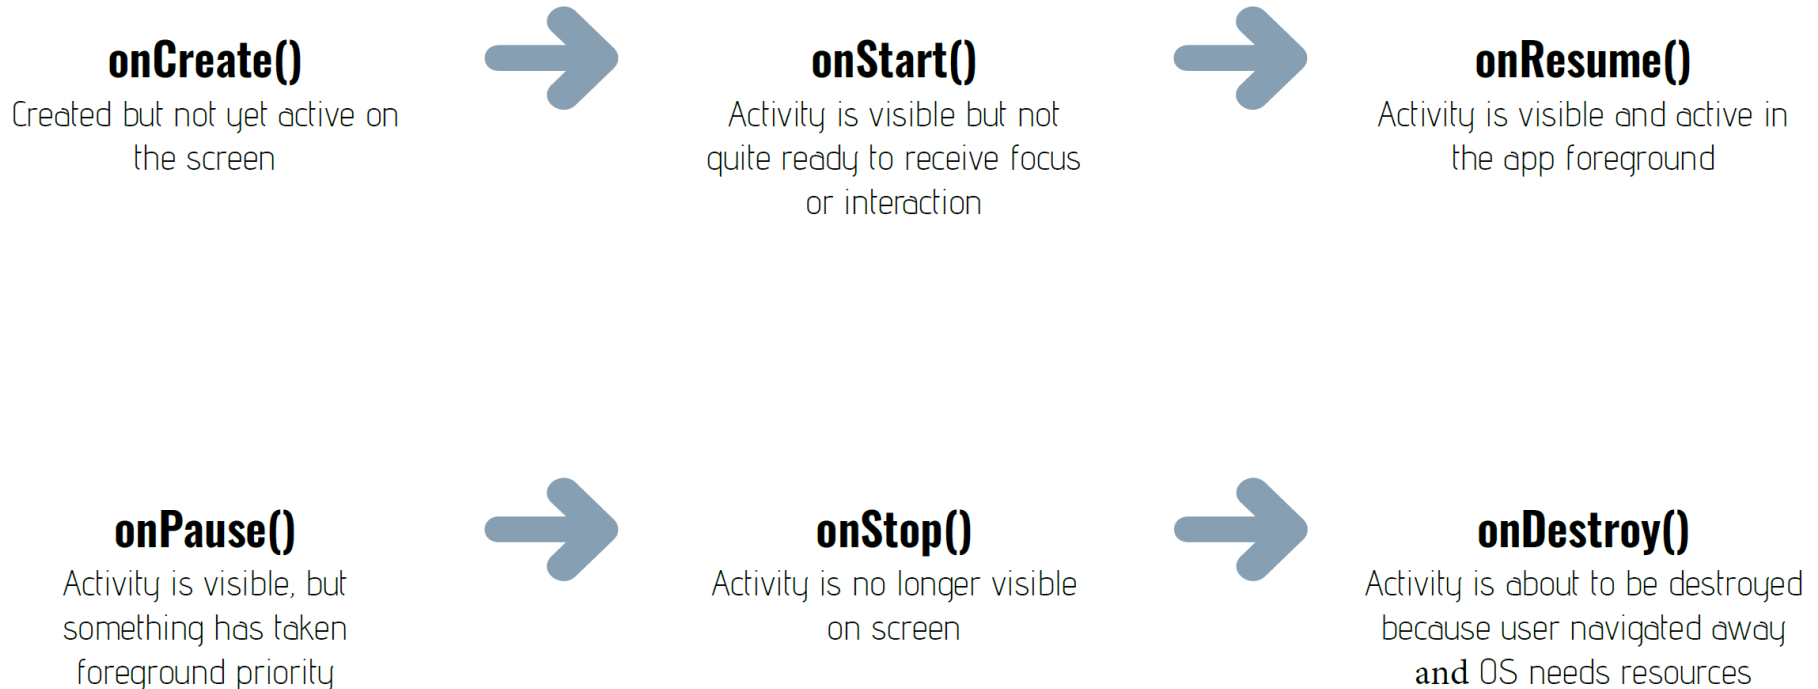

- Events handlers can be associated to these events
 - Android invokes them when the activity moves from one state to another
 - E.g., in `onCreate()` you inflate the layout and define click listeners

What Makes up an Activity UI?

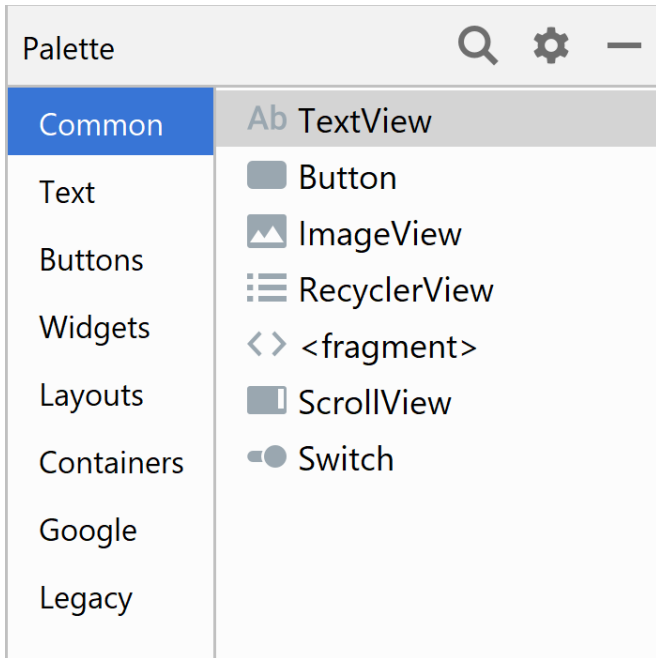


- **Views**
 - Set of pre-built UI components that can be composed to create a GUI
 - e.g. Button, TextView, Menu, List, etc.
- **Layout**
 - Container that controls the size and positioning of views in the Activity

Views


Button




CheckBox

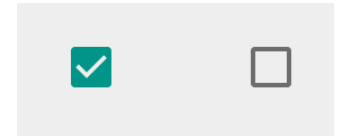

EditText




RadioButton

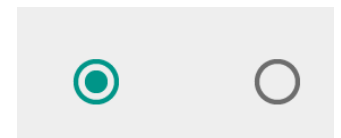

SeekBar



Switch



Views


- **View = Widget = Control**
 - Examples: Button, Switch, Spinner, TextView, EditText, ImageView
 - Advanced Views (covered later): **RecyclerView** & **MapView**
- **Common Attributes**
 - id (i.e. `android:id="@+id/myViewId"`)
 - `layout_width`, `layout_height`
 - Values: `match_constraint` (or `0dp`), `wrap_content`, fixed size (e.g., `50dp`)

Views (Attributes and Listeners)

- TextView - Displays text on the screen
 - text
- EditText - Allows entering user input
 - inputType : such as email, phone number, etc.
 - text
 - .addTextChangedListener { ... }
- Button - Clickable view responding to user clicks
 - text
 - .setOnClickListener { ... }
- ImageView - Displays image from a URL or from a resource file
 - .setImageDrawable(drawable) // set image to display
 - .setOnClickListener { ... }

Customize TextEdit with **inputType**


- **textPersonName**: Single line of text
- **textCapCharacters**: Set to all capital letters
- **textPassword**: Conceal an entered password
- **number**: Restrict text entry to numbers
- **textEmailAddress**: Show keyboard with @ conveniently located
- **phone**: Show a numeric phone keypad

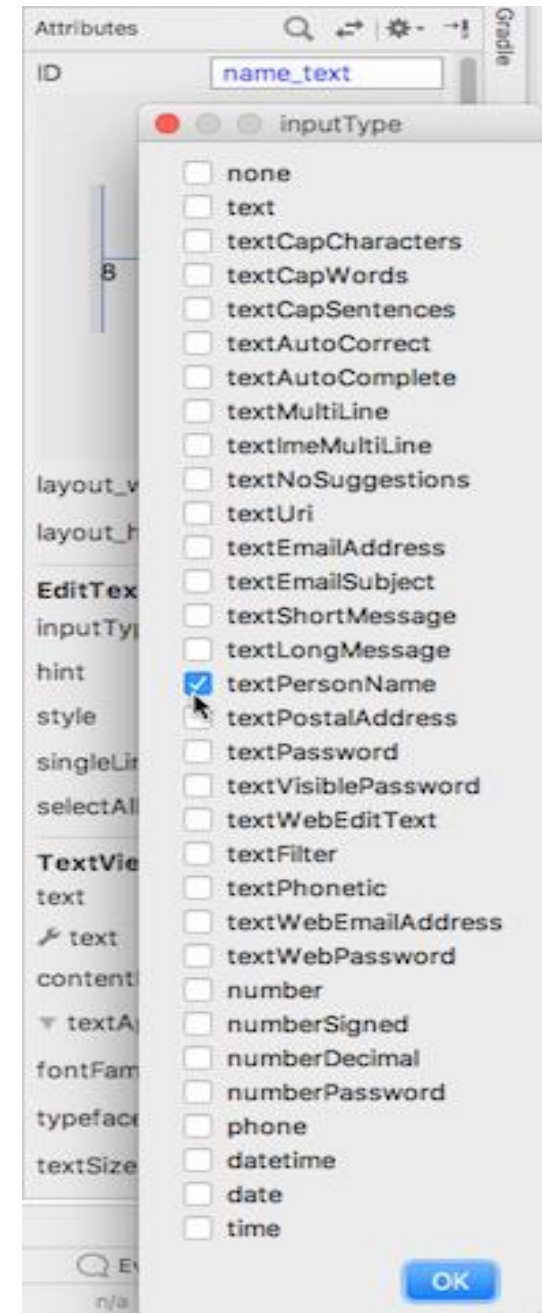

Views (Attributes and Listeners)

- **Switch (on/off)**
 - `.checked = booleanVal` – set check state
 - `.setOnCheckedChangeListener { ... }`
- **Spinner (dropdown list)**
 - `.setAdapter(ArrayAdapter)` – specify list values
 - `.setSelection(int)` – specify selected item
 - `onItemSelectedListener { ... }`
- **SearchView**
 - `queryHint` – text to display when the field is empty
 - `.setOnQueryTextListener { ... }`


Setting Entries of a Spinner in the XML Layout File

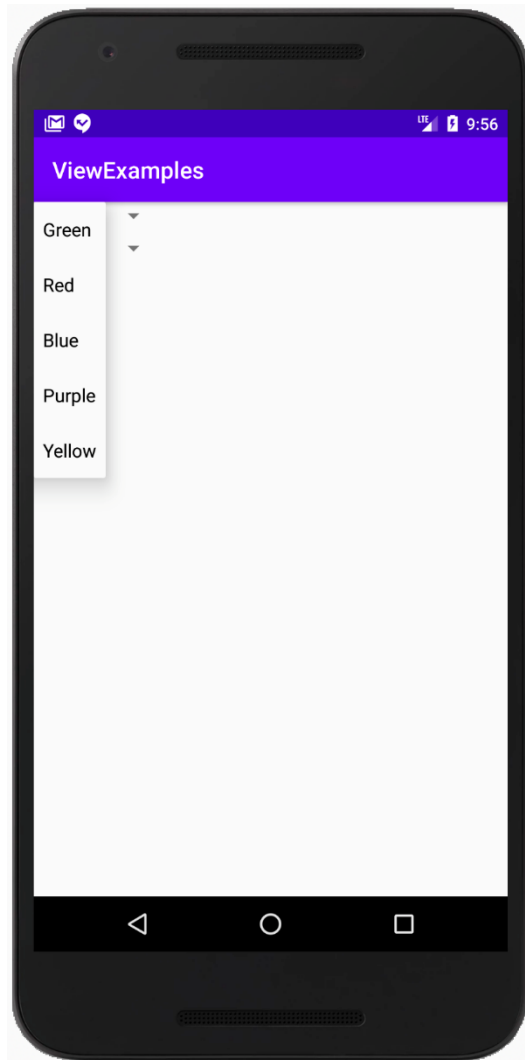

```
<Spinner
    android:id="@+id/colorSelector1"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginEnd="32dp"
    android:layout_marginBottom="4dp"
    android:entries="@array/colorChoices"/>
```

```
strings.xml
1  <resources>
2      <string name="app_name">ViewExamples</string>
3
4      <string-array name="colorChoices">
5          <item>Green</item>
6          <item>Red</item>
7          <item>Blue</item>
8          <item>Purple</item>
9          <item>Yellow</item>
10     </string-array>
11
12 </resources>
```

Setting Entries of a Spinner in Code

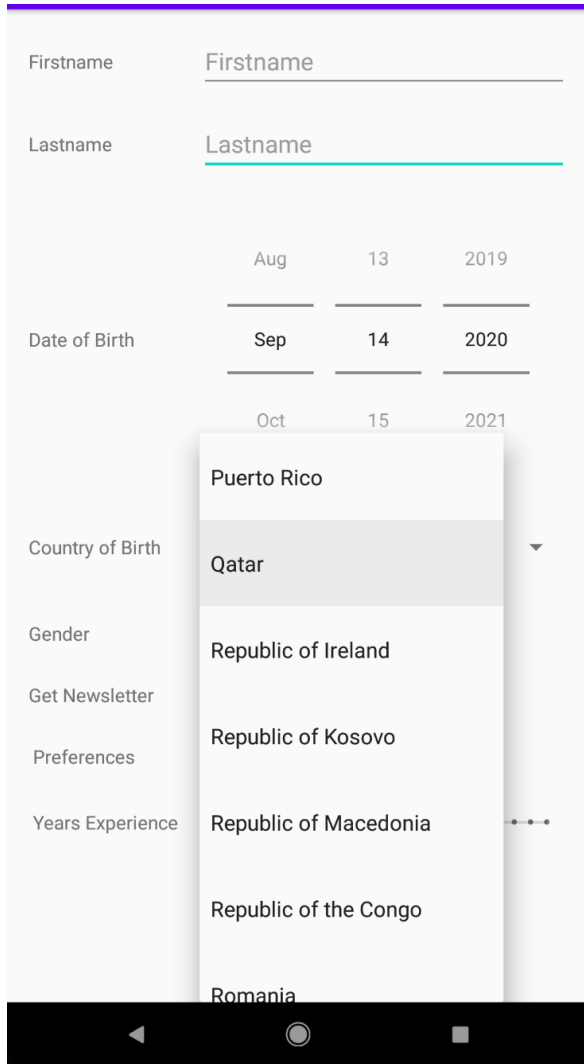

```
<Spinner
    android:id="@+id/countriesSp"
    android:layout_width="0dp"
    android:layout_height="wrap_content"
/>
```

```
override fun onCreate(savedInstanceState: Bundle?) {
    super.onCreate(savedInstanceState)
    setContentView(R.layout.activity_register)

    CountryRepository.loadCountries(this)

    val adapter = ArrayAdapter<String>(
        this,
        android.R.layout.simple_dropdown_item_1line,
        CountryRepository.countryNames
    )
    countriesSp.adapter = adapter
}
```

Which View gets focus next?

- Topmost view on the activity layout
- After user submits input, focus moves to nearest neighbor—priority is left to right, top to bottom
- Arrange input controls in a layout from left to right and top to bottom in the order you want focus assigned
- Specify ordering in XML

`android:id="@+id/top"`

`android:focusable="true"`

`android:nextFocusDown="@+id/bottom"`


Set focus explicitly

Use methods of the View class to set focus



- setFocusable() sets whether a view can have focus
- requestFocus() gives focus to a specific view
- setOnFocusChangeListener() sets listener for when view gains or loses focus
- Find the view with focus
 - Activity.getCurrentFocus()
 - ViewGroup.getFocusedChild()

App 1 - Color Changer



App that contains Text reading “YaHala!”, an Image and a **Button** that randomly changes text’s color with every click

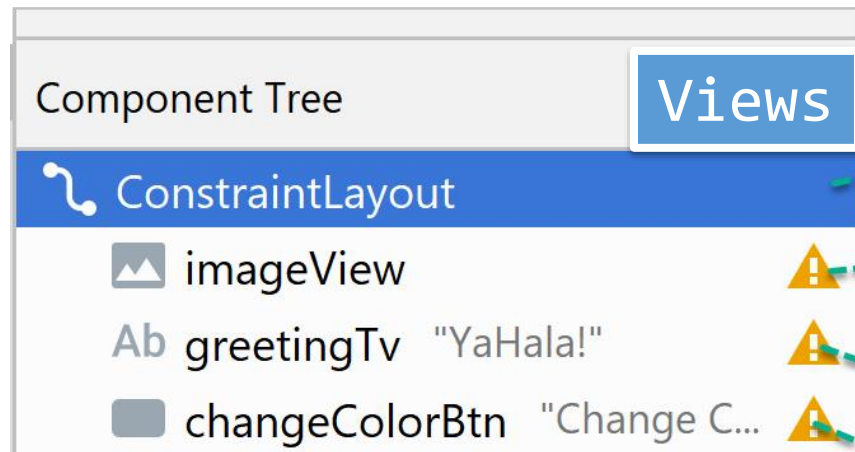

App 2 – Guessing Game

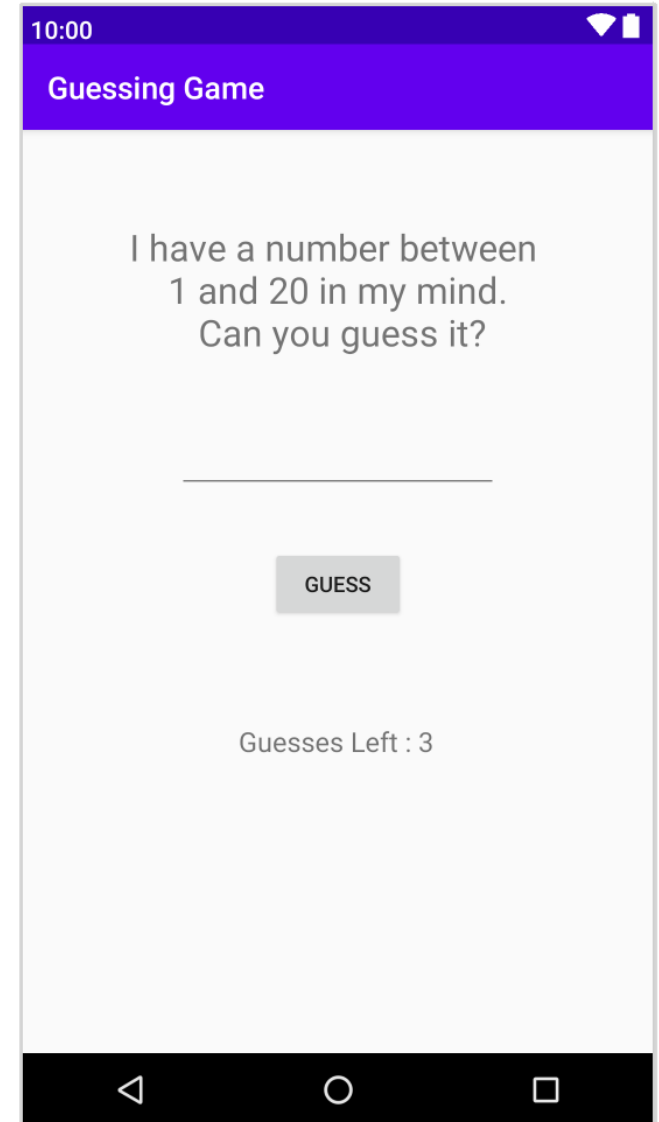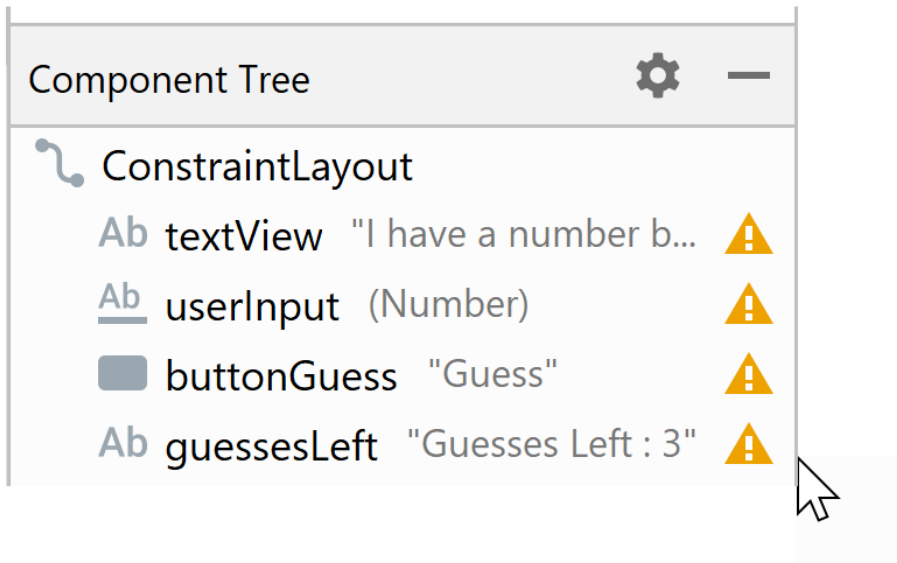

App 3 – Tips Calculator

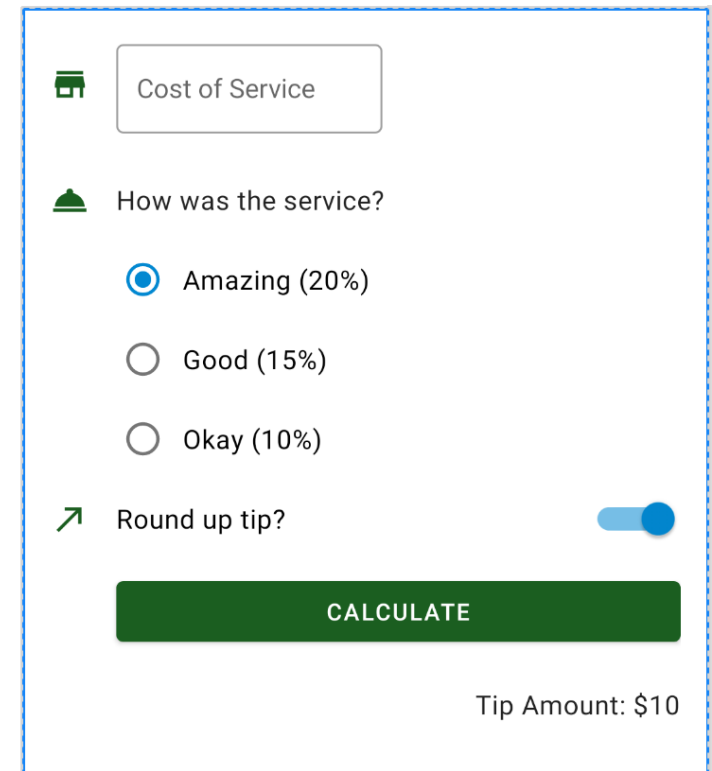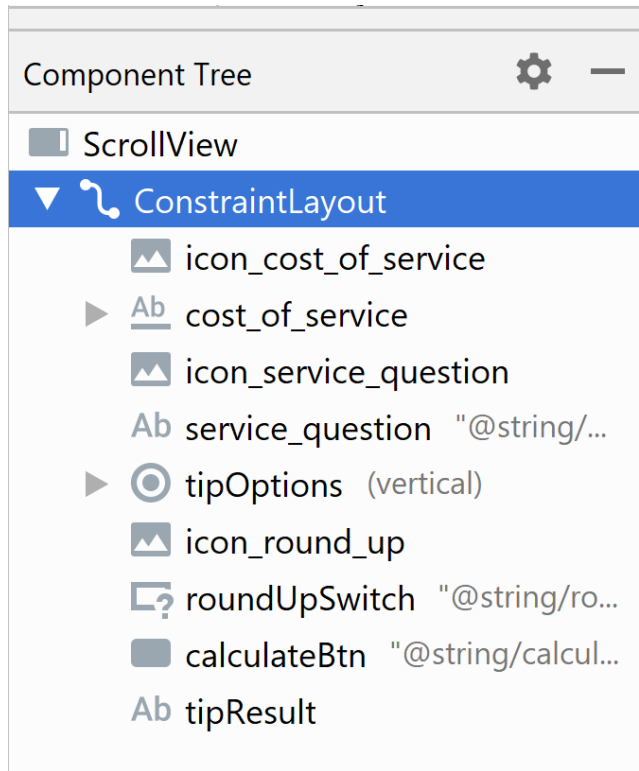

Registration Form

Firstname	<input type="text" value="Firstname"/>		
Lastname	<input type="text" value="Lastname"/>		
Date of Birth	Aug	13	2019
	Sep	14	2020
	Oct	15	2021
Graduated From	Qatar University ▼		
Gender	<input type="radio"/> Male <input type="radio"/> Female		
Get Newsletter	<input type="checkbox"/>		
Preferences	<input type="checkbox"/> Email <input type="checkbox"/> SMS		
Years Experience	<input type="range" value="2"/>		

Material Design Components


- Using MDC to make your app look great easily

<https://material.io/components>

- Float labels – TextInputLayout
- FloatingActionButton
- NavigationDrawer
- Toolbar
- CardView
- TabLayout
- BottomNavigationView
- BottomSheet
- Snackbar



Constraint Layout

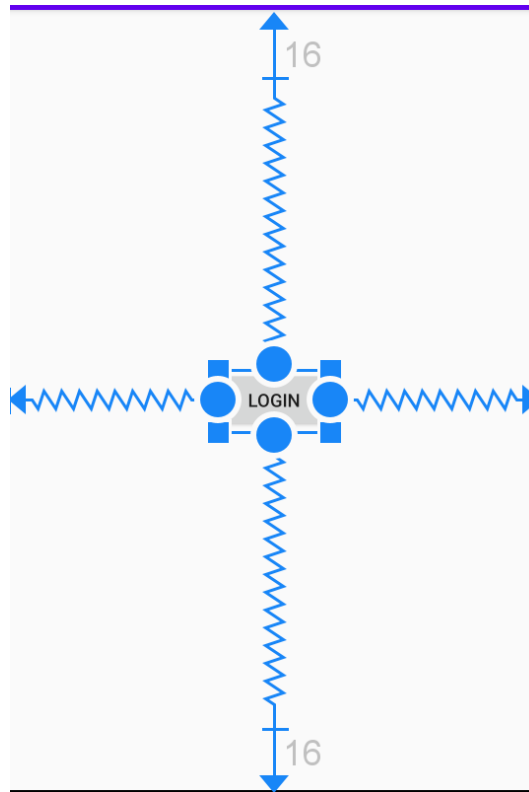

Responsive UI



- Layout automatically **controls** the **size** and **placement** of views to create a **Responsive UI**
 - Frees programmer from handling/hardcoding the sizing and positioning of UI elements
 - **Responsive UI** = When the screen is resized, the views reorganize themselves based on the rules of the layout


Constraint Layout

- ConstraintLayout: Allows building a Responsive UI by defining constraints for views
 - A constraint is a **connection** to another view, parent layout, or invisible Guideline / Barrier
 - Constraints control the **position** and **alignment** of UI elements
 - Position a view relative others including the parent
 - Need to add at least one horizontal and one vertical constraint
 - Center views by adding constraints to opposite sides of the view



Defining Constraints

Steps

1. Drop a view to the editor
2. Connect constraint handles
(e.g., top/bottom/left/right)

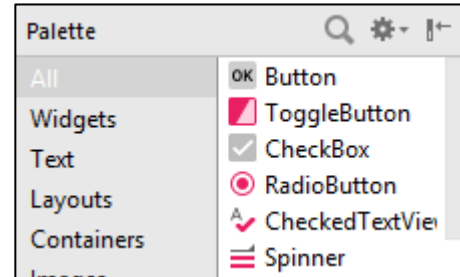


Add at least **one horizontal** and **one vertical** constraint

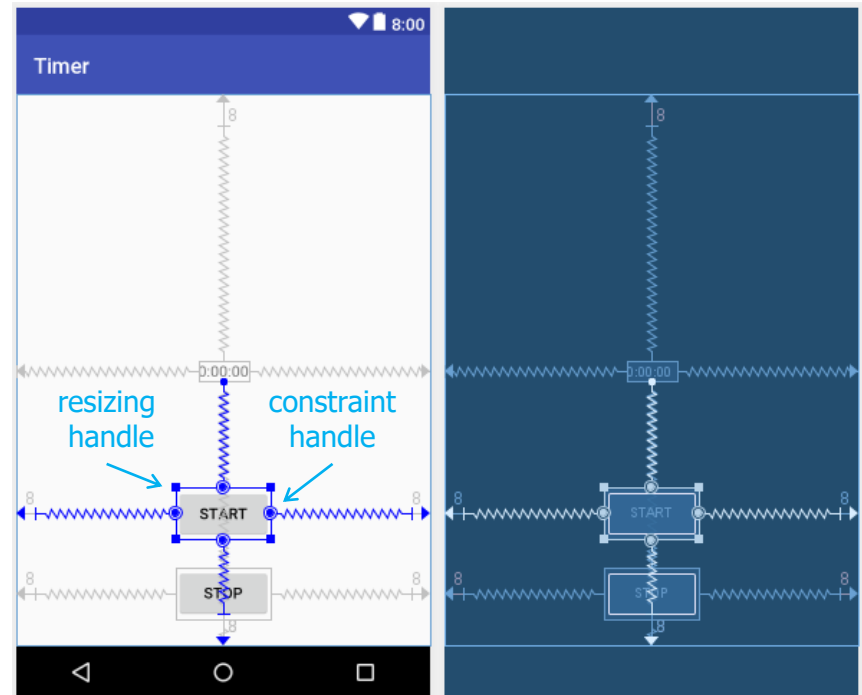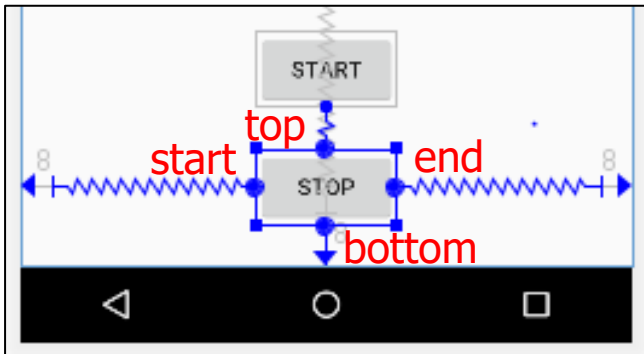


Alignment

- Align the edge of a view to the same edge of another view
- The left side of C is aligned to the left side of A.
 - If you want to **center** view C, create a constraint on both sides

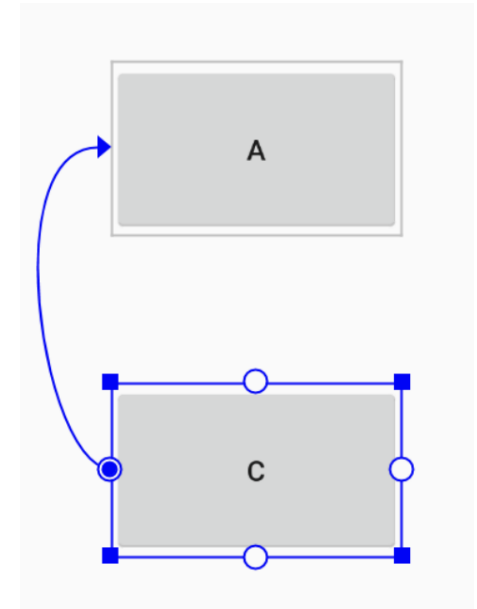

Bias

- If you add opposing constraints on a view, the constraint lines become like a **spring** to indicate the opposing forces
- The view becomes centered between the two constraints with a bias of 50% by default
- You can adjust the bias by dragging the view

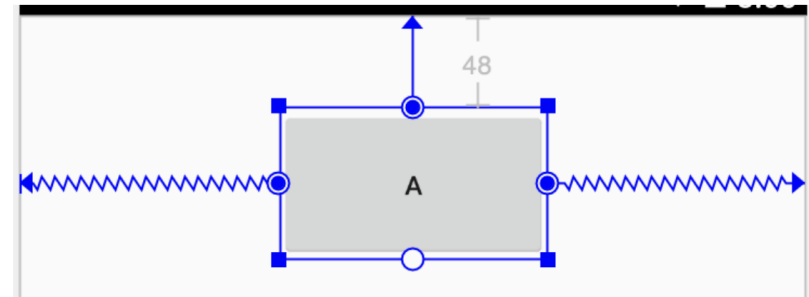

View Constraints Editor

Constraint Widget

50 0 16 16 0 50

Delete Constraint


Margins

Height / Width Mode

Constraint Bias

▼ Constraints

- Start → StartOf **parent** (0dp)
- End → EndOf **parent** (0dp)
- Top → TopOf **parent** (16dp)
- Bottom → BottomOf **parent** (16dp)
- Horizontal Bias (0.5)

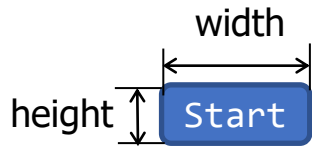


View Size



`layout_width="0dp"`

- The view expands to **match constraints** on each side (after accounting for the view's margins)
 - View will grow/shrink on resizing

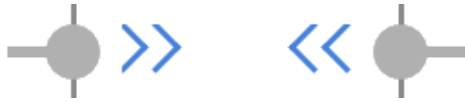

`layout_width="wrap_content"`

- The view expands as needed to **fit** its contents





`layout_width="200dp"`

- **Fixed** size (e.g., 200dp density-independent pixels)

Guideline

- A guideline is a visual guide used to divide the layout
- Add a vertical or horizontal **guideline** to which you can constrain views, and the guideline will be invisible to app users
- Position the guideline within the layout based on either **dp** (Density-independent pixels) units or percent relative to the layout's edge

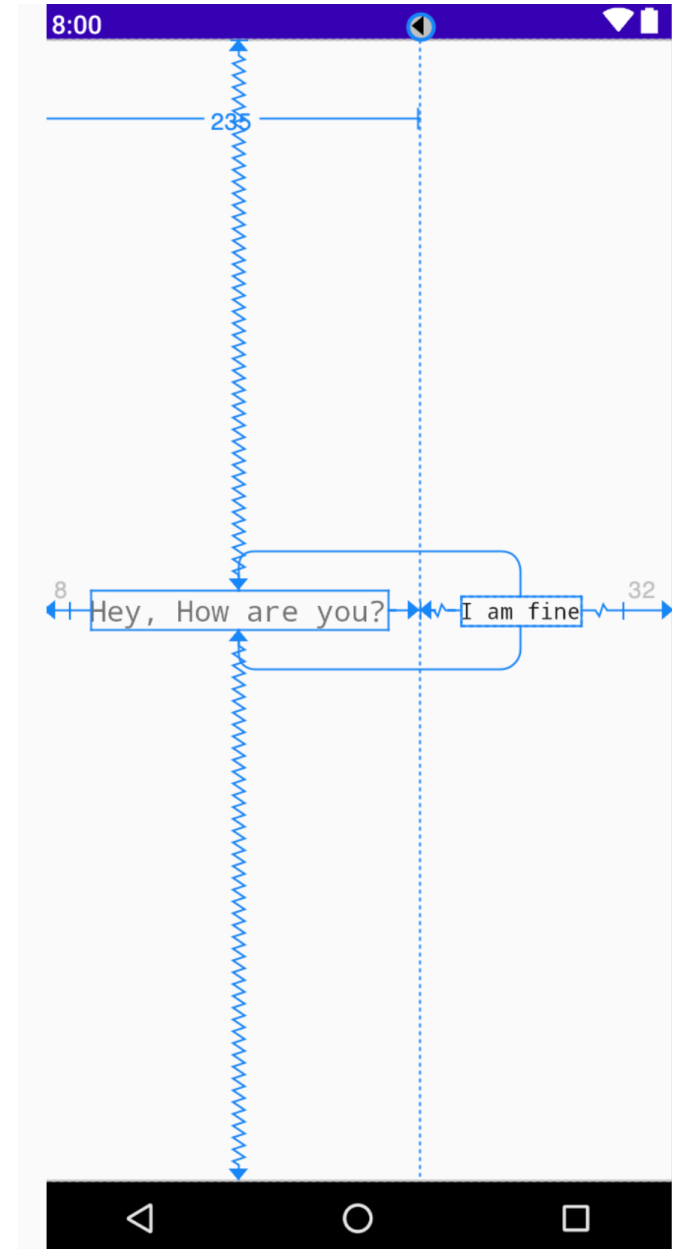

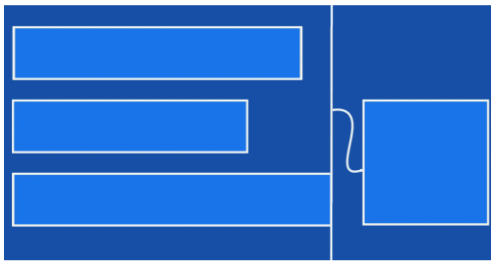

Barrier





- A Barrier is a virtual view, similar to a Guideline, to which we can constrain objects
- The Barrier width/height are determined by the views placed in it
- Use a barrier any time the views placed in it **could dynamically vary in size** based on user input or language setting



```
<android.support.constraint.Barrier
    android:id="@+id/barrier"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    app:barrierDirection="start"
    app:constraint_referenced_ids="button1,button2" />
```


Flow

- Flow provides an efficient way to **distribute space** among items in the flow while accommodating different screen sizes

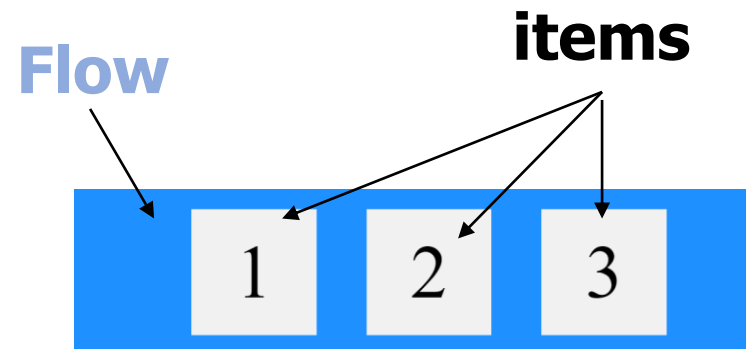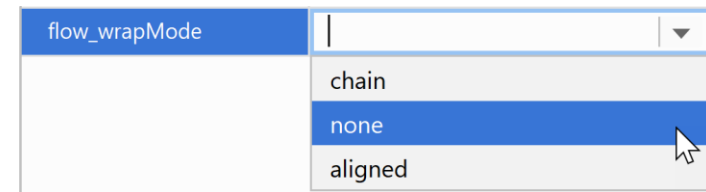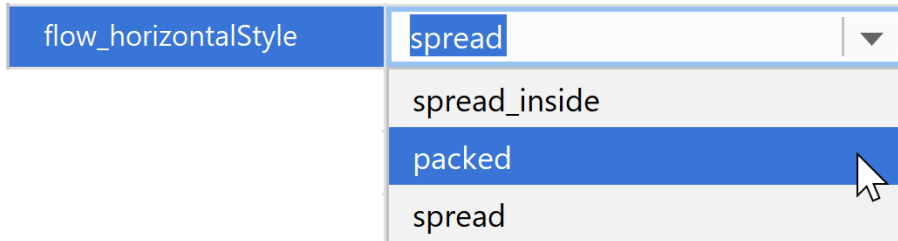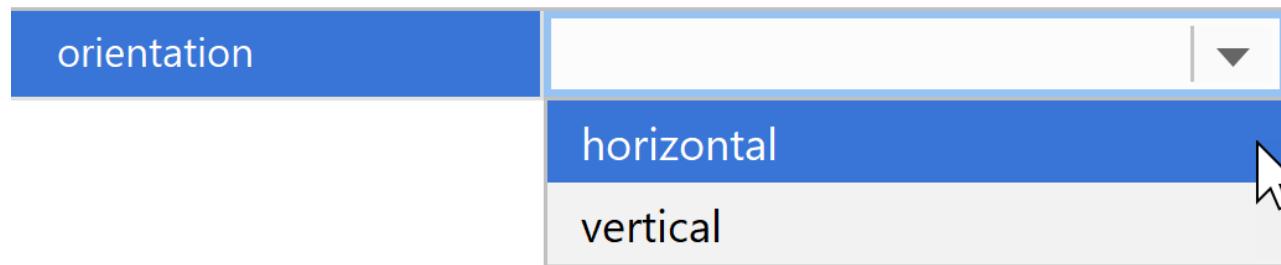

Flow - wrapMode

app:flow_wrapMode = "none | chain | aligned"

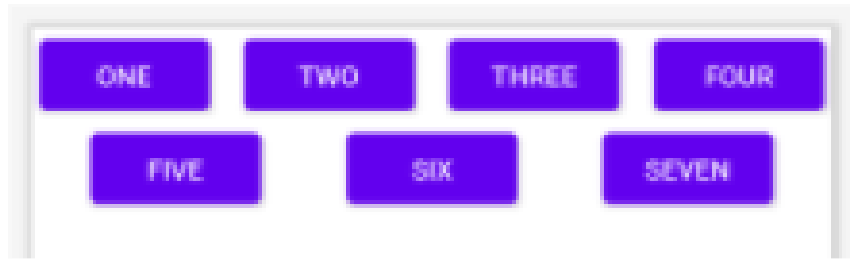

app:flow_wrapMode="chain"



app:flow_wrapMode="aligned"



app:flow_wrapMode="none"

Reusing Layouts

- Extract commonly used elements into common layout and then use `<include>` tag to include a layout

`<include`



`android:id="@+id/toolbar"`

`layout="@layout/toolbar"`

`android:layout_width="match_parent"`

`android:layout_height="wrap_content" />`

Summary

- **Activity** provides the UI that the user interacts with
 - It has layout (.xml) file & Activity class (UI Controller)
=> This allows a **clear separation** between the UI and the app logic
 - Activity class define listeners to handle events
 - ConstraintLayout enables responsive design
- .. mastering it will take some time and practice   ...

Resources

- Build a Responsive UI with ConstraintLayout
 - <https://developer.android.com/training/constraint-layout>
- ConstraintLayout codelab
 - <https://codelabs.developers.google.com/codelabs/constraint-layout/>
 - <https://developer.android.com/codelabs/kotlin-android-training-constraint-layout>
- Android Dev Guide
 - <https://developer.android.com/guide/>