

# Web Pages

using **NEXT.js**

# Outline

- Pages
- Links
- Layouts
- Data Fetching

# What is Next.js?

- Next.js = React-based full stack web framework that allows creating component-based **Web pages** and **Web API**
- It provides a large set of features including:
  - File system-based routing
  - Shared layouts having UI that is shared between multiple pages
  - Caching the Web pages on the server-side to improve performance and avoid regenerating the page per request


# Why Server-side Web Pages?

- Improve Search Engine Optimization (SEO) to enable search engines to discover and index the app pages
- Faster initial app start by reducing client-side JavaScript that the browser has to download, parse and execute to render the result in the browser (which could take up to a few seconds for a large application)
- Access to resources that the client can't access such as direct access to a database
- Hide sensitive data from the client such as passwords and API Keys
- Allow caching the Web pages on the server-side to improve performance and avoid regenerating the page per request

# Project Folder Structure

- Next.js uses **app/** folder for routing, every subfolder inside it will be a route
  - the **app/** directory is a container for the app pages / Web API
- The **public/** folder contains all the public and static assets such as images, fonts, etc.
- **app/** and **public/** are mandatory and reserved directories so make sure not to delete or use them for different purposes


# Page

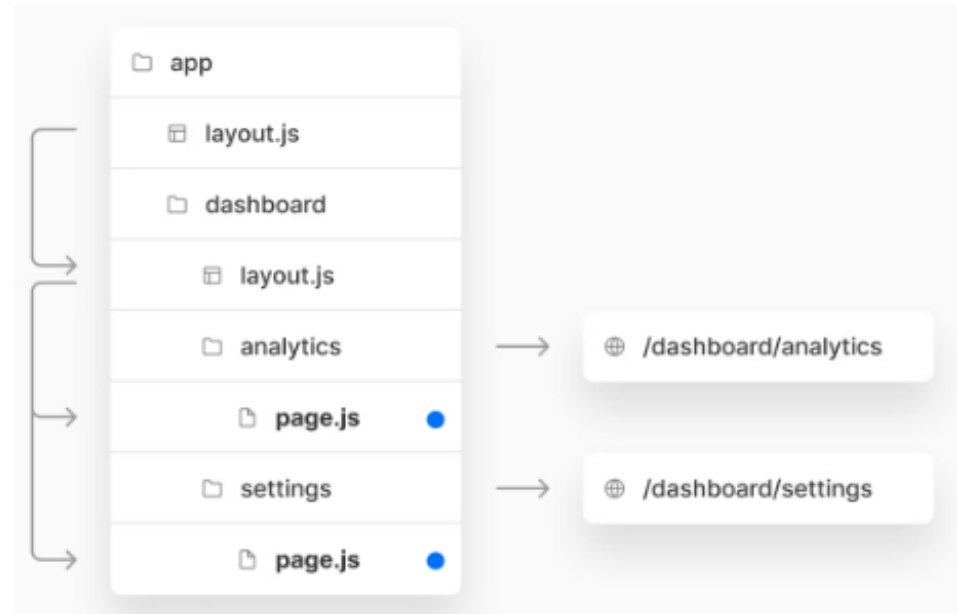

# UI Pages

- You can create a page by adding a **page.js** file inside a subfolder under app folder
  - Can colocate your related files (UI components, styles, images, test files, etc.) inside the app folder & subfolders

When a user visits  
**/dashboard/settings**  
Next.js will render the  
**page.js** file inside  
the settings folder

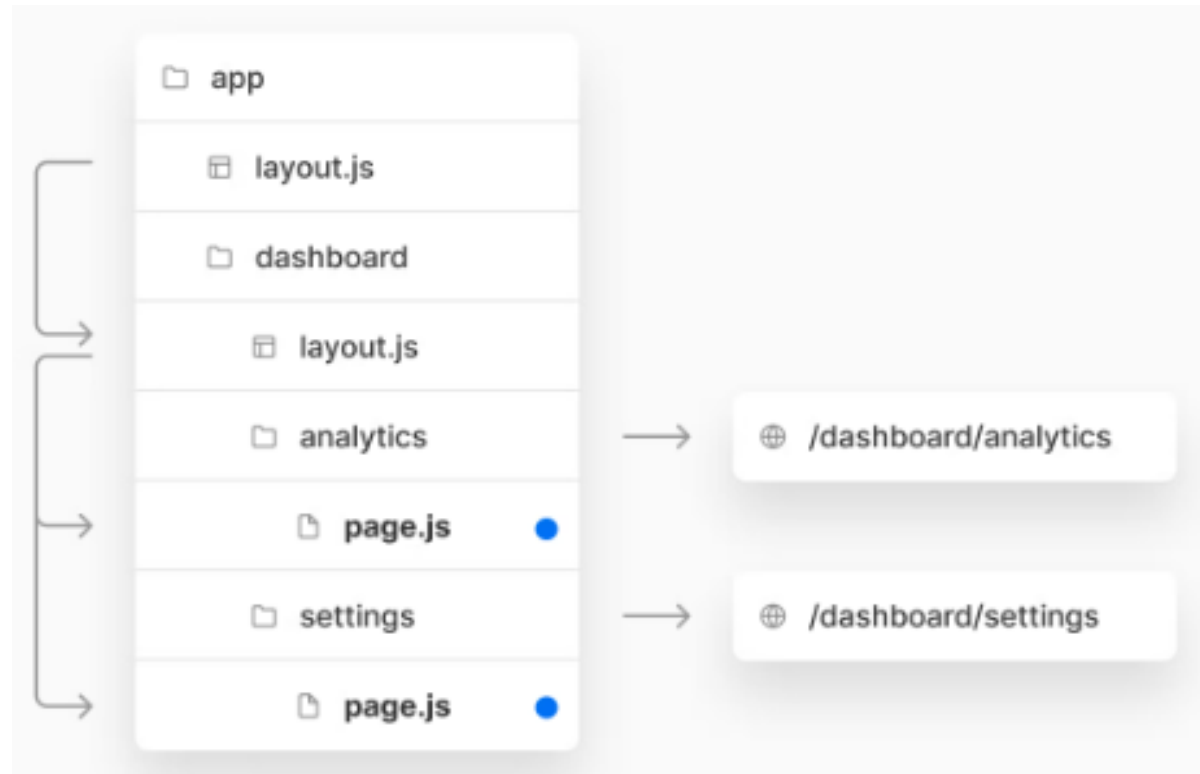

# React Server Components

- By default, files inside **app** folder and its subfolders will be rendered on the server as **React Server Components**
  - resulting in less client-side JavaScript and better performance
- Making the route accessible requires adding **page.js** file

```
// app/page.js
// This file maps to the index route (/)
export default function Page() {
  return <h1>Hello, Next.js!</h1>;
}
```




# UI Pages

- You can create a page by adding a **page.js** file inside a folder
- File name conventions used to define the app UI:
  - **layout.js**: define UI that is shared across multiple routes
  - **page.js**: define UI unique to a route
  - **loading.js**: show a loading indicator such as a spinner
  - **error.js**: show specific error information
  - **not-found.js**: render UI when the notFound is thrown within a route segment

# Loading UI

- **loading.js** return a loading indicator such as a spinner while the content of the route segment loads. The new content is automatically swapped in once rendering on the server is complete
  - This provides a better user experience by indicating that the app is responding

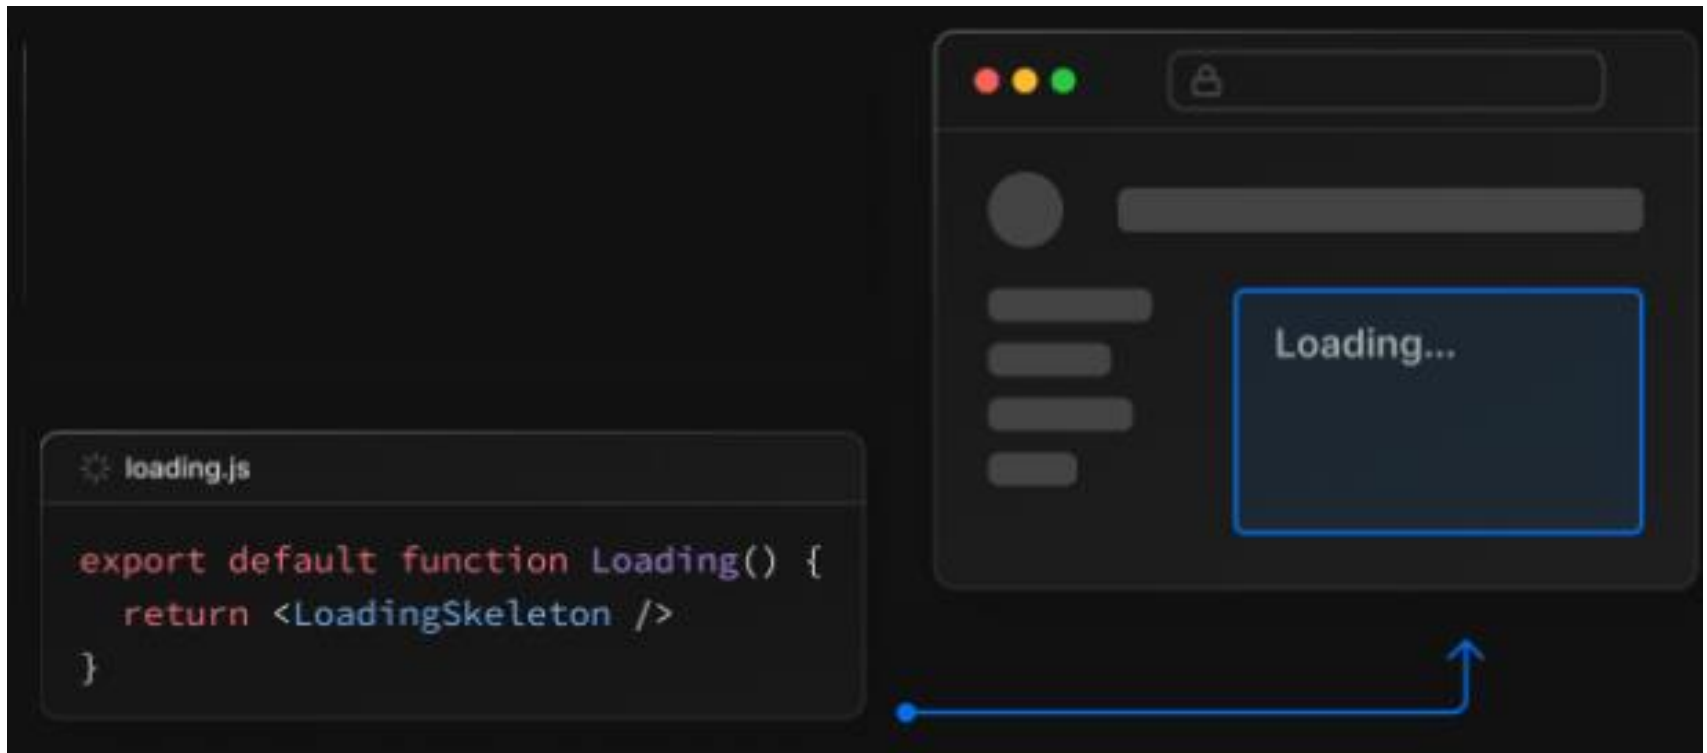

# error.js

- **error.js** defines the error boundary for a route segment and the children below it. It can be used to show specific error information, and functionality to attempt to recover from the error
  - Should return a client-side component

```
'use client'
export default function Error({error}) {
  return (
    <>
    <p>✖ Something went wrong! {error.message}</p>
    </>
  );
}
```

# not-found.js

- **not-found.js**:  
is used to  
render UI when  
the `notFound`  
function is  
thrown within  
a route  
segment

```
import { notFound } from 'next/navigation';

async function fetchUsers(id) {
  const res = await fetch('https://...');
  return res.json();
}

export default async function Profile({ params }) {
  const user = await fetchUser(params.id);

  if (!user) {
    notFound();
  }

  // ...
}
```

```
export default function NotFound() {
  return "Couldn't find requested resource"
}
```

# Accessing Path Parameters from a Page

- To create a dynamic route (having named path parameters) simply wrap the folder's name in square brackets **[folderName]**
  - Allows adding **path parameters** to the URL path. E.g.,  
**/blogs/123**

Route	Example URL	params
app/blogs/[id]/route.js	/blog/123	{ id: '123' }
app/blogs/[id]/route.js	/blog/234	{ id: '234' }

- Dynamic segments are passed as **params** argument to the page
  - E.g., if you have the path **/blogs/[id]**, then the “id” property is available as **params.id**

```
// app/blogs/[id]/page.js
// http://localhost:3000/blogs/123
export default function BlogPage ({ params }) {
  return <p>Blog id# ${params.id}</p>
}
```

# Accessing Query Parameters from a Page

- Named **query parameters** can be added to the URL path after a **?** E.g., **/products?sortBy=price**
- Query parameters are often used for **optional** parameters (e.g., optionally specifying the property to be used to sort of results)
- **searchParams** is an object post to the page and contains a property for each query parameter in the URL path
  - If you have the path **/products?sortBy=price**, then the **"sortBy"** property can accessed as shown below:

```
export default async function Products({ searchParams }) {  
  console.log("Products - searchParams.sortBy", searchParams.sortBy);  
  return <>  
    <ProductsList sortBy= {searchParams.sortBy} />  
  </>  
}
```

# Links



# Linking between pages

- The Next.js router provides a React component called **Link** to do **client-side route** transitions between pages
  - **href** specify the route associated with the link
  - Pages for any `<Link />` will be prefetched by default (including the corresponding data) for pages using Static Generation. The corresponding data for server-rendered routes is not prefetched.

```
import Link from 'next/link'
export default function Home() {
  return ( <ul>
    <li> <Link href="/"> Home </Link> </li>
    <li> <Link href="/about"> About Us </Link> </li>
  </ul>)
}
```



# Linking to dynamic paths

- Links can be created for dynamic paths

E.g., creating links to access posts for a list which have been passed to the component

```
import Link from 'next/link'

function Posts({ posts }) {
  return (
    <ul>
      {posts.map((post) => (
        <li key={post.id}>
          <Link href={`/blogs/${post.id}`}>
            {post.title}
          </Link>
        </li>
      ))}
    </ul>
  )
}
```

# redirect()

app/team/[id]/page.js

```
import { redirect } from 'next/navigation';

async function fetchTeam(id) {
  const res = await fetch('https://...');
  return res.json();
}

export default async function Profile({ params }) {
  const team = await fetchTeam(params.id);
  if (!team) {
    redirect('https://...');
  }
  // ...
}
```

The  
redirect  
function  
allows you  
to redirect  
the user to  
another  
URL

# useRouter push method

- **useRouter** hook can be used for programmatic **client-side** routing
  - E.g., use **push** method to navigate to *savings/current* accts

```
"use client"
import { useRouter } from "next/navigation"
export default function AcctTypeDropdown(){
  const router = useRouter();
  return (<>
    <select onChange={(e) => {
      router.push(`/accounts?type=${e.target.value}`)
    }}
    > <option value="Savings">Savings</option>
      <option value="Current">Current</option>
    </select>
  </>
)}
```

# usePathname & useSearchParams

- **usePathname**: returns the path of the current Url
- **useSearchParams**: returns query params of the current Url

← → ↻ ⓘ http://localhost:3001/accounts?type=Savings

pathname: /accounts

searchParams - type: Savings

```
"use client"
import { usePathname, useSearchParams } from "next/navigation"
export default function AcctTypeDropdown({ onChange }) {
  const pathname = usePathname()
  const searchParams = useSearchParams()
  return (
    <>
      <p>pathname: {pathname}</p>
      <p>searchParams - type: {searchParams.get("type")}</p>
    </>
  );
}
```


# next/image

- Allows **lazy loading** of images (only loaded when they become visible) for increased performance with less client-side JavaScript

```
import Image from 'next/image';
import avatar from './lee.png';

function Home() {
  // "alt" is now required for improved accessibility
  // optional: image files can be colocated inside the app/ directory
  return <Image alt="leerob" src={avatar} placeholder="blur" />;
}
```

# Layout

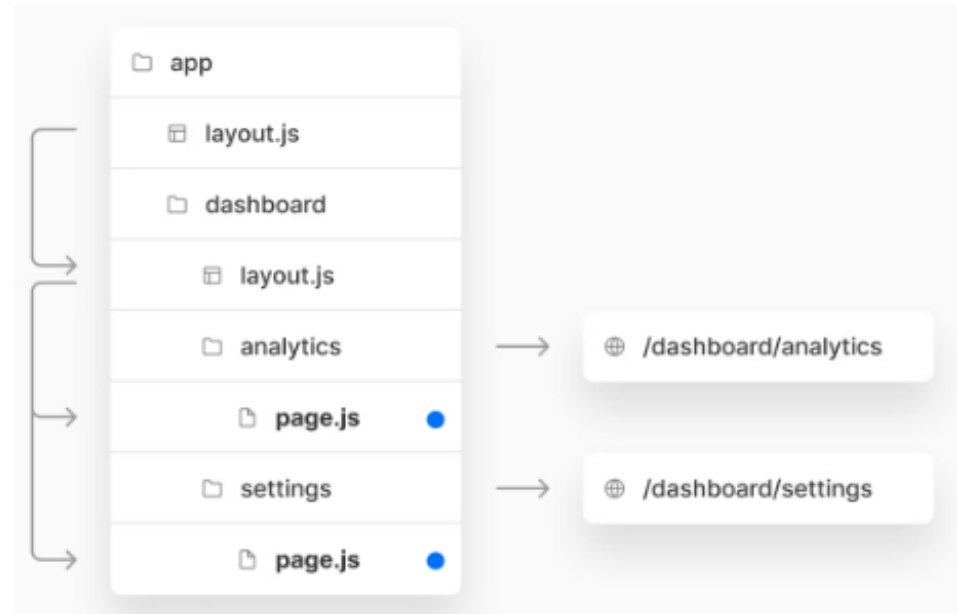


# Layouts

- A layout is UI that is shared between multiple pages
  - On navigation, layouts preserve state, remain interactive, and do not re-render.
  - Navigating between routes only fetches and renders the segments that change
- A layout can be defined by exporting a React component from a **layout.js** file
  - The component should accept a **children** prop which will be populated with the segments the layout is wrapping


There are 2 types of layouts:

- **Root layout:** in **app** folder and applies to all routes
- **Regular layout:** inside a specific folder and applies to associated route segments

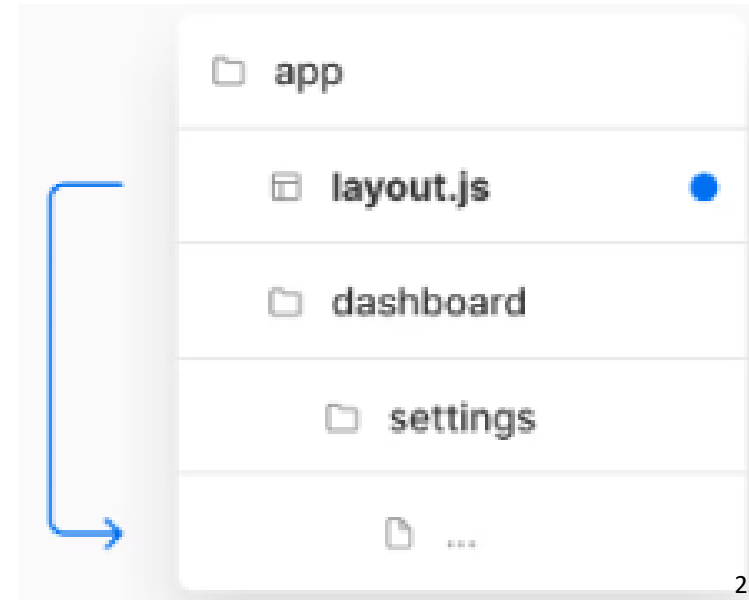

# Nesting Layouts


- Layouts that can be nested and shared across routes
- E.g., the root layout (**app/layout.js**) would be applied to the dashboard layout, which would also apply to all route segments inside **dashboard/\***

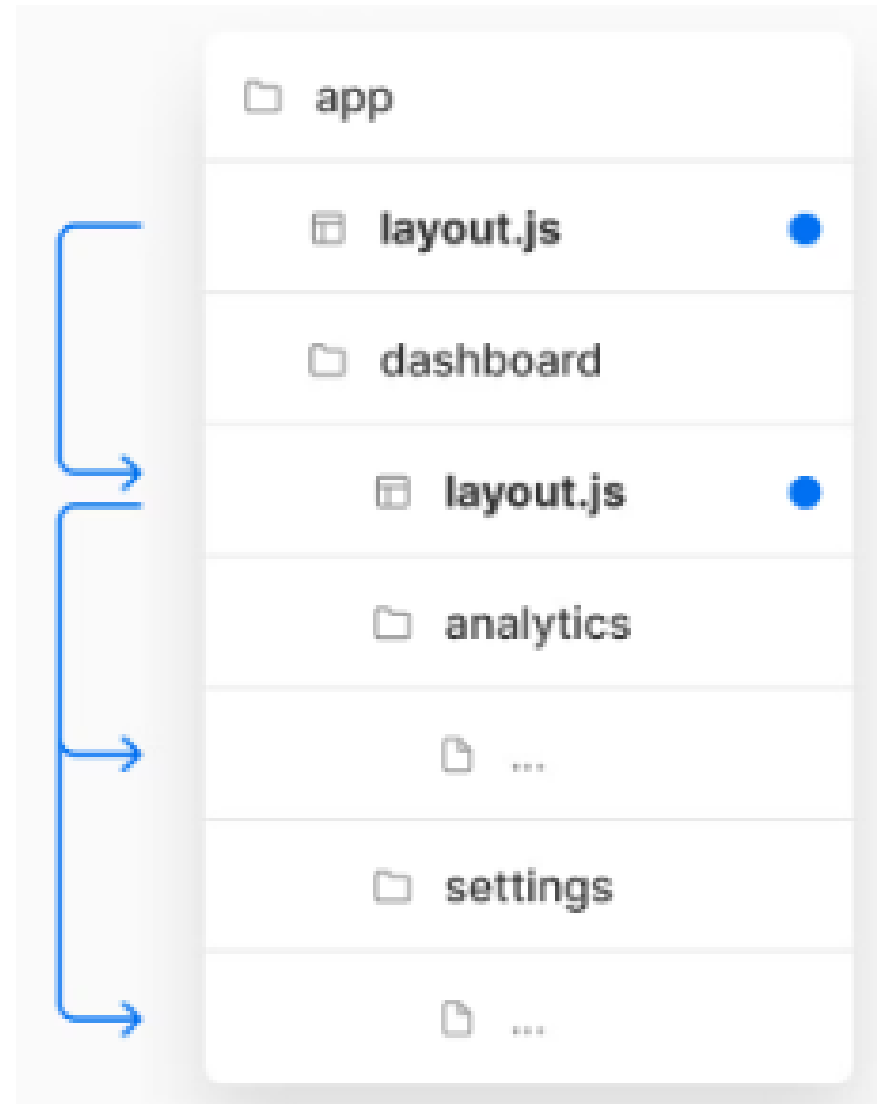



# Pages are Wrapped in Layouts


- When a user visits `/dashboard/settings` Next.js will render the `page.js` file inside the settings folder **wrapped** in any layouts that exist further up the subtree (i.e., `page.js` will be **wrapped** in the Dashboard Layout which will in turn be wrapped in the Root Layout)

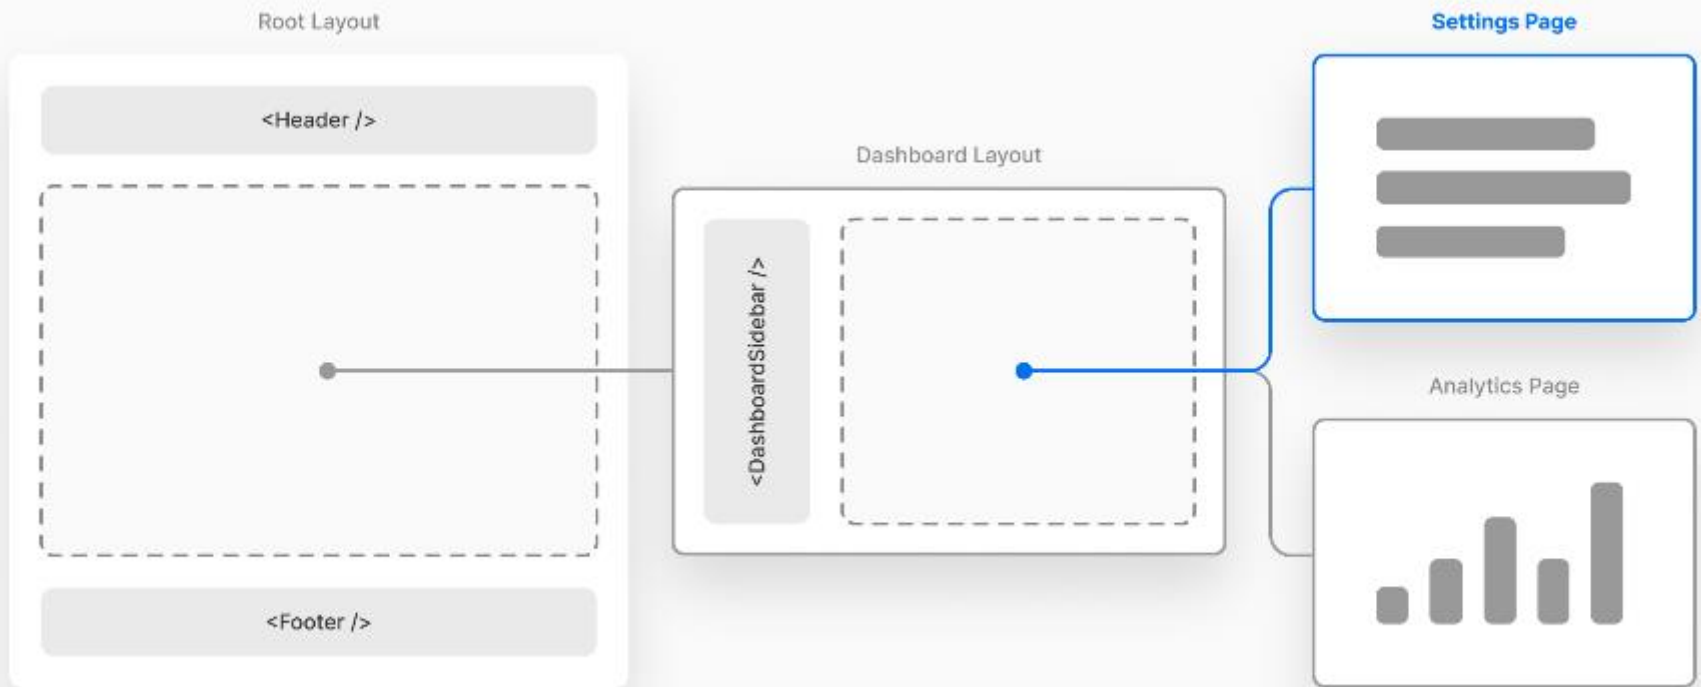

## AnalyticsPage will be wrapped in the Dashboard Layout which will in turn be wrapped in the Root Layout

Root Layout

<Header />

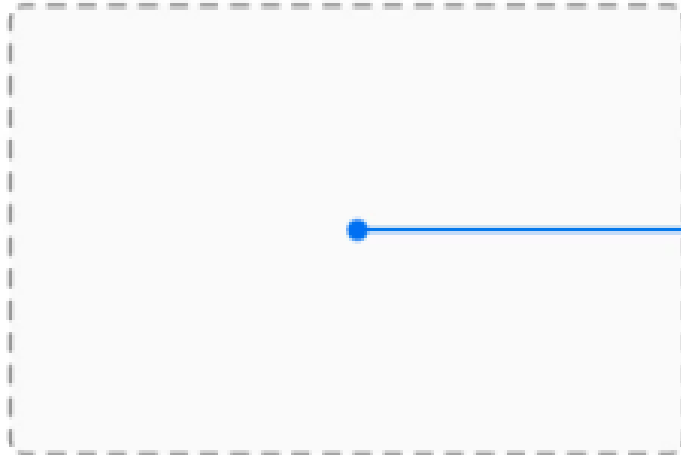

<Footer />

Dashboard Layout

<DashboardSidebar />

```
// Page Component (app/dashboard/analytics/page.js)
// - The UI for the `app/dashboard/analytics` segment
export default function AnalyticsPage() {
  return (
    <main>...</main>
  )
}
```


```
// Regular layout (app/dashboard/layout.js)
// - Applies to route segments in app/dashboard/*
export default function DashboardLayout({ children }) {
  return (
    <
      <DashboardSidebar />
      {children}
    >
  )
}
```

```
// Root layout (app/layout.js)
// - Applies to all routes
export default function RootLayout({ children }) {
  return (
    <html>
      <body>
        <Header />
        {children}
        <Footer />
      </body>
    </html>
  )
}
```

The above wrapping of the page in layouts would render the following component hierarchy:

```
<RootLayout>
  <Header />
  <DashboardLayout>
    <DashboardSidebar />
    <AnalyticsPage>
      <main>...</main>
    </AnalyticsPage>
  </DashboardLayout>
  <Footer />
</RootLayout>
```

# Nested Layout Example

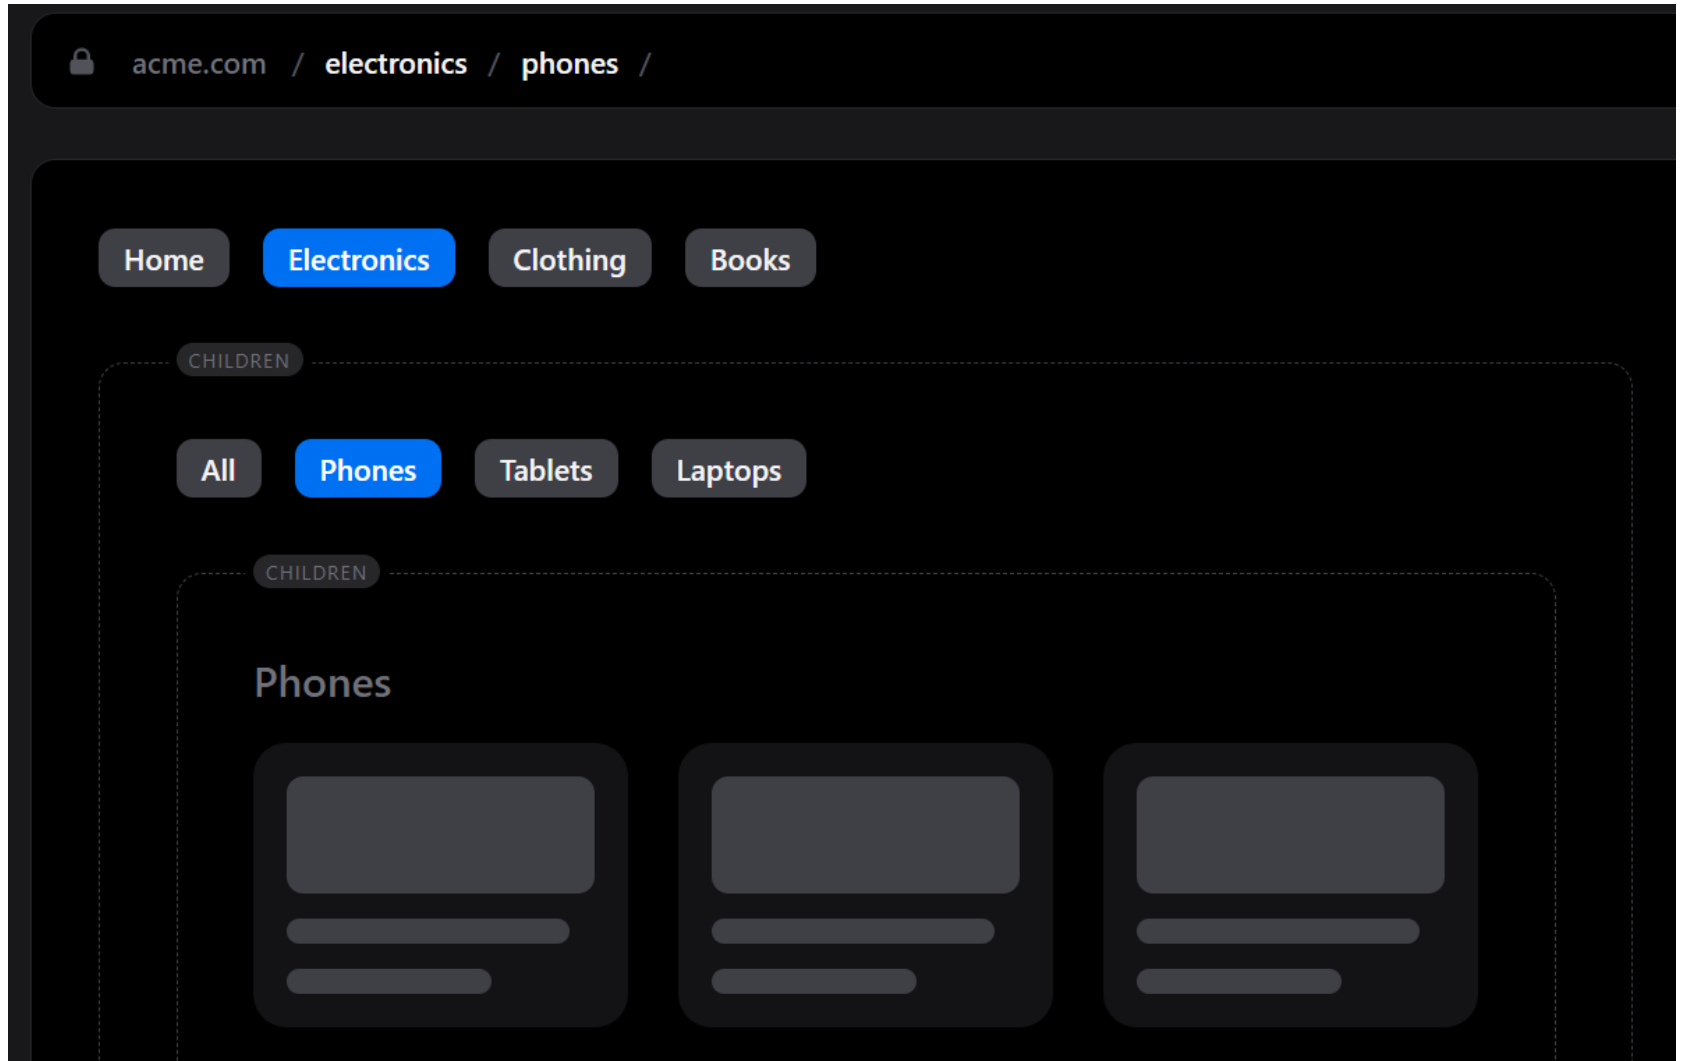

<https://app-dir.vercel.app/layouts/electronics/phones>

# Data Fetching

# Data Fetching using fetch

- **fetch()** is a Web API used to fetch remote data
- You can fetch data with `async/await` in a component, a page or a layout
  - e.g., a blog page could fetch categories which can be used to populate a dropdown

```
async function getData() {  
  const res = await fetch('https://api.example.com/...');  
  return res.json();  
}  
  
export default async function Page() {  
  const name = await getData();  
  
  return '...';  
}
```

# Data Fetching

- You can call fetch with async/await directly within Server Components

```
// This request should be cached until manually invalidated.  
// Similar to `getStaticProps`.
```

```
// `force-cache` is the default and can be omitted.
```

```
fetch(URL, { cache: 'force-cache' });
```

```
// This request should be refetched on every request.
```

```
fetch(URL, { cache: 'no-store' });
```

```
// This request should be cached with a lifetime of 10 seconds.
```

```
fetch(URL, { next: { revalidate: 10 } });
```

# Summary

- Next.js = React-based full stack web framework that allows creating component-based Web pages and Web API
- Next.js has a **file-system based router**: when a subfolder is added to the **app** directory, it's automatically available as a route
  - In Next.js you can add brackets to the subfolder name to create a dynamic route
- A layout A layout is UI that is shared between multiple pages
- You can **fetch** data with `async/await` in a component, a page or a layout

# Resources

- Learn Next.js

<https://nextjs.org/docs>

- Next.js Fetch API

<https://nextjs.org/docs/app/building-your-application/data-fetching>