



---

## Components-Based UI



# Outline

1. Introduction
2. React Components
3. State
4. Components Communication
5. React Hooks: useEffect & useContext
6. React Tools and Component Libraries

# React Introduction



Used by Facebook, Instagram, Netflix, Dropbox, Outlook, Yahoo, Khan Academy, ....

<https://intellisoft.io/15-popular-sites-built-with-react-js/>

# Web Dev Big Picture



Web Client

Request

Response



Web Server

Frontend  
development

HTML for page  
content and  
structure



CSS for styling



JavaScript for  
interaction



UI Components



Backend  
development

Web API



Data Management




# What is React?


- React is an open-source JavaScript library for building **components-based user interfaces (UI)**
  - UI is **composed** of small reusable **components**
  - A component encapsulates **UI elements** and the **behavior** associated with them
- Ease creating a Single Page Application (SPA)
  - SPA is a Web app that load a single HTML page and **dynamically loads components** as the user interacts with the app
- Open-sourced by Facebook mid-2013 - <https://reactjs.org/>
- Competing with Angular <http://angular.io> and Vue.js <https://vuejs.org/>

# Components of Single Page Application (SPA)


- A **Single-Page Application (SPA)** has **1 main shell page** and **multiple UI components loaded** in response to user actions

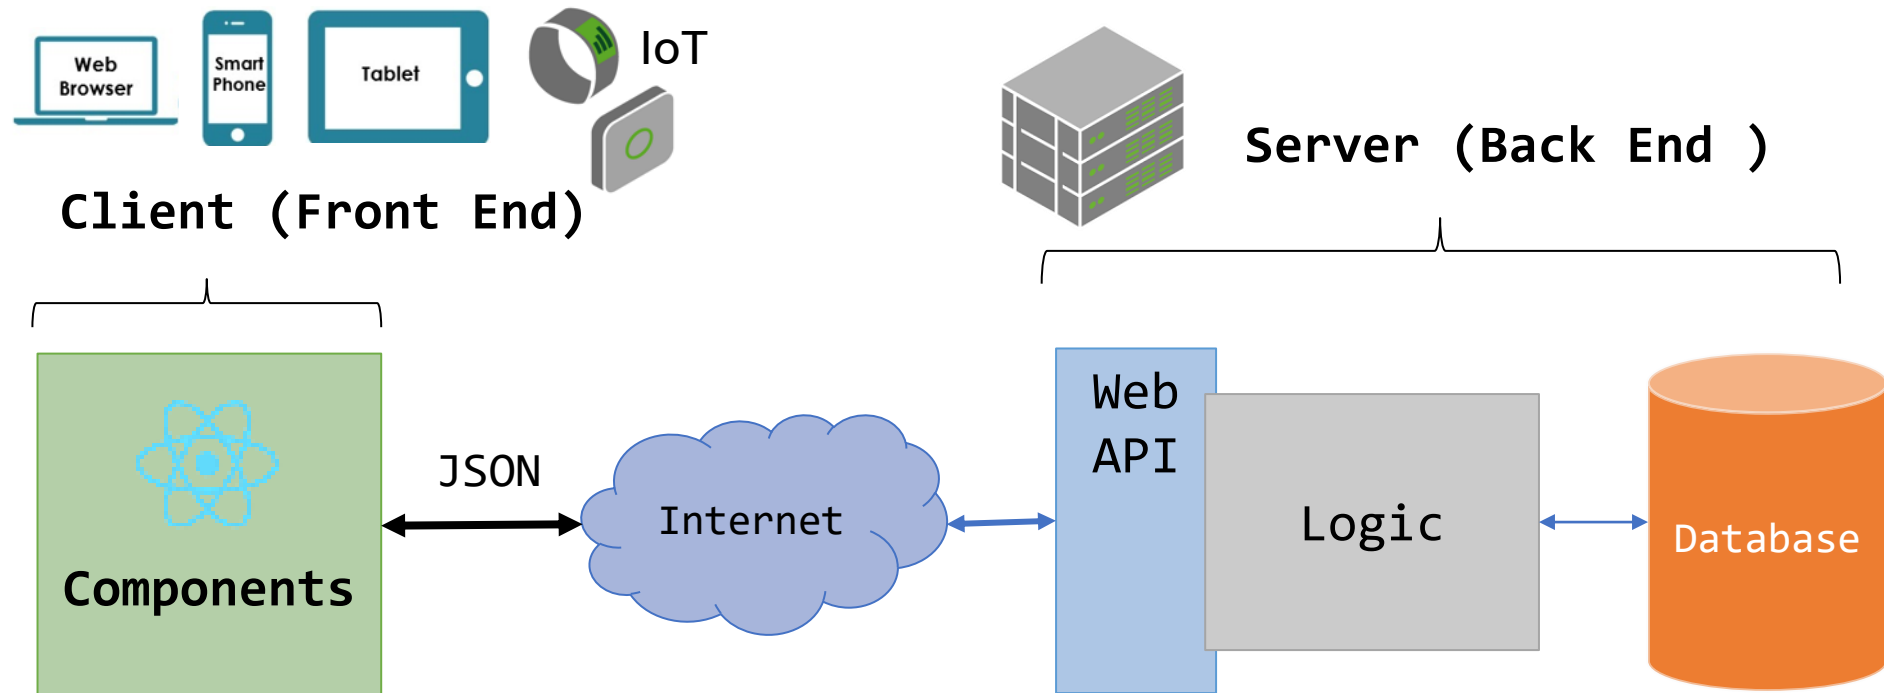

# An app = a composition of components


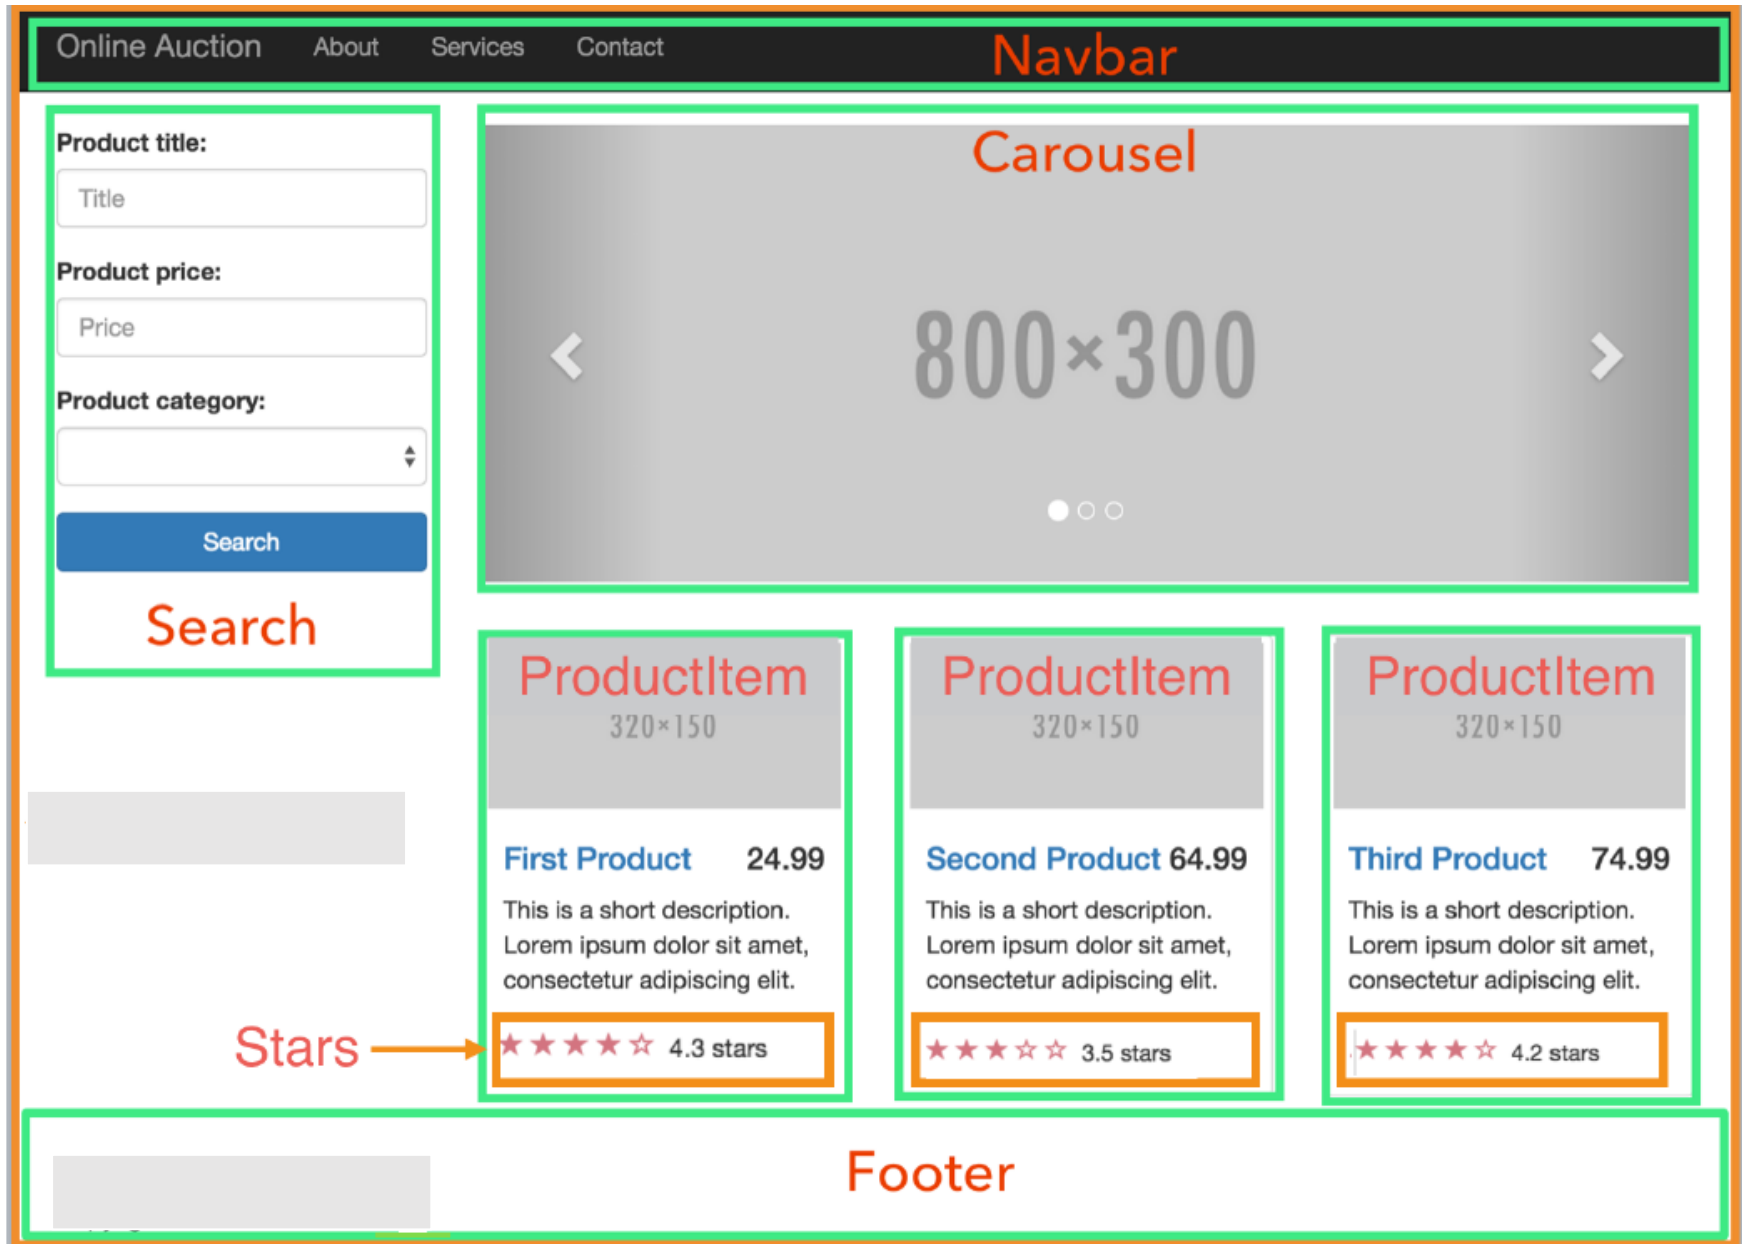


# An app = a tree of components

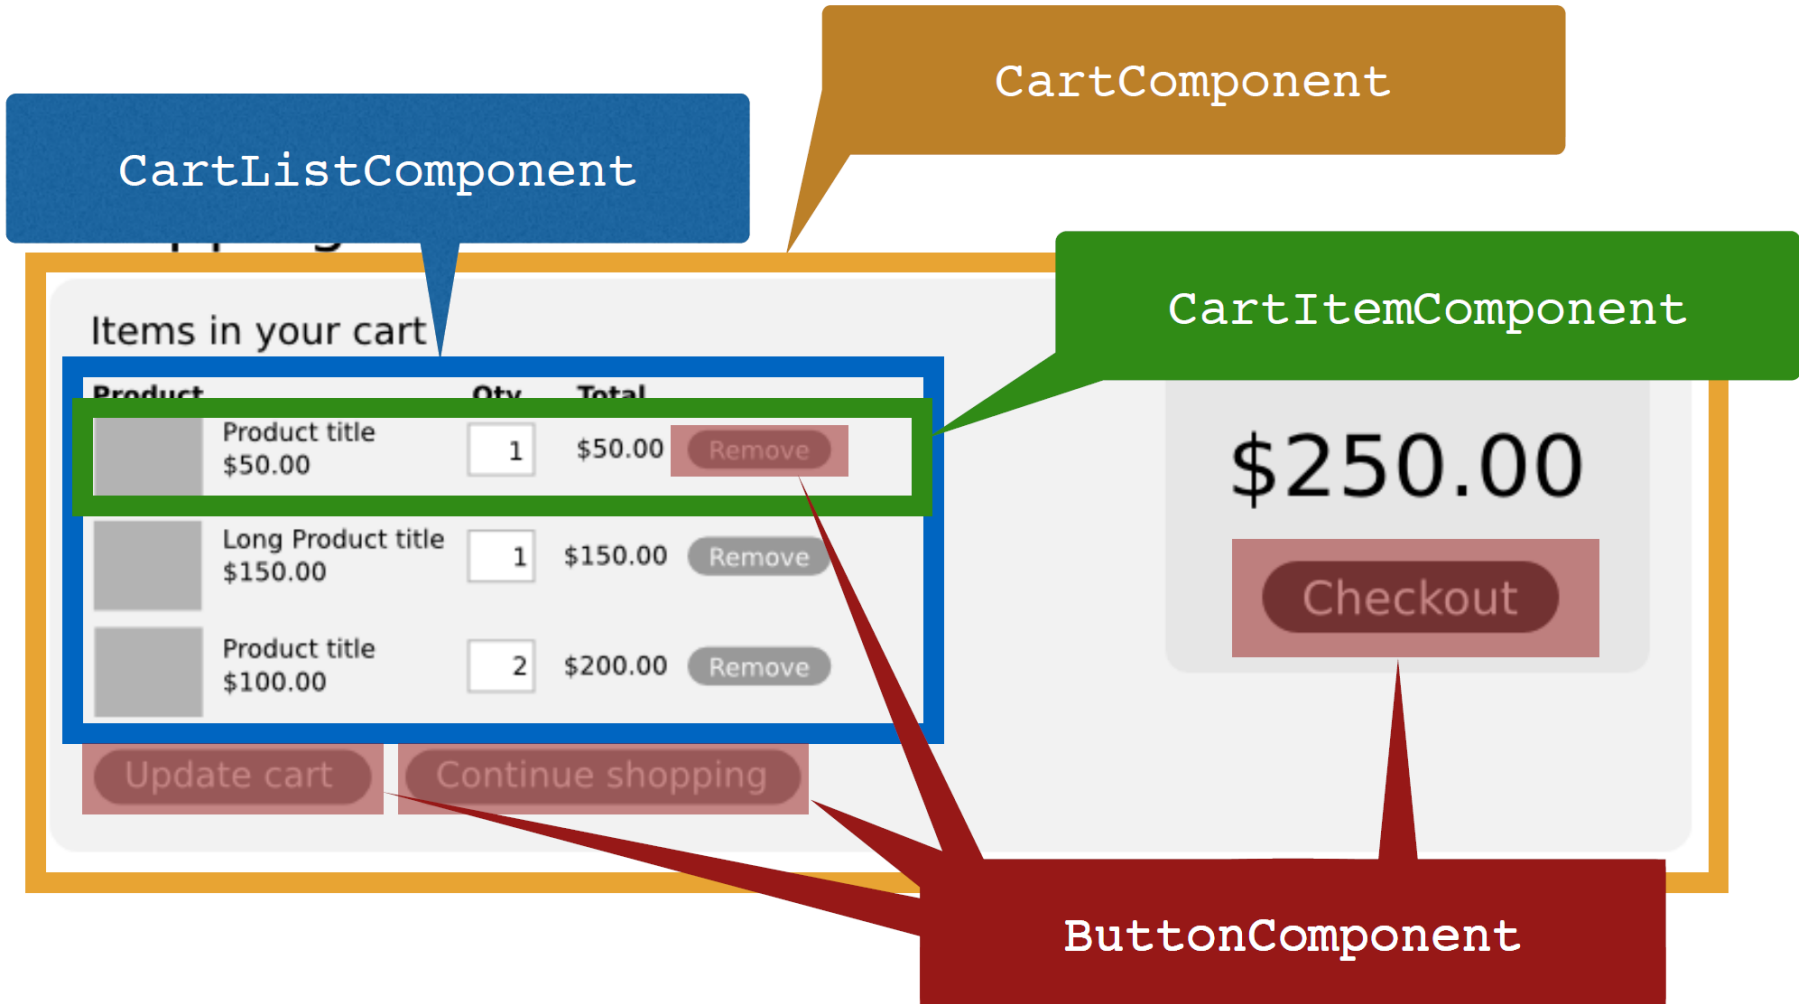



# React Components

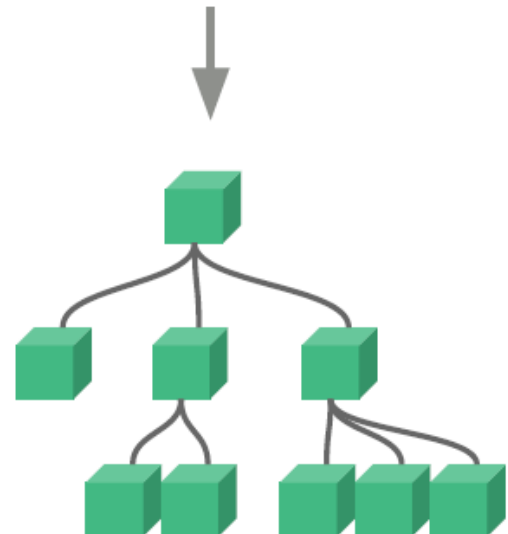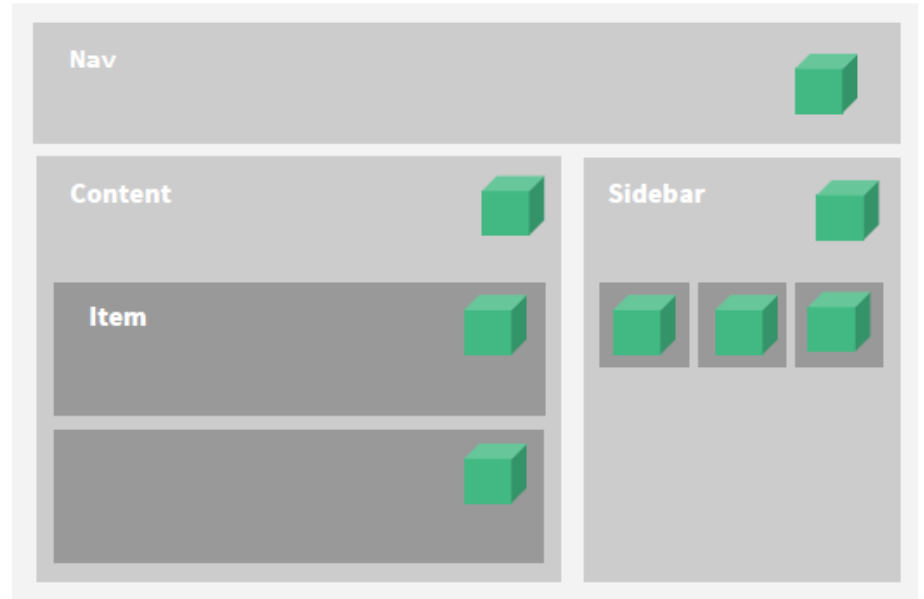

# Getting started

- Install latest **Node.js** <https://nodejs.org/en/>
- Download **VS Code** <https://code.visualstudio.com/>
- Create an empty folder (with no space in the name use **dash** - instead)
- Create a react app

**npx create-react-app .**

- Run the app

**npm start**

# React Component

- A React App is composed of self-contained and often reusable **components**
- A ***component***:
  - Return **HTML *elements*** to provide the UI
  - Encapsulate **state** (internal component data) and **functions** to ***handle events*** raised from the UI elements
- Component = UI + display logic
- Components allows creating new 'HTML tags'

# React = A declarative component-based programming model

- UI is built using JavaScript functions
  - Each function define a piece the app's UI programmatically
  - As state changes the UI automatically updates (Reactive UI)
    - without imperatively mutating UI views



# How to define a piece of UI?

UI is **composed** of small reusable **components**

UI Component = a **function**:

- Takes some inputs and emits a piece of UI
- Function that converts the state (i.e., app data) into UI



- **UI = f(state) : UI is a visual representation of state**  
(e.g., display a tweet and associated comments)
- **State changes trigger automatic update of the UI**



# Component Example

- Create a **Welcome** component
  - Returns **JSX** : an HTML-like syntax to define the component UI
  - Can accept a parameter called **props**
  - Component name must start with a capital letter
  - **props** are read-only

```
import React from "react";  
function Welcome(props) {  
  return (<h1>Welcome to {props.appName}</h1>);  
}  
export default Welcome;
```

You can embed  
JavaScript  
expressions in JSX

- Use the **Welcome** component

```
<Welcome appName='React Demo App' />
```

# What is JSX?

- React uses JSX (JavaScript XML) syntax to describe the component's UI
- Embraces the fact that rendering logic is inherently coupled with other UI
- JSX allows us to write HTML like syntax which gets transformed to JavaScript objects

JSX

```
const element = (  
  <h1 className="greeting">  
    Hello, world!  
  </h1>  
);
```

JavaScript

```
const element = React.createElement(  
  'h1',  
  {className: 'greeting'},  
  'Hello, world!'  
);
```

It's just JavaScript!!

# Props destructuring

- In a **react** component you can destructure **props into variables**

```
function UserInfo(props) {  
  return (  
    <div>  
      First Name: {props.firstName}  
      Last Name: {props.lastName}  
    </div>  
  );  
}
```



**Becomes**

```
function UserInfo({ firstName, lastName }) {  
  return (  
    <div>  
      First Name: {firstName}  
      Last Name: {lastName}  
    </div>  
  );  
}
```



# Rendering a List of items (with .map())

Lists are handled using **.map** array function

```
function FriendsList({friends}) {  
  return <ul>  
    {friends.map( (friend, i) =>  
      <li key={i}>{friend}</li>  
    )}  
  </ul>  
}
```

- Fatima
- Mouza
- Sarah

```
<FriendsList>  
  <ul>  
    <li key="0">Fatima</li>  
    <li key="1">Mouza</li>  
    <li key="2">Sarah</li>  
  </ul>  
</FriendsList>
```

**Key** helps identify which items have changed, added or removed

- Use the **FriendsList** component

```
<FriendsList friends={['Fatima', 'Mouza', 'Sarah']}/>
```

# State

$$f(\text{State } \begin{matrix} \text{name: John} \\ \text{surname: Dough} \end{matrix}) =$$

View

# Component State

- A component can store its own local data (**state**)
  - Private and fully controlled by the component
  - Can be passed as **props** to children
- Use **useState** hook to create a *state variable* and an *associated function* to update the state

```
const [count, setCount] = useState(0);
```

**useState** returns a state variable *count* initialized with 0 and a function *setCount* to be used to update it

- Calling *setCount* causes React to **re-render the app components** and **update the DOM** to reflect the state changes



**Never change the state directly by assigning a value to the state variable => otherwise React will NOT re-render the UI**


# State

- State = any value that can change overtime
  - State variable must be declared using **useState** hook to act as **Change Notifiers**
    - They **are observed** by the React runtime
    - Any change of a state variable will trigger the **re-rendering** of any functions that **reads** the state variable
    - Both props and state changes trigger a render update
- => UI is **auto-updated** to reflect the updated app state

# Observer Pattern at the heart of Jetpack Compose

Observer Pattern Real-Life Example: A celebrity who has many fans on Tweeter

- Fans want to get all the latest updates (posts and photos)
- Here fans are **Observers** and celebrity is an **Observable** (analogous **state variable** in React)
- A **State variable** is an **observable data holder**: React runtime **observes its changes** and updates the UI accordingly

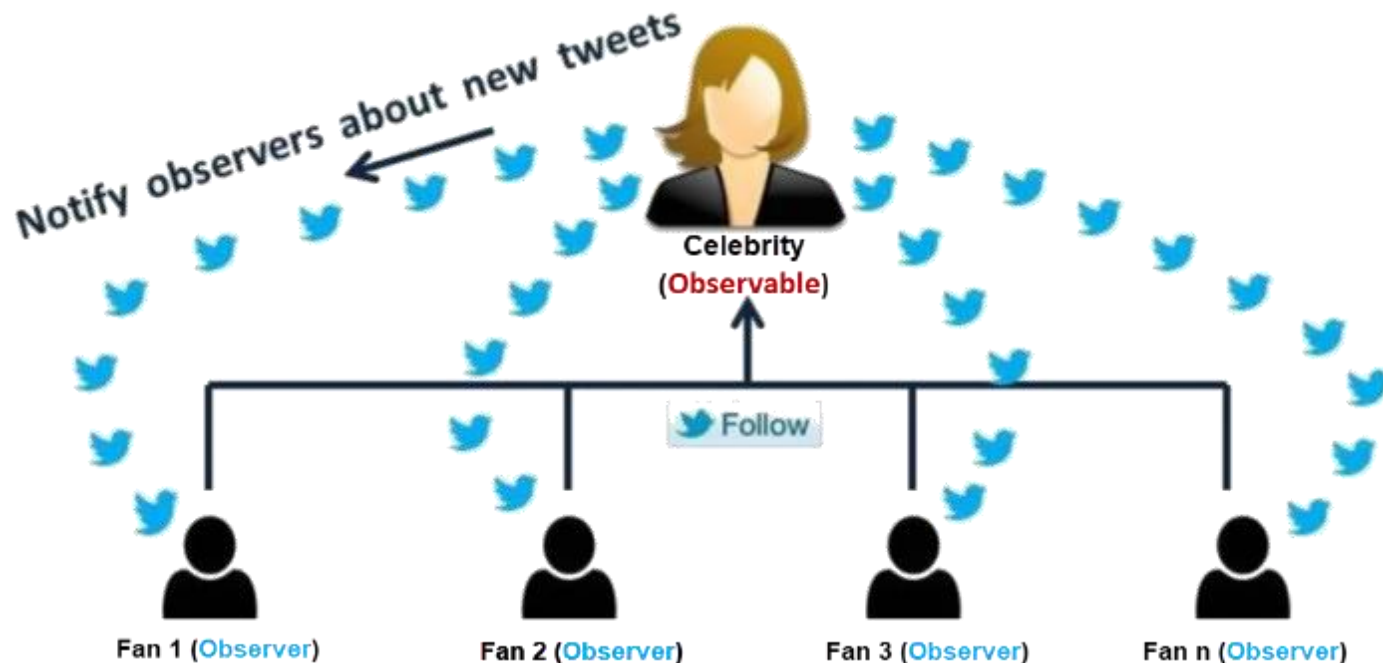

# Imperative UI vs. Declarative UI

- Imperative UI – manipulate DOM to change its internal state / UI

```
document.querySelector('#bulbImage').src = 'images/bulb-on.png';  
document.querySelector('#switchBtn').value = "Turn off";
```



## UI in React is immutable

- In react you should NOT access/update UI elements directly (as done in the imperative approach)
- Instead update the UI is by updating the state variable(s) used by the UI elements – this triggers automatic UI update
  - E.g., change the bulb image by updating the ***isBulbOn*** state variable

```
<input type="button"  
  value= {isBulbOn ? "Turn off" : "Turn on"}  
  onClick={() => setIsBulbOn(!isBulbOn)} />
```

# useState Hook

State Variable

Setter Function

Initial Value



```
// State with Hooks  
const [count, setCount] = useState(0);
```

The diagram shows three white arrows pointing from the labels above to the code below. The first arrow points from 'State Variable' to the `count` variable in the array. The second arrow points from 'Setter Function' to the `setCount` function in the array. The third arrow points from 'Initial Value' to the `0` argument of the `useState` function.

# Component with State + Events Handling

```
import React, { useState } from "react";
```

Count: 4



```
function Counter(props) {  
  const [count, setCount] = useState(props.startValue);  
  const increment = () => { setCount(count + 1); };  
  
  const decrement = () => { setCount(count - 1); };  
  
  return <div>  
    Count: {count}  
    <button type="button" onClick={increment}>+</button>  
    <button type="button" onClick={decrement}>-</button>  
  </div>  
}  
export default Counter;
```



**Handling events** is done the way events are handled on DOM elements


- Use the **Counter** component

```
<Counter startValue={3}/>
```



# Uni-directional Data Flow:

## Props vs. State




- **Props** = data passed to the child component from the parent component
- **Props** parameters are **read only**

- **State** = internal data managed by the component (cannot be accessed and modified outside of the component)
- **State** variables are **Private** and **Modifiable** inside the component only (through **set** functions returned by `useState`)

👍 React **automatically re-render the UI** whenever **state** or **props** are updated


# Event Handlers update the State and React updates the UI

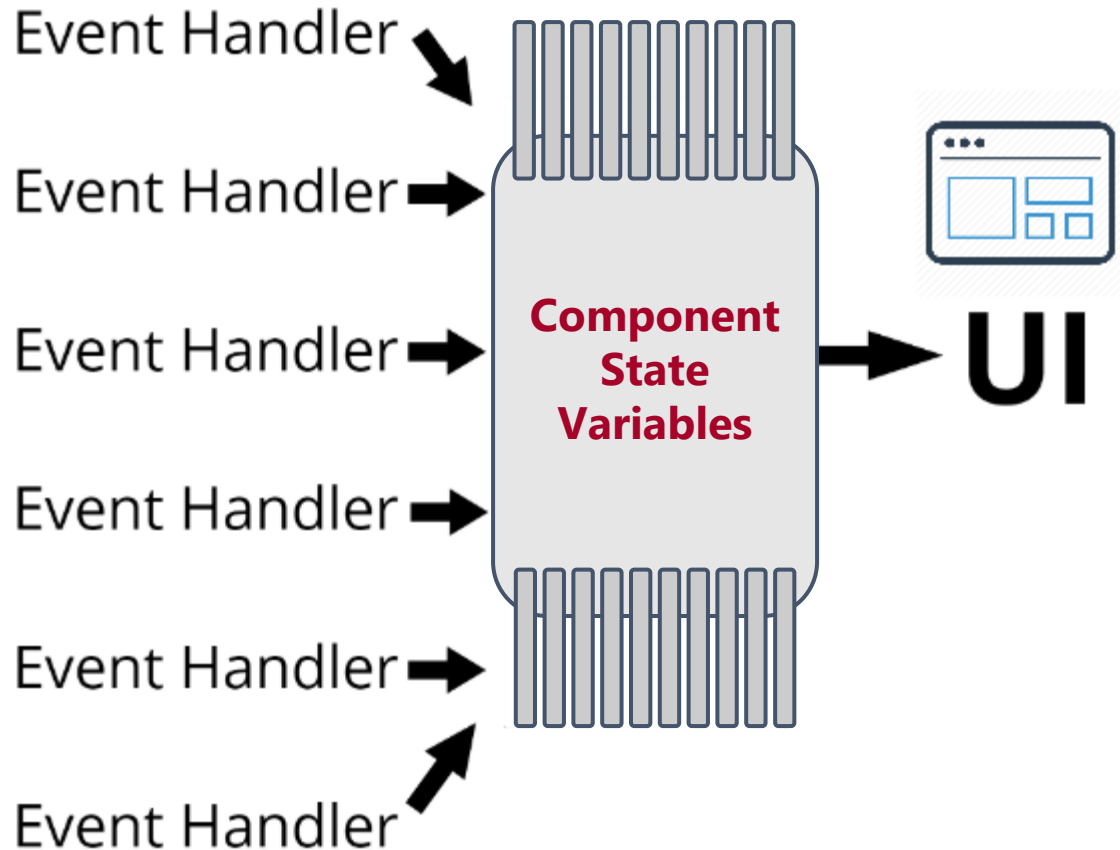


**Every place a state variable is displayed is guaranteed to be auto-updated**

# Virtual DOM

- Virtual DOM = Pure JavaScript lightweight DOM, totally separate from the browser's slow JavaScript/C++ DOM API
- Every time the component **updates its state** or **receives new data via props**
  - A new virtual DOM tree is generated
  - New tree is **diffed** against old...
  - ...producing a minimum set of changes to be performed on real DOM to bring it up to date

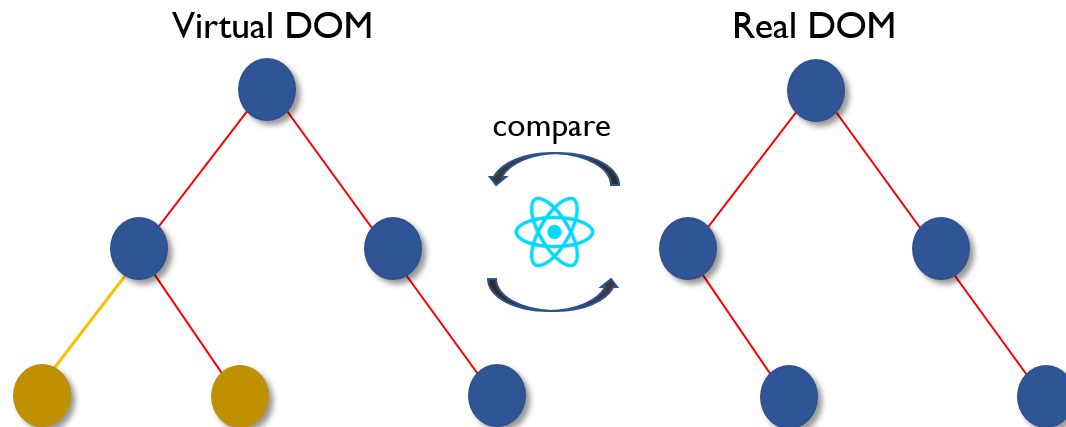

# Unidirectional Data Flow in Forms

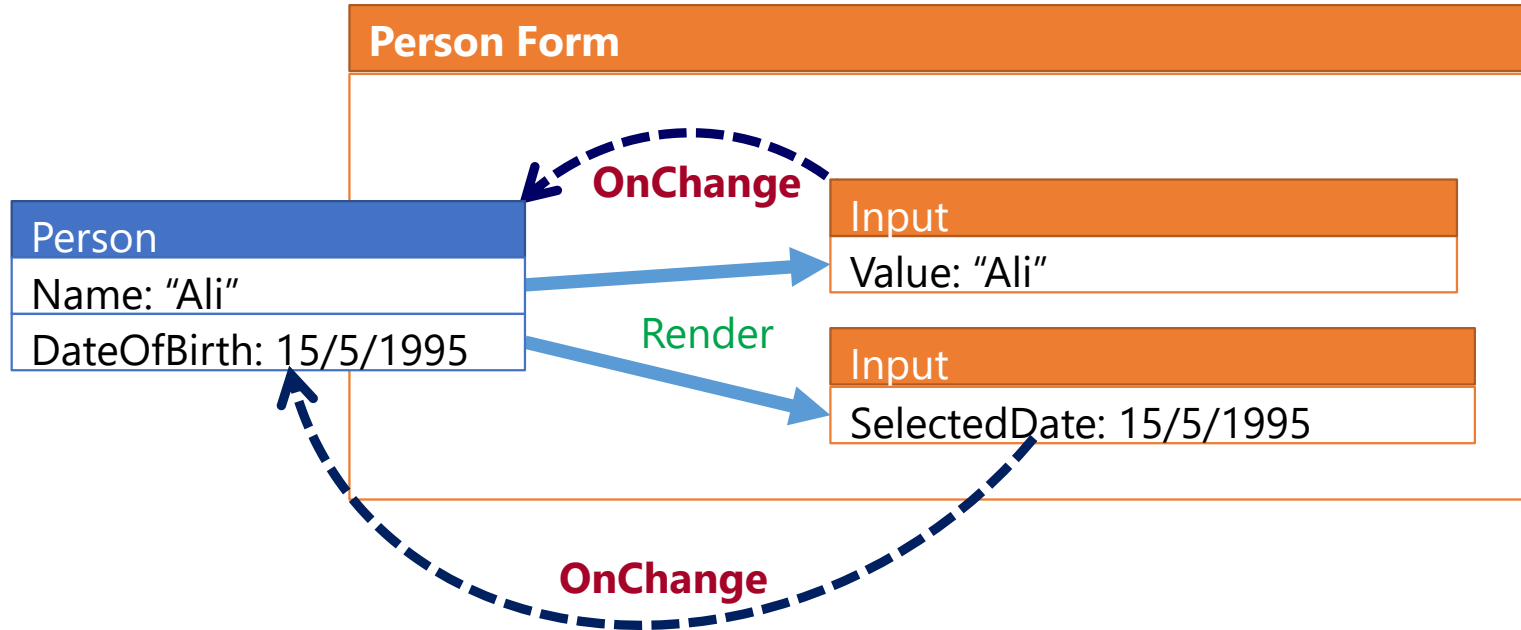

**Common Events:** `onClick` - `onSubmit` - `onChange`

# Forms with React

## Form UI

```
<form onSubmit={handleSubmit}>
  <input
    name="email"
    type="email" required
    value={values.user}
    onChange={handleChange} />
  <input
    name="password"
    type="password" required
    value={values.password}
    onChange={handleChange} />
  <input type="submit" />
</form>
```


```
const [values, setValues] = useState({ email: "", password: "" });
```

```
const handleChange = e => {
  const name = e.target.name;
  const value = e.target.value;
  //Merge the object before change with the updated property
  setValues({ ...values, [name]: value });
};
```

```
const handleSubmit = e => {
  e.preventDefault();
  alert(JSON.stringify(values));
};
```


## Form State and Event Handlers

# Components Communication

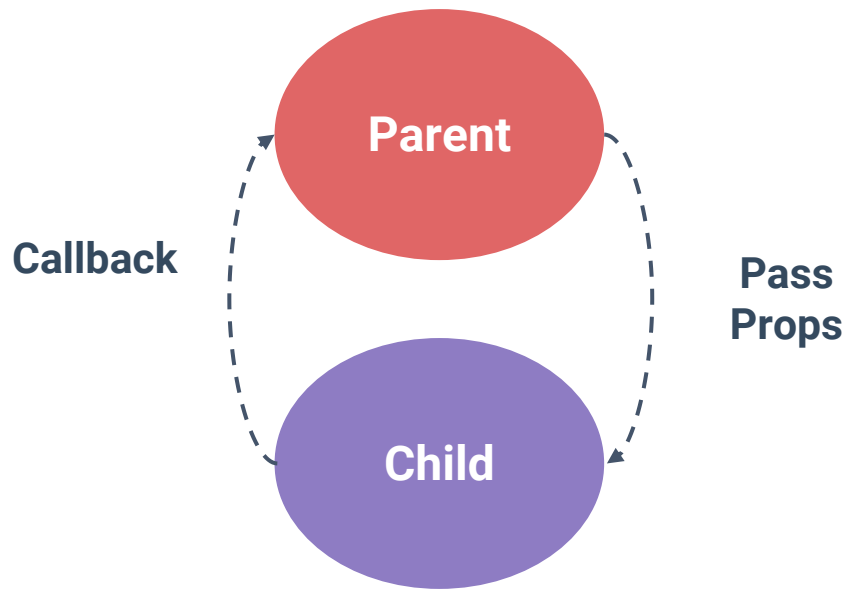


# Composing Components

- Components are meant to be used together, most commonly in parent-child relationships.
- Parent passes data down to the child via **props**
- The child notify its parent of a **state change via callbacks** (a parent must pass the child a callback as a parameter)

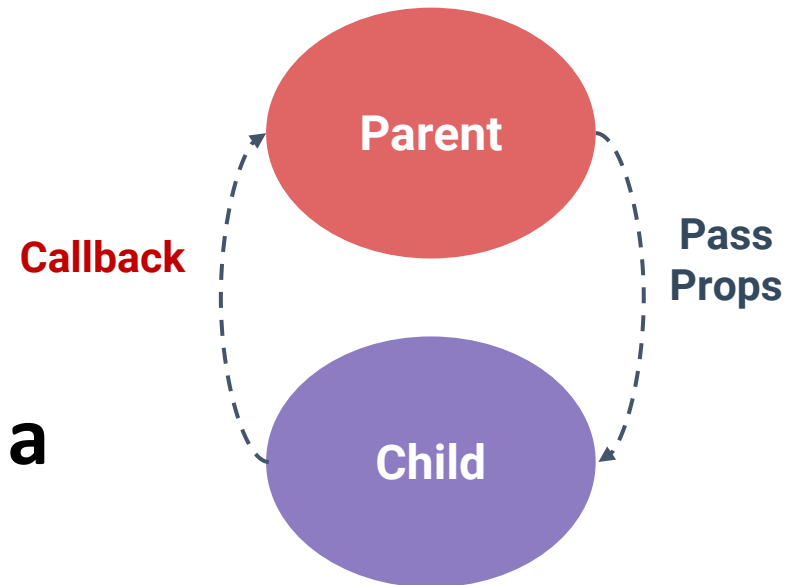

# Parent-Child Communication

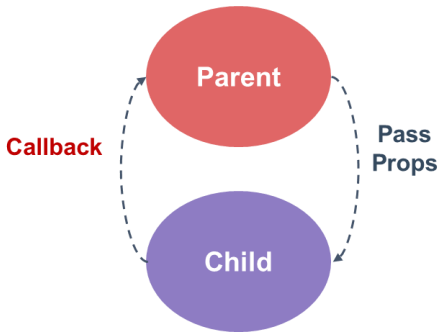

**Parent**

```
<Counter startValue={3}  
  onChange= {count => console.log(`Count from the child component: ${count}`)} />
```

**Child**

```
function Counter(props) {  
  const [count, setCount] = useState(props.startValue);  
  
  const increment = () => {  
    const updatedCount = count + 1;  
    setCount(updatedCount);  
    props.onChange(updatedCount);  
  };  
  
  return <div>  
    Count: {count}  
    <button type="button" onClick= {increment}>+</button>  
  </div>  
}
```



# React Hooks



**useEffect**  
**useContext**

# What is Hook?

- A Hook is a special function that lets you “hook into” React features
- **useState**: creates a state variable
- **useEffect**: allows a running a function to execute some code at a specific time during the component lifecycle
  - when the component is first mounted to the DOM
  - every time a particular state variable changes
- **useContext**: allows providing and consuming ‘global’ variables and functions

# useEffect – Executes code during Component Life Cycle

- **Initialize state data when the component loads**

```
useEffect(() => {
  async function fetchData() {
    const url = "https://api.github.com/users";
    const response = await fetch(url);
    setUsers( await response.json() ); // set users in state
    fetchData();
  }, []); // pass empty array to run this effect once when the component is first mounted to the DOM.
```

- **Executing a function every time a state variable changes**

```
useEffect(() => {
  async function fetchData() {
    const url = `https://hn.algolia.com/api/v1/search?query=${query}`;
    const response = await fetch(url);
    const data = await response.json();
    setNews(data.hits);
  }
  fetchData();
}, [query]);
```

**If 2<sup>nd</sup> parameter is not set then the useEffect function will run on every re-render**

# useContext – Define global variables and functions

1. **Create a context** (i.e., a global container to provide global variables and functions available to all components)

```
import React from 'react';  
const UserContext = React.createContext();  
export default UserContext;
```

2. **Provider places global variables / functions in the context**

```
import UserContext from './components/UserContext';  
function App() {  
  return (  
    <UserContext.Provider value={ user }>  
      <Welcome appName='React Demo App' /> ...  
    </UserContext.Provider>  
  );  
}
```

3. **Consumer access the global variables / functions in the context**

```
import React, {useContext} from "react"; import UserContext from './UserContext';  
export default function Welcome() {  
  const user = useContext(UserContext);  
  return <div>You are login as: {user.username}</div>;  
}
```


# React Tools and Component Libraries

- **React Dev Tools**
- **React Components Libraries**

# React Dev Tools

- React Dev Tools

<https://chrome.google.com/webstore/detail/react-developer-tools/fmkadmapgofadopljbjfkapdkoienihi?hl=en>

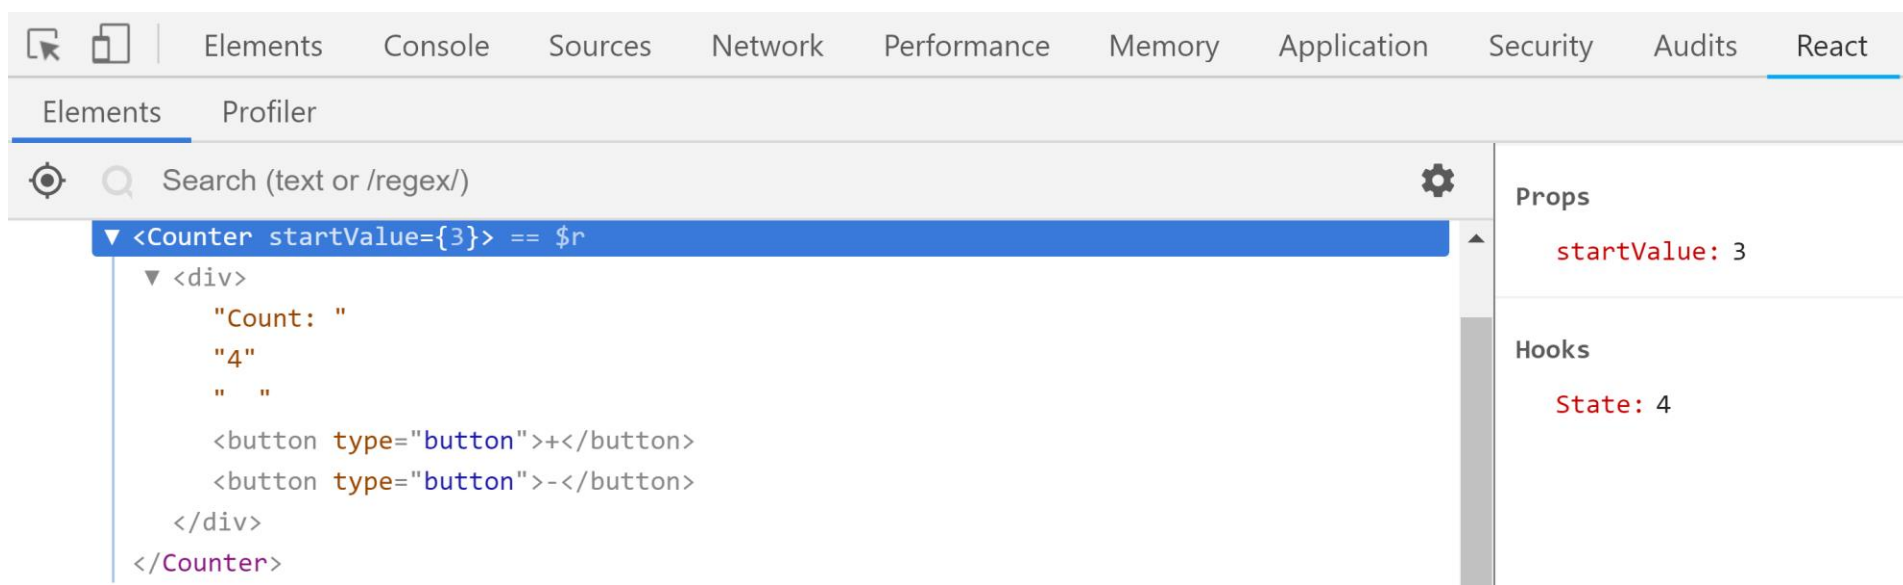

# React Component Libraries

- **Material-UI:** React components with Material Design  
<https://mui.com/>
- **Grommet Components**  
<https://v2.grommet.io/components>
- **Blueprint:** React-based UI toolkit  
<https://blueprintjs.com/>
- **Fluent UI React Components**  
<https://react.fluentui.dev/>

# Summary

- Decompose UI into self-contained and often reusable components
  - UI = Composition of Components
- Why React:
  - Component-based
  - Virtual DOM
  - Declarative
- React uses JSX (JavaScript Extension) syntax to define component's UI



# Resources

- Thinking in React

<https://reactjs.org/docs/thinking-in-react.html>

- React Router

<https://reactrouter.com/>

- Useful list of resources

<https://github.com/enaqx/awesome-react>