Definition AXOL1TL and TOPO model names

Bernhard Arnold, Herbert Bergauer, Manfred Jeitler
Institute of High Energy Physics (HEPHY)
http://www.hephy.at
http://globaltrigger.hephy.at
https://twiki.cern.ch/twiki/bin/viewauth/CMS/GlobalTrigger

February 12, 2024

Contents

1 AXOL1TL and TOPO model names **2**

1.1 Implementation in Trigger Menu Editor (TME) 2

1.2 Implementation in uGT firmware 2

1 AXOL1TL and TOPO model names

This document is a description for the naming convetion of AXOL1TL and TOPO model names.

With the release of utm version 0.12, the possibility of setting cuts for different models of Axol1tl and Topological triggers is available. To prevent changes in utm and TME, we created a structure which is open for upcoming new models without touching utm and TME!
The uGT tool "VHDL Producer" and the uGT firmware (VHDL) code depend on the AXOL1TL and TOPO model names. Therefore a convention is necessary.
A list of valid AXOL1TL and TOPO model names will be provided on a web page (an example is available https://globaltrigger.web.cern.ch/upgrade/tme/models).

1.1 Implementation in Trigger Menu Editor (TME)

In TME "cut editor" a link to valid model names is available for L1Menu developers to set model names, see Figure 1 for TMODEL (Topological model), similar for AMODEL (Axol1tl model).

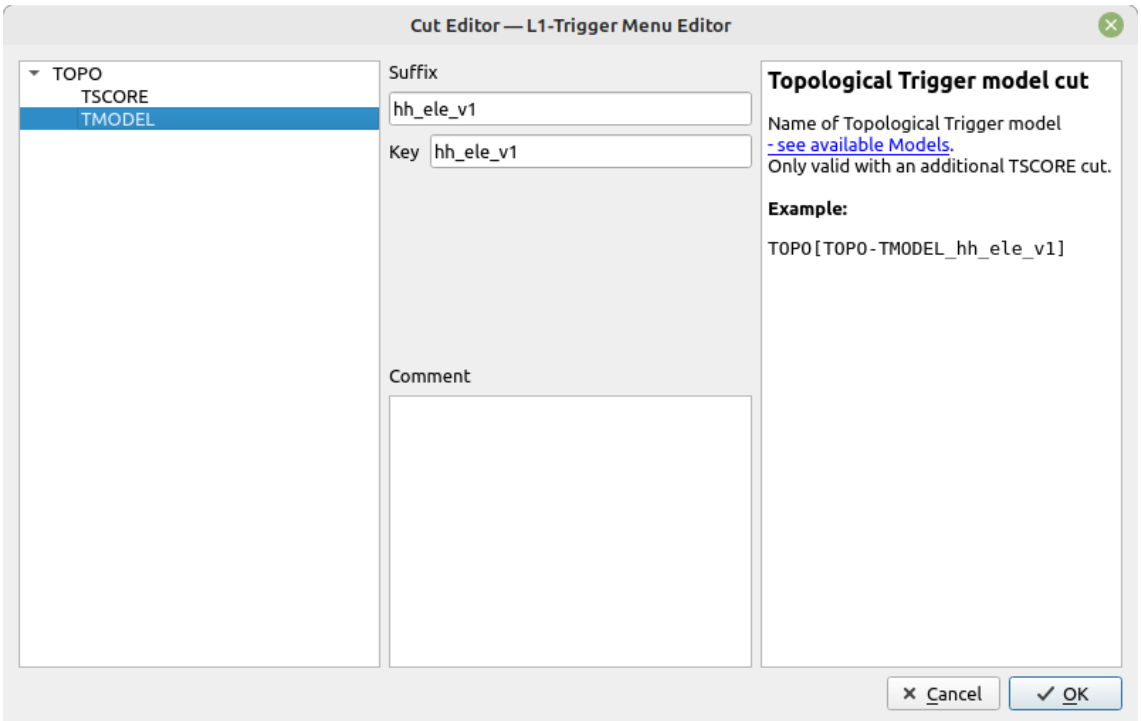

Figure 1: TME cut editor TMODEL

1.2 Implementation in uGT firmware

The uGT firmware (https://github.com/cms-l1-globaltrigger/mp7_ugt_legacy) will provide subdirectories for VHDL files of every available model.

According to the model names listed in https://globaltrigger.web.cern.ch/upgrade/tme/models, we created a subdirectory structure as follows (currently in branch "dev_v1.26.x_nn_models" - https://github.com/cms-l1-globaltrigger/mp7_ugt_legacy/tree/dev_v1.26.x_nn_models/firmware/hdl/payload/gtl):

`../axol1tl_trigger/model_v1`
containing VHDL files named "axol1tl_v1_<hls file name>.vhd" and "axol1tl_v1.vhd".

`../axol1tl_trigger/model_v3`
containing VHDL files named "axol1tl_v3_<hls file name>.vhd" and "axol1tl_v3.vhd".

`../topo_trigger/model_hh_ele_v1`
containing VHDL files named "topo_hh_ele_v1_<hls file name>.vhd" and "topo_hh_ele_v1.vhd". (See example Figure 2).

`../topo_trigger/model_hh_ele_v1`
containing VHDL files named "topo_hh_had_v1_<hls file name>.vhd" and "topo_hh_had_v1.vhd".

`../topo_trigger/model_hh_ele_v1`
containing VHDL files named "topo_hh_mu_v1_<hls file name>.vhd" and "topo_hh_mu_v1.vhd".

VHDL file names and VHDL entity names of HLS generated files have to comply with this naming convention.
An example of HLS generated files is shown in Figure 2 (for Topological trigger model "hh_ele_v1").

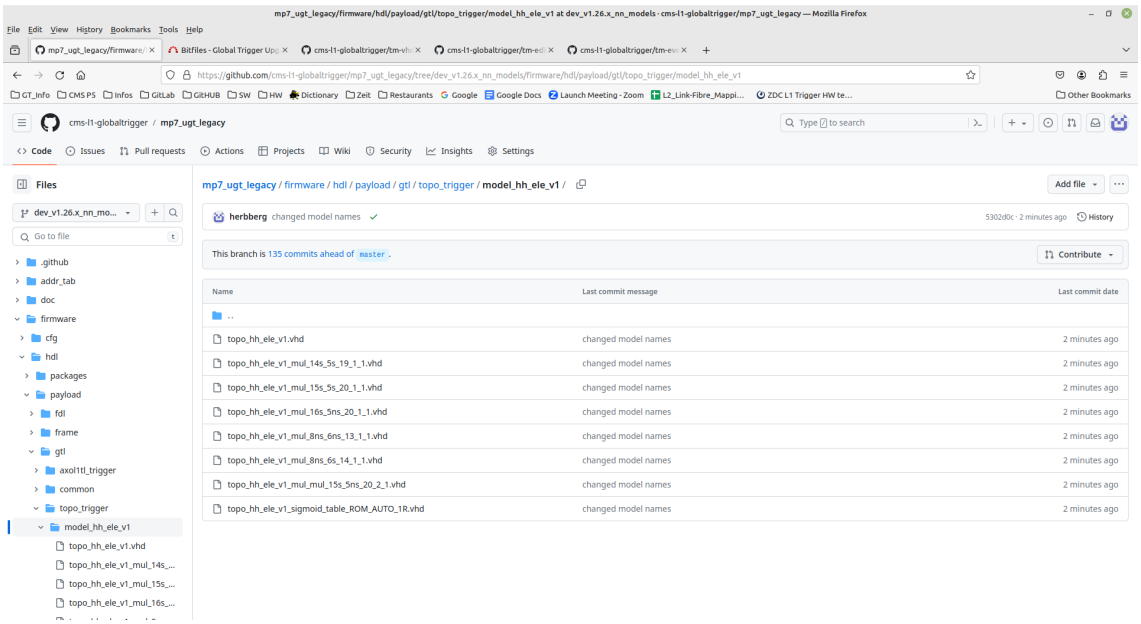

Figure 2: TOPO model "hh_ele_v1" files

The dependency files "axol1tl_trigger.dep" and "topo_trigger.dep" should contain all HLS generated filenames (with path) for all models.
In Figure 3 an example for "topo_trigger.dep" is shown.

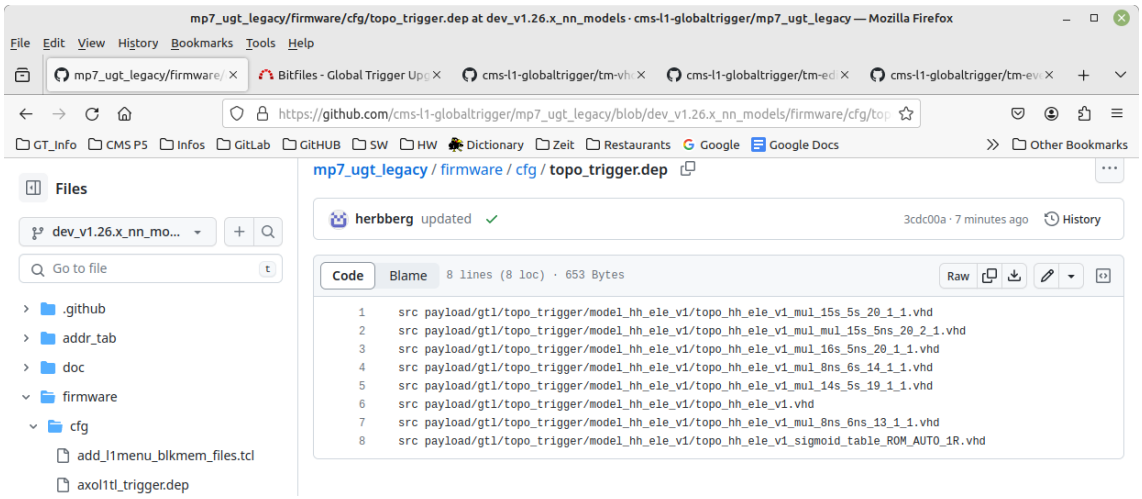

Figure 3: Example of "topo_trigger.dep" (for model "hh_ele_v1" files)