

Package API documentation for **blindex-0.4.0**

C. Naaktgeboren
<https://github.com/cnaak/blindex.typ>

1 Introduction

The sections below are automatically generated by tidy-0.4.3 based on the source code documentation annotations on blindex-0.4.0.

2 blindex

- abbrev-to-dict()
- blindex()
- get-book-abbrevs()
- get-language-traditions()
- get-sorting-traditions()
- ind-blk()
- ind-inl()
- mk-index()
- quo-high()
- quo-quot()
- ref-bare()
- ver()

2.1 abbrev-to-dict

Helper function (not user-facing) that converts a biblical literature book abbreviation (according to a given language-tradition) into an indexing dictionary.

Parameters

```
abbrev-to-dict(  
  book-abbrev: string,  
  language-tradition: string  
) → dictionary
```

book-abbrev string

The biblical literature book abbreviation (according to a given language-tradition)

language-tradition string

The language-tradition in which the book-abbrev points to the intended book

Default: "en-USX"

2.2 blindex

Biblical literature indexing marking function.

This function produces no visible output, but only adds to the document the appropriate indexing `#metadata()`.

This function is perhaps best used indirectly, through the various quoting functions (see `ind-inl()` and `ind-blk()`, for instance).

Parameters

```
blindex(  
  book-abbrev: string,  
  chapter-verse: content,  
  language-tradition: string  
) → none
```

book-abbrev string

The book abbreviation (see `get-book-abbrevs()`)

chapter-verse content

The [chapter:verse(s)] entry

language-tradition string

The book abbreviation language-tradition (see `get-language-traditions()`)

Default: "en-USX"

2.3 get-book-abbrevs

Returns valid book-abbrev values, to be passed as the corresponding argument in user-facing functions.

Examples

```
#block(width: 80mm)[  
  #for item in get-book-abbrevs("fr-T0B") [  
    #box[#raw("\ " + item + "\"),]  
  ]  
]
```

```
"Gn", "Ex", "Lv", "Nb", "Dt", "Jos",  
"Jg", "Rt", "1S", "2S", "1R", "2R",  
"1Ch", "2Ch", "Esd", "Ne", "Est", "Jb",  
"Ps", "Pr", "Qo", "Ct", "Es", "Jr",  
"Lm", "Ez", "Dn", "Os", "Jl", "Am",  
"Ab", "Jon", "Mi", "Na", "Ha", "So",  
"Ag", "Za", "Ml", "Mt", "Mc", "Lc",  
"Jn", "Ac", "Rm", "1Co", "2Co", "Ga",  
"Ep", "Ph", "Col", "1Th", "2Th", "1Tm",  
"2Tm", "Tt", "Phm", "He", "Jc", "1P",  
"2P", "1Jn", "2Jn", "3Jn", "Jude", "Ap",  
"1Esd", "Jdt", "Tb", "1M", "2M", "3M",  
"4M", "Est-grec", "Ps-151", "Ode", "Sg",  
"Si", "Ps-Sol", "Ba", "Lt-Jr", "Dn-grec",  
"Dn-grec", "Dn-grec", "3Esd", "4Esd",  
"Mn", "2ES", "EZA", "5EZ", "6EZ", "DAG",  
"PS3", "2BA", "LBA", "JUB", "ENO", "1MQ",  
"2MQ", "3MQ", "REP", "4BA", "LAO", "XXA",  
"XXB", "XXC", "XXD", "XXE", "XXF", "XXG",  
"FRT", "BAK", "OTH", "INT", "CNC", "GLO",  
"TDX", "NDX",
```

Parameters

```
get-book-abbrevs(language-tradition: string) → array
```

language-tradition `string`

The language-tradition for which to retrieve book abbreviations from (see `get-language-traditions()`)

2.4 get-language-traditions

Returns valid language-tradition values, to be passed as the corresponding named argument in user-facing functions.

Examples

```
#block(width: 80mm)[
  #for item in get-language-traditions() [
    #box[#raw("\\" + item + "\\"),]
  ]
]
```

"en-USX", "en-3", "en-logos",
"pt-ARC-1911", "br-pro", "br-cat",
"fr-T0B",

Parameters

`get-language-traditions()` → `array`

2.5 get-sorting-traditions

Returns valid biblical literature book sorting-tradition values, to be passed as the corresponding named argument in user-facing functions like `mk-index()`.

Examples

```
#block(width: 80mm)[
  #for item in get-sorting-traditions() [
    #box[#raw("\\" + item + "\\"),]
  ]
]
```

"code", "LXX", "Greek-Bible",
"Hebrew-Tanakh", "Hebrew-Bible",
"Protestant-Bible", "Catholic-Bible",
"Orthodox-Bible", "Oecumenic-Bible",
"USX",

Parameters

`get-sorting-traditions()` → `array`

2.6 ind-blk

Indexed blocked quoting-referencing(-citing) function.

This is one of the main user-facing functions of this library, meant for fully configurable blocked biblical literature quoting, referencing, optional citation, and indexing.

Example

```
#set text(font: "Noto Sans")
#block(width: 80mm)[
  The Revelation of Jesus Christ affirms:
  #ind-blk([Behold, he cometh with the
clouds; and every eye shall
  see him, and they that pierced him; and
all the tribes of the
  earth shall mourn over him. Even so,
```

```
Amen.],
  "REV", [1:7], version: "ASV")
  therefore...
]
```

The Revelation of Jesus Christ affirms:

Behold, he cometh with the clouds; and every eye shall see him, and they that pierced him; and all the tribes of the earth shall mourn over him. Even so, Amen.

— Revelation 1:7 (ASV)

therefore...

Parameters

```
ind-blk(
  body: content,
  book-abbrev: string,
  passage,
  language-tradition: string,
  version: string none,
  cite-label: label none,
  cite-pars: dictionary,
  ref-text-pars: dictionary,
  ref-sep: content,
  quo-text-pars: dictionary,
  quo-highlight-pars: dictionary,
  quote-pars: dictionary,
  oquot: content,
  cquot: content,
  quo-block-pars: dictionary,
  ref-block-pars: dictionary
) → content
```

body content

The excerpt or passage to be rendered

book-abbrev string

The biblical literature book abbreviation (see `get-book-abbrevs()`)

passage

The referencing passage such as `[1:1--7]` > contents

language-tradition string

The language-tradition in which the book-abbrev is valid (see `get-language-traditions()`)

Default: "en-USX"

version string or none

The biblical literature version (usually translation/source acronym)

Default: none

cite-label label or none

The bibliography citation label or none, for no citation

Default: none

cite-pars dictionary

Named args (pars) that can be passed to a `#cite(..cite-pars, cite-label)` function call

Default: (supplement: none, form: "normal", style: auto)

ref-text-pars dictionary

Formatting named args that can be passed to a `#text(..ref-text-pars)` function call

Default: pkg-pars.fmt.text.ref

ref-sep content

Separator (from previous content)

Default: [`#h(1fr)---`]

quo-text-pars dictionary

Formatting named args that can be passed to a `#text(..quo-text-pars)` function call

Default: pkg-pars.fmt.text.quo

quo-highlight-pars dictionary

Formatting named args that can be passed to a `#highlight(..quo-highlight-pars)` function call

Default: pkg-pars.fmt.highlight.blk

quote-pars dictionary

Smartquote parameters that can be passed to a `#set smartquote(..quote-pars)` function call

Default: pkg-pars.quo.at("def")

oquot content

The opening quote

Default: []

cquot content

The closing quote

Default: []

quo-block-pars dictionary

Formatting named args that can be passed to a `#block(..quo-block-pars)` function call

Default: `pkg-pars.fmt.block.quo`

ref-block-pars dictionary

Formatting named args that can be passed to a `#block(..ref-block-pars)` function call

Default: `pkg-pars.fmt.block.ref`

2.7 ind-inl

Indexed inline quoting-referencing(-citing) function.

This is one of the main user-facing functions of this library, meant for fully configurable inline biblical literature quoting, referencing, optional citation, and indexing.

Example

```
#set text(font: "Noto Sans")
#block(width: 80mm)[
  It is written that
  #ind-inl([Abraham believed God, and it
    reckoned unto him for
      righteousness,], "GAL", [3:6], version:
"ASV")
  therefore...
]
```

It is written that “Abraham believed God, and it was reckoned unto him for righteousness,”
— Galatians 3:6 (ASV) therefore...

Parameters

```
ind-inl(
  body: content,
  book-abbrev: string,
  passage,
  language-tradition: string,
  version: string none,
  cite-label: label none,
  cite-pars: dictionary,
  ref-text-pars: dictionary,
  ref-sep: content,
  quo-text-pars: dictionary,
  quo-highlight-pars: dictionary,
  quote-pars: dictionary,
  oquot: content
) → content
```

body content

The excerpt or passage to be rendered

book-abbrev string

The biblical literature book abbreviation (see `get-book-abbrevs()`)

passage

The referencing passage such as [1:1--7] > contents

language-tradition string

The language-tradition in which the book-abbrev is valid (see `get-language-traditions()`)

Default: "en-USX"

version string or none

The biblical literature version (usually translation/source acronym)

Default: none

cite-label label or none

The bibliography citation label or none, for no citation

Default: none

cite-pars dictionary

Named args (pars) that can be passed to a `#cite(..cite-pars, cite-label)` function call

Default: (supplement: none, form: "normal", style: auto)

ref-text-pars dictionary

Formatting named args that can be passed to a `#text(..ref-text-pars)` function call

Default: `pkg-pars.fmt.text.ref`

ref-sep content

Separator (from previous content)

Default: [---]

quo-text-pars dictionary

Formatting named args that can be passed to a `#text(..quo-text-pars)` function call

Default: `pkg-pars.fmt.text.quo`

quo-highlight-pars dictionary

Formatting named args that can be passed to a `#highlight(..quo-highlight-pars)` function call

Default: `pkg-pars.fmt.highlight.quo`

quote-pars dictionary

Smartquote parameters that can be passed to a `#set smartquote(..quote-pars)` function call

Default: `pkg-pars.quo.at("def")`

oquot **content**

The opening quote → content The closing quote

Default: ["],

cquot: ["]

2.8 mk-index

Index-making (producing, typesetting) function.

This function produces a biblical literature index, at the point of call in the document, based on the document's `#metadata()` entries placed directly through `blindex()` calls, or indirectly through one of the quoting functions (see `ind-inl()` and `ind-blk()`, for instance).

Since indices are produced and placed at the point of call of this function, the user has full control on the index location within the document. Moreover, there's no restriction on the number of times this function can be called, thus allowing multiple indices to be produced. This may be useful in polyglot documents, since it enables the production of indices of multiple languages.

The index language, ordering of books (according to various traditions), and appearance is controllable through the function arguments.

Parameters

```
mk-index(  
  language-tradition: string,  
  sorting-tradition: string,  
  cols: int,  
  gutter: length,  
  book-text-page-weights: dictionary,  
  pattern: content,  
  merged-book-headings-full: bool,  
  merged-book-headings-join: array  
)
```

language-tradition **string**

The language-tradition code for printing full index book names (see `get-language-traditions()`). This can be freely specified regardless of the tradition-language used to marking index entries along the document, since during index-marking, language-tradition book abbreviations are converted into generic internal representation keys that are language-tradition independent, while during index making, the generic internal representations are converted back to whatever specified language-tradition

Default: "en-USX"

sorting-tradition `string`

The book sorting tradition (see `get-sorting-traditions()`). This parameter controls the *sorting order* of biblical literature book entries. It is worth noting that most sorting traditions do not define book placements for all biblical literature books (owing to the inclusion of deuterocanonical and apocripha books only in certain sorting traditions). Therefore, apocripha or deuterocanonical books may *not be listed at all* in some book sorting traditions, since their placement is not defined. The library includes the code and USX sorting traditions, which are all-inclusive, meaning indices made with these sorting traditions are guaranteed to include every indexed biblical literature citation in the document.

Default: `"USX"`

cols `int`

The number of columns for the index rendering. It is worth noting that while `typst` does not implement automatic column balancing, some situations may call for manual column balancing, which can be accomplished externally to this function call

Default: `2`

gutter `length`

The gutter argument for the `#columns` function call

Default: `8pt`

book-text-page-weights `dictionary`

Font weight customizations for the book, text, and page elements of the index.

Default: (book: `"bold"`, text: `"regular"`, page: `"extrabold"`)

pattern `content`

The pattern for the index leaders

Default: `[ . ]`

merged-book-headings-full `bool`

Flags whether to fully merge index book headings for books merged on given language-traditions. In some traditions, a single book entry may contain multiple books of other traditions. For instance, in some Catholic traditions, the 6th chapter of the book of “Baruch” is listed as a separate book—the “Letter of Jeremiah”—in other traditions. Since index metadata entries are made through the book abbreviation `book-abbrev` (see `get-book-abbrevs()`), there might be a 1:many associations between abbreviation and actual book(s). Whenever this happens, the stored `#metadata()` actually contains an *array* of books, and this option controls whether or not all books get merged or just the first one (usually the most-encompassing) is displayed, i.e., using the example above, whether only “Baruch” or “Baruch / Letter of Jeremiah” is listed as a book heading in the index.

Default: `false`

merged-book-headings-join `array`

The book merging arguments for `join`. The entry at (0) is the positional argument for `join`, while optional entry at (1) is the named `last` argument for `join`

Default: (" / " ,)

2.9 quo-high

Helper function for fully controlled highlighted and formatting of body quoting.

This function is only concerned with biblical literature passage formatting: full text and highlight specifications, without any “dressings” — such as smart-quoting, biblical literature referencing, bibliography citation, or indexing; therefore, it has seldom cases of direct user-facing usage.

Both `#text` and `#highlight` formatting abilities are complete for maximum usability, which makes this function a central component of the higher-level (user-facing) quoting-referencing-citing-indexing functions.

Example

The rare function user-facing usage includes the repeating of immediate-context, previous, fully-qualified quoted passage excerpts within a discussion, such as:

```
#set text(font: "Libertinus Serif")
#block(width: 80mm)[
  we've seen that
  #quo-high([all kindreds of the earth
    shall wail because of him]),
  (speaking of Jesus), therefore...
]
```

we've seen that all kindreds of the earth shall wail
because of him, (speaking of Jesus), therefore...

Parameters

```
quo-high(
  quo-text-pars: dictionary ,
  quo-highlight-pars: dictionary ,
  body: content
) → content
```

quo-text-pars `dictionary`

Formatting named args that can be passed to a `#text(..quo-text-pars)` function call

Default: `pkg-pars.fmt.text.quo`

quo-highlight-pars `dictionary`

Formatting named args that can be passed to a `#highlight(..quo-highlight-pars)` function call

Default: `pkg-pars.fmt.highlight.quo`

body `content`

The excerpt or passage to be rendered

2.10 quo-quot

Helper function for fully controlled (smart-)quoting, highlighted and formatting of body quoting.

This function expands upon quo-high() by optionally smart-quoting its generated contents.

Example

```
#set text(font: "Libertinus Serif")
#block(width: 80mm)[
  The shortest verse of the New Testament
  is
  #quo-quot[Jesus wept.]
]
```

The shortest verse of the New Testament is “Jesus wept.”

Parameters

```
quo-quot(
  body: content,
  quo-text-pars: dictionary,
  quo-highlight-pars: dictionary,
  quote-pars: dictionary,
  oquot: content
) → content
```

body content

The excerpt or passage to be rendered

quo-text-pars dictionary

Formatting named args that can be passed to a `#text(..quo-text-pars)` function call

Default: `pkg-pars.fmt.text.quo`

quo-highlight-pars dictionary

Formatting named args that can be passed to a `#highlight(..quo-highlight-pars)` function call

Default: `pkg-pars.fmt.highlight.quo`

quote-pars dictionary

Smartquote parameters that can be passed to a `#set smartquote(..quote-pars)` function call

Default: `pkg-pars.quo.at("def")`

oquot content

The opening quote → content The closing quote

Default: `[ " ]`,

`cquot: [ " ]`

2.11 ref-bare

Helper function for biblical literature passage referencing, according to various language-traditions, and optional bibliography citing.

This function isn't meant for direct user-facing usage.

Parameters

```
ref-bare(  
  book-abbrev: string,  
  passage,  
  language-tradition: string,  
  version: string none,  
  cite-label: label none,  
  cite-pars: dictionary,  
  ref-text-pars: dictionary,  
  ref-sep: content  
) → content
```

book-abbrev string

The biblical literature book abbreviation (see `get-book-abbrevs()`)

passage

The referencing passage such as [1:1--7] > contents

language-tradition string

The language-tradition in which the book-abbrev is valid (see `get-language-traditions()`)

Default: "en-USX"

version string or none

The biblical literature version (usually translation/source acronym)

Default: none

cite-label label or none

The bibliography citation label or none, for no citation

Default: none

cite-pars dictionary

Named args (pars) that can be passed to a `#cite(..cite-pars, cite-label)` function call

Default: (supplement: none, form: "normal", style: auto)

ref-text-pars dictionary

Formatting named args that can be passed to a `#set text(..ref-text-pars)` function call

Default: `pkg-pars.fmt.text.ref`

ref-sep content

Separator (from previous content)


Default: [---]

2.12 ver

Verse number formatting function

Examples

```
#set text(font: "Libertinus Serif")
#block(width: 80mm)[
  #ver[1]In the beginning God created the
  heavens and the earth.
]
```

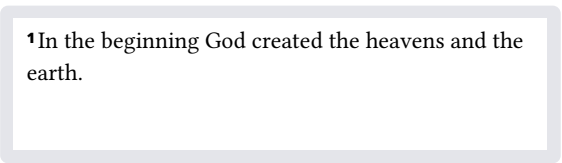

Parameters

```
ver(
  text-pars: dictionary ,
  box-pars: dictionary ,
  spc: content ,
  body: int string content
) → content
```

text-pars dictionary

Formatting named args that can be passed to a `#text(..text-pars)` function call

Default: `pkg-pars.fmt.text.ver`

box-pars dictionary

Formatting named args that can be passed to a `#box(..box-pars)` function call

Default: `pkg-pars.fmt.box.ver`

spc content

The contents added meant for spacing between the rendered verse mark and the following contents in the calling context. Note that in the provided example no space was left between the function call closing parenthesis and the following contents, so that the exact spacing content is produced

Default: `[#h(0.2em)]`

body int or string or content

The verse mark to render