


10. Initializing

This function initializes the storage device such as memory and floppy disk. When this function is activated, all the data in the storage device will be deleted.

The operating procedure is as indicated below.

- (1) Press function key [F2] (INIT).

"IN" is displayed on the console line.

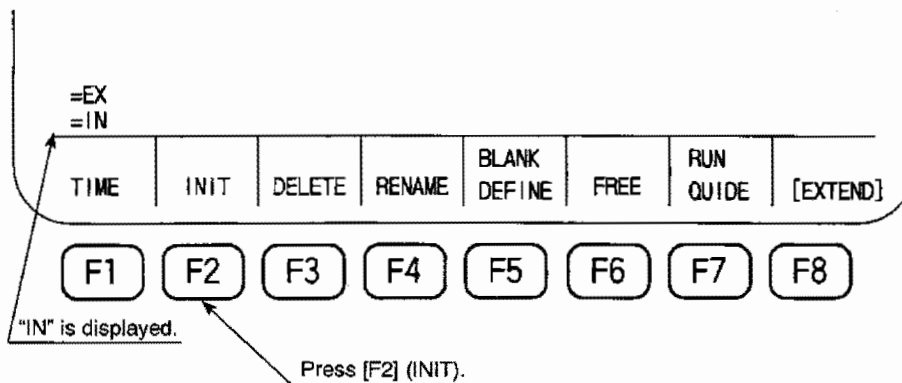


- (2) Enter the device name, MD1: or FD0:.

The default is MD1:.

- (3) Press the WRITE key.

The indication as shown below will appear on the screen, requiring the operator to respond.

=IN
Initialize OK (Y/N) !

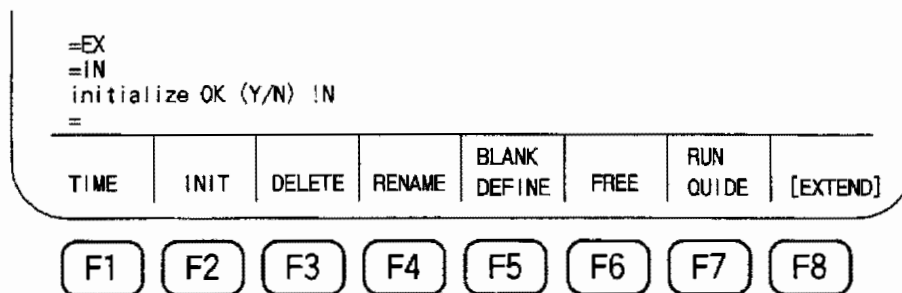

- (4) To initialize the device, type Y. To abort operation, type N.

- (5) Press the WRITE key.

When "Y" has been typed and the WRITE key has been pressed, the storage device will be initialized.

When "N" has been typed and the WRITE key has been pressed, initialization will be aborted.