# Test Run Report




# **Test Run Overview**

Started 07 Mar 2022, 12:46:27 Ended 07 Mar 2022, 12:48:47

Duration (mm:ss) 02:20.053

# Test Results Summary

Passed 1 Failed 0 Skipped 0

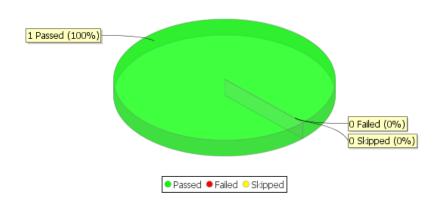

successful

successful

successful

# **Test Case Summary**



# AddNewContact.testcase

# Summary

Started 07 Mar 2022, 12:46:27 Ended 07 Mar 2022, 12:48:43

Duration (mm:ss) 02:15.477
Outcome successful

# Output

Salesforce Connect: Admin (Test)

0 12:46:27(00:00.030)

- (i) Connecting to Salesforce as Admin
- (i) Successfully connected to Salesforce as Admin

# On SF Contact Home screen

0 12:46:29(00:02.301)

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?action=ObjectHome&object=Contact
- ① Opening Chrome webdriver instance to https://test.salesforce.com/
- ① Successfully opened Chrome webdriver to https://test.salesforce.com/
- (1) Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Contact, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/003/list?filterName=Recent, Current URL: chrome://new-tab-page/
- (i) Opening Salesforce user home page
- Successfully opened user home page
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

#### Click the New Contact button

0 12:46:57(00:30.031)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Faction%3DNewContact%26object%3DContact&name=NewContact, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Faction%3DNewContact%26object%3DContact&name=NewContact
- 1 Interaction: ui:interaction?name=action
- ⑤ Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/list?filterName=Recent
- i Interaction: ui:interaction?name=action
- ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]// div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table\_joined') and contains(@class, 'test-listViewManager'))]//ul[contains(@class, 'oneActionsRibbon')] | // div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '604:0')]
- (1) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default&gt; wait.
- ① Found element: [[ChromeDriver: chrome on XP (172d78c43d33bd8c51923563fba59c9b)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table\_joined') and contains(@class, 'test-listViewManager'))]//ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '604:0')]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]
- ① Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- Going to update browser window handles.
- (i) Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- (i) Closing Page context. Name: screen, data: null, frame: null

- 1 Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665361918937048&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent
- Going to update browser window handles.
- Successfully updated browser window handles.

#### On SF Contact Record Type selection screen

0 12:47:02(00:35.069)

- Start of With Screen. Connection Name: Admin, target: sf:ui:target?action=recordTypeNew&object=Contact
- (i) Opening Page context. Name: screen, data: null, frame: null
- ① Hover>Clicking WebElement. WebElement [tag: h2, text: New Contact]
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.

#### Click the Continue button

0 12:47:08(00:40.752)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=save&path=selectRecordType, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=save&path=selectRecordType
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665361918937048&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent
- 1 Interaction: ui:interaction?name=action
- ① Find elements using xpath: ((//\*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabSat') and not(contains(@class, 'wsTabSat') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace')) or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))) )]// div[contains(@class, 'modal-footer') or contains(@class, 'modal-footer') or contains(@class, 'modal-footer'))][last()]//button)[last()]
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Found element: [[ChromeDriver: chrome on XP (172d78c43d33bd8c51923563fba59c9b)] -> xpath: ((//\*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//div[contains(@class, 'modal-footer') or contains(@class, 'modal\_footer') or contains(@class, 'modal\_footer') or contains(@class, 'indextor'))]))]/div[contains(@class, 'modal-footer') or contains(@class, 'modal\_footer') or contains(@class, 'modal\_footer') or contains(@class, 'modal\_footer') or contains(@class, 'modal\_footer'))]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Next]
- Doing after wait. waitUrl: default
- End of <default&gt; wait.
- Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- (1) Closing Page context. Name: screen, data: null, frame: null
- (1) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.

# On SF Contact (Employee) New screen

0 12:47:12(00:44.654)

1 Start of With Screen. Connection Name: Admin, target: sf:ui:target?action=New&noOverride=true&recordType=Employee&object=Contact

- (i) Opening Page context. Name: screen, data: null, frame: null
- ① Hover>Clicking WebElement. WebElement [tag: h2, text: New Contact: Employee]
- Going to update browser window handles.
- Successfully updated browser window handles.

#### Set the Salutation picklist to Prof.

0 12:47:18(00:50.512)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field %3DSalutation&name=Salutation, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DSalutation&name=Salutation
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- ① Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/\*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/\*[[self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/\*[[self::fieldset and contains(@class, 'uilnput--compound')) or (self::lightning-input-name and contains(@class, 'slds-form-compound'))]/\*[[self::span and contains(@class, 'uilpicklistLabel') and .='Name' or . = 'Salutation') or (self::lightning-picklist and contains(@data-field, 'salutation'))]/ancestor::div[1]
- 1 Find field using relative xpath: .//\*[self::a or self::input or self::button[contains(@class, 'slds-combobox\_input')]]
- Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@78707db6 -> unknown locator]] -> xpath: ://\*[self::a or self::input or self::button[contains(@class, 'slds-combobox\_input')]]]
- ① Got webElement. tagName: BUTTON, id: combobox-button-156, type: button, class: slds-combobox\_input slds-input\_faux slds-combobox\_input-value
- ① Typing value. tagName: BUTTON, type: button, value: Prof., blur: false
- ① Clicking WebElement. WebElement [tag: button, text: --None--]
- ① Clicking WebElement. WebElement [tag: div, text: --None-- --None-- Mr. Ms. Mrs. Dr. Prof.]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]
- Doing after wait. waitUrl: default
- End of <default&gt; wait.
- Going to update browser window handles.
- (i) Successfully updated browser window handles.

#### Set the Last Name field to Smith

0 12:47:21(00:53.412)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field %3DLastName&name=LastName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLastName&name=LastName
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- ① Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/\*[contains(@class, 'forcePageError')])][last()]/\*[contains(@class, 'forcePageError')]/\*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//\*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element\_label')) and not(contains(@class, 'hide'))) or (self::self::div and contains(@class, 'slds-form-element\_label'))) or (self::div and contains(@class, 'test-id\_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (//text()[normalize-space()='Last Name'] or .//text() = 'Last Name')]/ancestor::div[1]
- i Find field using relative xpath: .//input
- (1) Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default

- i End of <default&gt; wait.
- ⑤ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@78707dbb -> unknown locator]] -> xpath: .//input]
- 1 Got webElement. tagName: INPUT, id: input-160, type: text, class: slds-input
- (1) Typing value. tagName: INPUT, type: text, value: Smith, blur: false
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

# Lookup the Account Name reference

0 12:47:23(00:56.211)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field %3DAccountId&name=AccountId, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DAccountId&name=AccountId
- i Interaction: ui:interaction?name=sfLookup
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- 1 Interaction: ui:interaction?name=sfLookup
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/\*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/\*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//\*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element\_label')) and not(contains(@class, 'hide'))) or (self::self::div and contains(@class, 'test-id\_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Account Name'] or .//text() = 'Account Name')]/ancestor::div[1]
- i Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- 1 Found element: [[[org.openqa.selenium.remote.RemoteWebElement@78707dd3 -> unknown locator]] -> xpath: .//input
- ① Hover>Clicking WebElement. WebElement [tag: input]
- (i) Waiting for lookup dropdown list to appear
- Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

# On SF Account Lookup screen

0 12:47:27(00:59.689)

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?lookup=Account
- (1) Opening Page context. Name: screen, data: null, frame: null
- Going to update browser window handles.
- Successfully updated browser window handles.

# Set the Search text to test

0 12:47:27(00:59.949)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SearchName&path=searchFrame, before wait: null, after wait: null, auto retry: default
- 1 Locator: ui:locator?name=SearchName&path=searchFrame
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&novigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- i Doing before wait. waitUrl: default
- End of <default&gt; wait.

- ① Found element: [[ChromeDriver: chrome on XP (172d78c43d33bd8c51923563fba59c9b)] -> xpath: (//\*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBart') and not(contains(@class, 'wsTabBartHidden'))] and ancestor::div[contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))) ]] | //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))] | //div[contains(@class, 'oneUtilityBarContainer')]//div[contains(@class, 'slds-docked\_container') and contains(@class, 'forceDockingPanel DOCKED')]//div[contains(@class, 'slds-is-open') and contains(@class, 'slds-docked-composer')] | //div[contains(@class, 'open') and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError'))][left::div[contains(@class, 'forceSearchInputLookupDesktop')] or self::lightning-lookup-desktop]//input[@aria-expanded='true' or contains(@aria-activedescendant, 'input')]]
- ① Clicking WebElement. WebElement [tag: lightning-base-combobox-item, text: Search Show All Results for "test"]
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

#### Click the Go! button

0 12:47:35(01:07.630)

- ⑤ Start of Interact. Connection: Admin, Locator: ui:locator?name=go&path=searchFrame, before wait: null, after wait: null, auto retry: default
- 1 Locator: ui:locator?name=go&path=searchFrame
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- 1 Found element: com.provar.core.model.ui.java.NullWebElement@7335c692
- 1 Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

#### Click the Account Name button

0 12:47:36(01:09.368)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?rowLocator=Name+%3D+%27Test%27&name=Name&path=resultsFrame %2FresultsTable%2FresultsRow, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?rowLocator=Name+%3D+%27Test%27&name=Name&path=resultsFrame%2FresultsTable%2FresultsRow
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- ① Interaction: ui:interaction?name=action
- (i) Populating webelement cells into the row Row Count: 0

Populated the row elements.

① Applying row locator to rows. Row Count: 13, Row Locator: {Name = "Test"}

The row locator matched 1 row.

- ① Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@78707dda -> unknown locator]] -> xpath: td[1]/span|td[1]//a|td[1] [not(\*)]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Test, href: https://provar-trial-org-training.lightning.force.com/lightning/r/0011X00000qFGBMQA4/view]
- Doing after wait. waitUrl: default
- i End of &lt:default&gt: wait.
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.

- All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- Going to update browser window handles.
- Successfully updated browser window handles.

#### Set the Phone field to 6158675309

0 12:47:41(01:14.307)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field %3DPhone&name=Phone, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DPhone&name=Phone
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- i Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//\*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//\*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]//\*[((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element\_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element\_label'))) or (self::div and contains(@class, 'test-id\_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')]/ ancestor::div[1]
- Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default&gt; wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@78707e12 -> unknown locator]] -> xpath: .//input]
- 1 Got webElement. tagName: INPUT, id: input-149, type: text, class: slds-input
- ① Typing value. tagName: INPUT, type: text, value: 6158675309, blur: false
- i Doing after wait. waitUrl: default
- End of <default&gt; wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

# Set the Title field to Senior Consultant

0 12:47:45(01:17.624)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field %3DTitle&name=Title, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DTitle&name=Title
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- 1 Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//\*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//\*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]//\*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element\_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element\_label'))) or (self::div and contains(@class, 'test-id\_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Title'] or .//text() = 'Title')]/
  ancestor::div[1]
- Find field using relative xpath: .//input

- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default&gt; wait.
- 1 Found element: [[[org.openqa.selenium.remote.RemoteWebElement@78707e14 -> unknown locator]] -> xpath: .//input
- ① Got webElement. tagName: INPUT, id: input-171, type: text, class: slds-input
- 1 Typing value. tagName: INPUT, type: text, value: Senior Consultant, blur: false
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.

## Set the Lead Source picklist to Web

0 12:47:47(01:20.299)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource&name=LeadSource, before wait: default, after wait: default, auto retry: default
- $\textbf{\textcircled{1}} Locator: ui:locator?binding=sf\%3Aui\%3Abinding\%3Aobject\%3Fobject\%3DContact\%26field\%3DLeadSource\&name=$
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- i Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//\*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//\*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][3]//\*[((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element\_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, inputLabel') or contains(@class, 'slds-form-element\_label'))) or (self::div and contains(@class, 'test-id\_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Lead Source'] or .//text() = 'Lead Source'] (\*\*Identification of the contains (\*\*Identification of the contains (\*\*Identification of the contains (\*\*Identification of the contains of the contains (\*\*Identification of the contains of the contains
- 1 Find field using relative xpath: .//\*[self::a or self::input or self::button[contains(@class, 'slds-combobox\_input')]]
- (1) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@78707e16 -> unknown locator]] -> xpath: ://\*[self::a or self::input or self::button[contains(@class, 'slds-combobox\_input')]]]
- ① Got webElement. tagName: BUTTON, id: combobox-button-205, type: button, class: slds-combobox\_\_input\_slds-input\_faux slds-combobox\_\_input\_value
- ① Typing value. tagName: BUTTON, type: button, value: Web, blur: false
- ① Clicking WebElement. WebElement [tag: button, text: --None--]
- ① Clicking WebElement. WebElement [tag: div, text: --None-- --None-- Web Other Phone Inquiry]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]
- i Doing after wait. waitUrl: default
- End of <default&gt; wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

## Set the Birthdate field to 2000-01-01

0 12:47:50(01:23.139)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field %3DBirthdate&name=Birthdate, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DBirthdate&name=Birthdate
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- Interaction: ui:interaction?name=set

- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])/[self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))]/[self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element\_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element\_label'))) or (self::div and contains(@class, 'test-id\_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Birthdate'] or .//text() = 'Birthdate')]/ancestor::div[1]
- (i) Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- End of <default&gt; wait.
- 1 Found element: [[[org.openqa.selenium.remote.RemoteWebElement@78707e30 -> unknown locator]] -> xpath: .//input
- ① Typing value. Element: [[[org.openqa.selenium.remote.RemoteWebElement@78707e30 -> unknown locator]] -> xpath: .//input], value: 1/1/2000, blur: false
- ① Clicking WebElement. WebElement [tag: td, text: 1]
- 1 Doing after wait. waitUrl: default
- End of <default&gt; wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- Click the Save button © 12:47:53(01:25.825)
  - ① Start of Interact. Connection: Admin, Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Faction%3Dsave%26object%3DContact&name=save, before wait: default, after wait: default, auto retry: default
  - ① Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Faction%3Dsave%26object%3DContact&name=save
  - i Interaction: ui:interaction?name=action
  - ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=164665362890624803&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
  - ① Interaction: ui:interaction?name=action
  - ① Find action link element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::\*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel]//runtime\_platform\_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']//\*[self::a or self::button]
  - ① Waiting for element to be present. Timeout(seconds): 10
  - i Doing before wait. waitUrl: default
  - i End of <default&gt; wait.
  - ① Found element: [[ChromeDriver: chrome on XP (172d78c43d33bd8c51923563fba59c9b)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/
    ancestor::\*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel\_lwcdetailpanel]//runtime\_platform\_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']//\*[self::a or self::button]]
  - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
  - i Doing after wait. waitUrl: default
  - End of <default&gt; wait.
  - (1) Going to update browser window handles.
  - (i) Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0v2QAC/view
- (i) Injecting script to get created object ID from aura component
- Storing created Salesforce Object ID. Result Name: contactId, created ID: 0031X00000nW0v2QAC, location: https://provar-trial-org-training.lightning.force.com/lightning/r/Contact/0031X00000nW0v2QAC/view
- ① Logging Salesforce Object Id for clean up. Object Name: Contact, id: 0031X00000nW0v2QAC
- ① Closing Page context. Name: screen, data: null, frame: null
- 1 Main window reselected. Window: main

- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0v2QAC/view
- Going to update browser window handles.
- Successfully updated browser window handles.

# On SF Contact (Employee) View screen

0 12:47:58(01:30.504)

- 1 Start of With Screen. Connection Name: Admin, target: sf:ui:target?action=View&noOverride=true&recordType=Employee&object=Contact
- ① Opening Page context. Name: screen, data: null, frame: null
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- Going to update browser window handles.
- Successfully updated browser window handles.

UI Assert © 12:48:03(01:35.373)

- i Start of UiAssert. Connection: Admin
- Resolving field Name
- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0v2QAC/view
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ⚠ Failed to resolve required duplicate field label. Field API name: Name, field label: Name
- ① Finding field placehoder using xpath: ((//\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'navexWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))) ]]/\*[contains(@class, 'navexWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))) ]]/\*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/\*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id\_section ')))]][1]/\* div[(contains(@class, 'labelCol') or contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id\_field-value')))][1]
- (i) Waiting for element to be present. Timeout(seconds): 10
- ① Finding field elements using relativePath: .//\*[self::lightning-formatted-name or self::lightning-formatted-text]
- i) Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- 1 End of <default&gt; wait.
- ① Found element: [[[[ChromeDriver: chrome on XP (172d78c43d33bd8c51923563fba59c9b)] -> xpath: ((//\*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'wasPinnedRegionTemplate') and contains(@class, 'wasActiveSubtab'))]] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wasTabset') and not(contains(@class, 'wasTabset') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))) ]//\*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/\*[[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id\_\_section slds-section ')))]][1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Name' or (.) ='Name'])]/following-sibling::div[1]/\*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id\_\_field-value'))]][1]] -> xpath: .//\*[self::lightning-formatted-name or self::lightning-formatted-text1]
- (i) Asserting field attributes: Name
- ① Asserting Attribute: value to PrimitiveValueImpl [ value: Prof. Smith, valueId=0, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- Assertion successful.Prof. Smith EqualTo Prof. Smith
- (i) Object read successfully. Result Name: Values
- Going to update browser window handles.
- i Successfully updated browser window handles.

#### Activate inline edit the Lead Source picklist

0 12:48:07(01:39.757)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field %3DLeadSource&name=LeadSource, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource&name=LeadSource
- ① Interaction: ui:interaction?name=sflleActivate
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0v2QAC/view

- ① Interaction: ui:interaction?name=sflleActivate
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placehoder using xpath: (//\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'navexWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))))]/\*[contains(@class, 'navexWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/\*[contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id\_section slds-section ')))]]/[3]//div[(contains(@class, 'labelCol') or contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id\_section slds-section '))]]/[3]//div[(contains(@class, 'labelCol') or contains(@class, 'feld-label-container')) and (span/text()[normalize-space()='Lead Source' or (.) ='Lead Source')]/[5]//\*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id\_field-value'))]
- (i) Waiting for element to be present. Timeout(seconds): 10
- Finding field elements using relativePath: .//lightning-formatted-text
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Found element: [[[[ChromeDriver: chrome on XP (172d78c43d33bd8c51923563fba59c9b)] -> xpath: (//\*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'naeVorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset') and contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))) ]// \*[contains(@class, 'navexWorkspace') or contains(@class, 'detail-panel-root')]//\*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id\_\_section slds-section ))))][3]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Lead Source' or (.) ='Lead Source'])]/following-sibling::div[1]// \*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id\_field-value'))]]] -> xpath: .//lightning-formatted-text]
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- Going to update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (1) Closing Page context. Name: screen, data: null, frame: null
- i Main window reselected. Window: main
- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0v2QAC/view
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

# On SF Contact (Employee) View screen

0 12:48:14(01:46.733)

- ⑤ Start of With Screen. Connection Name: Admin, target: sf:ui:target?action=View&noOverride=true&recordType=Employee&object=Contact
- (i) Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Contact, RelatedList: null, Action: View, Page URL: /lightning/r/0031X00000nW0LcQAK/view, Current URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0v2QAC/view
- (i) Opening Salesforce user home page
- Successfully opened user home page
- Activating detailTab tab
- 1 Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

# Activate inline edit the Lead Source picklist

0 12:48:25(01:57.922)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource&name=LeadSource, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource&name=LeadSource
- 1 Interaction: ui:interaction?name=sflleActivate
- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0LcQAK/view

- Interaction: ui:interaction?name=sflleActivate
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placehoder using xpath: (//\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))))//\*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//\*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id\_section slds-section ')))])
  [3]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Lead Source' or (.) ='Lead Source')])/following-sibling::div[1]//\*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id\_field-value'))]
- (i) Waiting for element to be present. Timeout(seconds): 10
- Finding field elements using relativePath: .//lightning-formatted-text
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Found element: [[[[ChromeDriver: chrome on XP (172d78c43d33bd8c51923563fba59c9b)] -> xpath: (//\*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'nasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'nasActiveSubtab')]))))]//\* \*[contains(@class, 'nasActiveSubtab')])))]/\*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/\*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forceDageBlockSectionView') or contains(@class, 'test-id\_\_section slds-section')))]/[div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Lead Source' or (.) ='Lead Source')]/\*[ollowing-sibling::div[1]//\* \*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id\_\_field-value'))]]] -> xpath: .//lightning-formatted-text]
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

#### Set the Lead Source picklist to Other

0 12:48:30(02:02.752)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource&name=LeadSource, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource&name=LeadSource
- (i) Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0LcQAK/view
- 1 Interaction: ui:interaction?name=set
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placehoder using xpath: (//\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))) //\*[contains(@class, 'noter-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/\*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id\_section slds-section ')))][3]/\*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element\_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element\_label'))) or (self::div and contains(@class, 'test-id\_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Lead Source'] or .//text() = 'Lead Source']/ancestor::div[1]
- ① Find field using relative xpath: .//\*[self::a or self::input or self::button[contains(@class, 'slds-combobox\_\_input')]]
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@ad9a147 -> unknown locator]] -> xpath: .//\*[self::a or self::input or self::button[contains(@class, 'slds-combobox\_input')]]]
- ① Got webElement. tagName: BUTTON, id: combobox-button-425, type: button, class: slds-combobox\_\_input slds-input\_faux slds-combobox\_\_input-value

- ① Typing value. tagName: BUTTON, type: button, value: Other, blur: false
- (i) Clicking WebElement. WebElement [tag: button, text: Other]
- ① Clicking WebElement. WebElement [tag: div, text: Other --None-- Web Other Phone Inquiry]
- Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- i Successfully updated browser window handles.

### Click the Save button

0 12:48:36(02:08.798)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Faction%3DSaveEdit%26object%3DContact&name=SaveEdit, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?binding=sf%3Aui%3Abinding%3Aobject%3Faction%3DSaveEdit%26object%3DContact&name=SaveEdit
- 1 Interaction: ui:interaction?name=action
- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0LcQAK/view
- (i) Interaction: ui:interaction?name=action
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Find action link element using xpath: //\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabSet') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'hasPinnedRegionTemplate') and (contains(@class, 'hasActiveSubtab')]))) ]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')/ ancestor::\*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel\_|wcdetailpanel]//runtime\_platform\_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']//\*[self::a or self::button]
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- End of <default&gt; wait.
- ① Found element: [[ChromeDriver: chrome on XP (172d78c43d33bd8c51923563fba59c9b)] -> xpath: //\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'naeWorkspace') or contains(@class, 'naeWorkspace')) and not(contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset')) and ancestor::div[contains(@class, 'wsTabset')) and contains(@class, 'naewowNorkspace')) and contains(@class, 'naewowNorkspace')) and contains(@class, 'naewowNorkspace')) and contains(@class, 'hasActiveSubtab')]))))]// div[(contains(@class, 'naewowNorkspace')) and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::\*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel\_lwcdetailpanel]//runtime\_platform\_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']/\*[self::a or self::button]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- (1) Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0LcQAK/view
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- (i) Handling managed resource. Name: Admin
- ① Salesforce Connection handled successfully. Name: Admin