


UiPath Community

UiPath for Coding Agent in Action : Rise of Vibe Coding (Codex & Claude)

Build Faster. Deploy Instantly. Scale Endlessly.

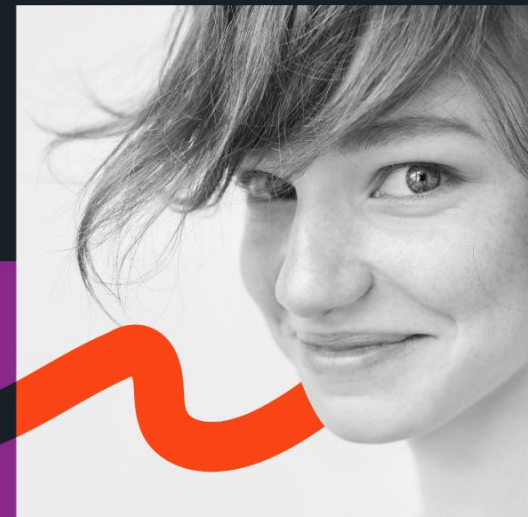

UiPath Community



UiPATH Delhi-NCR Meetup

WhatsApp group



UiPath Community- Delhi Chapter

Join our [LinkedIn Page](#)



[Network](#) | [Learn](#) | [Collaborate](#)

 Scan to follow our LinkedIn Page

UiPath Community Delhi Chapter

Follow on Instagram



Scan to follow

About Me



Lead Architect & Automation CoE



2x UiPath MVP — recognized for contributions to the UiPath Community



4x UiPath Global Hackathon Winner — delivering innovative, real-world automation solutions



UiPath & AWS Certified — combining automation with cloud-native architectures



YouTube Creator — sharing knowledge at [@co-developerUiPath](#)



Content Writer on Medium — publishing insights at [@mohdfaizkhan](#)



Agenda



Hackathon - UiPath AgentHack 2026



Maestro Flow And Case Management



Low-Code To Pro-Code And Pro-Code To Low-Code




JS App, TypeScript SDK & UiPath CLI (Command-line Interface)



Quick Walkthrough




Product Deep-dive into Next Session



**“The hottest new
programming language
is English.”**

There’s a new kind of coding
I call “vibe coding”

— Andrej Karpathy

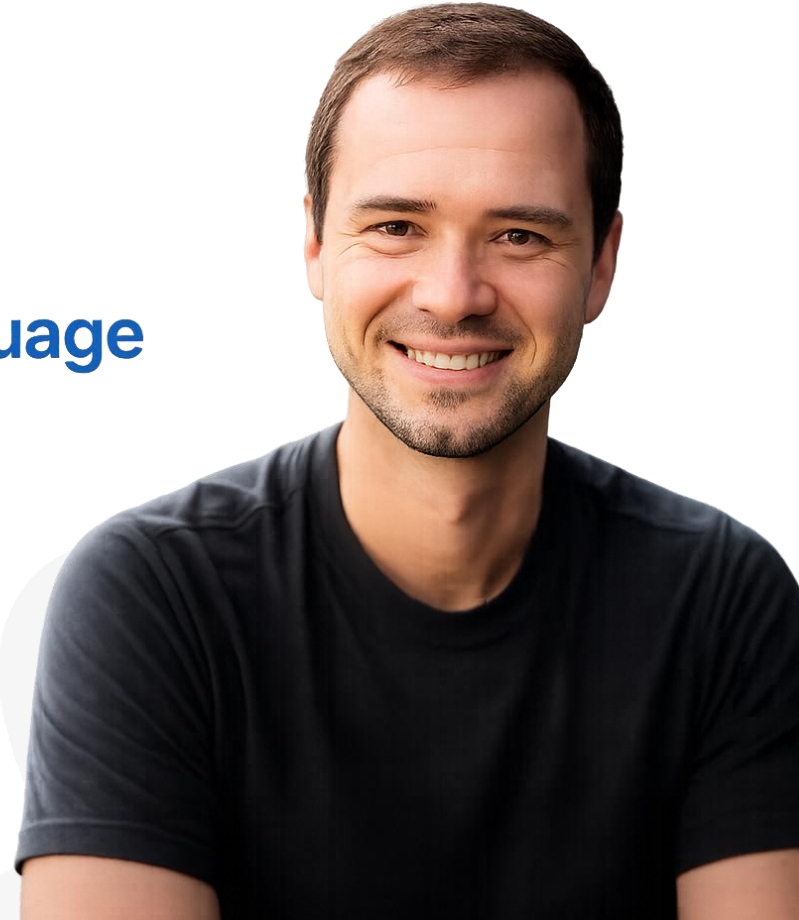

UiPath CLI: Why UiPath Introduced It When Orchestrator UI Already Exists?

- ◆ UiPath traditionally used **Studio** and **Orchestrator** for designing, deploying, and managing automations through graphical interfaces.
- ◆ As automation evolves toward **DevOps**, **AI-assisted development**, **coding agents**, and **Infrastructure-as-Code**, GUI-based operations alone are no longer sufficient.
- ◆ To meet these modern needs, UiPath introduced **UiPath CLI**, a cross-platform command-line tool for managing automation lifecycles programmatically.
- ◆ UiPath CLI enables **developers**, **DevOps teams**, **RPA engineers**, and **AI agents** to build, test, deploy, and manage automations directly from terminals and CI/CD pipelines.
- ◆ It complements Orchestrator by providing a **developer-friendly, automation-first approach** that supports modern software engineering practices.

 **Key Takeaway** : UiPath CLI complements Orchestrator by enabling developers, DevOps teams, and AI agents to automate, test, and deploy UiPath solutions programmatically, making automation delivery faster, scalable, and DevOps-ready.

Best practice: Use UiPath CLI as part of a CI/CD pipeline rather than for manual deployments, keep automation projects under Git version control, securely manage credentials through secret stores, validate and test packages before deployment, and standardize deployment processes across environments. For maximum value, combine UiPath CLI with AI coding agents and DevOps tools to automate the entire automation lifecycle from development to production.

>_ More Than a CI / CD Tool


Earlier UiPath command-line tooling focused on CI / CD tasks — pack, analyze, deploy, run tests. UiPath CLI 1.x keeps all of that and adds the full platform surface. You can use **uip** to:

Build — scaffold projects (uip solution new, uip agent init, uip flow init, uip maestro init), pack (uip rpa pack, uip solution pack, uip agent pack), and analyze (uip rpa analyze with governance policies).

Manage — work with Orchestrator folders, users, roles, and licenses; create and update assets, queues, storage buckets, libraries, triggers, and webhooks; administer Test Manager projects, test sets, and results; manage Integration Service connectors and connections.

Operate — start, stop, and inspect Orchestrator jobs; monitor Flow and Maestro instances and incidents; run Agents and evaluate them against datasets; execute test sets and read results.

Deploy — upload packages, create and update processes, publish Solutions and Agents, activate or uninstall Solution deployments.

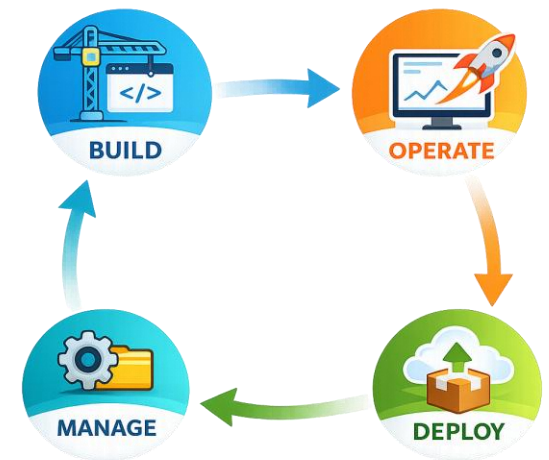

>_ Installing UiPath CLI

UiPath CLI is distributed on npm as @uipath/cli and installs the uip command globally. It runs on any platform supported by Node.js 18 or later — Windows, macOS, and Linux, on both x64 and ARM64.

Prerequisites

- ✓ **Node.js 18** or later. Node.js ships with **npm**, which is sufficient to install and run **uip**.
- ✓ Any platform — Windows (x64, ARM64), macOS (x64, ARM64), Linux (x64, ARM64).
- ✓ Check your Node version: >_node --version

</> cmd

```
D:\VSCode_Python\VibeCoding> npm install -g @uipath/cli
```

```
changed 1 package in 5s
```

```
D:\VSCode_Python\VibeCoding> uip --version
```

```
1.1.1
```

```
D:\VSCode_Python\VibeCoding> uip --help
```

```
UiPath CLI 1.1.1
```

```
Build automations, agents, and orchestrations from your terminal.
```

```
Usage: uip <command> [options]
```

```
uip <tool> <command> [options]
```


> **UiPath** uip Commands

Commands

login	Login to UiPath Cloud
logout	Logout from UiPath Cloud by removing credentials
config	View or update CLI configuration preferences
tools	Manage CLI tools
skills	Install and manage UiPath skills for AI coding agents.
mcp	Model Context Protocol (MCP) server
feedback	Send bug reports and improvement suggestions

Installed Tools

codedapp	Build, pack, publish, deploy, and manage UiPath Coded Web Applications.
completion	Install or output the shell completion script. Interactive in a TTY; with an explicit shell argument, dumps the script to stdout. Dynamic flag-value completion (e.g. --package-name <TAB>) is zsh-only and requires `jq` on PATH; static subcommand/option-name completion works on bash, zsh, fish, and pwsh.
rpa	Tool for creating and managing UiPath RPA projects
update	Update installed UiPath tools and skills, and check for newer CLI
user	Show information about the currently logged-in user

Options

-v, --version	output the version number
-h, --help	display help for command
--output <table json yaml plain>	Output format (default: json)
--output-filter <expression>	JMESPath expression to filter output
--log-level <debug info warn error>	Log level threshold (default: info)
--log-file <path>	Write logs to file instead of stderr

>_ **UiPath** for Coding Agent - Configuration

First, install your preferred coding agent (Codex or Claude Code) in UiPath Studio using the command below. Then, follow the instructions to complete the configuration.

UiPath Studio Terminal Tab :

✓ >_ uip skills install (Then select your favorite coding agent by using **down arrow** the press “**spacebar key**” and then “**enter**”)

? Select agents to install skills for

>() Claude Code (Plugin)

() Cursor

() GitHub Copilot

() Gemini CLI

() Codex

() OpenCode

✓ >_ codex (Type code to launch the coding agent)

>_ **UiPath** for Coding Agent - Codex

The screenshot displays the UiPath Studio interface. The top menu bar includes 'Design' and 'Debug'. The left sidebar shows the 'Explorer' pane with a tree view containing 'UiPath Terminal CLI', 'Dependencies (Windows)', 'Entities', 'Templates', 'Input', 'Workflows', 'entry-points.json', 'Main.xaml', 'project.json', 'project.uiproj', and 'Temp.xaml'. The main workspace shows a 'Main Sequence' with a flowchart titled 'Populate Sample Email Inputs'. This flowchart contains two activities: 'Set Sample To Email' and 'Set Sample Subject'. The 'Set Sample To Email' activity has a 'To variable' field set to 'sampleToEmail' and a 'Set value' field containing the expression 'Environment.GetEnvironmentVariable("L")'. The 'Set Sample Subject' activity has a 'To variable' field set to 'sampleSubject'. The bottom pane is the 'Terminal' window, which shows the output of the 'UiPath Terminal CLI' command. The terminal text includes the command prompt '>_ OpenAI Codex (v0.137.0)', the model 'gpt-5.5 xhigh', the directory 'D:\...\Documents\UiPath\UiPath Terminal CLI', a tip about using '/fast', and the command 'Use /skills to list available skills'. The terminal also shows the output 'gpt-5.5 xhigh · D:\OneDrive - The Silicon Partners Inc\Documents\UiPath\UiPath Terminal CLI'.

UiPath Studio Interface:

- Explorer:** Shows project files including `entry-points.json`, `Main.xaml`, `project.json`, `project.uiproj`, and `Temp.xaml`.
- Main Sequence:** Contains a flowchart titled "Populate Sample Email Inputs".
- Flowchart Activities:**
 - Set Sample To Email:** To variable * `sampleToEmail`. Set value * `Environment.GetEnvironmentVariable("L")`.
 - Set Sample Subject:** To variable * `sampleSubject`.
- Terminal:** Displays the output of the `UiPath Terminal CLI` command.

```
>_ OpenAI Codex (v0.137.0)

model:    gpt-5.5 xhigh  /model to change
directory: D:\...\Documents\UiPath\UiPath Terminal CLI

Tip: New Use /fast to enable our fastest inference with increased plan usage.

> Use /skills to list available skills

gpt-5.5 xhigh · D:\OneDrive - The Silicon Partners Inc\Documents\UiPath\UiPath Terminal CLI
```



Quick Demo.....

Getting started with Vibe Coding

Live



Questions?

Let's discuss your move to Cloud-First Automation.