

Companion to Bird & de Moor, Algebra of Programming

§8. Thinning Algorithms

§8.1. Thinning

(8.1)

For $Q : A \rightarrow A$, $\text{thin}(Q) \triangleq (\exists/\exists) \cap (\epsilon \setminus (Q^\circ \epsilon)) : EA \rightarrow EA$ (8.1).


$ys \text{ thin}(Q) xs \iff xs \subseteq ys \wedge (\forall a \in ys. \exists b \in xs. b \ Q \ a)$ the same $^\circ$ as $\triangleq \text{est}$: ϵX runs $a \rightarrow ys \rightarrow xs$, member of ys first, and $Q^\circ \epsilon$ runs $a \rightarrow b \rightarrow xs$, so $(a, b) \in Q^\circ$ reads $b \ Q \ a$; at $Q^\circ \leq$ every $a \in ys$ keeps some $b \leq a$ in xs , the end $\text{est}(\leq)$ picks

(8.1a)


the law	what it says
$X \sqsubseteq \frac{S}{\exists} \text{thin}(Q) \iff X \exists \exists S$ and $S^\circ X \sqsubseteq Q^\circ \epsilon$	everything kept is an S -value, and every S -value has a Q -lower bound among the kept ones
$\text{thin}(Q) \exists \exists \exists$	everything a thinning keeps was in the set
$\text{thin}(Q)^\circ \exists \exists \exists Q$	every element of the set has a Q -lower bound among the kept ones
$Q \sqsubseteq R \implies \text{thin}(Q) \sqsubseteq \text{thin}(R)$	the fewer pairs Q relates, the fewer subsets count as thinnings
$1 \sqsubseteq Q \implies 1 \sqsubseteq \text{thin}(Q)$ $QQ \sqsubseteq Q \implies \text{thin}(Q) \text{thin}(Q) \sqsubseteq \text{thin}(Q)$	keeping everything is always a legal thinning
$Q \sqsubseteq R \wedge 1 \sqsubseteq Q \wedge RR \sqsubseteq R \implies \text{est}(R) = \text{thin}(Q) \text{est}(R)$ $Q \sqsubseteq R, 1 \sqsubseteq Q, RR \sqsubseteq R$ — (8.1.2a); weaker than the book's "both preorders": Q transitive is never used and $1 \sqsubseteq R$ follows	thin-introduction: thinning first cannot lose an R -minimum
$\text{thin}(Q) \sqsupseteq \text{est}(Q) \frac{1}{\exists}$ (8.2) — (8.2)	thin-elimination: keeping one element is a thinning, but its domain is the sets $\text{est}(Q)$ is defined on
$\frac{S}{\exists} \text{thin}(Q) \sqsupseteq \frac{S}{\exists} \text{est}(R) \frac{1}{\exists}$ (8.3), $R \cap (S^\circ S) \sqsubseteq Q$ — thin-elimination variant	the usable variant: R need only refine Q between values S gives one argument
$P(\text{thin}(Q)) \text{union} \sqsubseteq \text{union thin}(Q)$ (8.4)	thinning each member set is a thinning of the union

§8.1.1. $X \sqsubseteq (S^\circ \exists) \text{thin}(Q) \iff X \exists \exists S$ and $S^\circ X \sqsubseteq Q^\circ \epsilon$

(8.1.1a)

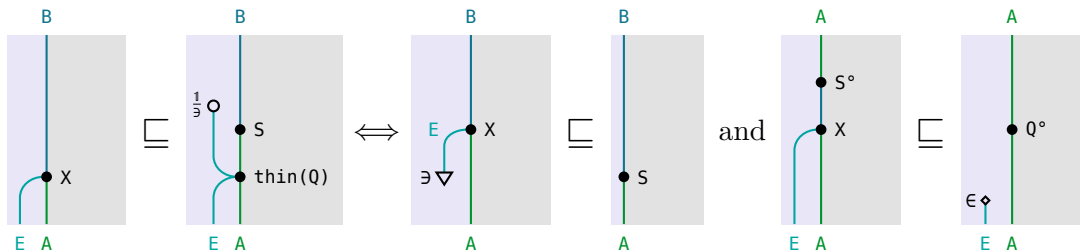

(8.1.1b)


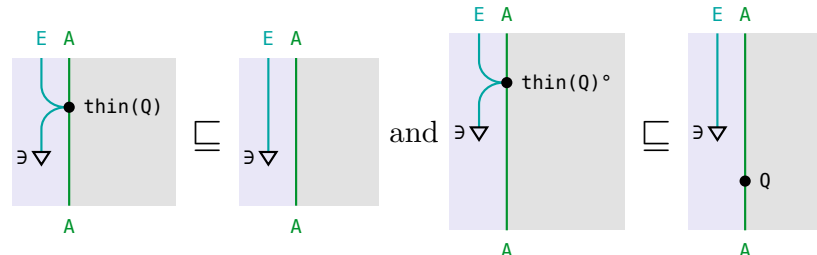


(8.1.1a) at $X \triangleq \text{thin}(Q)$, $S \triangleq \exists$: the left side is $\text{thin}(Q) \sqsubseteq \text{thin}(Q)$, since $\exists \exists \exists = \Lambda(\exists) = 1$

§8.1.2. $\text{est}(R) = \text{thin}(Q) \text{est}(R)$ given $Q \sqsubseteq R, 1 \sqsubseteq Q, RR \sqsubseteq R$

$\text{est}(R) \sqsubseteq \text{thin}(Q) \text{ est}(R)$ (8.1.2a)

the $\sqsubseteq$ half: keeping everything is a thinning — $1 \sqsubseteq Q$






(a) (b)

(a)	$\text{est}(R)$	$1 \sqsubseteq \text{thin}(Q)$ — (8.1a)
(b)	$\text{thin}(Q) \text{ est}(R)$	

$\text{thin}(Q) \text{ est}(R) \sqsubseteq \exists$ (8.1.2b)

the $\sqsubseteq$ half, first condition of the UP of est at $X \triangleq \text{thin}(Q) \text{ est}(R)$ — est-up









(a) (b) (c)

(a)	$\text{thin}(Q) \text{ est}(R)$	$\text{est}(R) \sqsubseteq \exists$ — est-laws
(b)	$\text{thin}(Q) \exists$	$\text{thin}(Q) \exists \sqsubseteq \exists$ — (8.1.1a)
(c)	$\exists$	

$\epsilon \text{ thin}(Q) \text{ est}(R) \sqsubseteq R^\circ$ (8.1.2c)

the $\sqsubseteq$ half, second condition — $Q \sqsubseteq R$, R transitive


(a) (b) (c) (d) (e)

(a)	$\epsilon \text{ thin}(Q) \text{ est}(R)$	$\epsilon \text{ thin}(Q) \sqsubseteq Q^\circ \epsilon$ — (8.1.1a)
(b)	$Q^\circ \epsilon \text{ est}(R)$	$\epsilon \text{ est}(R) \sqsubseteq R^\circ$ — est-laws
(c)	$Q^\circ R^\circ$	$Q \sqsubseteq R$
(d)	$R^\circ R^\circ$	R transitive
(e)	R°	


$$\text{est}(Q) \stackrel{1}{\exists} \text{thin}(Q)$$

(8.2)

the singleton holding a Q -least member of a set is a thinning of that set


$$\text{est}(Q) \stackrel{1}{\exists} \exists \exists$$

every member of the singleton is a member of the set

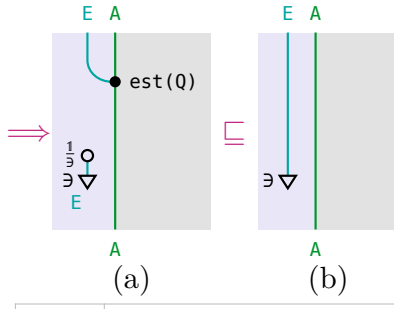

(a)	$\text{est}(Q) \stackrel{1}{\exists} \exists$	$\stackrel{1}{\exists} \exists = 1$ — pow-laws; $\text{est}(Q) \sqsubseteq \exists$ — est-laws
(b)	$\exists$	$\triangleq \text{thin}, \epsilon \setminus (Q^\circ \epsilon)$ half

$$\epsilon \text{est}(Q) \stackrel{1}{\exists} \sqsubseteq Q^\circ \epsilon$$

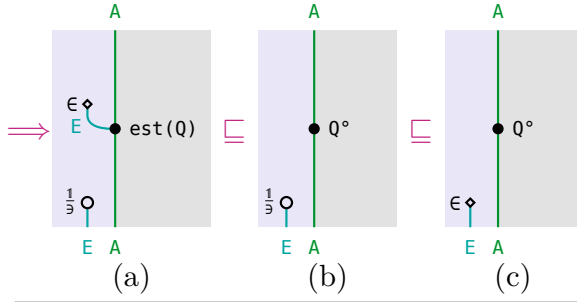the singleton's member stands in Q to every member of the set


(a)	$\epsilon \text{est}(Q) \stackrel{1}{\exists}$	$\epsilon \text{est}(Q) \sqsubseteq Q^\circ$ — est-up
(b)	$Q^\circ \stackrel{1}{\exists}$	$\stackrel{1}{\exists} \sqsubseteq \epsilon$ — pow-laws
(c)	$Q^\circ \epsilon$	

$$\mathbf{RnS^\circ S \sqsubseteq Q \Rightarrow \frac{S}{S} \text{est}(R) \frac{1}{S} \sqsubseteq \frac{S}{S} \text{thin}(Q)}$$

(8.3)


given $\mathbf{Rn}(S^\circ S) \sqsubseteq Q$, Q a preorder

$$\frac{S}{S} \text{est}(R) \frac{1}{S} \sqsubseteq S$$

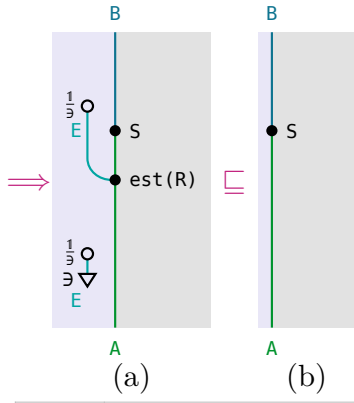
every member of the singleton is a value S returns

(a)	$\frac{S}{S} \text{est}(R) \frac{1}{S} \sqsubseteq S$	$\frac{1}{S} \sqsubseteq 1$ — pow-laws; $\frac{S}{S} \text{est}(R) \sqsubseteq S$ — est-laws
(b)		(8.1a), second condition

$$\mathbf{RnS^\circ S \sqsubseteq Q \Rightarrow S^\circ \frac{S}{S} \text{est}(R) \frac{1}{S} \sqsubseteq Q^\circ \epsilon}$$

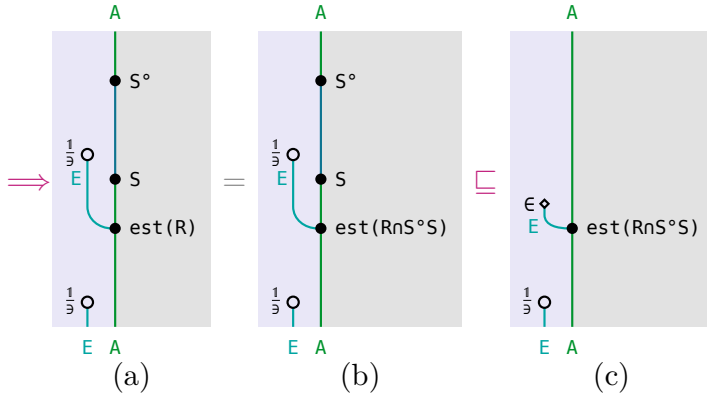the singleton's member stands in Q to every value S returns at the same argument

(a)	$S^\circ \frac{S}{S} \text{est}(R) \frac{1}{S}$	$\frac{S}{S} \text{est}(R) = \frac{S}{S} \text{est}(RnS^\circ S)$ — est-laws
(b)	$S^\circ \frac{S}{S} \text{est}(RnS^\circ S) \frac{1}{S}$	$S^\circ \frac{S}{S} \sqsubseteq \epsilon$ — pow-laws
(c)	$\epsilon \text{est}(RnS^\circ S) \frac{1}{S}$	$\epsilon \text{est}(RnS^\circ S) \sqsubseteq (RnS^\circ S)^\circ$ — est-up; $\mathbf{Rn}(S^\circ S) \sqsubseteq Q$

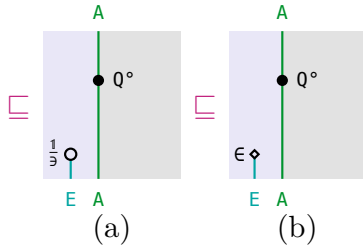

(a)	$Q^\circ \frac{1}{S}$	$\frac{1}{S} \sqsubseteq \epsilon$ — pow-laws
(b)	$Q^\circ \epsilon$	


$$Q \sqsubseteq Q \wedge \text{MonoAlg}(S, Q) \Rightarrow \langle \frac{F(\exists)S}{\exists} \text{thin}(Q) \rangle \sqsubseteq \langle \frac{S}{\exists} \text{thin}(Q) \rangle$$

Theorem 8.1

thinning at every step of the reduce is a thinning of the whole candidate set — S monotonic on Q , Q a preorder

$$\langle \frac{F(\exists)S}{\exists} \text{thin}(Q) \rangle \sqsubseteq \langle \frac{S}{\exists} \text{thin}(Q) \rangle \quad \text{and} \quad \langle \frac{S}{\exists} \rangle \circ \langle \frac{F(\exists)S}{\exists} \text{thin}(Q) \rangle \sqsubseteq Q^\circ \in$$

(8.1a) at $X \triangleq \langle \frac{F(\exists)S}{\exists} \text{thin}(Q) \rangle$, $\langle \frac{S}{\exists} \rangle$ for its S

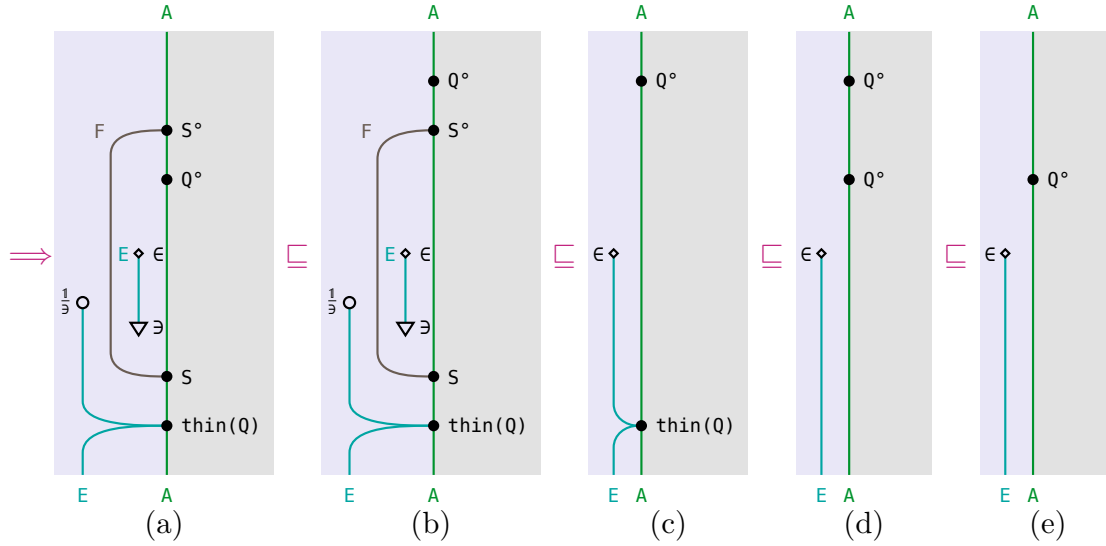


(a)	$S^\circ F(Q^\circ \in) \frac{F(\exists)S}{\exists} \text{thin}(Q)$	$S^\circ F(Q^\circ) \sqsubseteq Q^\circ S^\circ$ — mon-str, relator-laws
(b)	$Q^\circ S^\circ F(\in) \frac{F(\exists)S}{\exists} \text{thin}(Q)$	$S^\circ F(\in) \frac{F(\exists)S}{\exists} \sqsubseteq \in$ — pow-laws
(c)	$Q^\circ \in \text{thin}(Q)$	$\in \text{thin}(Q) \sqsubseteq Q^\circ \in$ — $\triangleq$ thin, adj-all
(d)	$Q^\circ Q^\circ \in$	Q a preorder
(e)	$Q^\circ \in$	

$$Q \sqsubseteq R \wedge 1 \sqsubseteq Q \wedge Q \sqsubseteq Q \wedge R \sqsubseteq R \wedge \text{MonoAlg}(S, Q) \Rightarrow \langle \frac{F(\exists)S}{\exists} \text{thin}(Q) \rangle \text{est}(R) \sqsubseteq \langle \frac{S}{\exists} \text{est}(R) \rangle$$

Corollary 8.1

the thinning fold refines the optimisation problem itself — S monotonic on Q , $Q \sqsubseteq R$, both preorders

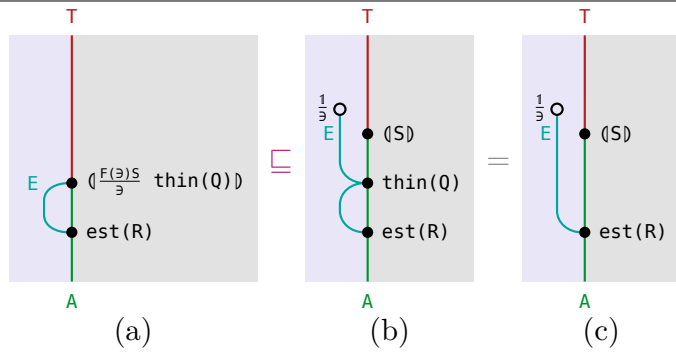

(a)	$\langle \frac{F(\exists)S}{\exists} \text{thin}(Q) \rangle \text{est}(R)$	thinning theorem
(b)	$\langle \frac{S}{\exists} \text{thin}(Q) \rangle \text{est}(R)$	$\text{est}(R) = \text{thin}(Q) \text{ est}(R)$ — (8.1a)
(c)	$\langle \frac{S}{\exists} \text{est}(R) \rangle$	

§8.2. Paths in a layered network

(8.2a)

$F(A, X) = A + A \times X$, $L = \text{list}^+$ with initial algebra $\alpha \triangleq [\text{wrap}, \text{cons}] : F(A, LA) \rightarrow LA$.

$\text{wrapz} \triangleq \langle \text{wrap}, \text{zero} \rangle$, $\text{consw}(a, (xs, n)) = (\text{cons}(a, xs), \text{wt}(a, \text{head}(xs)) + n)$.

$\text{cost} \triangleq \langle [\text{wrapz}, \text{consw}] \rangle \pi_2$, $\langle [\text{wrapz}, \text{consw}] \rangle = \langle 1, \text{cost} \rangle$, $R \triangleq \text{cost} \leq \text{cost}^\circ$.


$Q \triangleq R \cap (\text{head} \text{ head}^\circ)$, $S \triangleq F(1, \exists) \alpha$, $\frac{F(\exists, 1)}{\exists} = 1 + \text{cpl}$, $\frac{F(1, \exists)}{\exists} = 1 + \text{cpr}$, $\text{step} \triangleq \text{cpr } P(\text{cons}) \text{ est}(R)$.

(8.2b)

the law	what it says
$F(\exists, Q) \alpha \sqsubseteq F(\exists, 1) \alpha Q$	$F(\exists, 1) \alpha$ is monotonic on Q ; on R it is not, since the next edge can cost arbitrarily much
$S \text{ head} \sqsubseteq [1, \pi_1] \quad S \triangleq F(1, \exists) \alpha$	$S \text{ head}$ is simple, which gives $R \cap (S^\circ S) \sqsubseteq Q$: between two paths S builds from one argument, equal cost and equal head already means Q

$$Q \sqsubseteq R \wedge 1 \sqsubseteq Q \wedge QQ \sqsubseteq Q \wedge R \circ R \circ \sqsubseteq R \circ \wedge \text{MonoAlg}(F(\exists, 1)\alpha, Q) \wedge \text{Rn}(F(1, \exists)\alpha) \circ F(1, \exists)\alpha \sqsubseteq Q \Rightarrow \langle \frac{F(\exists, 1)}{\exists} P(\frac{F(1, \exists)\alpha}{\exists} \text{est}(R)) \rangle \text{est}(R) \sqsubseteq \langle \frac{F(\exists, 1)\alpha}{\exists} \text{est}(R) \rangle \text{est}(R) \quad (8.2c)$$

a least-cost path in a layered network, as a fold over the layers

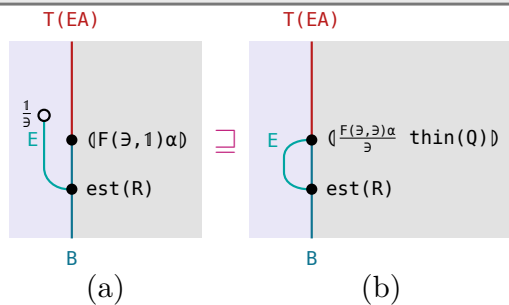

(a)	$\langle \frac{F(\exists, 1)\alpha}{\exists} \text{est}(R) \rangle$	Corollary 8.1, (8.2b)
(b)	$\langle \frac{F(\exists, \exists)\alpha}{\exists} \text{thin}(Q) \rangle \text{est}(R)$	


$\equiv$ (8.2d) under $\langle \rangle$ monotonic: the whole chain runs inside the reduce, and the $\text{est}(R)$ behind it never moves.

$$Rn(F(1, \exists)\alpha) \circ F(1, \exists)\alpha \sqsubseteq Q \Rightarrow \frac{F(\exists, 1)}{\exists} P(\frac{F(1, \exists)\alpha}{\exists} \text{est}(R)) \sqsubseteq \frac{F(\exists, \exists)\alpha}{\exists} \text{thin}(Q) \quad (8.2d)$$

thinning the algebra of a layered network costs no more than taking the program's two cases

$$\frac{F(\exists, 1)}{\exists} P(\frac{F(1, \exists)\alpha}{\exists}) P(\text{thin}(Q)) \text{union} \sqsubseteq \frac{F(\exists, \exists)\alpha}{\exists} \text{thin}(Q)$$


thinning each set the algebra's parts build, then taking the union, is below thinning the one set the whole algebra builds

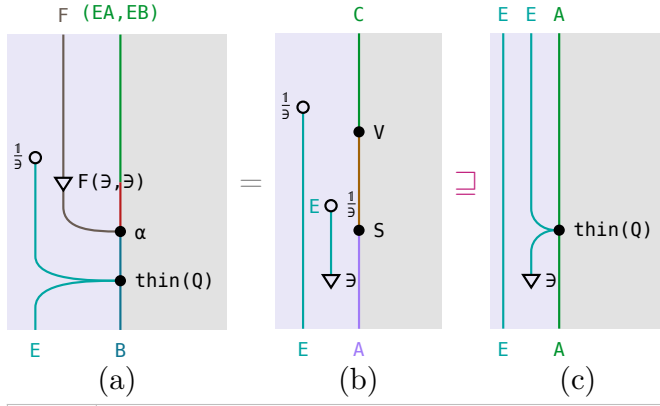

(a)	$\frac{F(\exists, \exists)\alpha}{\exists} \text{thin}(Q)$	$\frac{F(\exists, 1)F(1, \exists)\alpha}{\exists} = \frac{F(\exists, 1)}{\exists} P(\frac{F(1, \exists)\alpha}{\exists}) \text{union}$
(b)	$\frac{V}{\exists} P(\frac{S}{\exists}) \text{union}$	$\text{union thin}(Q) \sqsupseteq P(\text{thin}(Q)) \text{union} \text{--- (8.1a)}$
(c)	$P(\text{thin}(Q)) \text{union}$	$\frac{S}{\exists} \text{thin}(Q) \sqsupseteq \frac{S}{\exists} \text{est}(R) \frac{1}{\exists} \text{--- (8.1a), (8.2b)}$

$$Rn(F(1, \exists)\alpha) \circ F(1, \exists)\alpha \sqsubseteq Q \Rightarrow \frac{F(\exists, 1)}{\exists} P(\frac{F(1, \exists)\alpha}{\exists} \text{est}(R)) \sqsubseteq \frac{F(\exists, 1)}{\exists} P(\frac{F(1, \exists)\alpha}{\exists}) P(\text{thin}(Q)) \text{union}$$


choosing an R-least member of each of those sets is below thinning each and taking the union

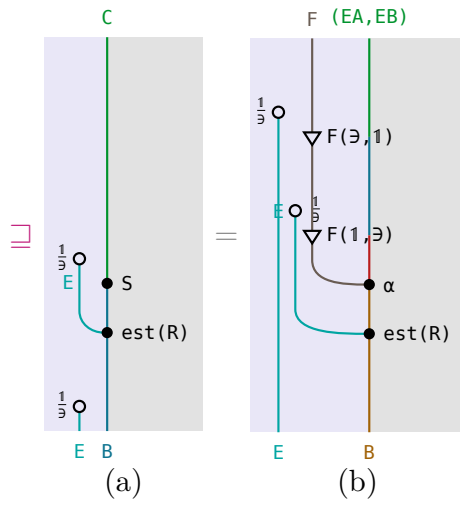

(a)	$\frac{S}{\exists} \text{est}(R) \frac{1}{\exists}$	$P(\frac{1}{\exists}) \text{union} = 1$
(b)	$\frac{F(\exists, 1)}{\exists} P(\frac{F(1, \exists)\alpha}{\exists} \text{est}(R))$	$\alpha \text{ a map; } \frac{F(1, \exists)}{\exists} P(\alpha) \text{est}(R) = [\text{wrap}, \text{step}] \text{---} \triangleq \text{cost}$

$$\text{cp } P(\alpha) \text{est}(\text{path}) = [\text{wrap}, \text{step}]$$

at the layered network, choosing an R-least path from each case is the program's two cases $[\text{wrap}, \text{step}]$



(a)	$[\text{wrap}, \text{step}]$	
-----	------------------------------	--

$$= \frac{F(\exists, 1)}{\exists} = 1 + \text{cpl} \text{---} \triangleq \text{cost}$$

§8.3. Implementing thin

(8.3a)

$\text{setify} : [A] \rightarrow EA$, $\text{cup} : EA \times EA \rightarrow EA$, $\text{cp}(F) \triangleq \frac{F(\exists)}{\exists}$, $\text{listcp} : F(L) \rightarrow LF$, $\text{sort}(P) \triangleq \text{setify}^\circ \text{ ordered } P$ for P a connected preorder.

$\text{thinlist}(Q)$ is any $\text{thinlist}(Q) \sqsubseteq \text{subseq}$ with $\text{thinlist}(Q) \text{ setify} \sqsubseteq \text{setify thin}(Q)$; one is $\llbracket \text{nil}, \text{bump } Q \rrbracket$, $\text{bump } Q (a, []) = [a]$, $\text{bump } Q (a, [b] \# xs) = (b \sqsubseteq a \rightarrow [a] \# xs, a \sqsubseteq b \rightarrow [b] \# xs, [a] \# [b] \# xs)$.

Binary thinning data: $S = (f_1 p_1) \cup (f_2 p_2)$ with p_1, p_2 coreflexive; Q a preorder with $Q \sqsubseteq R$ and both $f_1 p_1, f_2 p_2$ monotonic on Q ; P a connected preorder with both f_1, f_2 monotonic on P ; $g_i \triangleq \text{list}(f_i) \text{ filter}(p_i)$.


(8.3b)

the law	what it says
$\text{thinlist}(Q) \text{ xs} = [\text{minlist}(Q) \text{ xs}]$ (8.5), Q connected, xs non-empty	what thinning should come to when it can: one element
$\text{sort}(P) \text{ thinlist}(Q) \sqsubseteq \text{thin}(Q) \text{ sort}(P)$ (8.6) — (8.6)	thinning a sorted list is a thinning of the set — this is what $\text{thinlist}(Q) \sqsubseteq \text{subseq}$ buys
$\text{sort}(P) \text{ minlist}(Q) \sqsubseteq \text{est}(Q)$ (8.7)	a minimum of the sorted list is a minimum of the set
$\text{sort}(f P f^\circ) \text{ list}(f) \sqsubseteq P(f) \text{ sort}(P)$ (8.8)	shunt a function through a sort
$\text{sort}(P) \text{ filter}(p) \sqsubseteq E(p) \text{ sort}(P)$ (8.9), p coreflexive	filtering a sorted list sorts the restricted set
$(\text{sort}(P) \times \text{sort}(P)) \text{ merge}(P) \sqsubseteq \text{cup sort}(P)$ (8.10)	merging two sorted lists sorts their union
$F(\text{sort}(P)) \text{ listcp} \sqsubseteq \text{cp}(F) \text{ sort}(FP)$ (8.11), F linear	listcp is the list implementation of the cartesian product $\text{cp}(F)$

Map(setify) $\wedge$ Coreflexive(ordered) $\wedge$ thinlist $\sqsubseteq \text{subseq} \wedge$ ordered subseq $\sqsubseteq \text{subseq ordered} \wedge$ thinlist (8.6)

setify $\sqsubseteq \text{setify thin}(Q) \Rightarrow \text{sortRel thinlist} \sqsubseteq \text{thin}(Q) \text{ sortRel}$

a thinning of the sorted list lists a thinning of the set — P a connected preorder, $\text{thinlist}(Q) \sqsubseteq \text{subseq}$.

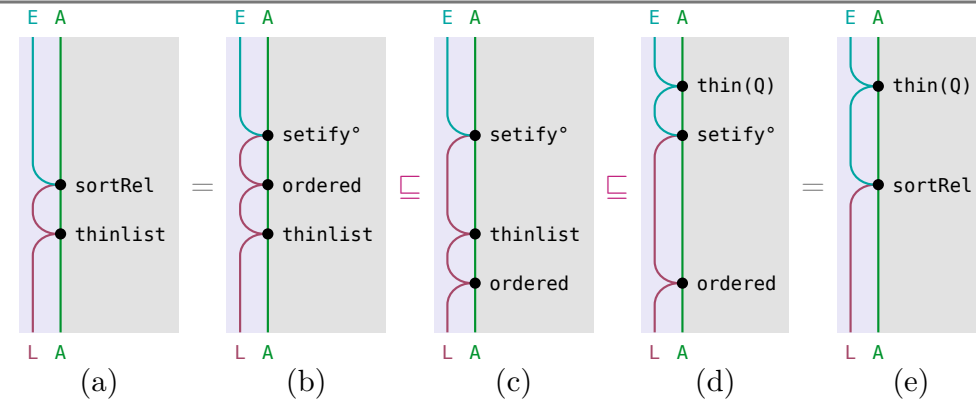

(a)	sortRel thinlist	$\text{sort}(P) \triangleq \text{setify}^\circ \text{ ordered } P \text{ — } \triangleq \text{thinlist}$
(b)	$\text{setify}^\circ \text{ ordered thinlist}$	$\text{ordered } P \text{ thinlist}(Q) \sqsubseteq \text{thinlist}(Q) \text{ ordered } P \text{ — } \triangleq \text{thinlist}$
(c)	$\text{setify}^\circ \text{ thinlist ordered}$	$\text{thinlist}(Q) \text{ setify} \sqsubseteq \text{setify thin}(Q) \text{ — } \triangleq \text{thinlist, dom-laws, triple-chains}$
(d)	$\text{thin}(Q) \text{ setify}^\circ \text{ ordered}$	$\text{sort}(P) \triangleq \text{setify}^\circ \text{ ordered } P \text{ — } \triangleq \text{thinlist}$
(e)	$\text{thin}(Q) \text{ sortRel}$	


Lemma 8.1

$$\begin{aligned} & \text{Map}(f) \wedge (\forall X. \forall Y. X \sqsubseteq Y \Rightarrow \text{sort}F(X) \sqsubseteq \text{sort}F(Y)) \wedge \text{MonoAlg}(f, P) \wedge \\ & \text{sort}F(fP f^\circ) \text{list}f \sqsubseteq P(f) \text{sort}(P) \wedge \text{sort}(P) \text{filter}p \sqsubseteq E(p) \text{sort}(P) \wedge F(\text{sort}(P)) \text{list}cp \sqsubseteq cp \\ & \text{sort}F(F(P)) \Rightarrow F(\text{sort}(P)) \text{list}cp \text{list}f \text{filter}p \sqsubseteq \frac{F(\exists)fp}{\exists} \text{sort}(P) \end{aligned}$$

one sorted list built from sorted arguments, instead of a set built and then sorted — $f : FA \rightarrow A$ monotonic
on P , p coreflexive, F linear.

$$\text{Map}(f) \wedge \text{sort}(P) \text{filter}p \sqsubseteq E(p) \text{sort}(P) \Rightarrow cp \ P(f) \text{sort}(P) \text{filter}p \sqsubseteq \frac{F(\exists)fp}{\exists} \text{sort}(P)$$


sorting the f -images of the product and filtering by p is below sorting the set $F(\exists)fp$ builds

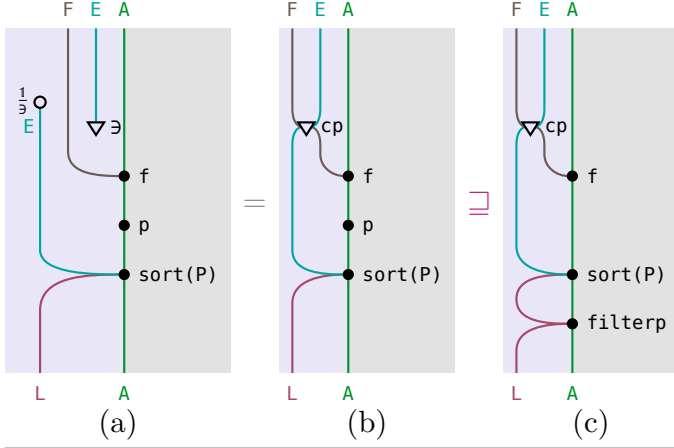

(a)	$\frac{F(\exists)fp}{\exists} \text{sort}(P)$	$\frac{F(\exists)fp}{\exists} = \frac{F(\exists)}{\exists} E(fp)$ — pow-laws, $\triangleq$ thinlist $E(f) = P(f)$, f a map — powrel-laws
(b)	$cp \ P(f)E(p)\text{sort}(P)$	$\text{sort}(P) \text{filter}(p) \sqsubseteq E(p) \text{sort}(P)$ — (8.3b)
(c)	$cp \ P(f)\text{sort}(P)\text{filter}p$	$\text{sort}(fP f^\circ) \text{list}(f) \sqsubseteq P(f) \text{sort}(P)$ — (8.3b)

$$\begin{aligned} & \text{Map}(f) \wedge (\forall X. \forall Y. X \sqsubseteq Y \Rightarrow \text{sort}F(X) \sqsubseteq \text{sort}F(Y)) \wedge \text{MonoAlg}(f, P) \wedge \text{sort}F(fP f^\circ) \text{list}f \sqsubseteq P(f) \text{sort}(P) \wedge \\ & F(\text{sort}(P)) \text{list}cp \sqsubseteq cp \ \text{sort}F(F(P)) \Rightarrow F(\text{sort}(P)) \text{list}cp \text{list}f \text{filter}p \sqsubseteq cp \ P(f) \text{sort}(P) \text{filter}p \end{aligned}$$









combining the arguments' sorted lists by $\text{list}cp$, mapping f and filtering is below sorting the f -images and filtering

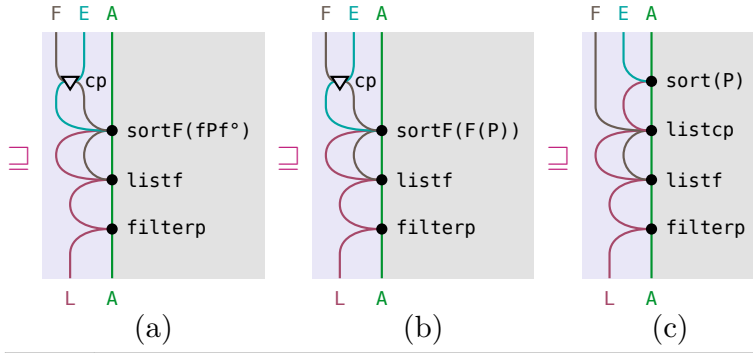

(a)	$cp \ \text{sort}F(fP f^\circ) \text{list}f \text{filter}p$	$FP \sqsubseteq fP f^\circ$ — mon-str, $\triangleq$ thinlist
(b)	$cp \ \text{sort}F(F(P)) \text{list}f \text{filter}p$	$F(\text{sort}(P)) \text{list}cp \sqsubseteq cp(F) \text{sort}(FP)$ — (8.3b)
(c)	$F(\text{sort}(P)) \text{list}cp \text{list}f \text{filter}p$	

Map(f_1) $\wedge$ **Map**(f_2) $\wedge$ $Q \subseteq R \wedge 1 \in Q \wedge Q \subseteq Q \wedge R \circ R \subseteq R \circ \wedge$ **MonoAlg**(f_1 p_1 , Q) $\wedge$ **MonoAlg**(f_2 p_2 , Q) Theorem 8.2
 $\wedge (\forall X. \forall Y. X \in Y \Rightarrow \text{sortF}(X) \subseteq \text{sortF}(Y)) \wedge \text{MonoAlg}(f_1, P) \wedge \text{MonoAlg}(f_2, P) \wedge \text{sortF}(f_1 P$
 $f_1^\circ) \text{listf}_1 \subseteq P(f_1) \text{sort}(P) \wedge \text{sortF}(f_2 P f_2^\circ) \text{listf}_2 \subseteq P(f_2) \text{sort}(P) \wedge$
 $\text{sort}(P) \text{filterp}_1 \subseteq E(p_1) \text{sort}(P) \wedge \text{sort}(P) \text{filterp}_2 \subseteq E(p_2) \text{sort}(P) \wedge F(\text{sort}(P)) \text{listcp} \subseteq \text{cp}$
 $\text{sortF}(F(P)) \wedge (\text{sort}(P) \times \text{sort}(P)) \text{merge}(P) \subseteq \text{cup } \text{sort}(P) \wedge$
 $\text{sort}(P) \text{thinlist}(Q) \subseteq \text{thin}(Q) \text{sort}(P) \wedge \text{sort}(P) \text{minlist}(R) \subseteq \text{est}(R) \wedge g_1 = \text{listf}_1 \text{ filterp}_1 \wedge$
 $g_2 = \text{listf}_2 \text{ filterp}_2 \wedge S = f_1 p_1 \cup f_2 p_2 \Rightarrow (\text{listcp}(g_1, g_2) \text{merge}(P) \text{thinlist}(Q))$
 $\text{minlist}(R) \subseteq \frac{(S)}{3} \text{est}(R)$

a fold on sorted lists of partial solutions, thinned at every step — at $\triangleq$ **thinlist**'s binary thinning data.

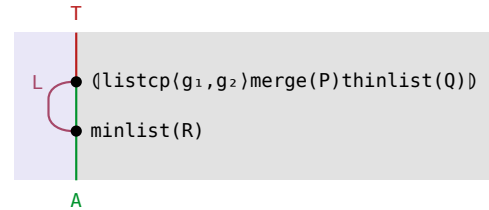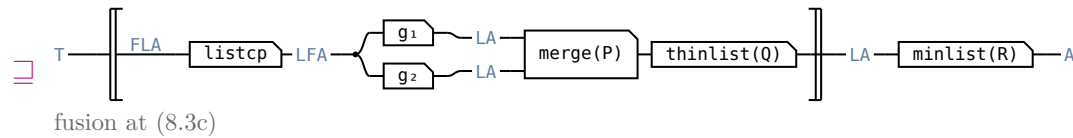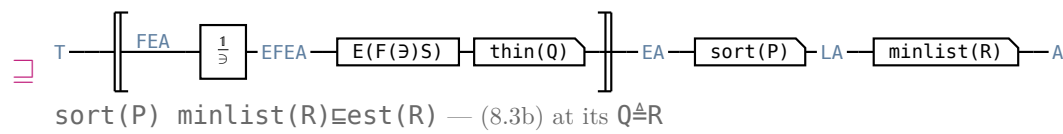circuit**Hinze–Marsden**

$$\begin{aligned}
& \text{Map}(f_1) \wedge \text{Map}(f_2) \wedge (\forall X. \forall Y. X \sqsubseteq Y \Rightarrow \text{sortF}(X) \sqsubseteq \text{sortF}(Y)) \wedge \text{MonoAlg}(f_1, P) \wedge \text{MonoAlg}(f_2, P) \wedge \quad (8.3c) \\
& \text{sortF}(f_1 \ P \ f_1^\circ) \text{listf}_1 \sqsubseteq P(f_1) \text{sort}(P) \wedge \text{sortF}(f_2 \ P \ f_2^\circ) \text{listf}_2 \sqsubseteq P(f_2) \text{sort}(P) \wedge \\
& \text{sort}(P) \text{filterp}_1 \sqsubseteq E(p_1) \text{sort}(P) \wedge \text{sort}(P) \text{filterp}_2 \sqsubseteq E(p_2) \text{sort}(P) \wedge F(\text{sort}(P)) \text{listcp} \sqsubseteq \text{cp} \text{sortF}(F(P)) \\
& \wedge (\text{sort}(P) \times \text{sort}(P)) \text{merge}(P) \sqsubseteq \text{cup} \text{sort}(P) \wedge \text{sort}(P) \text{thinlist}(Q) \sqsubseteq \text{thin}(Q) \text{sort}(P) \Rightarrow \\
& F(\text{sort}(P)) \text{listcp}(\text{listf}_1 \ \text{filterp}_1, \text{listf}_2 \ \text{filterp}_2) \text{merge}(P) \text{thinlist}(Q) \sqsubseteq \frac{F(\exists)(f_1 \ p_1 \cup f_2 \ p_2)}{\exists} \\
& \text{thin}(Q) \text{sort}(P)
\end{aligned}$$

sorting the candidate set is what turns the thinning algebra into an algebra on lists — the side condition of binary thinning theorem's last step.

circuit	Hinze–Marsden
$\sqsubseteq$ $\text{sort}(P) \text{thinlist}(Q) \sqsubseteq \text{thin}(Q) \text{sort}(P) \quad (8.3b)$	
$=$ $\{ \frac{F(\exists)f_1 p_1}{\exists}, \frac{F(\exists)f_2 p_2}{\exists} \} \text{cup} \text{sort}(P) \text{thinlist}(Q)$ $S = (f_1 p_1) \cup (f_2 p_2) \quad \triangleq \text{thinlist}, \text{ then } \triangleq \text{cup}$	
$\sqsubseteq$ $\{ \frac{F(\exists)f_1 p_1}{\exists}, \frac{F(\exists)f_2 p_2}{\exists} \} (\text{sort}(P) \times \text{sort}(P)) \text{merge}(P) \text{thinlist}(Q)$ $(\text{sort}(P) \times \text{sort}(P)) \text{merge}(P) \sqsubseteq \text{cup} \text{sort}(P) \quad (8.3b)$	
$=$ $\{ \frac{F(\exists)f_1 p_1}{\exists} \text{sort}(P), \frac{F(\exists)f_2 p_2}{\exists} \text{sort}(P) \} \text{merge}(P) \text{thinlist}(Q)$ $\langle X, Y \rangle (\text{sort}(P) \times \text{sort}(P)) = \langle X \text{sort}(P), Y \text{sort}(P) \rangle \quad \text{— bdm-prod-laws}$	
$\sqsubseteq F(\text{sort}(P)) \text{listcp} \langle g_1, g_2 \rangle \text{merge}(P) \text{thinlist}(Q)$ Lemma 8.1 at f_1, p_1 and at f_2, p_2, then $X \langle g_1, g_2 \rangle \sqsubseteq \langle Xg_1, Xg_2 \rangle \quad \text{— bdm-prod-laws; } g_i \triangleq \text{list}(f_i)$ $\text{filter}(p_i) \quad \triangleq \text{thinlist}$	

§8.4. The knapsack problem

(8.4a)

$\text{vol}, \text{wt} : \text{Item} \rightarrow \text{Real}, \text{ value} \triangleq \text{list}(\text{vol}) \text{ sum}, \text{ weight} \triangleq \text{list}(\text{wt}) \text{ sum}.$

$\text{subseq} = ([\text{nil}, \text{cons}] \cup [\text{nil}, \pi_2]) \circ \text{w}$, within w the coreflexive on xs with weight $xs \leq w, 0 \leq w$.

$R \triangleq \text{value} \geq \text{value}^\circ, Q \triangleq \text{Rn}(\text{weight} \leq \text{weight}^\circ), P \triangleq R \circ \text{w}.$

$\text{FA} = 1 + \text{Item} \times \text{A}, \quad \text{listcp} = \text{wrap} + \text{cpr}, \quad g_1 \triangleq \text{list}([\text{nil}, \text{cons}]) \quad \text{filter}(\text{within } w) \quad = [\text{list}(\text{nil}), h_1],$
 $g_2 \triangleq \text{list}([\text{nil}, \pi_2]) = [\text{list}(\text{nil}), h_2].$

$h_1 \triangleq \text{list}(\text{cons}) \text{ filter}(\text{within } w), \quad h_2 \triangleq \text{list}(\pi_2).$

(8.4b)

the law	what it says
$(1 \times R) \text{ (cons (within } w)) \sqsubseteq \text{cons (within } w) R$ FALSE	not monotonic on R: a selection of greater value need not still fit once one more item goes in
$(1 \times Q) \text{ (cons (within } w)) \sqsubseteq \text{cons (within } w) Q$ $(1 \times Q) \pi_2 \sqsubseteq \pi_2 Q$,	both halves are monotonic on Q once ties in value are broken by weight

$$\begin{aligned} & 0 \leq w \wedge (\forall i. 0 \leq \text{wt}(i)) \wedge (\forall X. \forall Y. X \subseteq Y \implies \text{sortF}(X) \subseteq \text{sortF}(Y)) \wedge \\ & \text{sortF}([\text{nil}, \text{cons}]R[\text{nil}, \text{cons}]^\circ) \text{listf}_1 \subseteq P([\text{nil}, \text{cons}]) \text{sortP} \wedge \\ & \text{sortF}([\text{nil}, \pi_2]R[\text{nil}, \pi_2]^\circ) \text{listf}_2 \subseteq P([\text{nil}, \pi_2]) \text{sortP} \wedge \text{sortP} \text{filterp}_1 \subseteq E(\text{within}) \text{sortP} \wedge \\ & F(\text{sortP}) \text{listcp} \subseteq \text{cp} \text{sortF}(F(R)) \wedge (\text{sortP} \times \text{sortP}) \text{mergeP} \subseteq \text{cup} \text{sortP} \wedge \text{sortP} \\ & \text{thinlist} \subseteq \text{thin}(Q(\text{vol}, \text{wt})) \text{sortP} \wedge \text{sortP} \text{minlist} \subseteq \text{est}(R) \implies (\text{listcp}(\text{listf}_1 \text{filterp}_1, \text{listf}_2) \text{mergeP} \\ & \text{thinlist}) \text{minlist} \subseteq \frac{\text{subseq} \text{ within}}{\exists} \text{est}(R) \end{aligned}$$

the knapsack problem, as a fold that thins the packings kept at each item

circuit	Hinze–Marsden
$ \begin{array}{c} \boxed{\text{[Item]}} \text{---} \boxed{\frac{1}{\exists}} \text{---} \boxed{E(\text{subseq within})} \text{---} \boxed{E[\text{Item}]} \text{---} \boxed{\text{est}(R)} \text{---} \boxed{\text{[Item]}} \\ \text{subseq (within w)} \\ \exists \quad \text{est}(R) \end{array} $	
$ \begin{array}{c} \boxed{\text{[Item]}} \text{---} \boxed{\frac{1}{\exists}} \text{---} \boxed{E(\langle [\text{nil}, \text{cons}] \text{ within } u \text{ } [\text{nil}, \pi_2] \rangle)} \text{---} \boxed{E[\text{Item}]} \text{---} \boxed{\text{est}(R)} \text{---} \boxed{\text{[Item]}} \\ = \quad \langle [\text{nil}, \text{cons}] \text{ (within w)} \cup [\text{nil}, \pi_2] \rangle \\ \exists \quad \text{est}(R) \\ \text{fusion, weights non-negative.} \end{array} $	
$ \begin{array}{c} \boxed{\text{[Item]}} \text{---} \boxed{\text{listcp}} \text{---} \boxed{\text{list}(F[\text{Item}])} \text{---} \boxed{\text{listf}_1} \text{---} \boxed{\text{filterp}_1} \text{---} \boxed{\text{list}[\text{Item}]} \text{---} \boxed{\text{mergeP}} \text{---} \boxed{\text{thinlist}} \text{---} \boxed{\text{list}[\text{Item}]} \text{---} \boxed{\text{minlist}} \text{---} \boxed{\text{[Item]}} \\ \boxed{\text{listcp}} \langle g_1, g_2 \rangle \text{ merge } R \text{ thinlist}(Q) \text{ minlist}(R) \\ \text{binary thinning theorem, at } P \triangleq R, F \text{ linear, } Q \text{ from (8.4b)} \end{array} $	
$ \begin{array}{c} \langle [\text{nil}, \text{cpr} \langle h_1, h_2 \rangle \text{ merge } R \text{ thinlist}(Q)] \rangle \text{ minlist}(R) \\ = \text{listcp} = \text{wrap} + \text{cpr}, g_i = [\text{list}(\text{nil}), h_i] \text{ --- } \triangleq \text{within}; \text{minlist}(R) \\ \text{is head, packings coming out in descending value} \end{array} $	

§8.5. The paragraph problem

(8.5a)

```

Line=list+ Word, Para=list+ Line, FA=Word+Word×A, listcp=wrap+cpr.
new(a,xs)=[a]#xs, glue(a,xs)=[a]#head(xs)#tail(xs), partition≐([wrap wrap,new u glue]) : list+
Word→Para.

width≐([length,(length×1) plus succ]), 0≤length a, fits w the coreflexive on a line x with width x≤w, ok w the
coreflexive on [x]#xs with width x≤w.

white w x=w-width x, collect≐list(sqr) sum, waste w≐init list(white w) collect.

R≐(waste w)≤(waste w)°, Q≐Rn(head head°), P≐T, .

g1≐list([wrap wrap,new]), g2≐list([wrap wrap,glue]) filter(ok w), start≐wrap wrap wrap, h1≐list(new),
h2≐list(glue) filter(ok w).

```

(8.5b)

the law	what it says
$(1 \times R) \text{ glue} \sqsubseteq \text{glue } R \quad \text{FALSE}$	glue is not monotonic on R: the waste of a paragraph depends on its whole first line, so no greedy algorithm solves this
$(1 \times Q) \text{ new} \sqsubseteq \text{new } Q$ $(1 \times Q) (\text{glue } (ok \ w)) \sqsubseteq \text{glue } (ok \ w) Q$ $\text{cons monotonic on } \text{collect} \sqsubseteq \text{collect}^\circ, .$	both halves are monotonic on Q once ties in waste are broken by the first line
merge $T = \text{cat}$; $P \triangleq \text{head prefix head}^\circ$ also serves	T needs no sorting at all, and prefix is a linear order on first lines of paragraphs of one input

(8.5c)

$(\forall a. 0 \leq \text{len}(a)) \wedge (\forall a. \text{len}(a) \leq w) \wedge (\forall X. \forall Y. X \sqsubseteq Y \Rightarrow \text{sortF}(X) \sqsubseteq \text{sortF}(Y)) \wedge \text{sortF}([wrap$
 $wrap,new]T[wrap wrap,new]^\circ) \text{listf}_1 \sqsubseteq P([wrap wrap,new]) \text{sortP} \wedge \text{sortF}([wrap wrap,glue]T[wrap$
 $wrap,glue]^\circ) \text{listf}_2 \sqsubseteq P([wrap wrap,glue]) \text{sortP} \wedge \text{sortP filterp}_2 \sqsubseteq E(ok) \text{sortP} \wedge F(\text{sortP}) \text{listcp} \sqsubseteq \text{cpr}$
 $\text{sortF}(F(T)) \wedge (\text{sortP} \times \text{sortP}) \text{mergeP} \sqsubseteq \text{cup sortP} \wedge \text{sortP thinlist} \sqsubseteq \text{thin}(Q(\text{len},w)) \text{sortP} \wedge \text{sortP}$
 $\text{minlist} \sqsubseteq \text{est}(R) \Rightarrow ([\text{listcp}(\text{listf}_1, \text{listf}_2 \text{ filterp}_2) \text{ mergeP thinlist}] \text{minlist} \sqsubseteq \frac{\text{partition fits}}{3} \text{est}(R))$
 a paragraph laid out as a fold that thins the layouts kept at each word

circuit	Hinze–Marsden
$\text{list}^*(\text{Word}) \xrightarrow{\frac{1}{3}} E(\text{list}^*(\text{Word})) \xrightarrow{E(\text{partition fits})} E(\text{list}^*(\text{list}^*(\text{Word}))) \xrightarrow{\text{est}(R)} \text{list}^*(\text{list}^*(\text{Word}))$ $\frac{\text{partition list}^*(\text{fits } w)}{3} \text{est}(R)$	
$\text{list}^*(\text{Word}) \xrightarrow{\frac{1}{3}} E(\text{list}^*(\text{Word})) \xrightarrow{E([wrap wrap,new] u [wrap wrap,glue]ok)} E(\text{list}^*(\text{list}^*(\text{Word}))) \xrightarrow{\text{est}(R)} \text{list}^*(\text{list}^*(\text{Word}))$ $= \frac{([wrap wrap,new] u ([wrap wrap,glue] (ok \ w)))}{3} \text{est}(R)$ fusion, every word fits on a line by itself.	
$\text{list}^*(\text{Word}) \xrightarrow{\frac{1}{3}} E(\text{list}^*(\text{Word})) \xrightarrow{E([wrap wrap,new] u ([wrap wrap,glue] (ok \ w)))} E(\text{list}^*(\text{list}^*(\text{Word}))) \xrightarrow{\text{est}(R)} \text{list}^*(\text{list}^*(\text{Word}))$ $= \frac{([wrap wrap,new] u ([wrap wrap,glue] (ok \ w)))}{3} \text{est}(R)$ the algebra as $(f_1 p_1) \cup (f_2 p_2)$, $p_1 \triangleq 1 \text{ — } \triangleq \text{thinlist}$.	
$\text{listcp} \langle g_1, g_2 \rangle \text{ cat thinlist}(Q) \text{ minlist}(R)$ binary thinning theorem, at $P \triangleq T$ with merge $T = \text{cat}$, Q from (8.5b)	
$([start, cpr \langle h_1, h_2 \rangle \text{ cat thinlist}(Q)] \text{ minlist}(R)$ $= \text{listcp} = \text{wrap} + \text{cpr}, g_i \text{ along the coproduct — } \triangleq \text{partition}$	

§8.6. Bitonic tours

(8.6a)

$FA = (City \times City) + (City \times A)$, the base functor of cons-lists of length at least two; $listcp = wrap + cpr$; $tc : City \times City \rightarrow Real$, neither positive nor symmetric.

$start(a, b) = ([a, b], [a, b])$, $dropl(a, ([b] \# xs, ys)) = ([a] \# xs, [a] \# ys)$, $dropr(a, (xs, [b] \# ys)) = ([a] \# xs, [a] \# ys)$, $tour \triangleq ([start, dropl \cup dropr])$.

$cost(xs, ys) = outcost\ xs + incost\ ys$, $outcost[a_0, \dots, a_n] = tc(a_0, a_1) + \dots + tc(a_{n-1}, a_n)$, $incost[a_0, \dots, a_n] = tc(a_1, a_0) + \dots + tc(a_n, a_{n-1})$.

$next \triangleq tail\ head$, $next2 \triangleq next \times next$, $head2 \triangleq head \times head$, $R \triangleq cost \leq cost^\circ$, $Q \triangleq Rn(next2\ next2^\circ) \cap (head2\ head2^\circ)$, $P \triangleq T$, $g_1 \triangleq list([start, dropl])$, $g_2 \triangleq list([start, dropr])$.

(8.6b)

the law	what it says
$(1 \times R)\ dropl \sqsubseteq dropl\ R\ \text{FALSE}$	neither drop is monotonic on R: the two edges it adds and removes depend on head and next of both lists
$(1 \times R)\ dropr \sqsubseteq dropr\ R\ \text{FALSE}$	
$(1 \times Q)\ dropl \sqsubseteq dropl\ Q$	both are, once ties in cost are broken by the two second cities — the heads already agree among tours of one input
$(1 \times Q)\ dropr \sqsubseteq dropr\ Q$	

(8.6c)

$(\forall X. \forall Y. X \sqsubseteq Y \Rightarrow sortF(X) \sqsubseteq sortF(Y)) \wedge$ $sortF([start, droplFn] \tau [start, droplFn]^\circ) g_1 \sqsubseteq P([start, droplFn]) sortP \wedge$ $sortF([start, droprFn] \tau [start, droprFn]^\circ) g_2 \sqsubseteq P([start, droprFn]) sortP \wedge F(sortP) listcp \sqsubseteq cp$ $sortF(F(\tau)) \wedge (sortP \times sortP) cat \sqsubseteq cup\ sortP \wedge sortP\ thinlist \sqsubseteq thin(Qc(tc)) sortP \wedge sortP$ $minlist \sqsubseteq est(R) \Rightarrow (listcp(g_1, g_2) cat\ thinlist) minlist \sqsubseteq \frac{(tourAlg)}{3} est(R)$ a least-cost bitonic tour, as a fold that thins the tours kept at each city	
circuit	Hinze–Marsden
$dCL(City \times City, City) \xrightarrow{\frac{1}{3}} E(dCL(City \times City, City)) \xrightarrow{E(tourAlg)} E(Journey^2) \xrightarrow{est(R)} Journey$ $\frac{tour}{3} est(R)$	
$dCL(City \times City, City) \xrightarrow{\frac{1}{3}} E(dCL(City \times City, City)) \xrightarrow{E([start, droplFn] \cup [start, droprFn])} E(Journey^2) \xrightarrow{est(R)} Journey$ $= \frac{([start, dropl \cup dropr])}{3} est(R)$ $tour \triangleq ([start, dropl \cup dropr]) \triangleq tour$	
$dCL(City \times City, City) \xrightarrow{\frac{1}{3}} E(dCL(City \times City, City)) \xrightarrow{E([start, droplFn] \cup [start, droprFn])} E(Journey^2) \xrightarrow{est(R)} Journey$ $\sqsubseteq (listcp(g_1, g_2) cat\ thinlist(Q)) minlist(R)$ binary thinning theorem, at $P \triangleq T$ with merge $T = cat$, Q from (8.6b)	
$([start\ wrap, cpr\ (list(dropl), list(dropr))\ cat\ thinlist(Q)] minlist(R)$ $listcp = wrap + cpr$, $g_i = [list(start), list(drop_i)] \triangleq tour$; quadratic, two tours added per step	