

# Relation Algebra

## §15. Dynamic Programming

### §15.1. Example of Hylo $(T)^\circ(h)$ : segmenting a list

- $(T)=\text{concat}$   
 $T=[\text{nil}, \text{cat}]$  takes a non-empty first list, so  $T^\circ$  cuts a non-empty prefix off a list every way, and folding with  $T$  flattens a list of segments
- $(h)=\text{list}(\text{sum})$   
 $h=[\text{nil}, \text{cons}(\text{sum}\times 1)]$  puts a segment's sum in front, so folding with  $h$  sums every segment
- $H=\text{partition list}(\text{sum})$   
 $H$  segments a list every way, then sums each segment; with  $R$  comparing the largest entry,  $M$  cuts the list so that the largest segment sum is as small as possible

| $x$                        | $h(x)$       |
|----------------------------|--------------|
| $\text{inl}(() )$          | $[\ ]$       |
| $\text{inr}([c], [ ])$     | $[c]$        |
| $\text{inr}([a, b], [c])$  | $[a + b, c]$ |
| $\text{inr}([a], [b + c])$ | $[a, b + c]$ |

- $H([a, b, c], ys) \iff ys=[a + b + c] \vee ys=[a, b + c] \vee ys=[a + b, c] \vee ys=[a, b, c]$   
 $H$  sends  $[a, b, c]$  to the sums of its four segmentations and nothing else
- $T^\circ F(H)h=H$   
cut once, solve the rest, put the pieces back together



### §15.2. Theory

$h : FB \rightarrow B$  a map,  $T : FA \rightarrow A$  an  $F$ -algebra,  $R : B \rightarrow B$ .  
 $H \triangleq (T)^\circ(h) : A \rightarrow B$ ,  $M \triangleq \frac{H}{\Xi} \text{est}(R)$  the problem to be solved,  $(\mu X : G(X))$  as in  $\triangleq \mu$ .

| <b>PreservesRecip(F) <math>\wedge</math> Map(h) <math>\wedge</math> MonoAlg(h, R<math>^\circ</math>) <math>\wedge</math> R<math>^\circ</math>R<math>^\circ \Xi</math>R<math>^\circ \implies (\mu X : \frac{T^\circ}{\Xi} P(F(X)h)\text{est}(R)) \Xi \frac{H}{\Xi} \text{est}(R)</math></b> (15.2b)<br>every answer the recursion returns is an optimal one                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• <math>\frac{T^\circ}{\Xi}</math> takes the input apart one step every way; <math>F(X)</math> solves each part by the recursion <math>X</math>; <math>h</math> assembles each candidate; <math>\text{est}(R)</math> keeps a best one</li> <li>• <math>\Xi M</math>: that never misses the optimum, though all candidates are never listed as <math>H</math> would</li> <li>• <math>h</math> monotonic on <math>R</math>: a better part never makes the whole worse</li> <li>• <math>\Xi</math>, not <math>=</math>: some optima may not be returned; that the recursion returns anything at all needs <math>T^\circ</math> to stop taking apart — dynamic programming theorem</li> </ul> |

$$T^\circ F(H)h=H \Rightarrow \frac{T^\circ}{\exists} P(F(\frac{H}{\exists} \text{est}(R))h)\text{est}(R) \sqsubseteq H \quad (15.2c)$$

taking the input apart every way  $T$  allows ( $\frac{T^\circ}{\exists}$ ), solving each part by  $M$  and keeping an optimum ( $P(F(M)h)$   
 $\text{est}(R)$ ) returns only what  $H$  returns

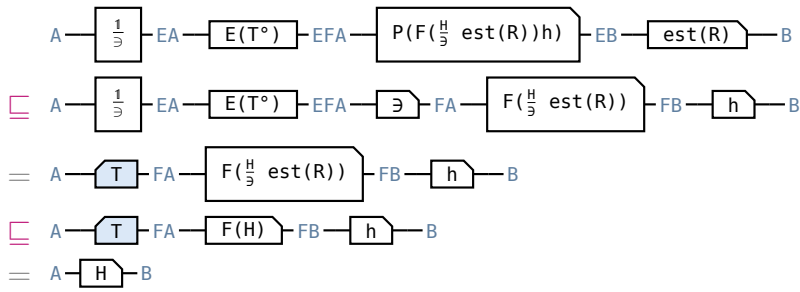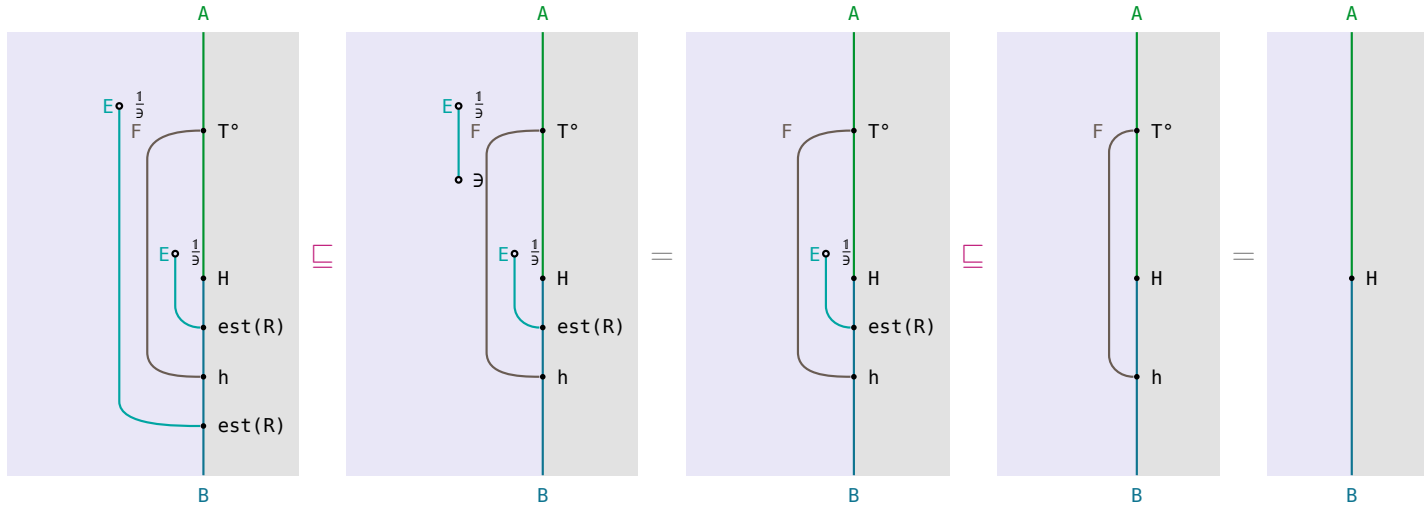

$$(9.4) P(X)\text{est}(R) \sqsubseteq \exists X \text{ at } X \triangleq F(\frac{H}{\exists} \text{est}(R))h \text{ — est-710}$$

$$\frac{T^\circ}{\exists} \exists = T^\circ \text{ — pow-laws}$$



$$M \triangleq \frac{H}{\exists} \text{est}(R) \sqsubseteq \frac{H}{\exists} \exists = H \text{ — est-up}$$

$$T^\circ F(H)h=H: H \triangleq (T)^\circ (h) \text{ and hylo-fix}$$

### §15.2.1. $\epsilon \setminus$ as a composite

$$\epsilon \setminus Z = \epsilon (\frac{Z^\circ}{\exists})^\circ \quad (15.2.1a)$$

$xs$  is related to  $c$  by  $\epsilon \setminus Z$  exactly when  $xs \sqsubseteq \Lambda(Z^\circ)(c)$ , the set of every  $a$  with  $a Z c$

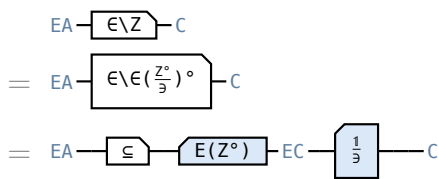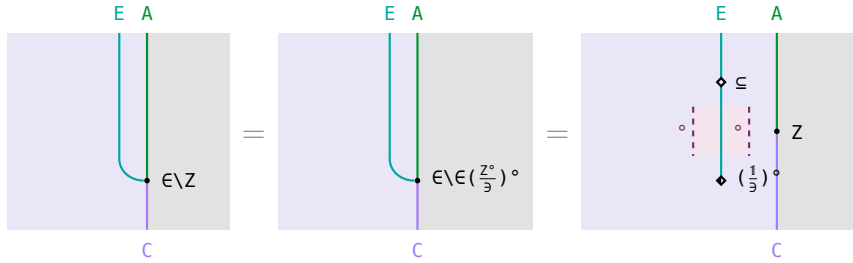

$$Z = \epsilon \Lambda(Z^\circ)^\circ: \text{the converse of } \Lambda(Z^\circ) \exists = Z^\circ \text{ — pow-laws}$$


$$X \setminus (Yf^\circ) = (X \setminus Y) f^\circ \text{ for a map } f \text{ (not a tabulated row), at the map } f \triangleq \Lambda(Z^\circ); \sqsubseteq \triangleq \epsilon \setminus \epsilon$$

$$\text{PreservesRecip}(F) \wedge \text{Map}(h) \wedge \text{MonoAlg}(h, R^\circ) \wedge R^\circ R^\circ \subseteq R^\circ \wedge T^\circ F(H)h = H \implies H^\circ \frac{T^\circ}{\exists} P(F(\frac{H}{\exists} \text{est}(R))h) \text{est}(R) \subseteq R^\circ \quad (15.2.1b)$$

for every  $b$  that  $H$  returns from an input, the step  $\frac{T^\circ}{\exists} P(F(M)h) \text{est}(R)$  returns from that input only  $b'$  with  $R$  relating  $b'$  to  $b$

$$\text{PreservesRecip}(F) \wedge T^\circ F(H)h = H \implies H^\circ \frac{T^\circ}{\exists} P(F(\frac{H}{\exists} \text{est}(R))h) \text{est}(R) \subseteq h^\circ F(H^\circ) F(\frac{H}{\exists} \text{est}(R)) h R^\circ$$


from an answer of  $H$ , the step's answer is reached by taking  $H$ 's parts back, rebuilding them by  $F(M)h$ , then one  $R^\circ$

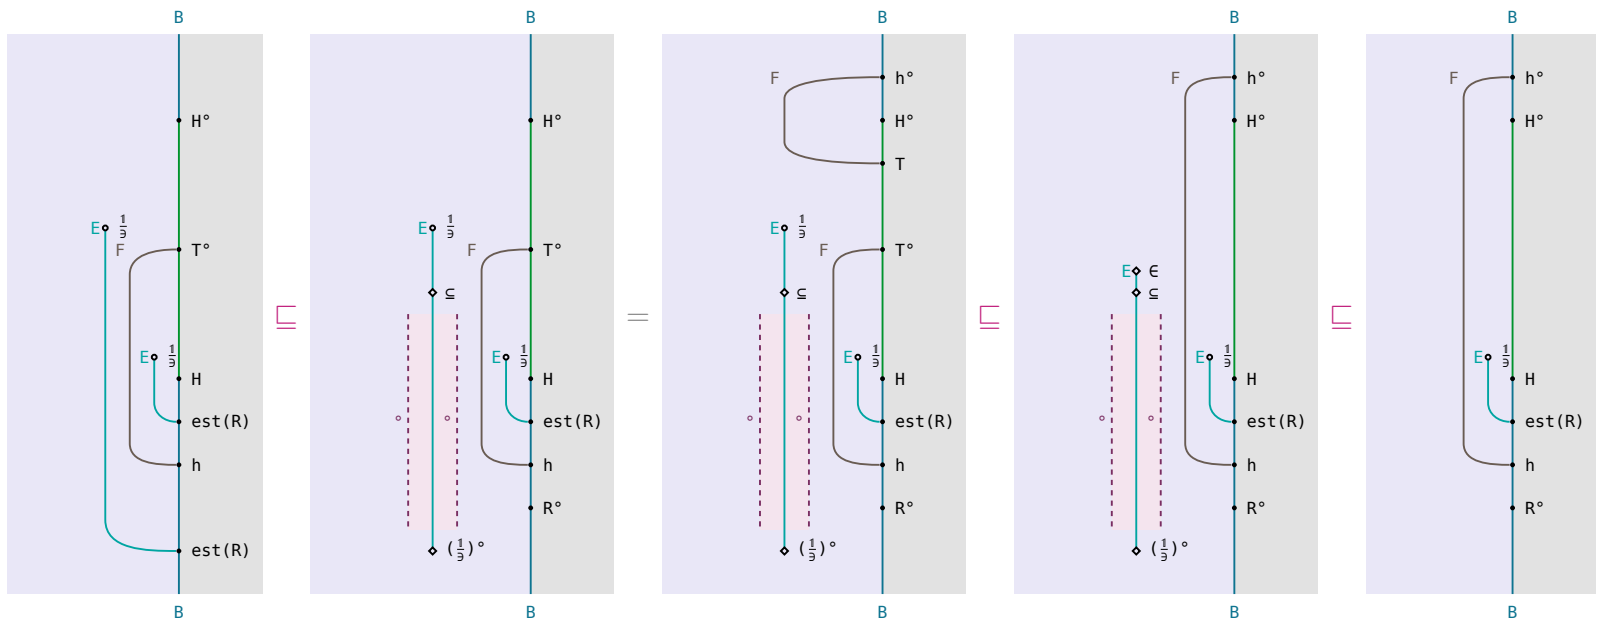

$$\begin{aligned} & B \xrightarrow{H} A \xrightarrow{\frac{1}{\exists}} EA \xrightarrow{E(T^\circ)} EFA \xrightarrow{P(F(\frac{H}{\exists} \text{est}(R))h)} EB \xrightarrow{\text{est}(R)} B \\ \sqsubseteq & B \xrightarrow{H} A \xrightarrow{\frac{1}{\exists}} EA \xrightarrow{E(T^\circ)} EFA \xrightarrow{\epsilon \setminus F(\frac{H}{\exists} \text{est}(R)) h R^\circ} B \quad (9.4) \quad P(X) \text{est}(R) \subseteq \epsilon \setminus (XR^\circ) \text{ at } X \triangleq F(\frac{H}{\exists} \text{est}(R))h \text{ — est-710} \\ = & B \xrightarrow{h} FB \xrightarrow{F(H^\circ)} FA \xrightarrow{T} A \xrightarrow{\frac{1}{\exists}} EA \xrightarrow{E(T^\circ)} EFA \xrightarrow{\epsilon \setminus F(\frac{H}{\exists} \text{est}(R)) h R^\circ} B \quad H^\circ = h^\circ F(H^\circ)T: H^\circ \triangleq (T)^\circ(h) \text{ and hylo-fix} \\ \sqsubseteq & B \xrightarrow{h} FB \xrightarrow{F(H^\circ)} FA \xrightarrow{\epsilon} EFA \xrightarrow{\epsilon \setminus F(\frac{H}{\exists} \text{est}(R)) h R^\circ} B \quad T \frac{T^\circ}{\exists} \subseteq \epsilon: \frac{T^\circ}{\exists} \text{ a map, } \frac{T^\circ}{\exists} \exists = T^\circ \text{ — pow-laws} \\ \sqsubseteq & B \xrightarrow{h} FB \xrightarrow{F(H^\circ)} FA \xrightarrow{F(\frac{H}{\exists} \text{est}(R))} FB \xrightarrow{h} R \xrightarrow{} B \quad \epsilon(\epsilon \setminus Y) \subseteq Y \text{ at } Y \triangleq F(M)h R^\circ \text{ — division} \end{aligned}$$

$$\text{Map}(h) \wedge \text{MonoAlg}(h, R^\circ) \wedge R^\circ R^\circ \subseteq R^\circ \implies h^\circ F(H^\circ) F(\frac{H}{\exists} \text{est}(R)) h R^\circ \subseteq R^\circ$$

rebuilding an answer of  $H$  from its parts, each replaced by  $M$ 's, and one  $R^\circ$  stays within  $R^\circ$

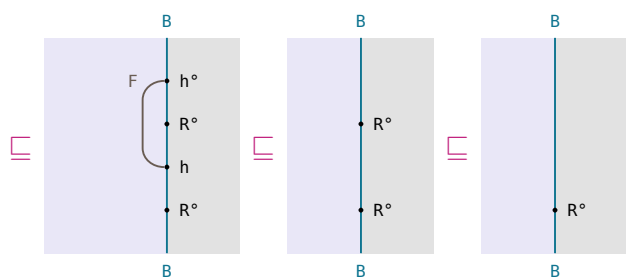


$$\begin{aligned} \sqsubseteq & B \xrightarrow{h} F(R^\circ) \xrightarrow{FB} h \xrightarrow{R} B \\ \sqsubseteq & B \xrightarrow{R} R \xrightarrow{} B \\ \sqsubseteq & B \xrightarrow{R} B \end{aligned}$$

$$\begin{aligned} H^\circ M \subseteq R^\circ: M \triangleq \frac{H}{\exists} \text{est}(R) & \text{ — est-up} \\ h^\circ F(R^\circ) h \subseteq R^\circ: h \text{ monotonic on } R^\circ & \\ R^\circ R^\circ \subseteq R^\circ: R \text{ transitive} & \end{aligned}$$

$$\text{PreservesRecip}(F) \wedge \text{Map}(h) \wedge \text{MonoAlg}(h, R^\circ) \wedge R^\circ R^\circ \sqsubseteq R^\circ \wedge \text{ThinCondition}(T, h, R, Q) \Rightarrow (\mu X : \frac{T^\circ}{\exists} \text{thin}(Q)P(F(X)h)\text{est}(R)) \sqsubseteq_{\frac{H}{\exists}} \text{est}(R) \quad (15.2.1c)$$

an optimum over everything  $H$  returns is reached by taking the input apart every way  $T$  allows, dropping the parts that can never win, solving each of the rest and keeping one optimum


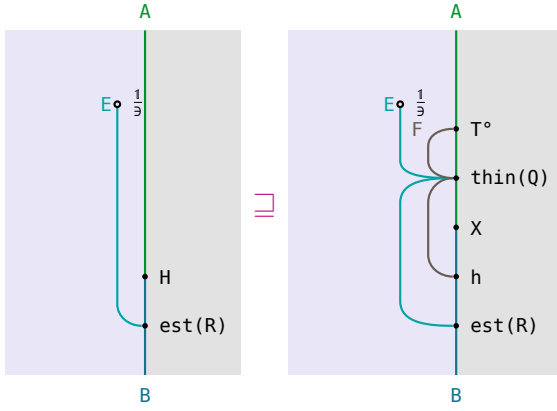


$$A \xrightarrow{\frac{1}{\exists}} EA \xrightarrow{E(H)} EB \xrightarrow{\text{est}(R)} B$$

the problem to be solved,  $H \triangleq (T)^\circ (h) \triangleq H$

$$A \xrightarrow{\frac{1}{\exists}} EA \xrightarrow{E(T^\circ)} \text{thin}(Q) \xrightarrow{EFA} P(F(X)h) \xrightarrow{EB} \text{est}(R) \xrightarrow{} B$$

$\sqsubseteq$   $h$  monotonic on  $R$  and  $Q$  a preorder with  $QF(H)h \sqsubseteq F(H)hR$ ;  $\text{thin}(Q)$  as in thin-laws. Theorem 9.1 is this with the thinning step dropped —  $1 \sqsubseteq \text{thin}(Q)$ . Knaster–Tarski leaves (9.1): the body at  $M$  is  $\sqsubseteq M$ ;  $M = Hn(H^\circ \setminus R^\circ)$  splits that into (9.2) and (9.3) below — est-up. The fixed point is unique and entire when  $T^\circ$  followed by  $F$ 's membership relation is inductive,  $\frac{T^\circ}{\exists}$  finite and non-empty,  $R$  connected

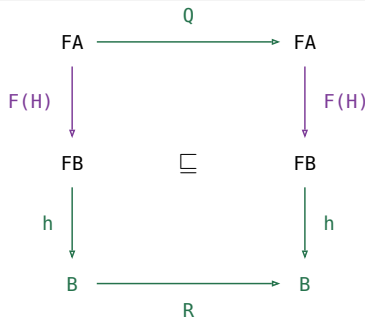


$QF(H)h \sqsubseteq F(H)hR$ : every result of thinning by  $Q$ , solving the parts by  $F(H)$  and assembling by  $h$  is reached by  $R$  from a result of solving by  $F(H)$  and assembling by  $h$  without  $Q$

$T^\circ F(H)h = H$ : taking the input apart once by  $T^\circ$ , solving the parts by  $F(H)$  and assembling by  $h$  returns exactly what  $H$  returns

$$T^\circ F(H)h = H \Rightarrow \frac{T^\circ}{\exists} \text{thin}(Q)P(F(\frac{H}{\exists} \text{est}(R))h)\text{est}(R) \sqsubseteq H \quad (15.2.1d)$$

taking the input apart every way  $T$  allows ( $\frac{T^\circ}{\exists}$ ), dropping the parts  $\text{thin}(Q)$  rejects, solving each rest by  $M$  and keeping an optimum returns only what  $H$  returns

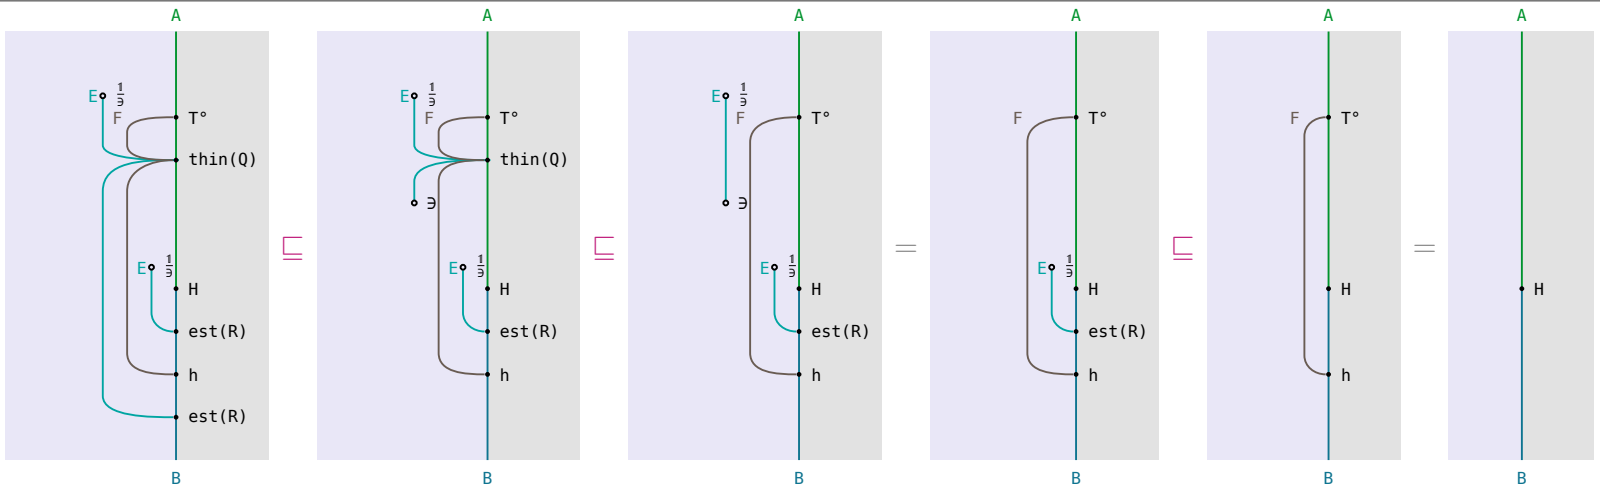

$$A \xrightarrow{\frac{1}{\exists}} EA \xrightarrow{E(T^\circ)} \text{thin}(Q) \xrightarrow{EFA} P(F(\frac{H}{\exists} \text{est}(R))h) \xrightarrow{EB} \text{est}(R) \xrightarrow{} B \quad (9.2)$$

$$\sqsubseteq A \xrightarrow{\frac{1}{\exists}} EA \xrightarrow{E(T^\circ)} \text{thin}(Q) \xrightarrow{EFA} \exists \text{FA} \xrightarrow{F(\frac{H}{\exists} \text{est}(R))} FB \xrightarrow{h} B \quad (9.4) P(X)\text{est}(R) \sqsubseteq \exists X \text{ at } X \triangleq F(\frac{H}{\exists} \text{est}(R))h \text{ — est-710}$$

$$\sqsubseteq A \xrightarrow{\frac{1}{\exists}} EA \xrightarrow{E(T^\circ)} EFA \xrightarrow{\exists} \text{FA} \xrightarrow{F(\frac{H}{\exists} \text{est}(R))} FB \xrightarrow{h} B$$

$\text{thin}(Q)\exists \exists$  — thin-laws

$$= A \xrightarrow{T} \text{FA} \xrightarrow{F(\frac{H}{\exists} \text{est}(R))} FB \xrightarrow{h} B$$

$\frac{T^\circ}{\exists} \exists = T^\circ$  — pow-laws

$$\sqsubseteq A \xrightarrow{T} \text{FA} \xrightarrow{F(H)} FB \xrightarrow{h} B$$

$M \sqsubseteq_{\frac{H}{\exists}} \exists = H$  — est-up

$$= A \xrightarrow{H} B$$

$T^\circ F(H)h = H$ :  $H \triangleq (T)^\circ (h)$  and hylo-fix


$$\text{PreservesRecip}(F) \wedge \text{Map}(h) \wedge \text{MonoAlg}(h, R^\circ) \wedge R^\circ R^\circ \sqsubseteq R^\circ \wedge T^\circ F(H)h=H \wedge QF(H)h \sqsubseteq F(H)hR \Rightarrow H^\circ \frac{T^\circ}{\exists} \quad (15.2.1e)$$

$$\text{thin}(Q)P(F(\frac{H}{\exists} \text{est}(R))h)\text{est}(R) \sqsubseteq R^\circ$$

$H^\circ$  followed by the body at  $M$  is  $\sqsubseteq R^\circ$ : an answer of the body is never worse than an answer of  $H$  to the same input

$$\text{PreservesRecip}(F) \wedge T^\circ F(H)h=H \Rightarrow H^\circ \frac{T^\circ}{\exists} \text{thin}(Q)P(F(\frac{H}{\exists} \text{est}(R))h)\text{est}(R) \sqsubseteq h^\circ F(H^\circ)Q^\circ \in (\epsilon \setminus F(\frac{H}{\exists} \text{est}(R))hR^\circ)$$

from an answer of  $H$ , the thinned step's answer is reached through  $H$ 's parts, a  $Q^\circ$  step to a candidate, and that candidate's answer


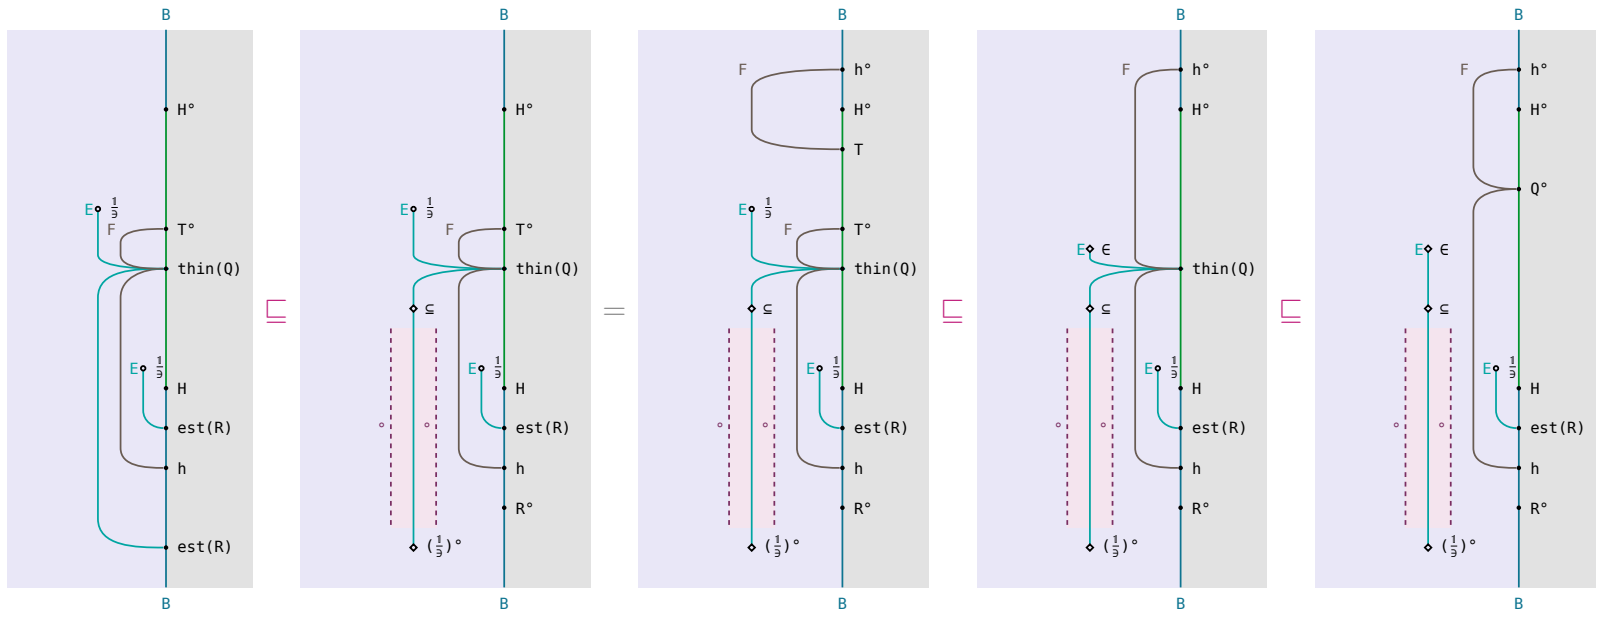


$$\begin{aligned} & B \xrightarrow{H} A \xrightarrow{\frac{1}{\exists}} EA \xrightarrow{E(T^\circ)} \text{thin}(Q) \xrightarrow{EFA} P(F(\frac{H}{\exists} \text{est}(R))h) \xrightarrow{EB} \text{est}(R) \xrightarrow{} B \\ \sqsubseteq & B \xrightarrow{H} A \xrightarrow{\frac{1}{\exists}} EA \xrightarrow{E(T^\circ)} \text{thin}(Q) \xrightarrow{EFA} \epsilon \setminus F(\frac{H}{\exists} \text{est}(R))hR^\circ \xrightarrow{} B \quad (9.4) \quad P(X)\text{est}(R) \sqsubseteq \epsilon \setminus (XR^\circ) \text{ at } X \triangleq F(\frac{H}{\exists} \text{est}(R))h \text{ — est-710} \\ = & B \xrightarrow{h} FB \xrightarrow{F(H^\circ)} FA \xrightarrow{T} A \xrightarrow{\frac{1}{\exists}} EA \xrightarrow{E(T^\circ)} \text{thin}(Q) \xrightarrow{EFA} \epsilon \setminus F(\frac{H}{\exists} \text{est}(R))hR^\circ \xrightarrow{} B \\ & H^\circ = h^\circ F(H^\circ)T, \text{ the converse of } T^\circ F(H)h=H \text{ — hylo-fix} \\ \sqsubseteq & B \xrightarrow{h} FB \xrightarrow{F(H^\circ)} FA \xrightarrow{\epsilon} \text{thin}(Q) \xrightarrow{EFA} \epsilon \setminus F(\frac{H}{\exists} \text{est}(R))hR^\circ \xrightarrow{} B \quad T \frac{T^\circ}{\exists} \sqsubseteq \epsilon, \text{ not a tabulated row: } \frac{T^\circ}{\exists} \ni T^\circ \text{ conversed} \\ \sqsubseteq & B \xrightarrow{h} FB \xrightarrow{F(H^\circ)} Q \xrightarrow{FA} \epsilon \xrightarrow{EFA} \epsilon \setminus F(\frac{H}{\exists} \text{est}(R))hR^\circ \xrightarrow{} B \end{aligned}$$

$\epsilon \text{thin}(Q) \sqsubseteq Q^\circ \epsilon$ : a dropped candidate is  $Q$ -below a kept one — thin-laws

$$\text{PreservesRecip}(F) \wedge QF(H)h \sqsubseteq F(H)hR \Rightarrow h^\circ F(H^\circ)Q^\circ \in (\epsilon \setminus F(\frac{H}{3} \text{ est}(R))hR^\circ) \sqsubseteq R^\circ h^\circ F(H^\circ)F(\frac{H}{3} \text{ est}(R))hR^\circ$$

the hypothesis on  $Q$  turns the  $Q^\circ$  step into an  $R^\circ$  step in front of rebuilding by  $F(M)h$

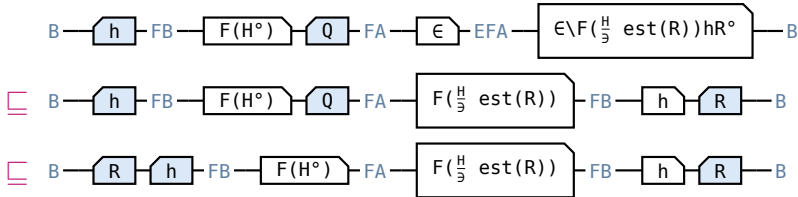
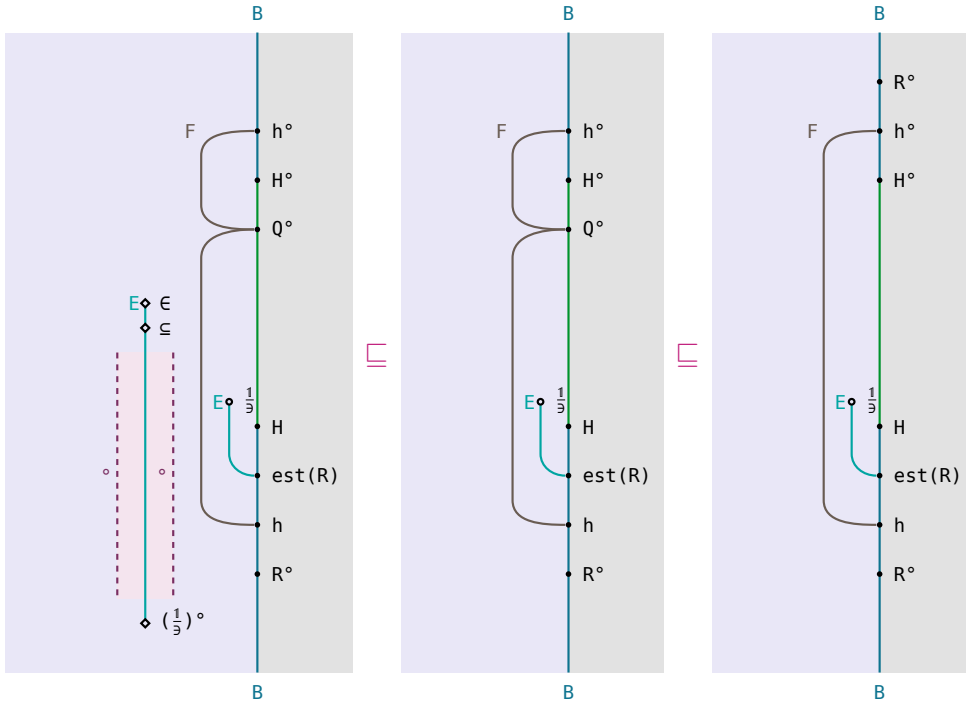


$\epsilon(\epsilon \setminus Y) \sqsubseteq Y$ , not a tabulated row: division cancels

$QF(H)h \sqsubseteq F(H)hR$  conversed — the hypothesis on  $Q$

$$\text{Map}(h) \wedge \text{MonoAlg}(h, R^\circ) \wedge R^\circ R^\circ \sqsubseteq R^\circ \Rightarrow R^\circ h^\circ F(H^\circ)F(\frac{H}{3} \text{ est}(R))hR^\circ \sqsubseteq R^\circ$$

rebuilding from parts replaced by  $M$ 's, between two  $R^\circ$  steps, stays within  $R^\circ$

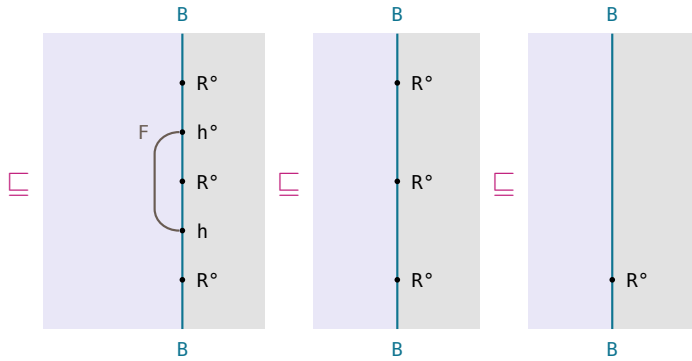


$H^\circ M \sqsubseteq R^\circ$  under  $F$  — est-up

$h^\circ F(R^\circ)h \sqsubseteq R^\circ$ :  $h$  monotonic on  $R$ , shunted — the hypothesis on  $h$

$R$  transitive, twice

$$V_2 \quad V_1^\circ = \emptyset \implies \frac{[V_1, V_2]^\circ}{\exists} \text{thin}(Q_1+Q_2)P([U_1, U_2])\text{est}(R) = \text{ran}(V_1) \frac{V_1^\circ}{\exists} \text{thin}(Q_1)P(U_1)\text{est}(R) \cup \text{ran}(V_2) \frac{V_2^\circ}{\exists} \text{thin}(Q_2)P(U_2)\text{est}(R) \quad (15.2.1g)$$


when  $V_1$  and  $V_2$  have disjoint ranges, the body over  $[V_1, V_2]$  runs the  $V_1$  problem on inputs  $V_1$  reaches and the  $V_2$  problem on inputs  $V_2$  reaches

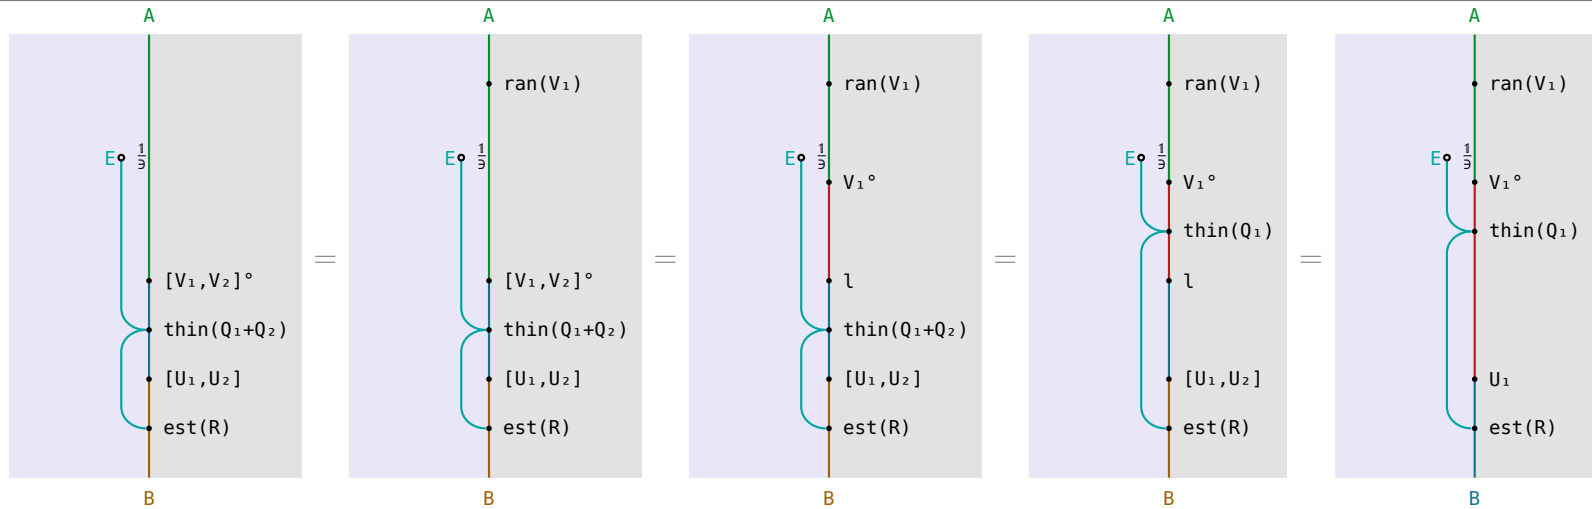

$$\begin{aligned} & A \xrightarrow{\frac{1}{\exists}} EA \xrightarrow{E([V_1, V_2]^\circ)} \text{thin}(Q_1+Q_2) \xrightarrow{E(\alpha+\beta)} P([U_1, U_2]) \xrightarrow{EB} \text{est}(R) \xrightarrow{} B \\ &= A \xrightarrow{\text{ran}(V_1)} \frac{1}{\exists} EA \xrightarrow{E([V_1, V_2]^\circ)} \text{thin}(Q_1+Q_2) \xrightarrow{E(\alpha+\beta)} P([U_1, U_2]) \xrightarrow{EB} \text{est}(R) \xrightarrow{} B \\ &\quad \text{off } \text{ran } V_1 \cup \text{ran } V_2 \text{ the set is empty and } \text{est}(R) \text{ of it is nothing; not a tabulated row — the } V_2 \text{ branch is the same} \\ &= A \xrightarrow{\text{ran}(V_1)} \frac{1}{\exists} EA \xrightarrow{E(V_1^\circ)} E\alpha \xrightarrow{P(l)} \text{thin}(Q_1+Q_2) \xrightarrow{E(\alpha+\beta)} P([U_1, U_2]) \xrightarrow{EB} \text{est}(R) \xrightarrow{} B \\ &\quad \text{Exercise 9.5: on } \text{ran } V_1, \frac{[V_1, V_2]^\circ}{\exists} = \frac{V_1^\circ}{\exists} P(\text{inl}), \text{ as } V_1, V_2 \text{ have disjoint ranges} \\ &= A \xrightarrow{\text{ran}(V_1)} \frac{1}{\exists} EA \xrightarrow{E(V_1^\circ)} \text{thin}(Q_1) \xrightarrow{E\alpha} P(l) \xrightarrow{E(\alpha+\beta)} P([U_1, U_2]) \xrightarrow{EB} \text{est}(R) \xrightarrow{} B \\ &\quad \text{Exercise 9.5: } P(\text{inl})\text{thin}(Q_1+Q_2) = \text{thin}(Q_1)P(\text{inl}) \\ &= A \xrightarrow{\text{ran}(V_1)} \frac{1}{\exists} EA \xrightarrow{E(V_1^\circ)} \text{thin}(Q_1) \xrightarrow{E\alpha} P(U_1) \xrightarrow{EB} \text{est}(R) \xrightarrow{} B \\ &\quad P \text{ a relator and } \text{inl}[U_1, U_2] = U_1 \end{aligned}$$

$$\text{Map}(\text{cost}) \wedge R = \text{cost} \leq \text{cost}^\circ \wedge h \text{cost} = F(\text{cost})k \wedge F(\leq)k \leq k \implies \text{MonoAlg}(h, R) \quad (15.2.1h)$$

if  $R$  compares two values by comparing their **costs** under  $\leq$ , and  $h$  then **cost** equals  $F(\text{cost})$  then a  $k$  monotonic on  $\leq$ , then  $h$  is monotonic on  $R$

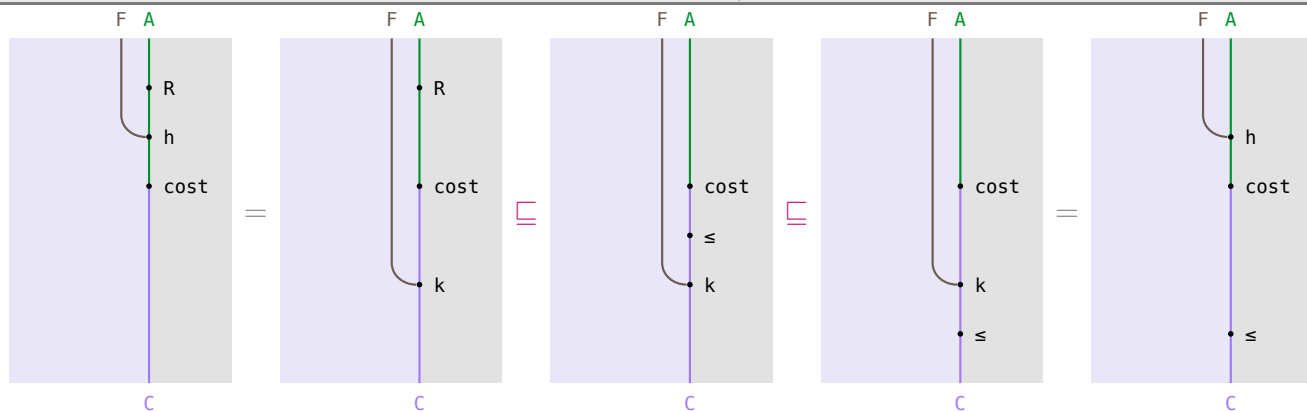

$$\begin{aligned} & FA \xrightarrow{F(R)} h \xrightarrow{} A \xrightarrow{\text{cost}} C \\ &= FA \xrightarrow{F(R)} F(\text{cost}) \xrightarrow{FC} k \xrightarrow{} C \\ &\sqsubseteq FA \xrightarrow{F(\text{cost})} F(\leq) \xrightarrow{FC} k \xrightarrow{} C \\ &\sqsubseteq FA \xrightarrow{F(\text{cost})} FC \xrightarrow{k} \leq \xrightarrow{} C \\ &= FA \xrightarrow{h} A \xrightarrow{\text{cost}} \leq \xrightarrow{} C \end{aligned}$$

$F(R)h \sqsubseteq hR$  iff  $F(R)h \text{ cost} \sqsubseteq h \text{ cost} \leq$ : definition of  $R$  and shunting  
 assumption  $h \text{ cost} = F(\text{cost})k$   
 $R \text{ cost} \sqsubseteq \text{cost} \leq$ , as  $\text{cost}$  is a map; functors  
 assumption  $F(\leq)k \leq k$ :  $k$  monotonic on  $\leq$   
 assumption  $h \text{ cost} = F(\text{cost})k$

(15.2.1i)


| the condition                                                                                                                                                                                                              | how it is discharged                                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| $F(R)h \sqsubseteq hR$<br>Proposition 9.2, $R \triangleq \text{cost} \leq \text{cost}^\circ$ , $h \text{ cost} = F(\text{cost})k$ , $F(\leq)k \leq k$                                                                      | monotonicity when the cost is itself a fold with a step $k$<br>monotonic on $\leq$   |
| $F(Rn(H^\circ H))h \sqsubseteq hR$<br>Proposition 9.3, $R \triangleq \text{cost} \leq \text{cost}^\circ$ , $h \text{ cost} = F(\langle \text{cost}, H^\circ \rangle)k$ ,<br>$F(\leq \times 1)k \leq k$ , $H^\circ$ simple; | monotonicity <b>in context</b> : $k$ may also read the input the part was built from |
| $QF(H)h \sqsubseteq F(H)hR$ at $Q \triangleq F(U, V)$<br>Proposition 9.4, $U, V$ preorders, $F(U, R)h \sqsubseteq hR$ , $VH \sqsubseteq HR$                                                                                | both conditions at once, split along the two arguments of a bifunctor                |

$$\text{Map}(\text{cost}) \wedge \text{Simple}(S) \wedge R = \text{cost} \leq \text{cost}^\circ \wedge \text{hcost} = F(\langle \text{cost}, S \rangle)k \wedge F(\leq \times 1)k \leq k \implies F(RnSS^\circ)h \leq hR \quad (15.2.1j)$$

improving each part by  $R$  within its  $S$ -context, then assembling by  $h$ , is below  $hR$

$$\text{Map}(\text{cost}) \wedge R = \text{cost} \leq \text{cost}^\circ \wedge \text{hcost} = F(\langle \text{cost}, S \rangle)k \implies F(RnSS^\circ)h \leq F(\langle \text{cost} \leq, S \rangle \langle \text{cost}, S \rangle^\circ) F(\langle \text{cost}, S \rangle)k \text{cost}^\circ$$

improving the parts within their  $S$ -context and assembling by  $h$  is below the same improvement on the  $(\text{cost}, \text{context})$  bundles, assembled by  $k$

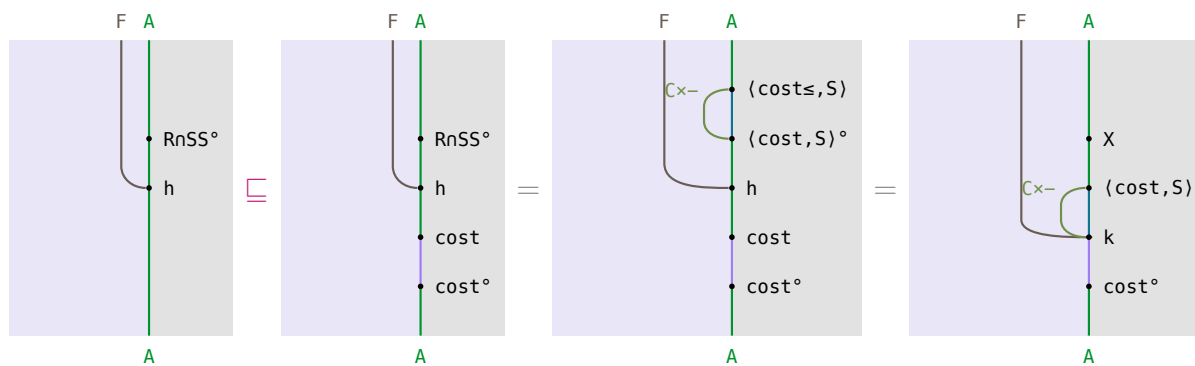

$$\begin{aligned} & FA \rightarrow F(RnSS^\circ) \rightarrow h \rightarrow A \\ & \sqsubseteq FA \rightarrow F(RnSS^\circ) \rightarrow h \rightarrow A \rightarrow \text{cost} \rightarrow C \rightarrow \text{cost} \rightarrow A \\ & = FA \rightarrow F(\langle \text{cost} \leq, S \rangle \langle \text{cost}, S \rangle^\circ) \rightarrow h \rightarrow A \rightarrow \text{cost} \rightarrow C \rightarrow \text{cost} \rightarrow A \\ & = FA \rightarrow F(X) \rightarrow F(\langle \text{cost}, S \rangle) \rightarrow F(C \times B) \rightarrow k \rightarrow C \rightarrow \text{cost} \rightarrow A \end{aligned}$$


shunting:  $\text{cost} \vdash \text{a map}$ , so  $1 \leq \text{cost} \text{ cost}^\circ$  — triple-chains

products:  $RnSS^\circ = \langle \text{cost} \leq, S \rangle \langle \text{cost}, S \rangle^\circ$  at  $R = \text{cost} \leq \text{cost}^\circ$  —  $\triangleq \times$

assumption on  $\text{cost}$ :  $h \text{ cost} = F(\langle \text{cost}, S \rangle)k$

$$\text{Map}(\text{cost}) \wedge \text{Simple}(S) \wedge R = \text{cost} \leq \text{cost}^\circ \wedge \text{hcost} = F(\langle \text{cost}, S \rangle)k \wedge F(\leq \times 1)k \leq k \implies F(\langle \text{cost} \leq, S \rangle \langle \text{cost}, S \rangle^\circ) F(\langle \text{cost}, S \rangle)k \text{cost}^\circ \leq hR$$

the improvement on the bundles, assembled by  $k$ , is below assembling by  $h$  and improving by  $R$

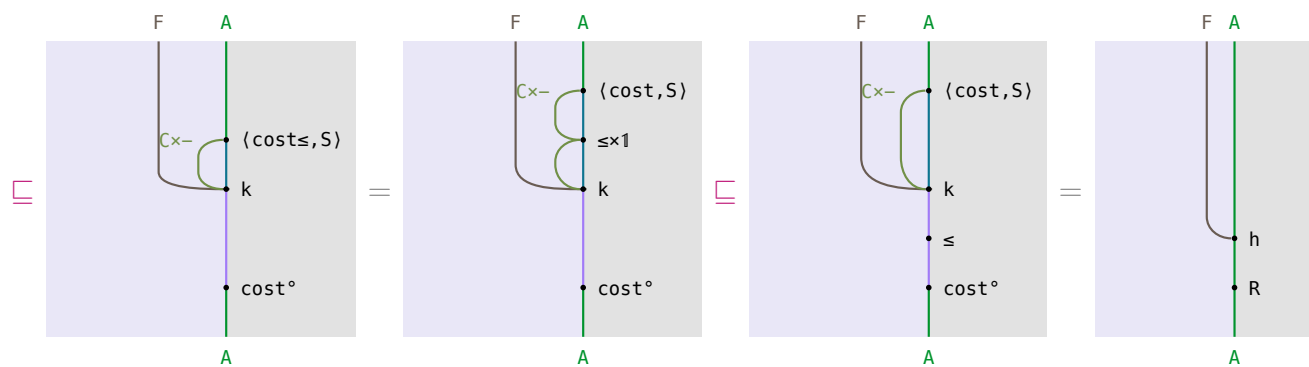

$$\begin{aligned} & \sqsubseteq FA \rightarrow F(\langle \text{cost} \leq, S \rangle) \rightarrow F(C \times B) \rightarrow k \rightarrow C \rightarrow \text{cost} \rightarrow A \\ & = FA \rightarrow F(\langle \text{cost}, S \rangle) \rightarrow F(\leq \times 1) \rightarrow F(C \times B) \rightarrow k \rightarrow C \rightarrow \text{cost} \rightarrow A \\ & \sqsubseteq FA \rightarrow F(\langle \text{cost}, S \rangle) \rightarrow F(C \times B) \rightarrow k \rightarrow \leq \rightarrow C \rightarrow \text{cost} \rightarrow A \\ & = FA \rightarrow h \rightarrow R \rightarrow A \end{aligned}$$

$S$  simple, so  $\langle \text{cost}, S \rangle$  simple:  $\langle \text{cost}, S \rangle^\circ \langle \text{cost}, S \rangle \leq 1$


products; functors:  $\langle \text{cost} \leq, S \rangle = \langle \text{cost}, S \rangle (\leq \times 1)$  — bdm-prod-laws, relator-laws

assumption on  $k$ :  $F(\leq \times 1)k \leq k$

assumption on  $\text{cost}$  read backwards, then  $R = \text{cost} \leq \text{cost}^\circ$

$$G(U, R)h \leq hR \wedge \forall H \leq HR \implies G(U, V)G(1, H)h \leq G(1, H)hR \quad (15.2.1k)$$

thinning the parts by  $U$  in the first argument and by  $V$  in the second  $(G(U, V))$ , then solving by  $H$  and assembling by  $h$ , gives only what solving and assembling and then improving by  $R$  gives  $(G(1, H)hR)$

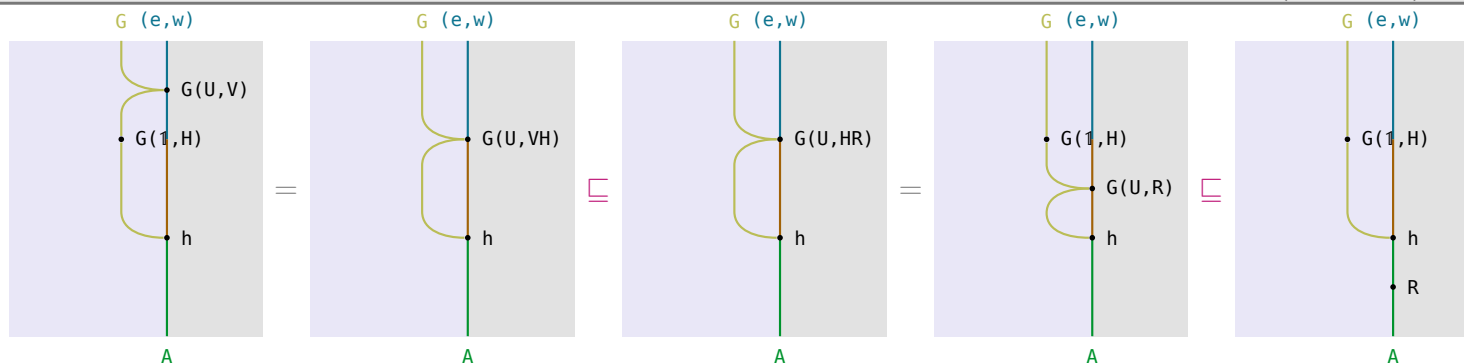

$$\begin{aligned} & G e w \rightarrow G(U, V) \rightarrow G(1, H) \rightarrow G e A \rightarrow h \rightarrow A \\ & = G e w \rightarrow G(U, V) \rightarrow G e A \rightarrow h \rightarrow A \\ & \sqsubseteq G e w \rightarrow G(U, H) \rightarrow G e A \rightarrow h \rightarrow A \\ & = G e w \rightarrow G(1, H) \rightarrow G(U, R) \rightarrow G e A \rightarrow h \rightarrow A \\ & \sqsubseteq G e w \rightarrow G(1, H) \rightarrow G e A \rightarrow h \rightarrow R \rightarrow A \end{aligned}$$

taking  $Q \triangleq G(U, V)$ ; bifunctors:  $G(U, V)G(1, H) = G(U, V)H$  — relator-laws

assumption on  $V$ :  $VH \leq HR$

bifunctors:  $G(U, H) = G(1, H)G(U, R)$  — relator-laws

assumption on  $h$ :  $G(U, R)h \leq hR$

### §15.3. The string edit problem

(15.3a)

- $(\exists a. o = \text{cpy}(a)) \vee (\exists a. o = \text{del}(a)) \vee (\exists a. o = \text{ins}(a))$   
an edit operation copies, deletes or inserts one character
- $\text{FX} = 1 + (0p \times X)$   
 $F(0p, X)$  is the empty sequence or one operation paired with an  $X$
- $\text{edit} = ([\text{base}, \text{step}])^\circ$   
 $\text{edit}$  is the fold of  $[\text{base}, \text{step}]$  over an edit sequence, returning the two strings it reconstitutes
- $\text{length} = ([\text{zero}, \pi_2 \text{ succ}])^\circ$   
the fold of  $[\text{zero}, \pi_2 \text{ succ}]$  counts the operations of a sequence
- $R = \text{length} \leq \text{length}^\circ$   
 $R$  relates  $\text{es}$  to  $\text{fs}$  when  $\text{es}$  is no longer than  $\text{fs}$
- $V = \text{suffix}^\circ \times \text{suffix}^\circ$   
 $V$  relates two pairs of strings when each string of the first is a suffix of the matching string of the second
- $Q(\text{inl}(u), \text{inl}(u))$   
 $Q$  is the identity on the **base** summand
- $Q(\text{inr}(p), \text{inr}(q)) \iff V(\pi_2(p), \pi_2(q))$   
on the **step** summand  $Q$  compares any two operations ( $U \triangleq T$ ) and the two pairs of strings by  $V$
- $\text{empty}(p, q) \iff p = q \wedge p = ([], [])$   
 $\text{empty}$  is the coreflexive holding only at the pair of two empty strings
- $q \in \text{unstep}(p) \implies \text{step}(\text{inr}(q)) = p$   
every decomposition  $\text{unstep}$  returns is sent back to its input by  $\text{step}$

(15.3b)

| <b>x</b>                     | <b><math>\alpha(x)</math></b> |
|------------------------------|-------------------------------|
| $\text{inl}(u)$              | $\text{wrap}(u)$              |
| $\text{inr}((o, \text{es}))$ | $\text{cons}(o, \text{es})$   |

(15.3c)

| <b>x</b>                                | <b><math>[\text{base}, \text{step}](x)</math></b> |
|-----------------------------------------|---------------------------------------------------|
| $\text{inl}(u)$                         | $([], [])$                                        |
| $\text{inr}((\text{cpy}(a), (xs, ys)))$ | $(\text{cons}(a, xs), \text{cons}(a, ys))$        |
| $\text{inr}((\text{del}(a), (xs, ys)))$ | $(\text{cons}(a, xs), ys)$                        |
| $\text{inr}((\text{ins}(a), (xs, ys)))$ | $(xs, \text{cons}(a, ys))$                        |


(15.3d)

| <b>p</b>                                   | <b><math>\text{unstep}(p)</math></b>                                                                                                                                    |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $([], [])$                                 | $[]$                                                                                                                                                                    |
| $(\text{cons}(a, xs), [])$                 | $[(\text{del}(a), (xs, []))]$                                                                                                                                           |
| $([], \text{cons}(b, ys))$                 | $[(\text{ins}(b), ([], ys))]$                                                                                                                                           |
| $(\text{cons}(a, xs), \text{cons}(b, ys))$ | if $a = b$ then $[(\text{cpy } a, xs, ys)]$ else $[(\text{del } a, xs, \text{ConsList.cons } b \text{ } ys), (\text{ins } b, \text{ConsList.cons } a \text{ } xs, ys)]$ |


$$(\mu X : \frac{[base, step]^{\circ}}{3} \text{thin}(Q)P(F(X)[nil, cons])est(R)) \sqsubseteq \frac{edit^{\circ}}{3} est(R), \text{mle} = (\text{empty} \rightarrow nil, \text{unstep} \text{list}((1 \times \text{mle})cons) \text{minlist}(R)) \quad (15.3e)$$

a shortest edit sequence from which both strings can be reconstituted is one pass over the two of them, each step copying, deleting or inserting one character and the best sequence for what is left taken from the entries already computed


**circuit**

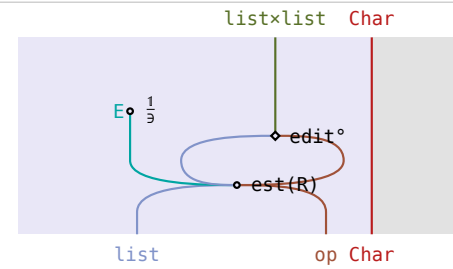**Hinze–Marsden**


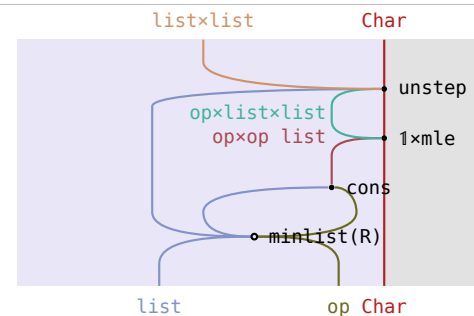
at  $Q \triangleq 1 + (U \times V)$ . Monotonicity  $F(R) \alpha \sqsubseteq \alpha R$  is Proposition 9.2 at  $\text{length} \triangleq ([zero, \pi_2 \text{succ}])$  with  $\text{succ}$  monotonic on  $\leq$ , so  $\text{cons}$  is monotonic on  $R$ . The thinning condition  $QF(1, edit^{\circ}) \alpha \sqsubseteq F(1, edit^{\circ}) \alpha R$  over  $F(0p, [Char] \times [Char])$  is Proposition 9.4 at  $U \triangleq T - F(T, R) \alpha \sqsubseteq \alpha R$ , left as an exercise, so any two operations may be compared — and  $V \triangleq \text{suffix}^{\circ} \times \text{suffix}^{\circ}$ , —  $\text{edit}(1 \times \text{suffix}) \sqsubseteq R^{\circ} \text{edit}$ ,  $\text{edit}(\text{suffix} \times 1) \sqsubseteq R^{\circ} \text{edit}$ .  $\text{suffix} = \text{tail}^*$  and  $BA \sqsubseteq CB \Rightarrow BA^* \sqsubseteq C^*B$  cut those to one step each: drop the operation that produced the head, or weaken its  $\text{cpy}$  to a  $\text{del}$ , never lengthening the sequence

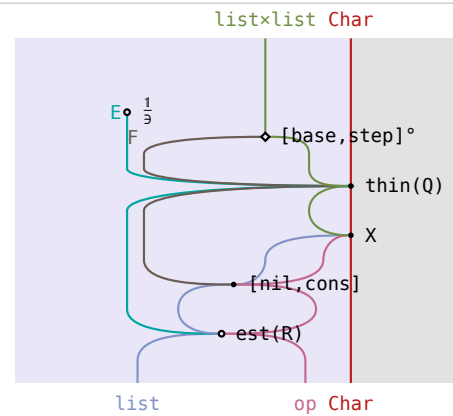

$\sqsubseteq$  Proposition 9.1:  $\text{base}$  and  $\text{step}$  have disjoint ranges, so the fixed point splits into one branch per summand —  $\text{empty}$ , the coreflexive on  $(xs, ys)$  with both lists empty, is where  $\text{base}$  returns




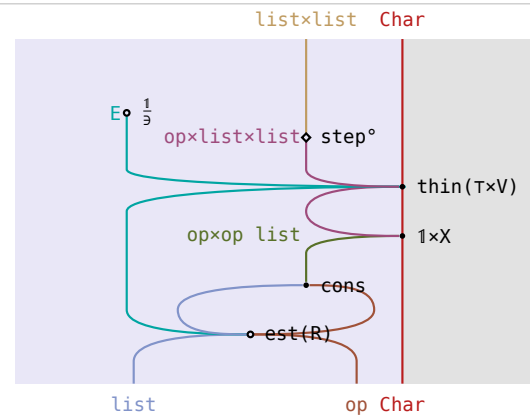


$\sqsubseteq$   $\text{unstep}$  implements  $\frac{step^{\circ}}{3} \text{thin}(U \times V)$  — at most two decompositions survive, a copy beating a delete or an insert wherever it is available — and  $\text{minlist}(R)$  implements  $\text{est}(R)$ . The same subproblem is solved many times over, so the running time is exponential in the two lengths



$$F(R)[nil, cons] \sqsubseteq [nil, cons]R \quad (15.3f)$$

comparing the tails by  $R$  and then putting an operation in front ( $F(R) \alpha$ ) relates only sequences that  $R$  also relates once the operation is in front ( $\alpha R$ )

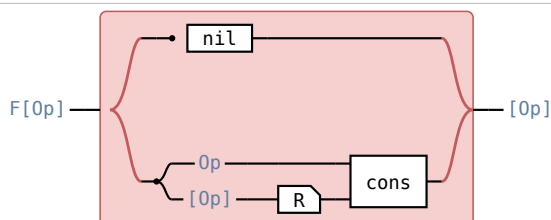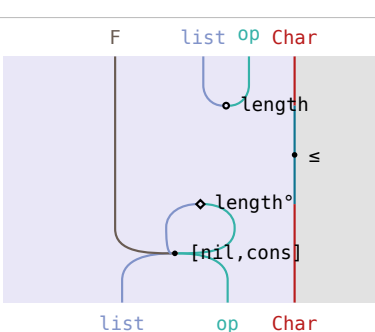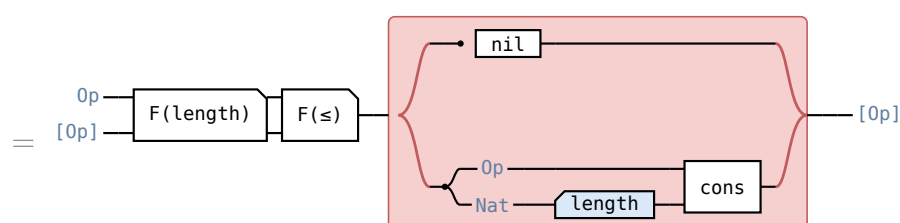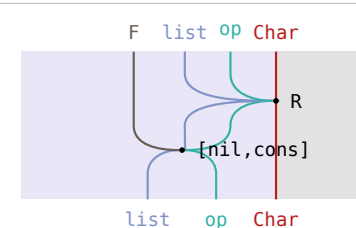**circuit**

**Hinze–Marsden**


$R \triangleq \text{length} \leq \text{length}^{\circ} \triangleq \text{edit}$ ;  $F$  preserves composition

| circuit                                                                                                                                                                     | Hinze–Marsden |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| <p><math>\text{length}</math> is a map, so entire: <math>1 \sqsubseteq \text{length } \text{length}^\circ</math></p>                                                        |               |
| <p><math>\alpha \text{ length} = F(\text{length})[\text{zero}, \pi_2 \text{ succ}]: \text{length} \triangleq ([\text{zero}, \pi_2 \text{ succ}]) \text{ — edit}</math></p>  |               |
| <p><math>\text{length}</math> is a map, so simple, and <math>F</math> is monotonic: <math>F(\text{length}^\circ)F(\text{length}) \sqsubseteq F(1) = 1</math></p>            |               |
| <p><math>\text{succ}</math> is monotonic on <math>\leq</math>: <math>F(\leq)[\text{zero}, \pi_2 \text{ succ}] \sqsubseteq [\text{zero}, \pi_2 \text{ succ}] \leq</math></p> |               |
| <p><math>F(\text{length})[\text{zero}, \pi_2 \text{ succ}] = \alpha \text{ length}</math> again</p>                                                                         |               |
| <p><math>R \triangleq \text{length} \leq \text{length}^\circ \text{ — edit}</math></p>                                                                                      |               |





$$QF(\text{edit}^\circ)[\text{nil}, \text{cons}] \sqsubseteq F(\text{edit}^\circ)[\text{nil}, \text{cons}]R$$

(15.3g)



every edit sequence built from a decomposition  $Q$  puts above a given one — any operation, each string lengthened at the front — is at least as long as one built from the given one

circuit



Hinze–Marsden

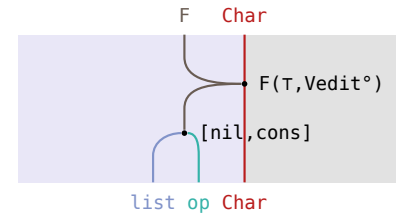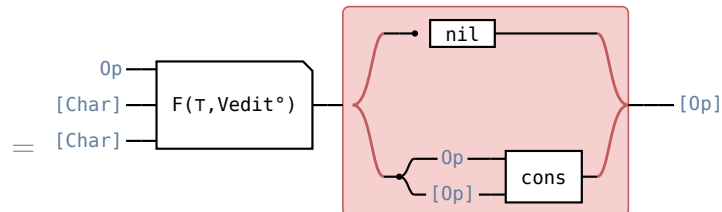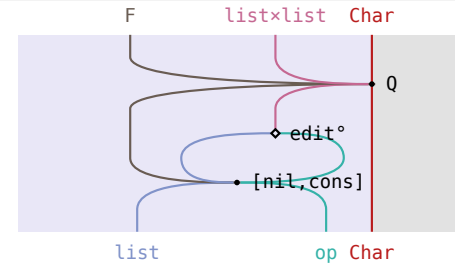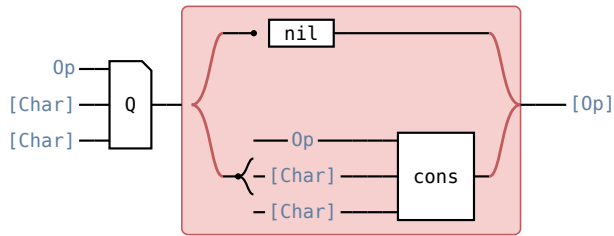



$Q \triangleq 1 + (U \times V)$  is  $F(U, V)$  at  $U \triangleq \tau$  —  $\triangleq \text{edit}$ ; and the bifunctor  $F$  preserves composition:  $F(U, V)F(1, \text{edit}^\circ) = F(U, V \text{ edit}^\circ)$

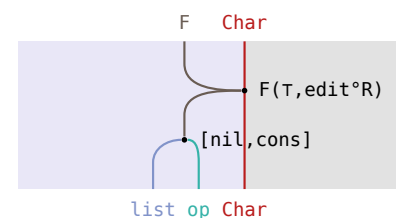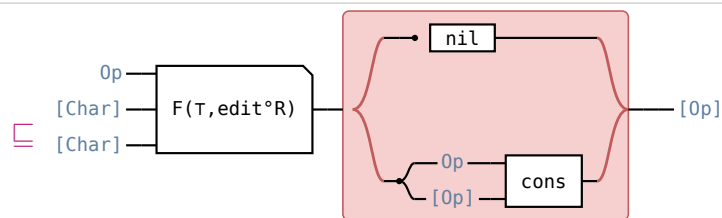

Proposition 9.4's second condition  $V \text{ edit}^\circ \sqsubseteq \text{edit}^\circ R$  — (15.3h)



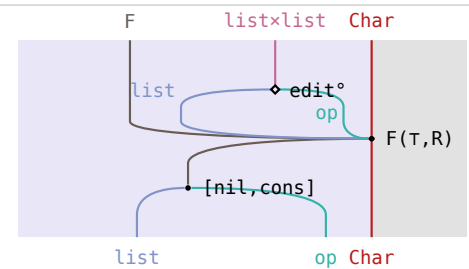
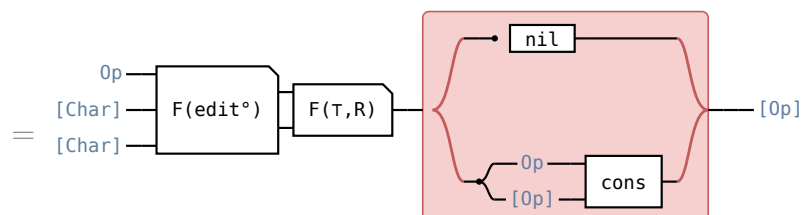


$F$  preserves composition:  $F(U, \text{edit}^\circ R) = F(1, \text{edit}^\circ)F(U, R)$

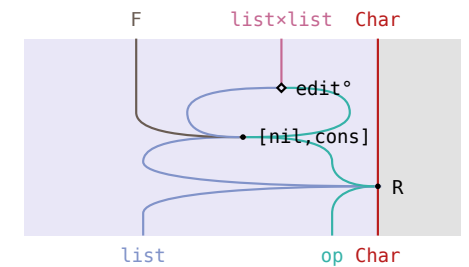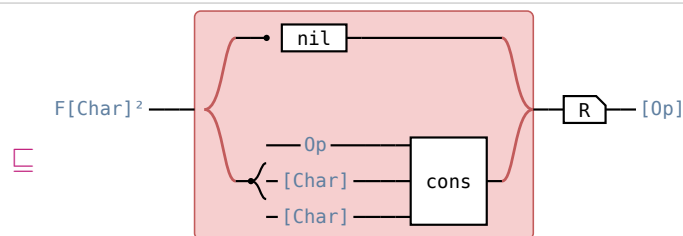

Proposition 9.4's first condition  $F(\tau, R) \alpha \sqsubseteq \alpha R$ , left as an exercise in the book:  $\text{CONS}$  adds one to both lengths whatever the two operations are

| $\text{edit } V^\circ \sqsubseteq R^\circ \text{ edit}$ (15.3h)<br>cutting a front off either string an edit sequence produces ( $\text{edit } V^\circ$ ) leaves a pair that a sequence no longer produces ( $R^\circ \text{ edit}$ )                                                                                                                |               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| circuit                                                                                                                                                                                                                                                                                                                                              | Hinze–Marsden |
|                                                                                                                                                                                                                                                                                                                                                      |               |
| $=$<br>$V \triangleq \text{suffix}^\circ \times \text{suffix}^\circ$ , and $\times$ preserves composition                                                                                                                                                                                                                                            |               |
| <br>$\sqsubseteq \text{edit } (\text{suffix} \times 1) \sqsubseteq R^\circ \text{ edit}$ : drop the operation that produced the head, or weaken its <b>cpy</b> to an <b>ins</b> . Proved by induction at <b>suffix</b> directly, not through $\text{suffix} = \text{tail}^*$ and $BA \sqsubseteq CB \implies BA^* \sqsubseteq C^*B$ as the book does |               |
| <br>$\sqsubseteq \text{edit } (1 \times \text{suffix}) \sqsubseteq R^\circ \text{ edit}$ , the mirror image: <b>cpy</b> weakens to a <b>del</b>                                                                                                                                                                                                      |               |
| <br>$R^\circ$ is transitive, $\leq$ being so                                                                                                                                                                                                                                                                                                         |               |
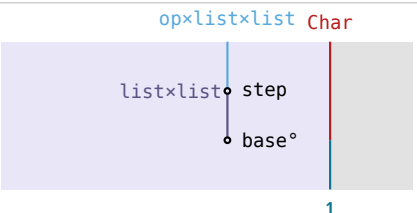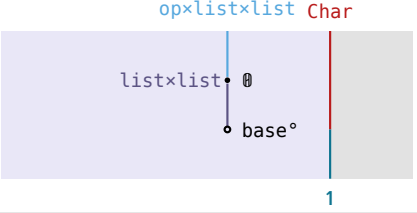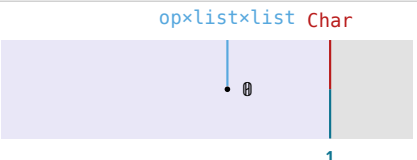
| $\text{step } \text{base}^\circ = \emptyset$ <span style="float: right;">(15.3i)</span><br>no pair of strings is both a result of <b>step</b> and the result $([], [])$ of <b>base</b>                                                 |                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| circuit                                                                                                                                                                                                                                | Hinze–Marsden                                                                        |
|                                                                                                                                                       |   |
|  <p><math>\text{base}</math> returns only <math>([], [])</math>, so <math>\text{base}^\circ = \text{empty } \text{base}^\circ</math></p>              |   |
|  <p><math>\text{step } \text{empty} = \emptyset</math>: <b>cpy</b> and <b>del</b> put a character on the left string, <b>ins</b> one on the right</p> |   |
|  <p><math>\emptyset</math> composed with anything is <math>\emptyset</math></p>                                                                      |  |

(15.3j)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| $\text{mle}(xs, ys) = \text{head}(\text{column}(xs, ys))$ , $\text{column}(xs, ys) = [\text{mle}(u, ys) \mid u \leftarrow \text{tails}(xs)]$<br>$\text{column}(xs) = ([\text{fstcol}(xs), \text{nextcol}(xs)])$ , $\text{fstcol} = \text{list}(\text{del}) \text{ tails}$<br>the tabulation: $\text{mle}(xs, ys)$ needs $\text{mle}(u, v)$ for every tail $u$ of $xs$ and $v$ of $ys$ , so the columns are built right to left                          |  |
| $\text{column}(xs, \text{cons}(b, ys)) = \text{nextcol}(xs, (b, \text{column}(xs, ys)))$<br>$\text{nextcol}(xs)(b, us) = ([\text{base}(b, \text{last}(us)), \text{step}(b)])(xus)$ , $xus = \text{zip}(xs, \text{zip}(\text{init}(us), \text{tail}(us)))$<br>each column is a fold built bottom to top, over $xs$ zipped with the adjacent pairs of the column to its right                                                                             |  |
| $\text{base}(b, u) = [[\text{ins}(b)] \# u]$<br>$\text{step}(b)((a, (u, v)), ws) = (a \rightarrow b \rightarrow [[\text{cpy}(a)] \# v] \# ws, [\text{bmin}(R)([\text{del}(a)] \# w, [\text{ins}(b)] \# u)] \# ws)$<br>$w = \text{head}(ws)$ ; these <b>base</b> , <b>step</b> are not <b>edit</b> 's. An entry depends on the one below it (a delete), the one to its right (an insert), and the one below that (a copy) — quadratic in the two lengths |  |

## §15.4. Optimal bracketing

(15.4a)

tree  $A ::= \text{tip } A \mid \text{bin } (\text{tree } A, \text{tree } A)$ ,  $FX = A + X^2$ , so  $F(R) = 1 + R^2$ ;  $h \triangleq [\text{tip}, \text{bin}]$ ,  $\text{flatten} \triangleq ([\text{wrap}, \text{cat}]) : \text{tree } A \rightarrow \text{list}^+ A$ ,  $H = \text{flatten}^\circ$ .

$\langle \text{cost}, \text{size} \rangle \triangleq ([\text{opt}, \text{opb}])$ ,  $\text{opt} \triangleq (\text{zero}, \text{st})$ ,  $\text{opb } ((cx, sx), (cy, sy)) = (\text{cb } (sx, sy) + cx + cy, \text{sb } (sx, sy))$ .

**sb** associative, so  $\text{size} = \text{flatten } \text{sz}$  for a map  $\text{sz} : R \triangleq \text{cost} \leq \text{cost}^\circ$ ,  $g \triangleq [\text{zero}, (1 \times \text{sz})^2 \text{ opb } \pi_1]$ , single the coreflexive on singleton lists.

$\text{splits} \triangleq (\text{inits}^+, \text{tails}^+)$  **zip**, an implementation of  $\frac{\text{cat}^\circ}{\text{zip}}$ ;  $\text{array} \triangleq \text{inits } \text{list}(\text{row})$ ,  $\text{row} \triangleq \text{tails } \text{list}(\text{mct})$ ,  $\text{col} \triangleq \text{inits } \text{list}(\text{mct})$ .

$\text{mix} \triangleq \text{zip } \text{list}(\text{bin}) \text{ minlist}(R)$ ,  $\text{next} \triangleq (\pi_1, \text{mix}) \text{ snoc}$ ,  $\text{process} \triangleq ((\text{tip } \text{wrap}) \times 1) \text{ loop}(\text{next})$ .

| $\text{Assoc}(\text{sb}) \Rightarrow F(\langle \text{cost}, \text{flatten} \rangle)g = [\text{tip}, \text{bin}] \text{cost}$ <span style="float: right;">(15.4b)</span>                                                                                                                                                                                                        |               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| pairing each subtree with its cost and its flattening and then applying $g$ gives what building the tree by $[\text{tip}, \text{bin}]$ and taking its $\text{cost}$ gives                                                                                                                                                                                                      |               |
| circuit                                                                                                                                                                                                                                                                                                                                                                        | Hinze–Marsden |
| $F(\text{tree}(A)) \rightarrow F(\langle \text{cost}, \text{flatten} \rangle) \rightarrow F(\text{Int} \times \text{list}^+(A)) \rightarrow g \rightarrow \text{Int}$                                                                                                                                                                                                          |               |
| $A + \text{tree}(A)^2 \rightarrow \text{zero} \rightarrow \text{cost} \rightarrow \text{flatten} \rightarrow \text{list}^+(A) \rightarrow \text{sz} \rightarrow \text{opb} \rightarrow \text{Int}$ <p>definition of <math>g</math>; coproducts and products — <math>\triangleq \text{flatten}</math></p>                                                                       |               |
| $A + \text{tree}(A)^2 \rightarrow \text{zero} \rightarrow \text{cost} \rightarrow \text{size} \rightarrow \text{opb} \rightarrow \text{Int}$ <p><math>\text{flatten sz} = \text{size}</math>, since <math>\text{sb}</math> is associative — <math>\triangleq \text{flatten}</math></p>                                                                                         |               |
| $A + \text{tree}(A)^2 \rightarrow \text{zero} \rightarrow \text{bin} \rightarrow \text{cost} \rightarrow \text{size} \rightarrow \text{opb} \rightarrow \text{Int}$ <p><math>\langle \text{cost}, \text{size} \rangle \triangleq ([\text{opt}, \text{opb}])</math>, at a node <math>\text{bin}(\text{cost}, \text{size}) = (\text{cost}, \text{size})^2 \text{ opb}</math></p> |               |
| $A + \text{tree}(A)^2 \rightarrow \text{tip} \rightarrow \text{tree}(A) \rightarrow \text{cost} \rightarrow \text{bin} \rightarrow \text{tree}(A) \rightarrow \text{cost} \rightarrow \text{Int}$ <p><math>\text{tip cost} = \text{zero}</math>; products, <math>\langle \text{cost}, \text{size} \rangle \pi_1 = \text{cost}</math></p>                                       |               |
| $A + \text{tree}(A)^2 \rightarrow \text{tip} \rightarrow \text{tree}(A) \rightarrow \text{cost} \rightarrow \text{bin} \rightarrow \text{tree}(A) \rightarrow \text{cost} \rightarrow \text{Int}$ <p>coproducts, <math>[\text{tip cost}, \text{bin cost}] = [\text{tip}, \text{bin}] \text{cost}</math></p>                                                                    |               |

| $F(\leq \times 1)g \sqsubseteq g \leq$ <span style="float: right;">(15.4c)</span>                                                                                                                                                                |               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| raising the cost of either subtree ( $\leq \times 1$ in both slots) and then applying $g$ returns a value at least what $g$ returns on the costs before raising ( $g \leq$ )                                                                     |               |
| circuit                                                                                                                                                                                                                                          | Hinze–Marsden |
| $F(\text{Int} \times \text{list}^+(A)) \rightarrow \boxed{F(\leq \times 1)} \rightarrow \boxed{g} \rightarrow \text{Int}$                                                                                                                        |               |
| $A + \text{Int} \times \text{list}^+(A) \times \text{Int} \times \text{list}^+(A) \rightarrow \text{Int}$<br>$=$                                                                                                                                 |               |
| $A + \text{Int} \times \text{list}^+(A) \times \text{Int} \times \text{list}^+(A) \rightarrow \text{Int}$<br>$\sqsubseteq$                                                                                                                       |               |
| $A + \text{Int} \times \text{list}^+(A) \times \text{Int} \times \text{list}^+(A) \rightarrow \text{Int}$<br>$\sqsubseteq$                                                                                                                       |               |
| $\leq$ reflexive, so $\text{zero} \sqsubseteq \text{zero} \leq$ ; coproducts<br>$=$ $F(\text{Int} \times \text{list}^+(A)) \rightarrow \boxed{g} \rightarrow \boxed{\leq} \rightarrow \text{Int}$<br>definition of $g \triangleq \text{flatten}$ |               |

$$\text{Assoc}(\text{sb}) \Rightarrow (\mu X : \frac{[\text{wrap}, \text{cat}]^\circ}{3} P([\text{tip}, (X \times X) \text{bin}]) \text{est}(R)) \sqsubseteq \frac{\text{flatten}^\circ}{3} \text{est}(R), \text{ mct} = (\text{single} \rightarrow \text{head tip}, \text{ (init col, tail row) mix}) \quad (15.4d)$$


a least-cost bracketing of  $a_1 \oplus \dots \oplus a_n$  is read off an array holding one best tree per non-empty segment, each entry built from the column to its left and the row below it

## circuit

$$\text{list}^+(A) \xrightarrow{\frac{1}{3}} E(\text{list}^+(A)) \xrightarrow{E(\text{flatten}^\circ)} E(\text{tree}(A)) \xrightarrow{\text{est}(R)} \text{tree}(A)$$


the specification  $\text{---} \triangleq \text{flatten}$

## Hinze–Marsden

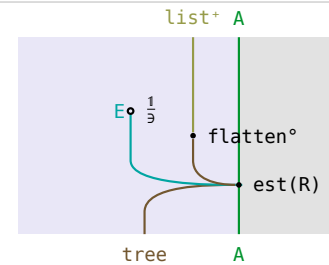

$$\text{list}^+(A) \xrightarrow{\frac{1}{3}} E(\text{list}^+(A)) \xrightarrow{E([\text{wrap}, \text{cat}]^\circ)} E(F(\text{list}^+(A))) \xrightarrow{P([\text{tip}, (X \times X) \text{bin}])} E(\text{tree}(A)) \xrightarrow{\text{est}(R)} \text{tree}(A)$$

split the list in every way, bracket both halves, join. The condition is monotonicity **in context**,  $F(Rn(\text{flatten} \text{ flatten}^\circ)) \text{h} \sqsubseteq \text{hR}$  — only trees with the same flattening are compared — which is Proposition 9.3 at  $H^\circ = \text{flatten}$ , a map, with (9.5)  $[\text{tip}, \text{bin}]$   
 $\text{cost} = (1 + (\text{cost}, \text{flatten})^2)g$  (the cost of a node reads only the cost and the flattening of its two subtrees) and (9.6)  $(1 + (\leq 1)^2)g \sqsubseteq g$  ( $g$  monotonic on  $\leq$  in its two cost arguments)

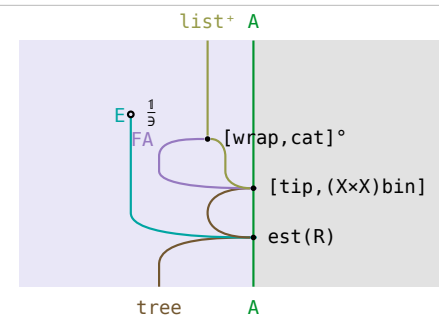


$$\text{list}^+(A) \xrightarrow{\frac{1}{3}} E(\text{list}^+(A)) \xrightarrow{E(\text{cat}^\circ)} E(\text{list}^+(A)^2) \xrightarrow{P((X \times X) \text{bin})} E(\text{tree}(A)) \xrightarrow{\text{est}(R)} \text{tree}(A)$$

$\text{---}$  Proposition 9.1: **wrap** and **cat** have disjoint ranges, and **single** is the coreflexive on singleton lists, where **wrap** returns

$$\text{list}^+(A) \xrightarrow{\text{splits}} [\text{list}^+(A)^2] \xrightarrow{\text{list}((\text{mct} \times \text{mct}) \text{bin})} [\text{tree}(A)] \xrightarrow{\text{minlist}(R)} \text{tree}(A)$$

$\text{splits} \triangleq \langle \text{inits}^+, \text{tails}^+ \rangle$  zip implements  $\frac{\text{cat}^\circ}{3}$  and  $\text{minlist}(R)$  implements  $\text{est}(R)$ . Exponential, since the segments of one list overlap

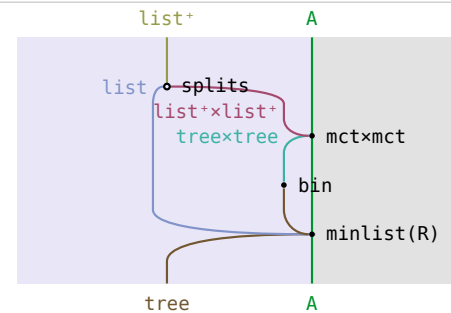

$$\text{mct} = (\text{single} \rightarrow \text{head tip}, (\text{init col}, \text{tail row}) \text{mix}) \quad (9.7)$$

$\text{---}$  the tabulation: **mct**  $\times S$  is needed for every non-empty segment  $\times S$ , so the values are held as an array of rows,  $\text{array} \triangleq \text{inits list}(\text{row}), \text{row} \triangleq \text{tails list}(\text{mct}), \text{col} \triangleq \text{inits list}(\text{mct}), \text{mix} \triangleq \text{zip list}(\text{bin}) \text{minlist}(R)$

$$\text{col} = (\text{single} \rightarrow \text{head tip wrap}, (\text{init col}, \text{tail row}) \text{next}) \quad (9.8)$$

$$\text{cons col} = (1 \times \text{array}) \text{process} \quad (9.9)$$

$$\text{row} = (\text{single} \rightarrow \text{head tip wrap}, (\text{mct}, \text{tail row}) \text{cons}) \quad (9.10)$$

a column extends the column to its left, a row the row below it; (9.9) is (9.8) rewritten as a loop,  $\text{next} \triangleq (\pi_1, \text{mix}) \text{snoc}, \text{process} \triangleq ((\text{tip wrap}) \times 1) \text{loop}(\text{next})$

$$\text{array} = ([\text{fstcol}, \text{addcol}]), \text{fstcol} \triangleq \text{tip wrap wrap}$$

$$\text{addcol} \triangleq (\pi_1 \text{tip wrap}, \text{step}) \text{cons}, \text{step} \triangleq (\text{process tail}, \pi_2) \text{zip list}(\text{cons})$$

the program: one fold building the array column by column, cubic in the length of the input

**nonsingle mct=nonsingle(init col,tail row)mix**


(15.4e)

on a list of two or more elements, **mct** gives what **mix** gives on the column of its **init** and the row of its **tail**

$$\begin{aligned}
 & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \text{mct} \rightarrow \text{tree}(A) \\
 = & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \text{splits} \rightarrow [\text{list}^+(A)^2] \xrightarrow{\text{list}(\text{graft})} [\text{tree}(A)] \xrightarrow{\text{minlist}(R)} \text{tree}(A) \quad \text{recursive case of mct} \triangleq \text{flatten} \\
 = & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \left\{ \begin{array}{l} \text{inits}^+ \\ \text{tails}^+ \end{array} \right\} \rightarrow [\text{list}^+(A)] \xrightarrow{\text{zip}} [\text{list}^+(A)^2] \xrightarrow{\text{list}(\text{graft})} [\text{tree}(A)] \xrightarrow{\text{minlist}(R)} \text{tree}(A) \\
 & \text{definition of splits} \triangleq \text{flatten} \\
 = & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \text{trees} \xrightarrow{\text{zip}} [\text{tree}(A)^2] \xrightarrow{\text{list}(\text{bin})} [\text{tree}(A)] \xrightarrow{\text{minlist}(R)} \text{tree}(A) \\
 & \text{definitions of graft} \triangleq (\text{mct} \times \text{mct}) \text{ bin and trees} \triangleq (\text{inits}^+ \text{ list}(\text{mct}), \text{tails}^+ \text{ list}(\text{mct})), \text{our names; zip} \\
 & \text{list}(f \times g) = (\text{list}(f) \times \text{list}(g)) \text{ zip} \\
 = & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \text{trees} \xrightarrow{\text{mix}} \text{tree}(A) \quad \text{introducing mix} \triangleq \text{zip list}(\text{bin}) \text{ minlist}(R) \triangleq \text{flatten} \\
 = & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \left\{ \begin{array}{l} \text{init} \quad \text{col} \\ \text{tail} \quad \text{row} \end{array} \right\} \rightarrow [\text{tree}(A)] \xrightarrow{\text{mix}} \text{tree}(A) \\
 & \text{definition of trees; inits}^+ = \text{init inits and tails}^+ = \text{tail tails on non-singletons; definition of row and col} \triangleq \text{flatten}
 \end{aligned}$$

**nonsingle col=nonsingle(init col,tail row)next**


(15.4f)

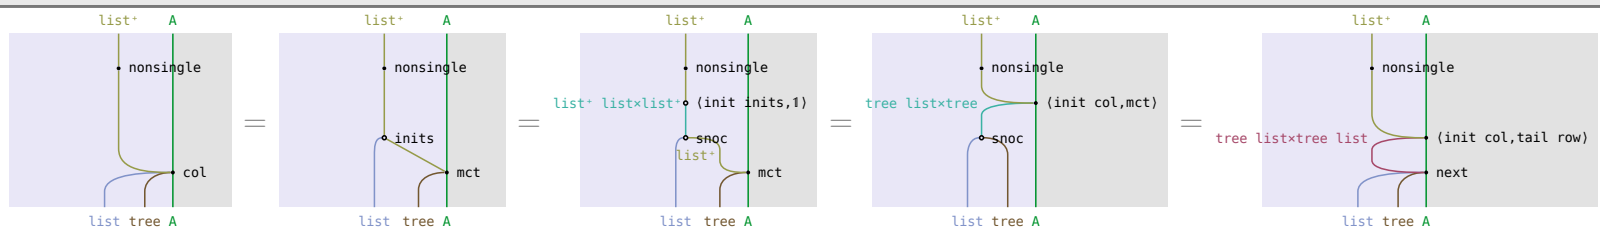on a list of two or more elements, the column is what **next** makes of the column of its **init** and the row of its **tail**

$$\begin{aligned}
 & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \text{col} \rightarrow [\text{tree}(A)] \\
 = & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \text{inits} \rightarrow [\text{list}^+(A)] \xrightarrow{\text{list}(\text{mct})} [\text{tree}(A)] \quad \text{definition of col} \triangleq \text{flatten} \\
 = & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \left\{ \begin{array}{l} \text{init} \quad \text{inits} \\ \text{list}^+(A) \end{array} \right\} \xrightarrow{\text{snoc}} [\text{list}^+(A)] \xrightarrow{\text{list}(\text{mct})} [\text{tree}(A)] \\
 & \text{inits} = (\text{init inits}, 1) \text{ snoc on non-singletons} \\
 = & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \left\{ \begin{array}{l} \text{init} \quad \text{col} \\ \text{mct} \end{array} \right\} \rightarrow [\text{tree}(A)] \xrightarrow{\text{snoc}} [\text{tree}(A)] \quad \text{snoc list}(f) = (\text{list}(f) \times f) \text{ snoc; definition of col} \\
 = & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \left\{ \begin{array}{l} \text{init} \quad \text{col} \\ \text{tail} \quad \text{row} \end{array} \right\} \rightarrow [\text{tree}(A)] \xrightarrow{\text{next}} [\text{tree}(A)] \\
 & (9.7) \text{ on non-singletons} \triangleq (15.4e) \text{ and introducing next} \triangleq (\pi_1, \text{mix}) \text{ snoc} \triangleq \text{flatten}
 \end{aligned}$$

**nonsingle row=nonsingle(mct,tail row)cons**



(15.4g)



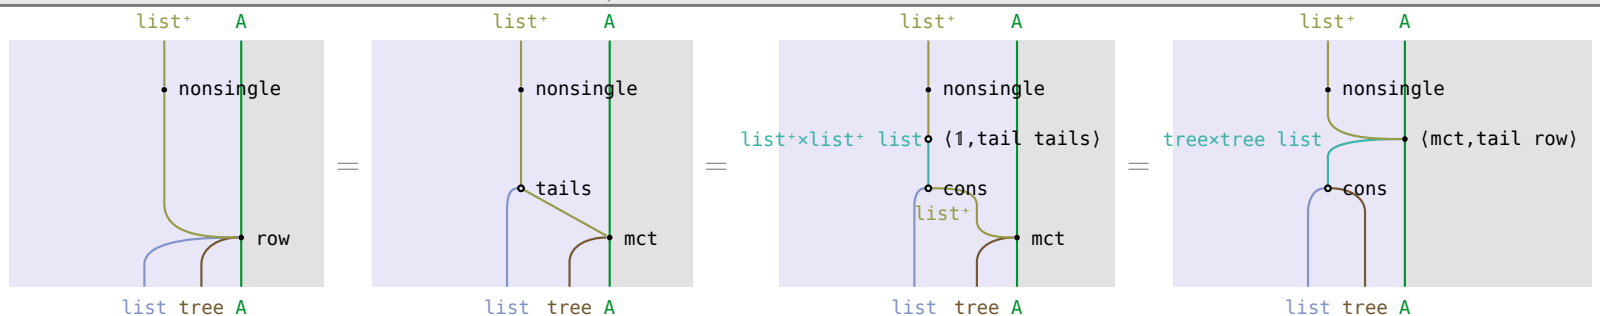
on a list of two or more elements, the row is **mct** of the whole list consed onto the row of its **tail**

$$\begin{aligned}
 & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \text{row} \rightarrow [\text{tree}(A)] \\
 = & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \text{tails} \rightarrow [\text{list}^+(A)] \xrightarrow{\text{list}(\text{mct})} [\text{tree}(A)] \quad \text{definition of row} \triangleq \text{flatten} \\
 = & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \left\{ \begin{array}{l} \text{tail} \quad \text{tails} \\ \text{list}^+(A) \end{array} \right\} \xrightarrow{\text{cons}} [\text{list}^+(A)] \xrightarrow{\text{list}(\text{mct})} [\text{tree}(A)] \\
 & \text{tails} = (1, \text{tail tails}) \text{ cons on non-singletons} \\
 = & \text{list}^+(A) \xrightarrow{\text{nonsingle}} \left\{ \begin{array}{l} \text{mct} \\ \text{tail} \quad \text{row} \end{array} \right\} \rightarrow [\text{tree}(A)] \xrightarrow{\text{cons}} [\text{tree}(A)] \quad \text{cons list}(f) = (f \times \text{list}(f)) \text{ cons; definition of row}
 \end{aligned}$$

| <b>cons col=(1×array)process</b> <span style="float: right;">(15.4h)</span><br>the column of <b>a</b> consed onto <b>x</b> is what <b>process</b> makes of <b>a</b> and the array of <b>x</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Hinze–Marsden |
| $\begin{array}{c} A \\ \text{list}^+(A) \end{array} \begin{array}{ c} \hline \text{cons} \\ \hline \end{array} \begin{array}{c} \text{list}^+(A) \\ \text{col} \end{array} \begin{array}{ c} \hline \text{tree}(A) \\ \hline \end{array}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |               |
| $\begin{array}{c} A \\ \text{list}^+(A) \end{array} \begin{array}{ c} \hline \text{tip} \\ \hline \end{array} \begin{array}{c} \text{tree}(A) \\ \text{array} \end{array} \begin{array}{ c} \hline \text{wrap} \\ \hline \end{array} \begin{array}{ c} \hline \text{loop(next)} \\ \hline \end{array} \begin{array}{ c} \hline \text{tree}(A) \\ \hline \end{array}$ <p>= Exercise 9.13 with <math>k \triangleq \text{cons}</math>, <math>g \triangleq \text{tip}</math>, <math>h \triangleq \text{wrap}</math>, <math>f \triangleq \text{next}</math>: its two equations are (9.8) — (15.4f) — at <math>a:[b]</math> and at <math>a:(u++[b])</math>, with <math>[a]</math> <math>\text{col}=[\text{tip}(a)]</math></p> |               |
| $\begin{array}{c} A \\ \text{list}^+(A) \end{array} \begin{array}{ c} \hline \text{tip} \\ \hline \end{array} \begin{array}{c} \text{tree}(A) \\ \text{array} \end{array} \begin{array}{ c} \hline \text{wrap} \\ \hline \end{array} \begin{array}{ c} \hline \text{loop(next)} \\ \hline \end{array} \begin{array}{ c} \hline \text{tree}(A) \\ \hline \end{array}$ <p>= products</p>                                                                                                                                                                                                                                                                                                                                  |               |
| $\begin{array}{c} A \\ \text{list}^+(A) \end{array} \begin{array}{ c} \hline \text{array} \\ \hline \end{array} \begin{array}{ c} \hline \text{process} \\ \hline \end{array} \begin{array}{ c} \hline \text{tree}(A) \\ \hline \end{array}$ <p>= definition of <b>process</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                      |               |

| <b>tops=(1×array)process tail</b> <span style="float: right;">(15.4i)</span><br>the trees at the top of the new rows are what <b>process</b> makes of <b>a</b> and the array of <b>x</b> , less its first                                                                                                                                                                                                            |               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| circuit                                                                                                                                                                                                                                                                                                                                                                                                              | Hinze–Marsden |
| $\begin{array}{c} A \\ \text{list}^+(A) \end{array} \begin{array}{ c} \hline \text{tops} \\ \hline \end{array} \begin{array}{ c} \hline \text{tree}(A) \\ \hline \end{array}$                                                                                                                                                                                                                                        |               |
| $\begin{array}{c} A \\ \text{list}^+(A) \end{array} \begin{array}{ c} \hline \text{cons} \\ \hline \end{array} \begin{array}{c} \text{list}^+(A) \\ \text{inits} \\ \text{tail} \end{array} \begin{array}{ c} \hline \text{list(mct)} \\ \hline \end{array} \begin{array}{ c} \hline \text{tree}(A) \\ \hline \end{array}$ <p>= definition of <math>\text{tops} \triangleq \text{tic list(mct)}</math>, our name</p> |               |
| $\begin{array}{c} A \\ \text{list}^+(A) \end{array} \begin{array}{ c} \hline \text{cons} \\ \hline \end{array} \begin{array}{c} \text{list}^+(A) \\ \text{col} \\ \text{tail} \end{array} \begin{array}{ c} \hline \text{tree}(A) \\ \hline \end{array}$ <p><math>\text{tail list}(f)=\text{list}(f) \text{ tail}</math>; definition of <b>col</b></p>                                                               |               |
| $\begin{array}{c} A \\ \text{list}^+(A) \end{array} \begin{array}{ c} \hline \text{array} \\ \hline \end{array} \begin{array}{ c} \hline \text{process} \\ \hline \end{array} \begin{array}{ c} \hline \text{tail} \\ \hline \end{array} \begin{array}{ c} \hline \text{tree}(A) \\ \hline \end{array}$ <p>(9.9) — (15.4h)</p>                                                                                       |               |
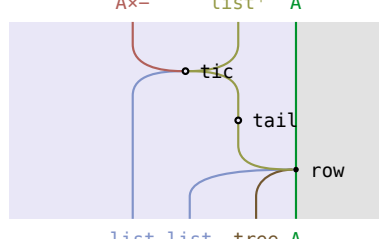
| <b>rests=<math>\pi_2</math> array</b> <span style="float: right;">(15.4j)</span><br>the rest of each new row is the array of <b>x</b>                                                                                                                                                                    |                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| circuit                                                                                                                                                                                                                                                                                                  | Hinze–Marsden                                                                       |
|                                                                                                                                                                                                                         |  |
| $= \text{list}^+(A) \xrightarrow{\text{cons}} \text{list}^+(A) \xrightarrow{\text{inits}} \text{tail} \xrightarrow{[\text{list}^+(A)]} \text{list}(\text{tail row}) \xrightarrow{[\text{tree}(A)]}$ <p>definition of <math>\text{rests} \triangleq \text{tic list}(\text{tail row})</math>, our name</p> |  |
| $= \text{list}^+(A) \xrightarrow{\text{list}^+(A)} \text{array} \xrightarrow{[\text{tree}(A)]}$ <p><math>\text{tic list}(\text{tail}) = \pi_2 \text{ inits}</math>; definition of <b>array</b></p>                                                                                                       |  |
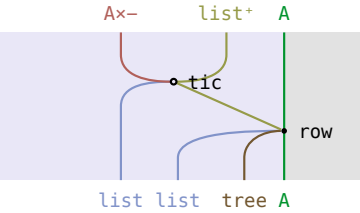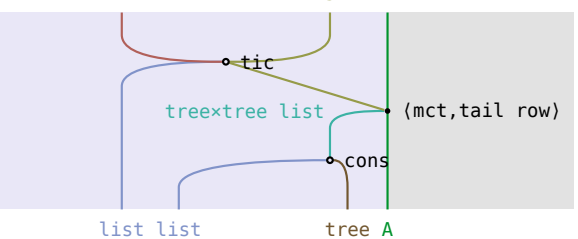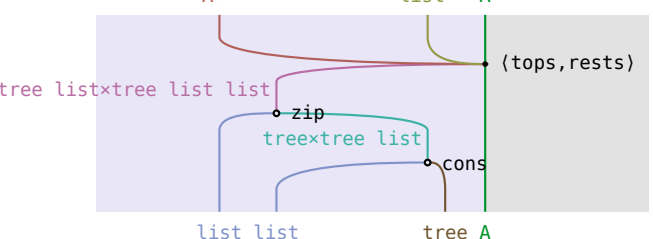
| <b>newrows=(<math>1 \times \text{array}</math>)step</b> <span style="float: right;">(15.4k)</span><br>the rows of the array of <b>a:x</b> below its first are what <b>step</b> makes of <b>a</b> and the array of <b>x</b>                                                                                                                               |                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| circuit                                                                                                                                                                                                                                                                                                                                                  | Hinze–Marsden                                                                         |
|                                                                                                                                                                                                                                                                       |  |
| $= \text{list}^+(A) \xrightarrow{\text{cons}} \text{list}^+(A) \xrightarrow{\text{inits}} \text{tail} \xrightarrow{[\text{list}^+(A)]} \text{list}(\text{row}) \xrightarrow{[\text{tree}(A)]}$ <p>definition of <math>\text{newrows} \triangleq \text{tic list}(\text{row})</math>, our name</p>                                                         |  |
| $= \text{list}^+(A) \xrightarrow{\text{cons}} \text{list}^+(A) \xrightarrow{\text{inits}} \text{tail} \xrightarrow{[\text{list}^+(A)]} \text{list}(\text{mct, tail row cons}) \xrightarrow{[\text{tree}(A)]}$ <p>(9.10) — (15.4g) — on the non-singleton <b>tic</b> lists</p>                                                                            |  |
| $= \text{list}^+(A) \xrightarrow{\text{tops}} \text{rests} \xrightarrow{[\text{tree}(A)]} \text{zip} \xrightarrow{[\text{tree}(A) \times [\text{tree}(A)]]} \text{list}(\text{cons}) \xrightarrow{[\text{tree}(A)]}$ <p><math>\text{list}(f, g) = (\text{list}(f), \text{list}(g))</math> zip; products; definitions of <b>tops</b> and <b>rests</b></p> |  |
| $= \text{list}^+(A) \xrightarrow{\text{array}} \text{step} \xrightarrow{[\text{tree}(A)]}$ <p>(15.4i) and (15.4j); products; definition of <b>step</b></p>                                                                                                                                                                                               |  |

| <div style="display: flex; justify-content: space-between;"> <div> <b>cons array=(1×array)addcol</b><br/>           the array of <b>a</b> consed onto <b>x</b> is what <b>addcol</b> makes of <b>a</b> and the array of <b>x</b> </div> <div>(15.4l)</div> </div>                                  |               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| circuit                                                                                                                                                                                                                                                                                            | Hinze–Marsden |
|                                                                                                                                                                                                                                                                                                    |               |
| $= \text{list}^+(A) \xrightarrow{\text{cons}} \text{list}^+(A) \xrightarrow{\text{inits}} [\text{list}^+(A)] \xrightarrow{\text{list}(\text{row})} [[\text{tree}(A)]]$ definition of <b>array</b>                                                                                                  |               |
| $= \text{cons } \text{inits} = (\pi_1 \text{ wrap, tic}) \text{ cons, abbreviating cons inits tail by tic}$                                                                                                                                                                                        |               |
| $= \text{list}^+(A) \xrightarrow{\text{newrows}} \text{list}^+(A) \xrightarrow{\text{wrap}} \text{list}^+(A) \xrightarrow{\text{row}} [\text{tree}(A)] \xrightarrow{\text{cons}} [[\text{tree}(A)]]$ cons $\text{list}(f) = (f \times \text{list}(f)) \text{ cons}$ ; definition of <b>newrows</b> |               |
| $= \text{list}^+(A) \xrightarrow{\text{newrows}} \text{list}^+(A) \xrightarrow{\text{tip}} \text{tree}(A) \xrightarrow{\text{wrap}} [\text{tree}(A)] \xrightarrow{\text{cons}} [[\text{tree}(A)]]$ wrap $\text{row} = \text{tip wrap}$                                                             |               |
| $= \text{list}^+(A) \xrightarrow{\text{array}} \text{addcol} \xrightarrow{\text{array}} [[\text{tree}(A)]]$ (15.4k); products; definition of <b>addcol</b>                                                                                                                                         |               |

## §15.5. Data compression

(15.5a)

$[A] ::= \text{nil} \mid \text{snoc } ([A], A), \text{ list}^+ A ::= \text{wrap } A \mid \text{snoc } (\text{list}^+ A, A), \text{ String} = [\text{Char}], \text{ Code} ::= \text{sym Char} \mid \text{ptr} (\text{String}, \text{String}^+), F(\text{Code}, \text{String}) = 1 + (\text{String} \times \text{Code}), \alpha \triangleq [\text{nil}, \text{snoc}].$

$\text{decode} \triangleq ([\text{nil}, \text{extend}]) : [\text{Code}] \rightarrow \text{String}, \text{ extend } (xs, \text{sym } a) = xs \# [a], \text{ extend } (xs, \text{ptr } (ys, zs)) = xs \# zs \text{ when } ys \# zs \text{ is a proper prefix of } xs \# zs; H = \text{decode}^\circ.$

$\text{size} \triangleq ([\text{zero}, \text{distr } [1 \times c, 1 \times p] \text{ plus}])$  with  $c, p$  the constant costs of a symbol and a pointer;  $R \triangleq \text{size} \leq \text{size}^\circ, Q \triangleq F(\tau + \tau, \text{prefix}^\circ) = 1 + (\text{prefix}^\circ \times (\tau + \tau))$ , the two  $\tau$  on symbols and on pointers.


$\text{lrt } ws = \text{est}(\text{prefix}^\circ \times (\tau + \tau)) \{(xs, (ys, zs)) \mid xs \# zs = ws, ys \# zs \text{ a proper prefix of } ws\}$ , the longest repeated tail;  $\text{reduce } (ws \# [a]) = (zs \neq [] \rightarrow [(ws, \text{sym } a), (xs, \text{ptr } (ys, zs))], [(ws, \text{sym } a)])$  with  $(xs, (ys, zs)) = \text{lrt } (ws \# [a]).$

$$\theta \leq c \wedge \theta \leq p \Rightarrow (\mu X : \frac{[nil, extend]^\circ}{\exists} \text{thin}(Q)P([nil, (X \times 1)snoc])est(R)) \sqsubseteq \frac{decode^\circ}{\exists} est(R), \quad (15.5b)$$


$$encode = (null \rightarrow nil, reduce \text{ list}((encode \times 1)snoc) \text{ minlist}(R))$$

a smallest code sequence decoding to the given string is built from the right, each step emitting the last character as a symbol or ending with a pointer back into what has already been decoded

## circuit





## Hinze–Marsden





at  $Q \triangleq F(\tau + \tau, \text{prefix}^\circ) = 1 + (\text{prefix}^\circ \times (\tau + \tau))$ , the two  $\tau$  on symbols and on pointers. Monotonicity  $F(R) \alpha \sqsubseteq \alpha R$  is routine, the two costs being constants:  $(\tau + \tau)[c, p] = [c, p]$ .


Proposition 9.4 splits the thinning condition in two —  $F(\tau + \tau, R) \alpha \sqsubseteq \alpha R$ , and  $\text{decode prefix} \sqsubseteq R^\circ \text{ decode}$ , for which  $\text{decode init} \sqsubseteq R^\circ \text{ decode}$  is enough: dropping the last character of the output shortens or removes the last code element and never raises the cost. So between a symbol and a pointer nothing can be decided in advance, and between two pointers the longer match wins

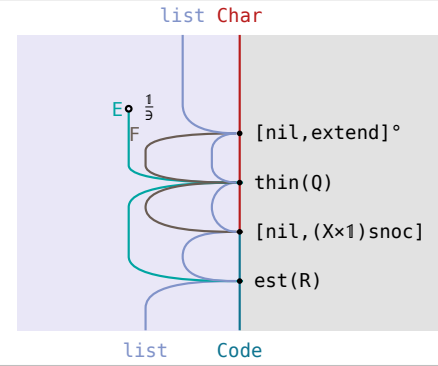

Proposition 9.1:  $nil$  and  $extend$  have disjoint ranges. The decompositions of one string are  $\frac{extend^\circ}{\exists} (ws \# [a]) = \{(ws, \text{sym } a)\} \cup \{(xs, \text{ptr } (ys, zs)) \mid xs \# zs = ws \# [a], ys \# zs \text{ a proper prefix of } ws\}$  — take the last character as a symbol, or end with a pointer

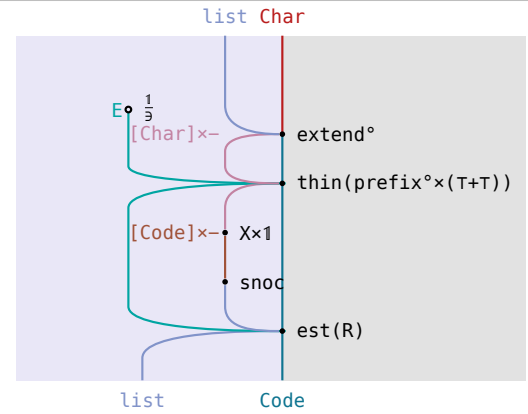

$\text{reduce}$  implements  $\frac{extend^\circ}{\exists} \text{thin}(\text{prefix}^\circ \times (\tau + \tau))$ : thinning leaves at most two, the symbol and the pointer of the longest repeated tail  $\text{lrt}$ . Again exponential; the book gives no tabulation for it




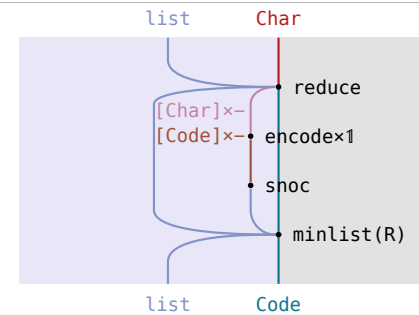


$$\theta \leq c \wedge \theta \leq p \Rightarrow QF(\text{decode}^\circ)[\text{nil}, \text{snoc}] \sqsubseteq F(\text{decode}^\circ)[\text{nil}, \text{snoc}]R \quad (15.5c)$$



every code sequence built from a decomposition  $Q$  puts above a given one — a code element of the same kind, a longer front string — costs at least as much as one built from the given one

circuit



Hinze–Marsden

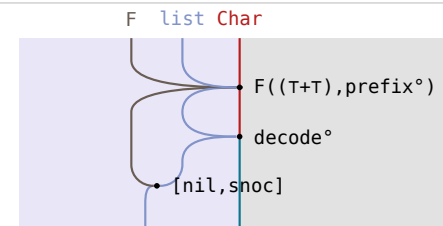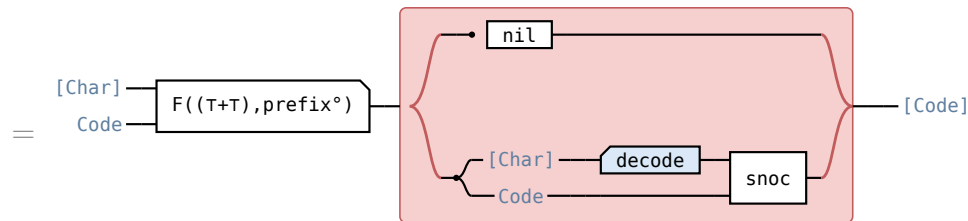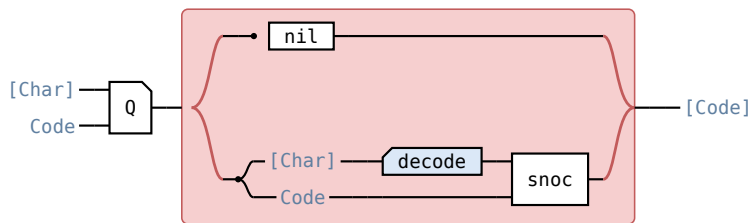



$Q \triangleq 1 + (\text{prefix}^\circ \times (T+T))$  is  $F(T+T, \text{prefix}^\circ) \triangleq \text{decode}$

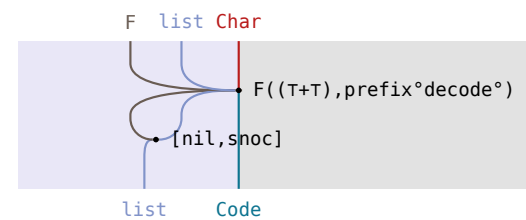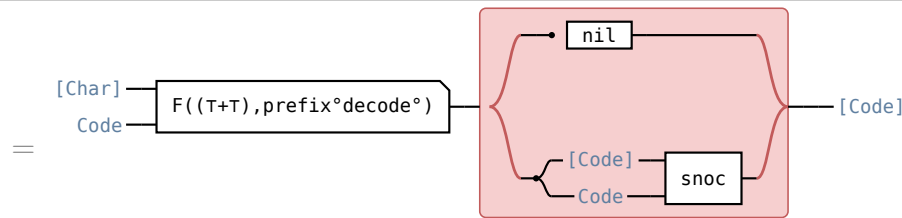



the bifunctor  $F$  preserves composition:  $F(U, \text{prefix}^\circ)F(1, \text{decode}^\circ) = F(U, \text{prefix}^\circ \text{decode}^\circ)$

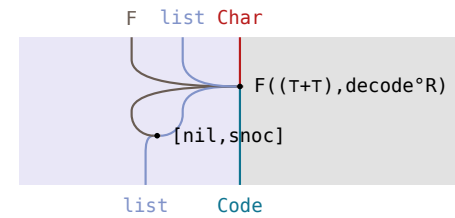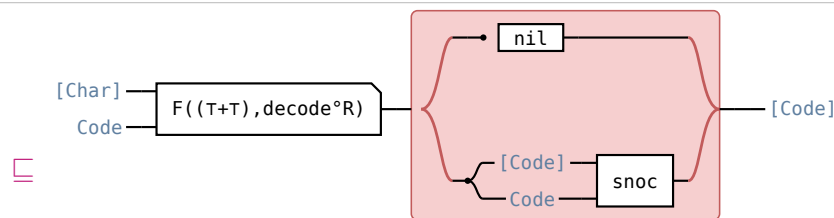

Proposition 9.4's second condition  $\text{prefix}^\circ \text{decode}^\circ \sqsubseteq \text{decode}^\circ R$ : dropping the last character drops the last **sym**, or shortens or drops the last pointer. Proved at **prefix** directly by induction, not through **init**

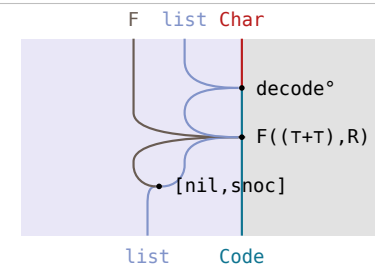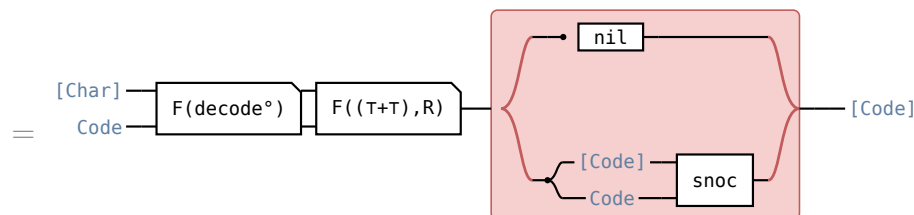

$F$  preserves composition:  $F(U, \text{decode}^\circ R) = F(1, \text{decode}^\circ)F(U, R)$

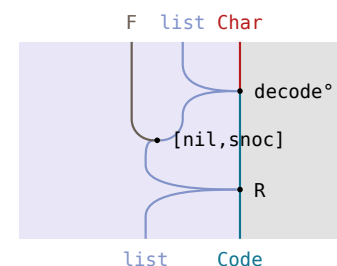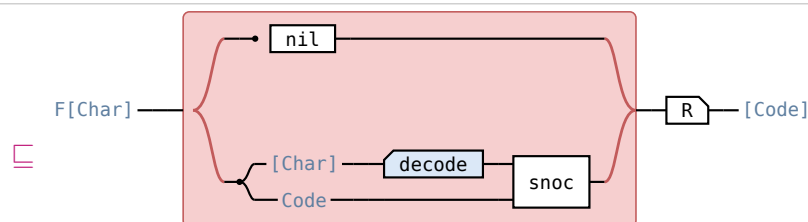

Proposition 9.4's first condition  $F(T+T, R) \alpha \sqsubseteq R$ , left as an exercise in the book: **snoc** adds the cost of the last element to both sides, and  $[c, p](T+T) = [c, p]$

| <div> <div>extend nil<sup>o</sup>=0</div> <div>(15.5d)</div> </div> <div>no string is both a result of <b>extend</b> and the result [] of <b>nil</b></div> |               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| circuit                                                                                                                                                    | Hinze-Marsden |
|                                                                                                                                                            |               |
| <p>=</p> <p>nil returns only [], so nil<sup>o</sup>=null nil<sup>o</sup></p>                                                                               |               |
| <p>=</p> <p>extend null=0: a symbol ends the string with a character, a pointer with its non-empty ZS</p>                                                  |               |
| <p>=</p> <p>0 composed with anything is 0</p>                                                                                                              |               |