

5. Suppose the word “catcall” is to be inserted into the above Trie. How many additional internal nodes (i.e., nodes with an array of 27 pointers) will get added?

- A. 1 B. 2 C. 3 **D. 4** E. 5

String Searching

NAÏVE-STRING-MATCHER (T,P)

```
1 n = T.length
2 m = P.length
3 s = 0
4 while s < n - m + 1 do
5     for i = 1 to m
6         if P[i] != T[s+i] then
7             s = s+1
8         exit the i-loop and go to step 4
9     print "pattern occurs with shift" s
10    s = s+1
```

6. If P=0001 and T=000010001010001, what are the shift values printed by step 9 of the algorithm above?

- A. 0, 4 & 10 B. 2, 6 & 12 C. 5, 9 & 11 **D. 1, 5 & 11** E. nothing will be printed

MODIFIED-NAÏVE-STRING-MATCHER (T,P)

```
1 n = T.length
2 m = P.length
3 s = 0
4 while s < n - m + 1 do
5     for i = 1 to m
6         if P[i] != T[s+i] then
7             s = s+i
8         exit the i-loop and go to step 4
9     print "pattern occurs with shift" s
10    s = s+m
```

7. True or **False?** MODIFIED-NAÏVE-STRING-MATCHER is a correct algorithm.

Do problem 32.2-1 in the text p. 994 before answering questions 8 and 9.

8. How many spurious hits will there be?

- A. 1 B. 2 **C. 3** D. 4 E. no spurious hits

9. How many correct matches will there be?

- A. **1** B. 2 C. 3 D. 4 E. no correct matches

10. Working modulo $q=13$, how many spurious hits does the Rabin-Karp algorithm encounter in the text T=16152279 when looking for the pattern P=27?

- A. 1** B. 2 C. 3 D. 4 E. 0

Disjoint Sets

11. If the array below implements disjoint sets as trees, what is the union being implemented?

The top row are cell indexes.

1	2	3	4	5	6	7	8
-2	6	8	8	1	3	1	-4

- A. arbitrary **B. by size** C. by height

Design a recursive, and a non-recursive algorithm that employs a stack, for the operation **Find(e)** where e is a data element and Find is to be done with path compression. Assume the disjoint set is implemented using array P and union by size. Partial algorithms are given below.

Find-recursive(e, P)

- ```
1 if P[e] > 0 then
2 _____ Q 12 _____
3 else return e
```

12. What is (are) the correct step (steps) to fill the blank above?

- A. Find-recursive(e, P)  
B. P[e] = Find-recursive(e, P)  
C. return P[e]  
**D. P[e] = Find-recursive(e, P); return P[e]**  
E. none of these

#### **Find-iterative(e, P)**

S: stack

- ```
1 while e is not negative
2     push(e, S)
3     _____ Q 13 _____
4 v = pop(S)
5 while S is not empty
6     _____ Q 14 _____
7     _____ Q 15 _____
8 return v
```

13. Which step should go to line 3 of Find-iterative?

- A. P[temp] = v B. temp = pop(S) **C. e = P[e]** D. push(e, S) E. none of these


14. Which step should go to line 6 of Find-iterative?

- A. P[temp] = v **B. temp = pop(S)** C. e = P[e] D. push(e, S) E. none of these

15. Which step should go to line 7 of Find-iterative?

- A. P[temp] = v** B. temp = pop(S) C. e = P[e] D. push(e, S) E. none of these

Graph representations and algorithms

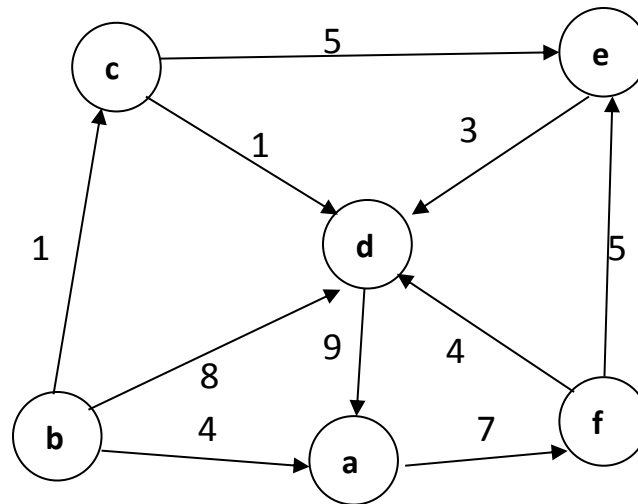


16. Simulate algorithm Breadth-First Search (slide 7, slide set 19) on the graph above with “a” as the starting node and determine the d and π values of each node. Assume that adjacent nodes are considered and inserted in the Queue in alphabetical order. What are the d and π values of node “e”?


- A. 2 & f B. 1 & a C. 0 & NIL D. ∞ & NIL E. none of these

17. If DFS-VISIT started at node 1 and the edges it traversed through recursive calls are shown in blue on the graph to the right, what are the correct classifications of the remaining three edges 5->1, 1->3, and 5->4 respectively?

- A. Cross, Forward and Back.
 B. Forward, Back, and Cross.
 C. Cross, Back and Forward.
 D. Back, Forward and Cross.
 E. none of the above

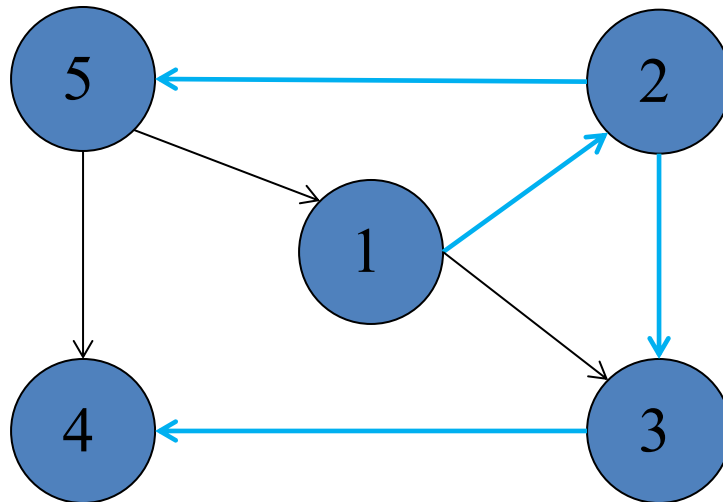


18. If the Bellman-Ford algorithm is run on the graph below with a negative cost cycle, with “a” as the start node, which edge when considered in step 6 of the algorithm will make the algorithm return false? Assume the for loop in step 5 considers the edges in the following order: a->d, a->e, b->c, b->a, e->b.

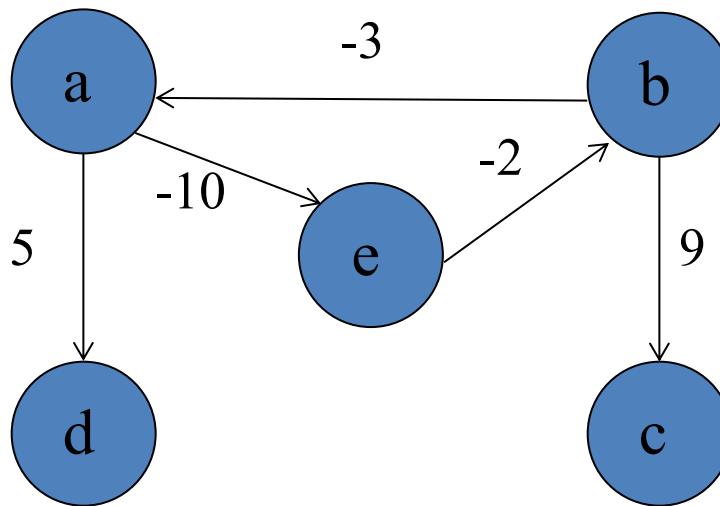

- A. edge a->d edge B. a->e C. edge b->c D. edge b->a **E. edge e->b**

19. Do Problem 24.2-1 on p. 657 of the text. Then answer the following question. The for loop in step 3 of the DAG-SHORTEST-PATHS algorithm on text p. 655 will run six times. **True or False?** The “d” values of none of the six nodes will change during the fourth, fifth and sixth iterations of the for loop.

20. Consider the graph below with nodes numbered 1-5 (node numbers are inside the circles) with edge costs as shown. Simulate Dijkstra's algorithm on this graph with 1 as the start node, and answer the following question. The algorithm will fail to find the shortest paths because the graph has negative weight edges. That is, the final “d” values of nodes after the algorithm completes may or may not have the correct costs of the shortest paths to those nodes from the start node 1. The d-values of which nodes are incorrectly computed by the algorithm?

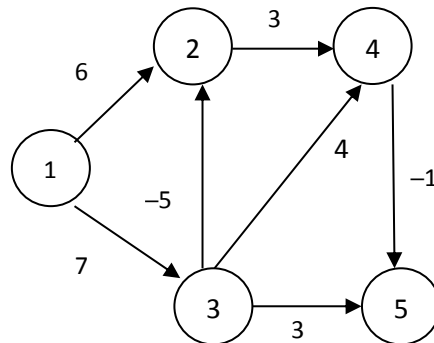

- A. nodes 2 & 3 **B. nodes 2 & 4** C. nodes 3 & 5 D. nodes 3 & 4 E. nodes 4 & 5