

## COMP3500 – Frequently Asked Questions

### Project 4 – Concurrent Computing: Cats and Mice

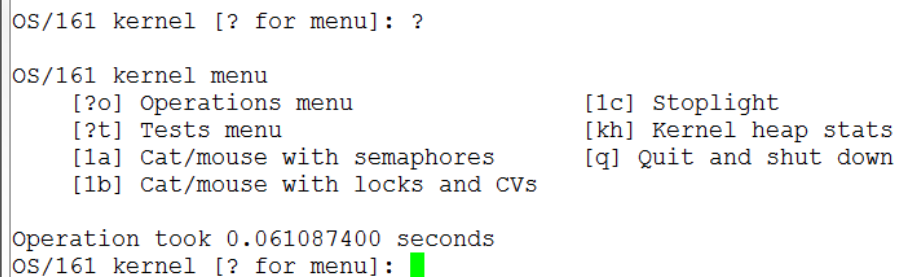
1. While trying project 4, we boot up os161, and go to the test menu, but there isn't a 1a option test for the cat and mouse.

**Answer:** Please follow the following instructions to rebuild kernel for project 3.

```
%cd ~/cs161/src
%./configure
%cd ~/cs161/src/kern/conf
%./config ASST1

% cd ../compile/ASST1
% make depend
% make
% make install
```

Now you can reboot your OS161 and you will find the following new menu.

A screenshot of a terminal window showing the OS/161 kernel menu. The prompt is 'OS/161 kernel [? for menu]: ?'. The menu lists several options: '[?o] Operations menu', '[?t] Tests menu', '[1a] Cat/mouse with semaphores', '[1b] Cat/mouse with locks and CVs', '[1c] Stoplight', '[kh] Kernel heap stats', and '[q] Quit and shut down'. Below the menu, it says 'Operation took 0.061087400 seconds' and the prompt returns to 'OS/161 kernel [? for menu]:' with a green cursor.

```
OS/161 kernel [? for menu]: ?

OS/161 kernel menu
[?o] Operations menu          [1c] Stoplight
[?t] Tests menu              [kh] Kernel heap stats
[1a] Cat/mouse with semaphores [q] Quit and shut down
[1b] Cat/mouse with locks and CVs

Operation took 0.061087400 seconds
OS/161 kernel [? for menu]: █
```

2. How to use semaphores in OS/161?

**Answer:** Please follow the sample code below to create and use semaphores to solve the cats-mice synchronization problem.

```
struct semaphore *testsem; /* Declare a semaphore */

testsem = sem_create("testsem", 2); /* Create and init */
if (testsem == NULL) {
    panic("synctest: sem_create failed\n");
}

P(testsem); /* Wait(testsem) */

kprintf("ok\n");

V(testsem); /* Signal(testsem) */
```

3. How to implement “play around” and “eat food” in the cats-mice algorithms?

**Answer:**

```
#define MAXTIME 3 /* You may change 3 to any number */  
  
clocksleep(random() % MAXTIME);
```

4. I am having issues with implementing the catlock portion of the assignment. I tried using a setup similar to the semaphore implementation but this hasn't worked out.

**Answer:** catlock.c is use the lock and condition variable mechanisms to solve the cats-mice problem. You must implement the lock and condition variable mechanisms first before working on catlock.c

5. Does it matter where we put the play around portion of cat and mouse? Is it supposed to be immediately after they finish eating or just at the end to make it wait before it tries to eat again?

**Answer:** Use the following state to make cats or mice to wait before eat again.

```
clocksleep(random() % MAXTIME);
```

6. When we were working on our project today, I ran into an error when running my implementations for the cat and mouse problem. The error was “Fatal Exception 2 (TLB miss on load) in kernel mode”. Do you have any advice on what could cause this error?

**Answer:** "TLB miss bug" can be detected using gdb. In the attached file (GDB and OS161-TLB Miss.html), you will find instructions how to use gdb to keep track of "TLB miss" related bugs. You may search "TLB miss" in the attached html file for important information.

7. In the catsem.c and catlock.c files, are we allowed to modify the parameters of functions like catsem() and mousesem(), or are we supposed to just modify the code inside and use the current parameters?

**Answer:** There is no need to modify the parameters of the functions like catsem() and mousesem(). If you choose to modify the prototypes (e.g., parameter lists) of any function, you have to modify the callers of the function accordingly.

8. **Early exit to menu/debugging issue.**

We were debugging catsem, and after one cat printed its "in the kitchen" message the "operation took x seconds" and the main menu came back up in the run terminal. However, we were able to continue to step through catsem in the GDB terminal. Is this behavior normal for GDB and os161 when a bug is encountered?

**Answer:** To avoid "early exit to menu", your test driver code (see, for example, catmouselock()) must wait until all the cat and mouse threads are done. The sample code is given below:

```
lock_acquire(mutex);  
while (num_cats_done < 6 || num_mice_done < 2)  
    cv_wait(donecv, mutex);  
lock_release(mutex);
```

### 9. `./sys161 kernel` not working all of a sudden

Running the kernel has suddenly began spitting out the following lines and then quitting...

```
sys161: System/161 release 1.14, compiled Aug 31 2016 14:16:22
sys161: 246000      cycles (119995k, 0u, 126005i)
sys161: 0 irqs 0 exns 0r/0w disk 0r/0w console 0r/0w/lm emufs 0r/0w
net
sys161: Elapsed real time: 0.010549 seconds (23.3197 mhz)
sys161: Elapsed virtual time: 0.009840000 seconds (25 mhz)
```

Why did we encounter this problem?

**Answer:** If you don't implement `lock` properly, you are likely to encounter this problem. Before implementing the `lock` mechanism, please try to implement the `cats_and_mice` concurrent program using the existing semaphore mechanism. If you encounter any problem with the `cats_and_mice` program, you may need to address the synchronization issues. Next, your team should start the implementation of the lock mechanism.

10. **Part 3 Testing.** In this step it discusses testing built-in threads such as `tt1` and `tt2` in the GDB debugger. Is part 3 only information for a later part of the project or is are we actually supposed to be running and testing these threads in step 3? (In short: Does part 3 have any actual steps to do or should we read it and move on to part 4?) And if we do have actual steps in part 3 how do we go about running and checking the threads.

**Answer:** Part 3 shows you an easy way to test your concurrent threads. You will follow the instructions to run and check your threads (e.g., cat threads and mouse threads).

11. **Meaning of "when cats aren't eating, they will not see mice eating."** In the project specifications it is stated that "when cats aren't eating, they will not see mice eating." (1) Does this mean that a cat can walk in at any time on a mouse that is eating? Or (2) does it just mean that a cat will not eat a mouse when that cat is not currently eating?

**Answer:** (1) "Does this mean that a cat can walk in at any time on a mouse that is eating?"  
In this case, the cat can't walk into the kitchen; the cat has to wait outside the kitchen.

(2) "Does it just mean that a cat will not eat a mouse when that cat is not currently eating?"  
Yes, you are right. The cat will not eat a mouse who is enjoying a dish, if the cat is waiting outside.

12. **`thread_sleep()` and `thread_wakeup()`.** Can you explain the `thread_sleep()` and `thread_wakeup()` functions to us?

**Answer:** In order to understand the implementation of `thread_sleep()` and `thread_wakeup()`, you have to study the `thread/thread.c` source code file. The global queue of sleepers is declared on lines 28-29 (see below).

```
28 /* Table of sleeping threads. */
29 static struct array *sleepers;
```

This queue is initialized in the `thread_bootstrap()` function as follows:

```

/*
 * Thread initialization.
 */
struct thread *
thread_bootstrap(void)
{
    struct thread *me;

    /* Create the data structures we need. */
    sleepers = array_create();
    if (sleepers==NULL) {
        panic("Cannot create sleepers array\n");
    }
}

```

The `thread_sleep()` function (see line 496) calls the `mi_switch()` function (see line 337) to place the current thread (i.e., `cur_thread`) into the sleepers list (i.e., the list of sleepers). `mi_switch()` in turn invokes the `array_add(sleepers, cur)` (see line 383) to insert `cur_thread` into `sleepers`.

The `thread_wakeup()` function (see line 511) wakes up one or more threads who are sleeping on "sleep address" `ADDR`. If you only want to wake up a single sleeper, you will have to modify this function by adding a `break` statement at the end of the `if` statement. For example,

```

If (t->t_sleepaddr == addr) {
    ...
    assert(result == 0);
    break;
}

```

**13. Initialization.** Do we need to initialize values for

```

turn_type
cats_in_this_turn
cats_eat_count
dish1_busy
dish2_busy
mydish?

```

If we are supposed to initialize these should they be global variables to local to `catlock`, `mouselock`, etc?

**Answer:** All the global variables must be initialized by the coordinator function (i.e., the parent thread of cats/mice threads).

**14. OS161 Panicking on startup after implementing lock.** I just finished implementing the lock, and everything compiles fine. However, after it starts, `os161` fails with this error:

```

panic: Assertion failed: SAME_STACK(curkstack-1,
(vaddr_t)tf), at ../../arch/mips/mips/trap.c:220
(mips_trap)

```

How to solve this problem?

**Answer:** There's probably a bug in your lock implementation. For example, if you have a `print` statement at the top of one of the lock methods, you may have the above error.

15. **Waking a single thread.** I have completed my `synch.c` implementation and it seems to work fine when I test it. However, I implemented `cv_signal()` and `cv_broadcast()` with the same code which leads me to believe that my solution is incorrect. My problem is that I could not find any way of waking a single thread in `thread.c`. `thread.c` only provides `thread_wakeup()` which will wake all threads sleeping on the same flag. Is there something I am missing?

**Answer:** You'll need to make a new function in `thread.c` that only wakes up one thread. It is very similar to `thread_wakeup()` since you only need to add one line of code to the body of the for loop. Be sure to put its prototype in `thread.h`. The lecture notes "08c1-Project 3-7 Thread Sleep and Wakeup.pptx" shows you how to implement a new `thread_wakeup()` function that only wakes up a single thread. Please download the lecture notes on Canvas.

16. **Arrays to store cats' name and mice names.** Do we need arrays to store cat names and mouse names? Because I see some comments on Slides that says print cat name. (Contributed by Pengfei Yao, Fall'18)

**Answer:** Each animal (e.g., cat or mouse) has its name stored as a string. You may build a `cat_name` array of strings to store all the cat names; you should also declare a `mouse_name` array of strings to store all the mouse names. The names may be hard coded in your program.

17. **For Loops.** Are we recommended to change the for-loops in the driver functions? (Contributed by Marco Zuniga, Fall'18)

**Answer:** The two test drivers are the `catmousesem()` and `catmouselock()` functions, which are invoked in `menu()` (see Lines 501 and 502 in `main.c`). You must modify these two driver functions in terms of for loops. For example, a *while* loop might be better than a *for* loop in the driver functions. Without finalizing these two drive functions, your cats and mice won't work. For option 1, please modify `catmousesem()`. If you choose option 2, you should modify `catmouselock()`.

18. **catsem.c.** What is the coordinator function in `catsem.c`? (Fall'19)

**Answer:** The coordinator function in `catsem.c` is the `catmousesem()` function.

19. **Header files in catsem.c.** Do we need to create anymore functions or have anymore `#include` statements in the `catsem.c` file? (Fall'19)

**Answer:** Your `catsem.c` should include the following header files:

```
#include <types.h>
#include <lib.h>
#include <synch.h>
#include <test.h>
#include <thread.h>
```

For example, the prototype of the coordinator function `catmousesem()` can be found in `src/kern/include/test.h`

Please feel free to define any new functions. If you create any new header file to contain the prototypes of new functions, please remember to (1) update the configuration file and (2) reconfigure your source code tree to create new make files.

20. **Bool.** How can I define a Boolean data type? (Fall'19)

**Answer:** You can define the Boolean data type as:

```
typedef int bool;
#define TRUE 1
#define FALSE 0

/* Sample Usage */
volatile bool no_cat_eat;
no_cat_eat = TRUE;
```

21. **Compilation Error.** Whenever I declared and initialized a boolean like this:

```
bool volatile no_mouse_eat = true;
```

I received the following compiler error whenever I do make depend

```
error: expected '=', ',', ';', 'asm' or '__attribute__' before
'volatile'
```

How to fix this error? (Fall'19)

**Answer:** You must define a Boolean as a new data type. See the answer for question 20 above.

REVISED: Oct. 20, 2019

VERSION 2.0