

CPU Scheduling

1

CPU Scheduling

- Basic Concepts
- Scheduling Criteria
- Scheduling Algorithms

4.2

2

Basic Concepts

- Maximum CPU utilization obtained with multiprogramming
- CPU-I/O Burst Cycle – Process execution consists of a cycle of CPU execution and I/O wait
- CPU burst distribution

4.3

3

Alternating Sequence of CPU And I/O Bursts

```
Printf("enter the three variables x,y,z"); } I/O-Burst
scanf("%i %i %i",&x,&y,&z); } I/O-Burst
if(x>y) { CPU-Burst
    if(x>z) printf("x is greatest"); I/O-Burst
    else printf("z is greatest"); I/O-Burst
} else { CPU-Burst
    if(y>z) printf("y is greatest"); I/O-Burst
    else printf("z is greatest"); I/O-Burst
}
getch();
```

4.4

4

CPU Scheduler

- Selects from among the processes in memory that are ready to execute, and allocates the CPU to one of them
- CPU scheduling decisions may take place when a process:
 1. Switches from running to waiting state
 2. Switches from running to ready state
 3. Switches from waiting to ready
 4. Terminates
- Scheduling under 1 and 4 is *nonpreemptive*
- All other scheduling is *preemptive*

4.5

5

Dispatcher

- Dispatcher module gives control of the CPU to the process selected by the short-term scheduler; this involves:
 - switching context
 - switching to user mode
 - jumping to the proper location in the user program to restart that program
- *Dispatch latency* – time it takes for the dispatcher to stop one process and start another running

4.6

6

Scheduling Criteria

- CPU utilization – keep the CPU as busy as possible
- Throughput – # of processes that complete their execution per time unit
- Turnaround time – amount of time to execute a particular process
- Waiting time – amount of time a process has been waiting in the ready queue
- Response time – amount of time it takes from when a request was submitted until the first response is produced, **not** output (for time-sharing environment)

4.7

7

Optimization Criteria

- Max CPU utilization
- Max throughput
- Min turnaround time
- Min waiting time
- Min response time

4.8

8

First-Come, First-Served (FCFS) Scheduling

- Processes are executed on first come, first serve basis. FCFS is non-preemptive.
- Easy to understand and implement
- Poor in performance as average wait time high

Process	Burst Time
P_1	24
P_2	3
P_3	3


- Suppose that the processes arrive in the order: P_1, P_2, P_3

4.9

9

First-Come, First-Served (FCFS) Scheduling

- The Gantt Chart for the schedule is:



- Waiting time for $P_1 = 0; P_2 = 24; P_3 = 27$
- Average waiting time: $(0 + 24 + 27)/3 = 17$


4.10

10

FCFS Scheduling (Cont.)

Suppose that the processes arrive in the order
 P_2, P_3, P_1

- The Gantt chart for the schedule is:



- Waiting time for $P_1 = 6; P_2 = 0, P_3 = 3$
- Average waiting time: $(6 + 0 + 3)/3 = 3$
- Much better than previous case
- *Convoy effect* short process behind long process

4.11

11

Shortest-Job-First (SJF) Scheduling

- Associate with each process the length of its next CPU burst. Use these lengths to schedule the process with the shortest time
- Two schemes:
 - Non-preemptive – once CPU given to the process it cannot be preempted until completes its CPU burst
 - Preemptive – if a new process arrives with CPU burst length less than remaining time of current executing process, preempt. This scheme is known as the Shortest-Remaining-Time-First (SRTF)
- SJF is optimal – gives minimum average waiting time for a given set of processes

4.12

12

Example of Non-Preemptive SJF

Process	Arrival Time	Burst Time
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4



4.13


13

Example of Non-Preemptive SJF

Process	Arrival Time	Burst Time
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4



□ SJF (non-preemptive)



□ Average waiting time = $(0 + 6 + 3 + 7)/4 = 4$

□ Average turnaround time = $(7 + 10 + 4 + 11)/4 = 8$

4.14


14

Example of Preemptive SJF

Process	Arrival Time	Burst Time
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4



□ SJF (preemptive) = SRT (Shortest Remaining Time)



□ Average waiting time = $(9 + 1 + 0 + 2)/4 = 3$

4.15

15

Priority Scheduling

- A priority number (integer) is associated with each process
- The CPU is allocated to the process with the highest priority (smallest integer = highest priority)
 - Preemptive
 - nonpreemptive
- SJF is a priority scheduling where priority is the predicted next CPU burst time
- Problem = Starvation – low priority processes may never execute
- Solution = Aging – as time progresses increase the priority of the process

4.16

16

Round Robin (RR)

- Each process gets a small unit of CPU time (*time quantum*), usually 10-100 milliseconds. After this time has elapsed, the process is preempted and added to the end of the ready queue.
- If there are n processes in the ready queue and the time quantum is q , then each process gets $1/n$ of the CPU time in chunks of at most q time units at once. No process waits more than $(n-1)q$ time units.
- Performance
 - q large \Rightarrow FIFO
 - q small $\Rightarrow q$ must be large with respect to context switch, otherwise overhead is too high

4.17

17

Example of RR with Time Quantum = 20

Process	Burst Time
P_1	53
P_2	17
P_3	68
P_4	24




4.18

18

Example of RR with Time Quantum = 20

Process	Burst Time
P_1	53
P_2	17
P_3	68
P_4	24

□ The Gantt chart is:



□ Typically, higher average turnaround than SJF, but better *response*

4.19

19


Multilevel Queue

- Ready queue is partitioned into separate queues:
 - foreground (interactive)
 - background (batch)
- Each queue has its own scheduling algorithm
 - foreground – RR
 - background – FCFS
- Scheduling must be done between the queues
 - Fixed priority scheduling; (i.e., serve all from foreground then from background). Possibility of starvation.
 - Time slice – each queue gets a certain amount of CPU time which it can schedule amongst its processes

4.20

20

Multilevel Queue Scheduling

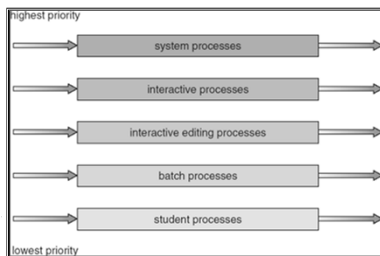

4.21

21

Multilevel Feedback Queue

- A process can move between the various queues; aging can be implemented this way
- Multilevel-feedback-queue scheduler defined by the following parameters:
 - number of queues
 - scheduling algorithms for each queue
 - method used to determine when to upgrade a process
 - method used to determine when to demote a process
 - method used to determine which queue a process will enter when that process needs service

4.22

22


Example of Multilevel Feedback Queue

- Three queues:
 - Q_0 – RR with time quantum 8 milliseconds
 - Q_1 – RR time quantum 16 milliseconds
 - Q_2 – FCFS
- Scheduling
 - A new job enters queue Q_0 which is served FCFS. When it gains CPU, job receives 8 milliseconds. If it does not finish in 8 milliseconds, job is moved to queue Q_1 .
 - At Q_1 , job is again served FCFS and receives 16 additional milliseconds. If it still does not complete, it is preempted and moved to queue Q_2 .

4.23

23

Multilevel Feedback Queues

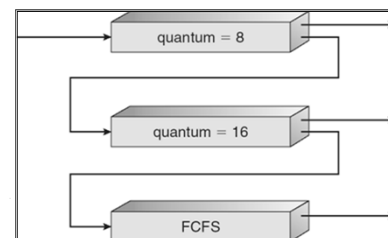

4.24

24

Thank you