

# **The CoCoME Platform for Collaborative Empirical Research on Information System Evolution**

**Evolutionscenario in the second founding period of SPP 1593**

Robert Heinrich, Niko Benkler, Tobias Haßberg, Ralf Reussner

June 11, 2018

# Contents

<b>1</b>	<b>Introduction</b>	<b>4</b>
<b>2</b>	<b>Evolution Scenarios</b>	<b>5</b>
2.1	Evolution Scenarios of the Hybrid Cloud-based Variant . . . . .	5
2.1.1	Setting up a Docker environment . . . . .	5
2.1.2	Adding a Mobile App . . . . .	5
2.2	Evolution Scenarios of the Microservice-based Variant . . . . .	6
2.2.1	Defining different Microservices . . . . .	6
<b>3</b>	<b>Design Details for Evolution Scenarios</b>	<b>7</b>
3.1	Adding a Mobile App Client . . . . .	7
3.1.1	Use Cases of the Mobile App . . . . .	7
3.1.2	Design of the Mobile App . . . . .	11
3.2	Using a Docker Environment . . . . .	13
3.3	Microservices Technology . . . . .	14
3.3.1	Orders . . . . .	14
3.3.2	Stores . . . . .	17
3.3.3	Reports . . . . .	22
3.3.4	Architectural overview . . . . .	23
<b>4</b>	<b>Implementation of Evolution Scenarios</b>	<b>25</b>
4.1	Using a Docker Environment . . . . .	25
4.2	Adding a Mobile App Client . . . . .	27
4.3	Using Microservice Technology . . . . .	29
<b>5</b>	<b>Conclusion</b>	<b>30</b>

# List of Figures

3.1	Use Case Diagram CoCoME Mobile App . . . . .	8
3.2	Component Diagram of the CoCoME Ecosystem After Adding the Mobile App Client . . . . .	11
3.3	Sequence Diagram of Searching an Item in the Mobile App Client . . . . .	12
3.4	Sequence Diagram of Processing a Sale . . . . .	13
3.5	Extended technology stack CoCoME . . . . .	14
3.6	Usecase 3 order products, part 1 . . . . .	15
3.7	Usecase 3 order products, part 2 . . . . .	16
3.8	Usecase 4 receive ordered products . . . . .	16
3.9	Usecase 1 process sale, part 1 . . . . .	18
3.10	Usecase 1 process sale, part 2 . . . . .	19
3.11	Usecase 2 manage express mode . . . . .	20
3.12	Usecase 7 change price . . . . .	20
3.13	Usecase 8 product exchange . . . . .	21
3.14	Usecase 5 show stock report . . . . .	22
3.15	Usecase 6 show delivery report . . . . .	23
3.16	Microservice architecture . . . . .	24
4.2	Assignment of archive files to Servers . . . . .	25
4.4	Assignment archive files to Servers . . . . .	25
4.1	Deployment diagram CoCoME . . . . .	26
4.3	Deployment diagram CoCoME Pickup Shop . . . . .	27
4.5	Primary Classes of the App . . . . .	28
4.6	Project structure microservices . . . . .	29

# **1 Introduction**

## 2 Evolution Scenarios

We implemented distinct evolution scenarios covering the categories adaptive and perfective evolution. Corrective evolution is not considered in the scenarios as this merely refers to fixing design or implementation issues.

### 2.1 Evolution Scenarios of the Hybrid Cloud-based Variant

This section introduces the two evolution scenarios of the hybrid cloud-based variant of CoCoME.

#### 2.1.1 Setting up a Docker environment

The CoCoME company must reduce IT administration costs but frequent updates to the enterprise and store software are necessary to continuously improve the entire system. As a consequence, IT staff need to update the system components as soon as a new software version is released. An Operations Team member has to get access to the actual server in order to undeploy the old version and replace it with the new one. This is time consuming and expensive as the updates have to be done manually.

Therefore, a Docker version is elaborated to simplify the administration process. As soon as a new software version of CoCoME is ready for delivery, the Development Team wrap it into a Docker Image. This Image can be automatically deployed to the destination server according to the principle of Continuous Deployment (CD) [3].

#### 2.1.2 Adding a Mobile App

After successfully adding a Pick-up Shop, the CoCoME company stays competitive with other online shop vendors (such as Amazon). In times of smartphones, customer do not only want to buy exclusively goods from their home computers. Purchasing goods 'on the way' comes more and more into fashion. This raises the idea to create a second sales channel next to the existing Pick-up Shop in the CoCoME system. As a consequence, more customers can be attracted to gain a larger share of the market.

The customer can order and pay by using the app. The delivery process is similar to the Pick-up Shop: The goods are delivered to a pick-up place (i.e. a store) of her/his choice, for example in the neighbourhood or the way to work. By introducing the Mobile App as a multi OS

application, the CoCoME system has to face various quality issues such as privacy, security and reliability. Also the performance of the whole application can be affected if many customers order via the app.

## 2.2 Evolution Scenarios of the Microservice-based Variant

This section introduces the evolution scenario of the Microservice-based variant of CoCoME.

### 2.2.1 Defining different Microservices

After a year of economical stagnation, the CoCoME company decides to restructure its infrastructure. Global players like Amazon or Netflix demonstrated that using a Microservice Architecture makes them more flexible regarding new functionality. When adding the Pick-up Shop, the CoCoME company realized that they have to break open the existing system. It was necessary to modify the *WebService::Inventory* and the *TradingSystem::Inventory* component [1]. Furthermore, adding a *MobileAppClient* demonstrated that the SOAP/WS\*-based web services provided by CoCoME are not compatible with REST-based App development.

Inspired by the flexibility and reusability of Microservices, the CoCoME company decided to invest money into a restructuring process. The current system is divided into a collection of loosely coupled services. Each of them covers a specific part of the former CoCoME system. The aim is to preserve the functionality of the current system and solely change its architecture. This enables the company to develop new markets much easier and therefore secures the future competitiveness. For example, the CoCoME company wants to extend their product range by offering movie streaming. This requires a vastly different system. Nevertheless, Customer Management like login and means of payment are identical to the former CoCoME system. Those components already exists as a Microservice a therefore can be taken over. The management is certain that this will soon result in economical growth.

## 3 Design Details for Evolution Scenarios

In this chapter we provide the detailed design documentation for each of the evolution scenarios introduced in the prior section. Sec. 3.1 sketches the design decision for the Mobile App that provides a second sales channel next to the existing Pick-up Shop. Sec. 3.2 describes the adaptive changes of using a Docker environment to simplify the update process. They are both based on, or at least use the Hybrid Cloud-based Variant of CoCoME [1]. In contrast, Sec. 3.3 provides a detailed design documentation of a new architectural version of CoCoME. This perfective evolution scenario is realized based on the Microservice idea.

### 3.1 Adding a Mobile App Client

Developing the Mobile App Client as an extension of CoCoME requires additional use cases. They are described in Sec. 3.1.1. Sec. 3.1.2 describes extensions on design level. The content of this chapter mainly originates from [4].

#### 3.1.1 Use Cases of the Mobile App

##### UC 14 - ProcessAppSale

*Brief Description* A Customer selects the product items s/he wants to buy and the payment by credit card is performed.

*Involved Actors* AppCustomer, Bank

*Precondition* The App is ready to process a new sale and the Customer already has an account registered in the System.

*Trigger* The Customer opens the app and wants to buy product items.

*Postcondition* The Customer has paid and the sale is registered in the inventory.

*Standard Process*

1. The AppCustomer searches products provided by the App.
2. The AppCustomer can see details for each product on a separate site.
3. The AppCustomer adds the product items s/he wants to purchase to the Shopping Cart. Step 1-3 is repeated until all items are added to the cart.

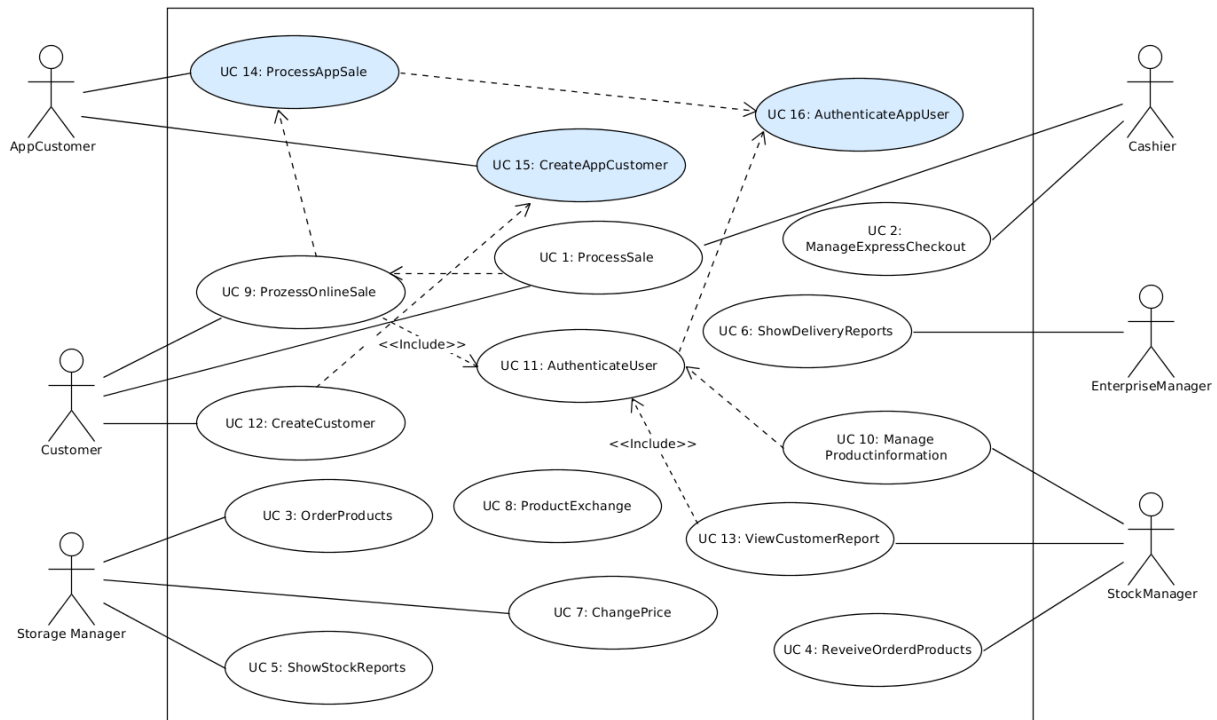


Figure 3.1: Use Case Diagram CoCoME Mobile App

4. The AppCustomer gets an overview of the items in the cart, their price and the running total.
5. The AppCustomer proceed to the Checkout
6. The AppCustomer selects the Store where s/he wants to pick up his/her purchased product items.
7. The AppCustomer is presented with a login form and is required to complete the "Authenticate user" use case.
8. In order to initiate card payment, the customer selects a credit card used for the purchase.
9. The AppCustomer enters his/her PIN in the designated field presented by the System.
10. The System presents the Customer with an overview of the purchase, the AppCustomer confirms the purchase and waits for validation. Step 9 is repeated until the validation is successful or the Customer decides to cancel the purchase.
11. Completed sales are logged by the System and sale information are sent to the Inventory in order to update the stock.
12. A success message is presented to the AppCustomer and the product items are being prepared to be picked up by the customer.
13. The AppCustomer closes the app.

### *Alternative or Exceptional Processes*

- In step 8: No Card available



1. In order to add a new credit card the Customer clicks the Add Card button.
  2. The Customer enters the card number of the new credit card and saves the card.
- In step 10: Card validation fails
1. The Customer tries again and again.
  2. Otherwise, the Customer can decide to cancel the purchase.

### **UC 15 - CreateAppCustomer**

*Brief Description* The app offers a possibility to create a new Customer account.

*Involved Actors* AppCustomer

*Precondition* The Customer does not have a Customer account yet and the app is started.

*Trigger* A new AppCustomer wants to create an account.

*Postcondition* The User is authenticated.

*Standard Process*

1. The AppCustomer has to fill out forms, requesting all necessary information to create a new AppCustomer account.
  - (a) Form for name, email and password
  - (b) Form for address
  - (c) Summary of the information
2. The Customer fills out the forms, verifies and submits the information.
3. The app verifies the given information and creates a new Customer account in the Inventory.

*Alternative or Exceptional Processes*

- In step 3 : Provided information is incorrect or not valid. The Customer is notified of the problem and enters the information again until it passes the check.

### **UC 16 - AuthenticateAppUser**

*Brief Description* The app provides the possibility to authenticate a User.

*Involved Actors* AppCustomer

*Precondition* The app is started.

*Trigger* An AppCustomer wants to authenticate his/herself.

*Postcondition* The AppCustomer is authenticated.

*Standard Process*

1. The AppCustomer gets displayed a login form. S/he is asked to enter email and password.
2. The App checks the provided credentials. If correct, the AppCustomer is logged in.

*Alternative or Exceptional Processes*

- In step 2: Wrong credentials
  1. An error message is displayed.
  2. The User may try again until the authentication succeeds.

### 3.1.2 Design of the Mobile App

Fig. 3.2 is the component of this evolution scenario. When adding the Mobile App client, the hybrid cloud-based variant of CoCoME did not have to be modified. Therefore, CoCoME is encapsulated in a single component. Simply the three web services *WebService::Inventory::LoginManager*, *WebService::Inventory::Store* and *WebService::Inventory::Enterprise* used by the App Client are emphasized. The entire component diagram for the hybrid cloud-based variant is available in the Technical Report [1].

Fig. 3.2 indicates that the AppShop requires an adapter to access the web services provided by CoCoME. This is because CoCoME uses SOAP/WS\*-based web services which are not compatible with the technology used to implement the AppShop Client. A more detailed introduction about the technology used to implement the Mobile App Client can be found in [4].

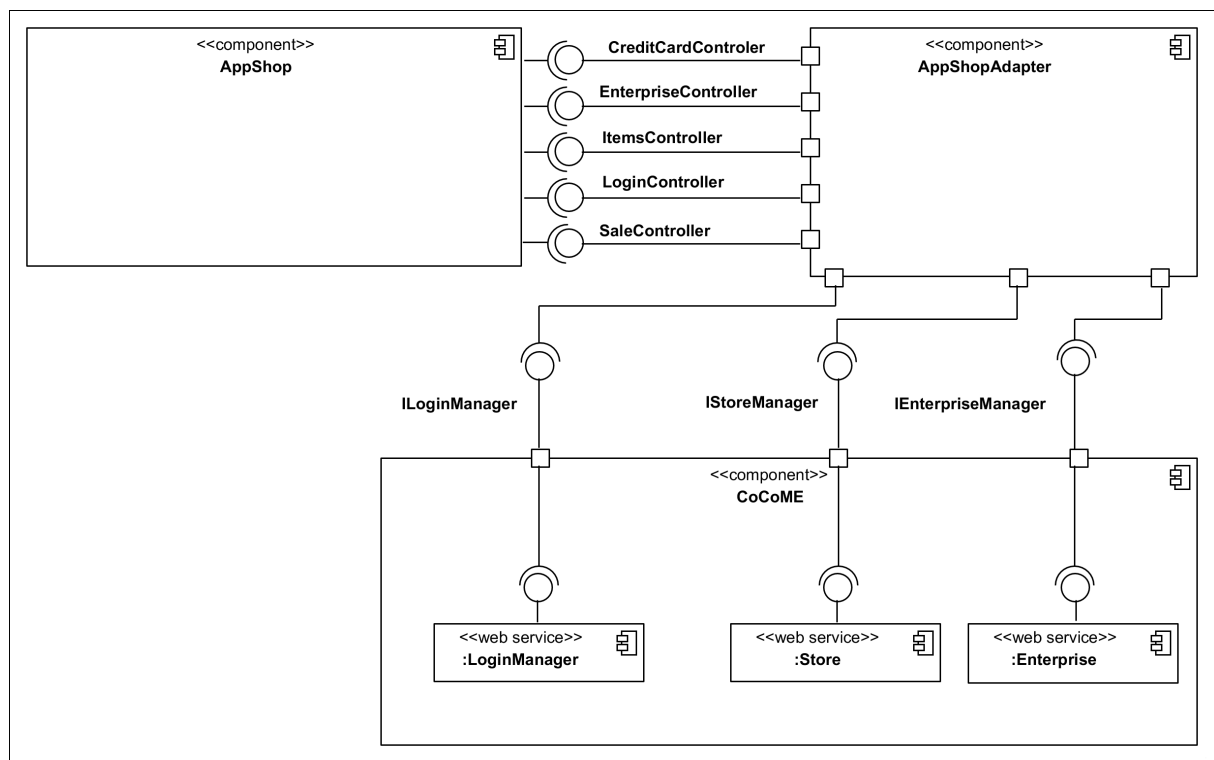


Figure 3.2: Component Diagram of the CoCoME Ecosystem After Adding the Mobile App Client

The *AppShopAdapter* consumes the three web services *WebService::Inventory::LoginManager*, *WebService::Inventory::Store* and *WebService::Inventory::Enterprise* and provides a Rest Api which is used by the actual *AppShop*. The Rest Api contains endpoints to retrieve and process Credit Card, Enterprise and StockItem information. To implement *UC14-16*, the Api also provides endpoints for user management and processing sales.

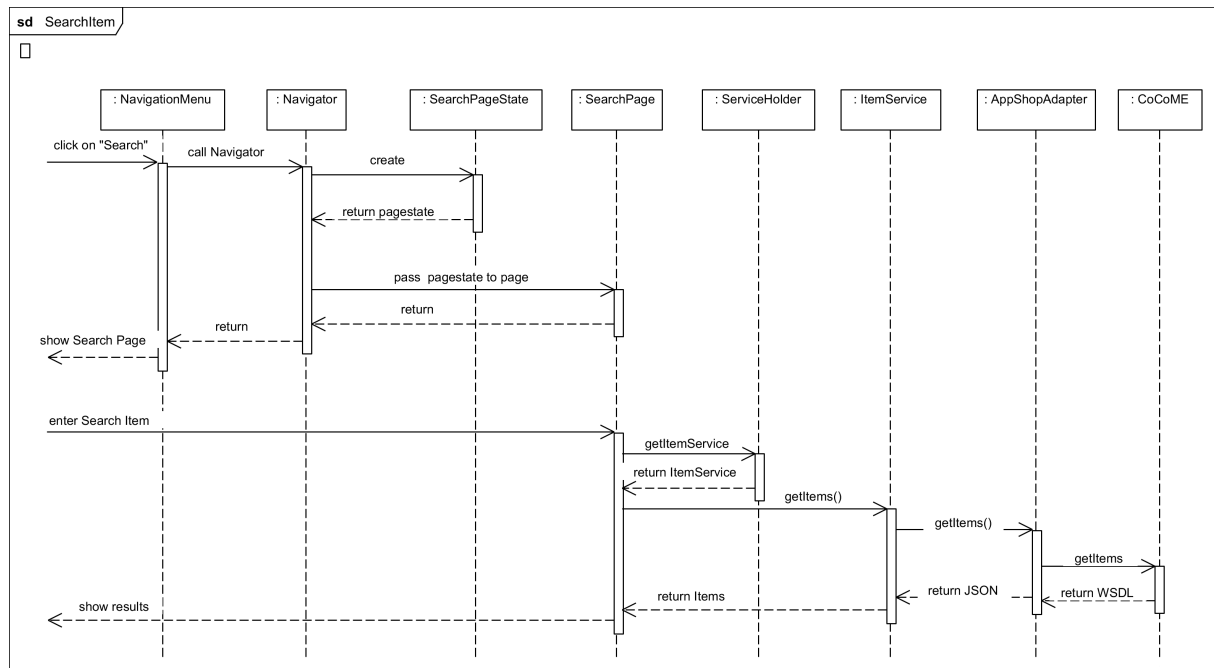


Figure 3.3: Sequence Diagram of Searching an Item in the Mobile App Client

Fig. 3.3 shows the process of opening a page to search for an Item. The customer opens the *WebShopClient* and triggers the "Search" function to search for an item. To open the page, the *NavigatorMenu* must call the *Navigator* which creates a pagestate object and passes the object to the page. This HTML page is now presented to the customer. To fill the page with information, i.e. when searching for a *ProductItem*, the page uses services provided by the *ServiceHolder*. In this case, the *ItemService* calls the responsible REST-Service of *AppShopAdapter* which in turn retrieves the necessary information from the WSDL services provided by CoCoME.

Fig. 3.4 demonstrates how the Mobile App Client processes sales. For the sake of clarity, the diagram is simplified and only contains the most important calls. First, the customer searches for items (according to Fig. 3.3). By clicking on the desired Item, the according *ItemPage* is shown. This page carries information about the Item. Here, the customer decides whether the Item should be added to the Shopping Cart or not. The last steps are repeated until the customer decides to proceed to the checkout. If not logged in, the customer gets forwarded to the *LoginPage*. When successfully logged in, the customer clicks the *BuyNow*-Button. The Sale process is finished as soon as the backend (CoCoME) has processed the sale.

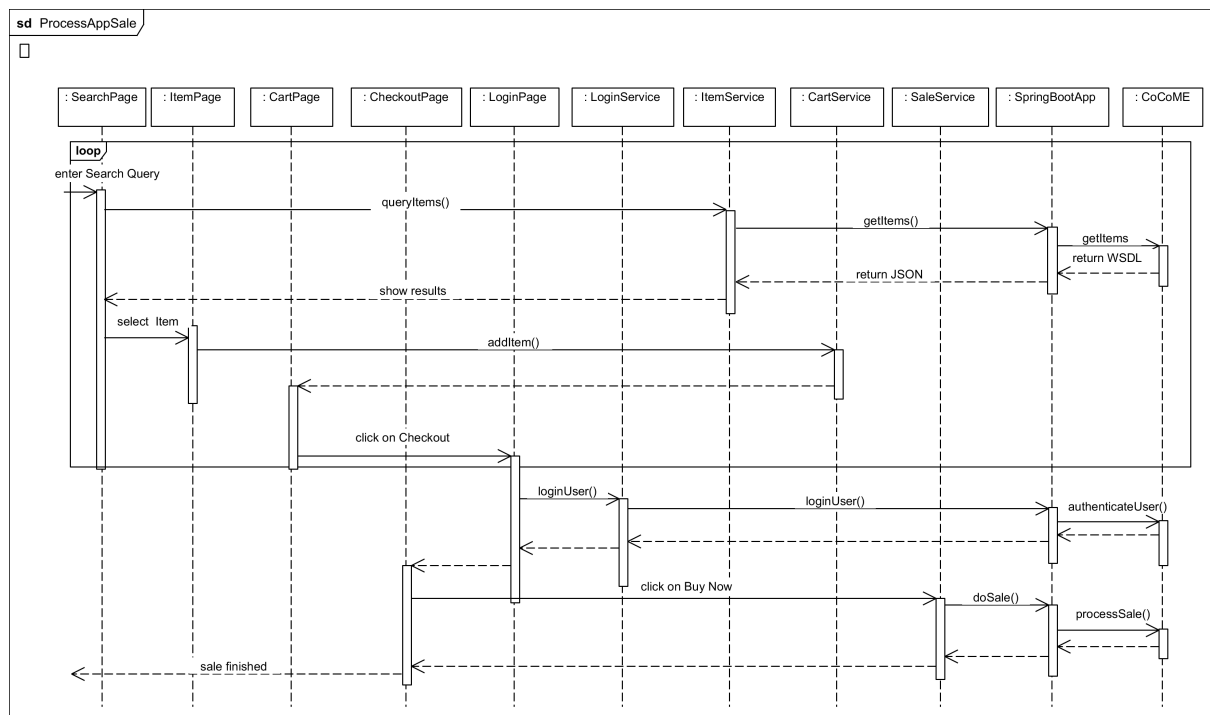


Figure 3.4: Sequence Diagram of Processing a Sale

## 3.2 Using a Docker Environment

As shown in Fig. 3.5, using a Docker Environment affects the technology stack by adding additional layers. More detailed, the given CoCoME Stack is moved into the Docker Deamon, which runs a Linux distribution. The original parts of the stack, like Glassfish and the Java Virtual Machine, are still a part of the stack.

The Dockerfile defines an environment based on the latest version of Ubuntu 16:04. Maven, Git and Java are also installed using the standard Ubuntu package manager.

Git has two purposes: On the one hand it is used to download the most recent version of CoCoME. On the other hand, it is used to download a prefabricated version of Glassfish that already includes domains and other adjustments required for CoCoME. Java is required by Glassfish and CoCoME as they need the Java Virtual Machine. Maven is needed to deploy the latest version of CoCoME onto the provided Glassfish servers. During the development, it was decided to implement and provide two different versions. The first version always pulls the most recent CoCoME source code from GitHub, downloads the entire dependencies with Maven, compiles and builds the project and finally deploys CoCoME on the Glassfish servers. As a consequence, creating and starting a Docker Container takes about one hour.

In contrast, the second version only pulls a prefabricated version of CoCoME from GitHub. Therefore, pulling the source code up to building the project is skipped. Maven does not have to be included in the technology stack. Solely, deploying CoCoME on the Glassfish server is

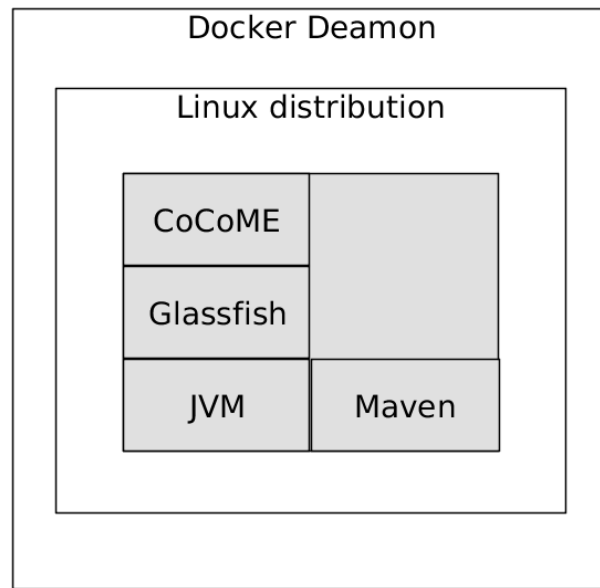


Figure 3.5: Extended technology stack CoCoME

necessary.

This reduces the deployment time to a few minutes but has a disadvantage: The prefabricated version is updated manually. Therefore, it is sometime not the most recent version.

By providing both, a fast deploying version and a current version, the user can choose what's the best for its situation.

### 3.3 Microservices Technology

In this section we provide a brief design documentation of the use cases that are defined in the hybrid cloud-based variant of CoCoME [2](p.4-10). The following subsections are divided into the Microservices and the corresponding Use Cases. Sec. 3.3.4 describes the general architectural overview of the Microservice variant of CoCoME.

#### 3.3.1 Orders

This section describes the design of the use cases implemented in the *Orders* Microservice that provides main parts of the functionality for UC 3 and UC 4.

##### Behavioural View on UC 3 - Order Products

For better understanding, UC 3 is divided in two steps. The first part is described in Fig. 3.6: A user chooses the product items to order and the corresponding amount. Each *ProductOrder* is stored in the *ProductOrderRepository* as a *OrderEntry*. In the second part (Fig. 3.7), the *OrderEntries* are wrapped in a single *ProductOrder* element that additionally contains information

about the store and the date of the order. When the user presses the button *Order*, the *OrderManagement* iterates over the collection of *OrderEntries* and sets a reference to the actual *ProductOrder*.

### Behavioural View on UC 4 - Receive Ordered Products

//The figure 3.8 shows, that first the *ProductOrder* element is refreshed and the delivery date is set to the passed date. After this, it performs for each *OrderEntry* a rest call to the store microservice in which the store itself is represented. With that rest call, the *StockItem*, which is representing the corresponding product in the store, is increased the amount of available products.

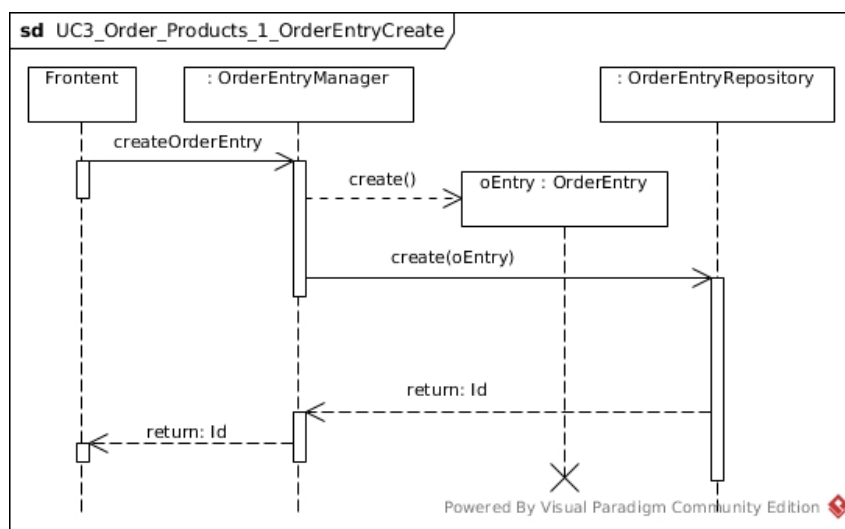


Figure 3.6: Usecase 3 order products, part 1

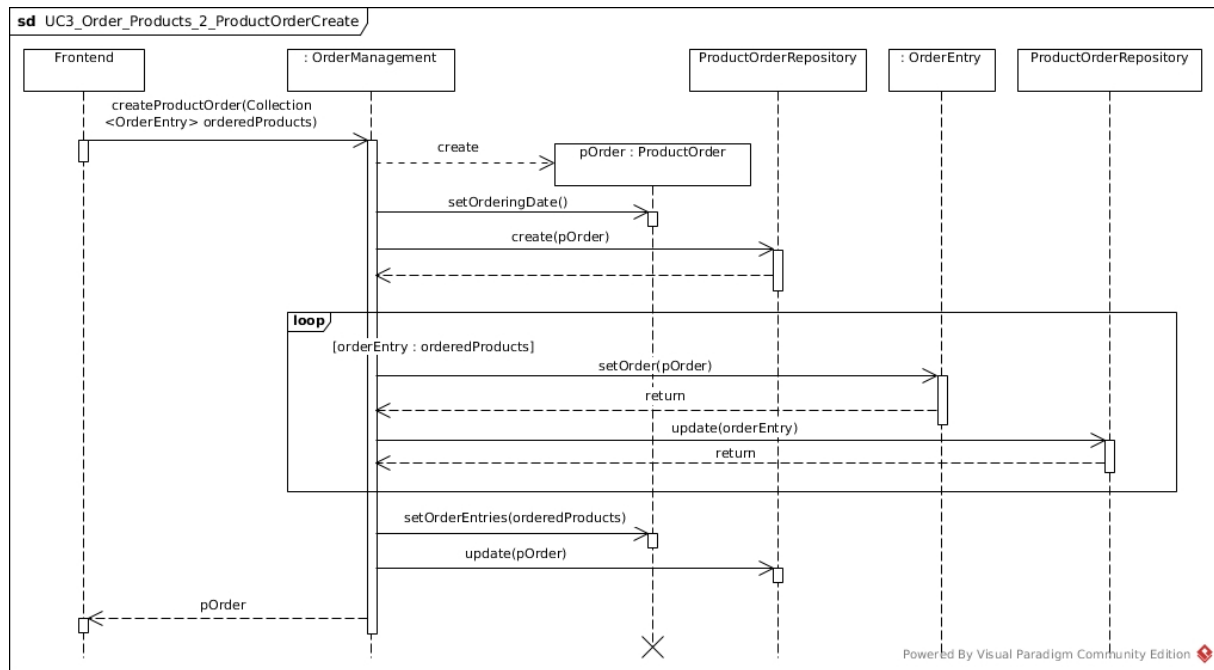


Figure 3.7: Usecase 3 order products, part 2

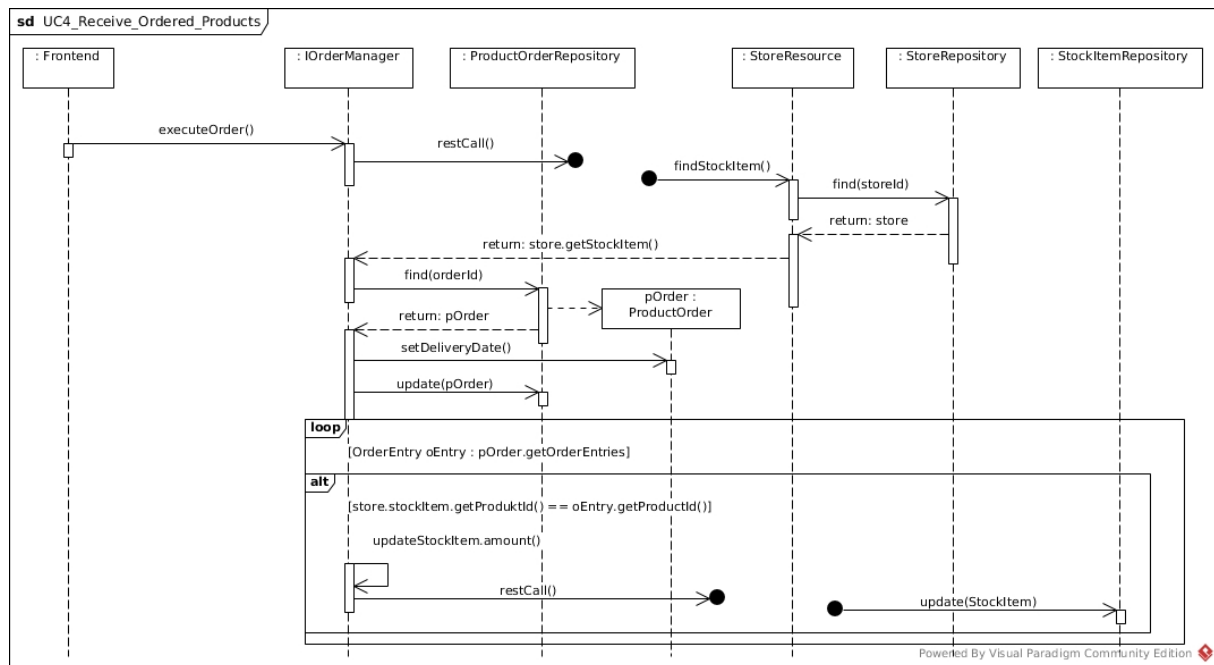


Figure 3.8: Usecase 4 receive ordered products



### 3.3.2 Stores

This section describes the design of the use cases implemented in the *Store* Microservice that provides main parts of the functionality for UC 1, UC 2, UC 7 and UC 8.

#### Behavioural View on UC 1 - Process Sale

Again UC 1 is divided in two parts (Fig. 3.9 and Fig. 3.10). The first part describes how a user can add products to the sale process. When the *startSale* action is executed, the sale mode is activated and the *CashDesk* is resetted from a previous, probably cancelled sale processes. To add products to the sale process, the user can either enter the barcode digit by digit using the keyboard or scan the barcode using a *Scanner*. Further, the user can choose how many products s/he wants to purchase. This process is depicted in the inner loop.

Several checks are executed when successfully entering the barcode: If an item with the same barcode was already added to the sale, then the total amount for this item is increased by the second purchase amount. If not, the item is added to the sale, provided that an item with this barcode exists. In both cases, the availability of the item amount in the stock is checked and reduced. If one of the conditions is violated, the attempt of adding a product with the provided barcode an amount is quit. Subsequently, the display is updated and the product information is added to the printer output.

The second part of this use case, shown in Fig. 3.10, handles the end of the sale process. By calling the *finishSale* routine when pressing the button *FinishSale*, the display is updated. Now, the user needs to choose between paying by card or cash and the *CashDesk* is set to the corresponding paying mode. In case the user wants to pay by credit card, s/he needs to enter the credit card details. In the other case, the cash amount is entered. In both cases, the information is checked to accuracy. After successfully ending the payment, the printer and display are updated and the *CashDesk* ends the sale process.

#### Behavioral View on UC 2 - Manage Express Checkout

Figure 3.11 shows, how each cash desk performs on an external call the *updateExpressLight* routine. In this, the cash desk checks by itself if based on the recently proceeded sales the Express light should be activated or not. In consequence, the express light is set to the correct value.

#### Behavioural View on UC 7 - Chane Price

As described in figure 3.12, in a first step, the database element which represents the store, managed by the store manager who wants to change the price is loaded. On this, the available products are filtered to find the one with the correct *productId*. Having the correct *StockItem* found, the sale price of that object can be updated. Afterwards, the *StockItem* object is updated in the database.

#### Behavioural View on UC 8 - Product Exchange

The process on usecase 8 is shown in figure 3.13. It starts at the end of an sale process. The

```
sequenceDiagram
    participant Frontend
    participant ICashDeskCommunicator as : ICashDeskCommunicator
    participant ICashDesk as : ICashDesk
    participant ICashBox as : ICashBox
    participant IDisplay as : IDisplay
    participant IScanner as : IScanner
    participant IStoreOrganizer as : IStoreOrganizer
    participant IPrinter as IPrinter

    Frontend->>ICashDeskCommunicator: startSale()
    activate ICashDeskCommunicator
    ICashDeskCommunicator->>ICashDesk: startSale()
    deactivate ICashDeskCommunicator
    activate ICashDesk
    ICashDesk->>ICashDesk: resetSale()
    deactivate ICashDesk
    ICashDesk->>IPrinter: resetPrinterOutput()
    deactivate ICashDesk
    activate IPrinter
    deactivate IPrinter

    alt [Products to Sale]
        alt
            loop [digit in Barcode]
                Frontend->>ICashDeskCommunicator: addDigitToBarcode(Char)
                activate ICashDeskCommunicator
                ICashDeskCommunicator->>ICashDesk: addDigitToBarcode(Char)
                deactivate ICashDeskCommunicator
                activate ICashDesk
                ICashDesk->>ICashBox: addToDigit(Char)
                deactivate ICashDesk
                activate ICashBox
                ICashBox->>IDisplay: addToDisplay(Char)
                deactivate ICashBox
                activate IDisplay
                deactivate IDisplay
            end

            Frontend->>ICashDeskCommunicator: submitBarcode()
            activate ICashDeskCommunicator
            ICashDeskCommunicator->>ICashDesk: submitBarcode()
            deactivate ICashDeskCommunicator
            activate ICashDesk
            ICashDesk->>ICashBox: submitBarcode()
            deactivate ICashDesk
            activate ICashBox
            ICashBox->>IDisplay: barcodeScanned(long Id)
            deactivate ICashBox
            activate IDisplay
            deactivate IDisplay
        alt
            Frontend->>ICashDeskCommunicator: submitBarcode(String)
            activate ICashDeskCommunicator
            ICashDeskCommunicator->>ICashDesk: submitBarcode(String)
            deactivate ICashDeskCommunicator
            activate ICashDesk
            ICashDesk->>IScanner: submitBarcode(String)
            deactivate ICashDesk
            activate IScanner
            IScanner->>IDisplay: barcodeScanned(long Id)
            deactivate IScanner
            activate IDisplay
            IDisplay->>ICashDesk: addDisplayLine(String)
            deactivate IDisplay
            activate ICashDesk
            deactivate ICashDesk
        end
    end

    alt
        [Product still in Inventory && enough in Stock]
            ICashDesk->>ICashDesk: increaseInventoryAmount()
            deactivate ICashDesk
            ICashDesk->>IStoreOrganizer: reduceStockAmount(Products)
            deactivate ICashDesk
            activate IStoreOrganizer
            IStoreOrganizer-->>ICashDesk: return
            deactivate IStoreOrganizer
            ICashDesk->>ICashDesk: updateRunningTotal()
            deactivate ICashDesk
        alt
            [Store contains StockItem with Id && enough in Stock]
                ICashDesk->>IStoreOrganizer: getStockItem(productId)
                deactivate ICashDesk
                activate IStoreOrganizer
                IStoreOrganizer-->>ICashDesk: return : product
                deactivate IStoreOrganizer
                activate ICashDesk
                ICashDesk->>ICashBox: addToSalesProducts(product)
                deactivate ICashDesk
                activate ICashBox
                ICashBox->>ICashDesk: reduceStockAmount(Products)
                deactivate ICashBox
                activate ICashDesk
                ICashDesk->>IStoreOrganizer: return
                deactivate ICashDesk
                activate IStoreOrganizer
                deactivate IStoreOrganizer
            else [else]
                ICashDesk-->>Frontend: return
                deactivate ICashDesk
            end
        end
    end

    ICashDesk->>IDisplay: getDisplayOutput()
    deactivate ICashDesk
    activate IDisplay
    IDisplay-->>ICashDesk: return: line(String)
    deactivate IDisplay
    activate ICashDesk
    ICashDesk->>IPrinter: addPrinterOutput(line)
    deactivate ICashDesk
    activate IPrinter
    deactivate IPrinter
    ICashDesk->>IDisplay: resetDisplayLine()
    deactivate ICashDesk
    activate IDisplay
    deactivate IDisplay
end
```

Figure 3.9: Usecase 1 process sale, part 1

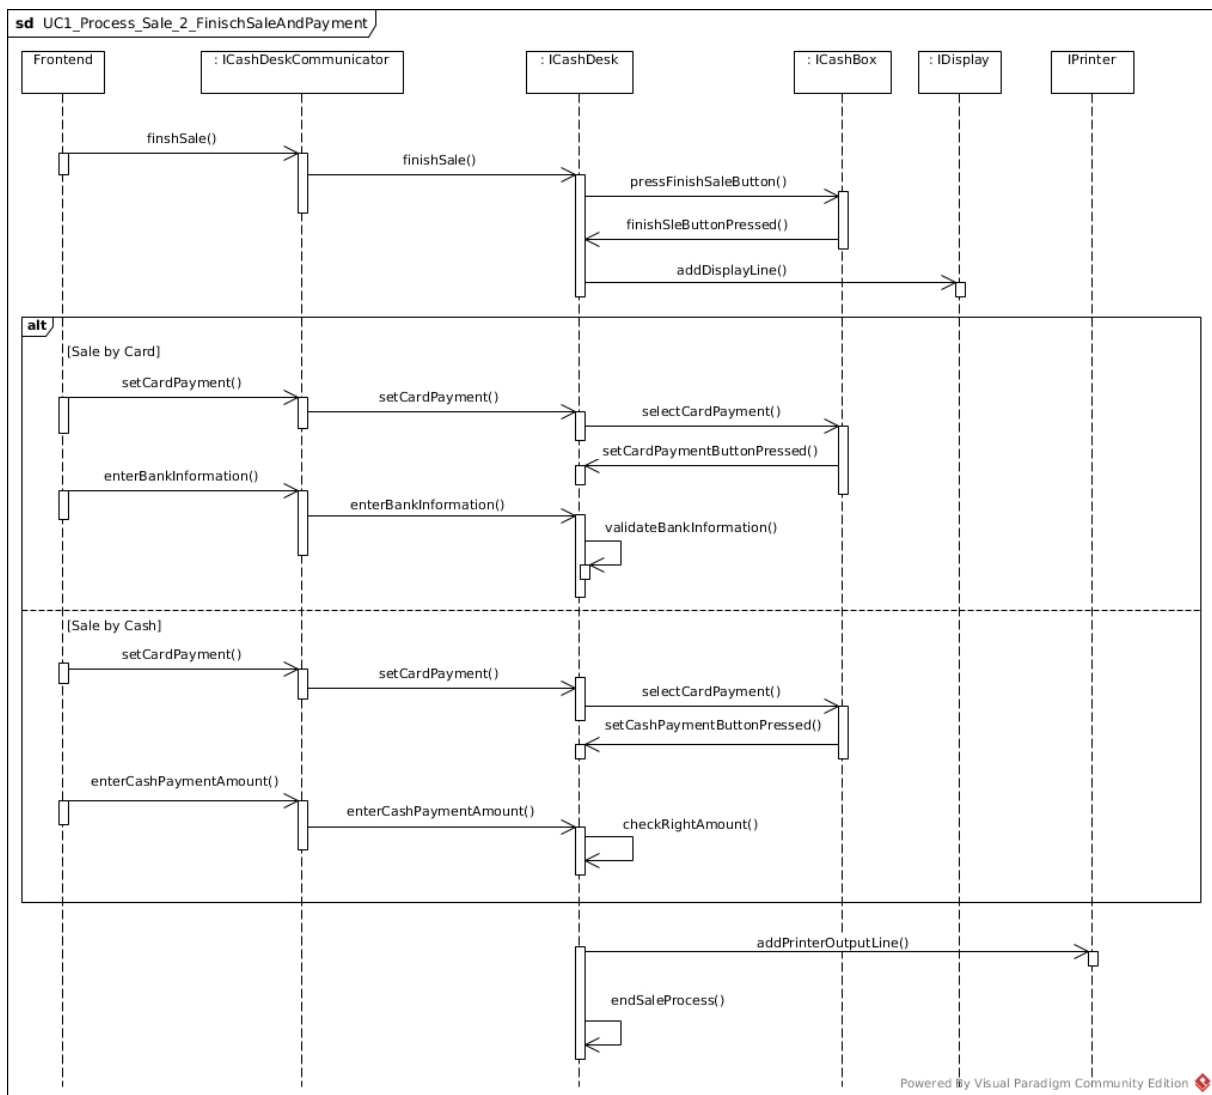


Figure 3.10: Usecase 1 process sale, part 2

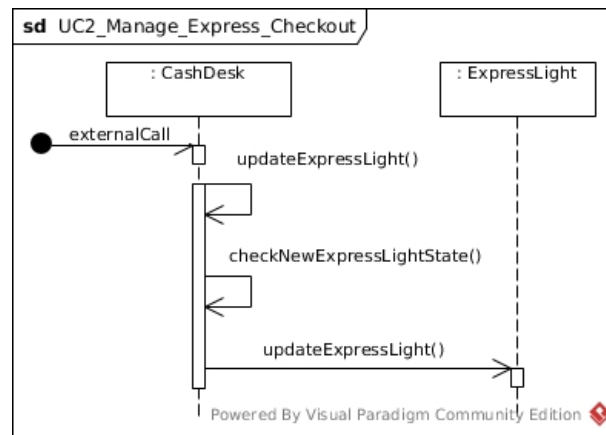


Figure 3.11: Usecase 2 manage express mode

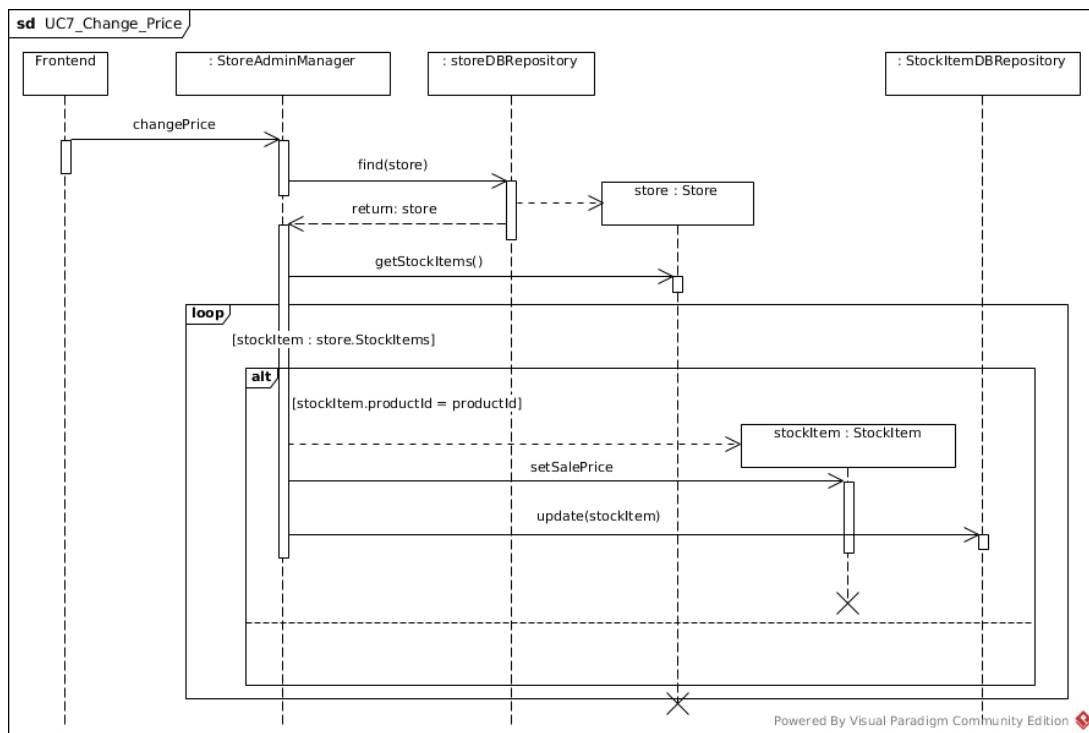


Figure 3.12: Usecase 7 change price

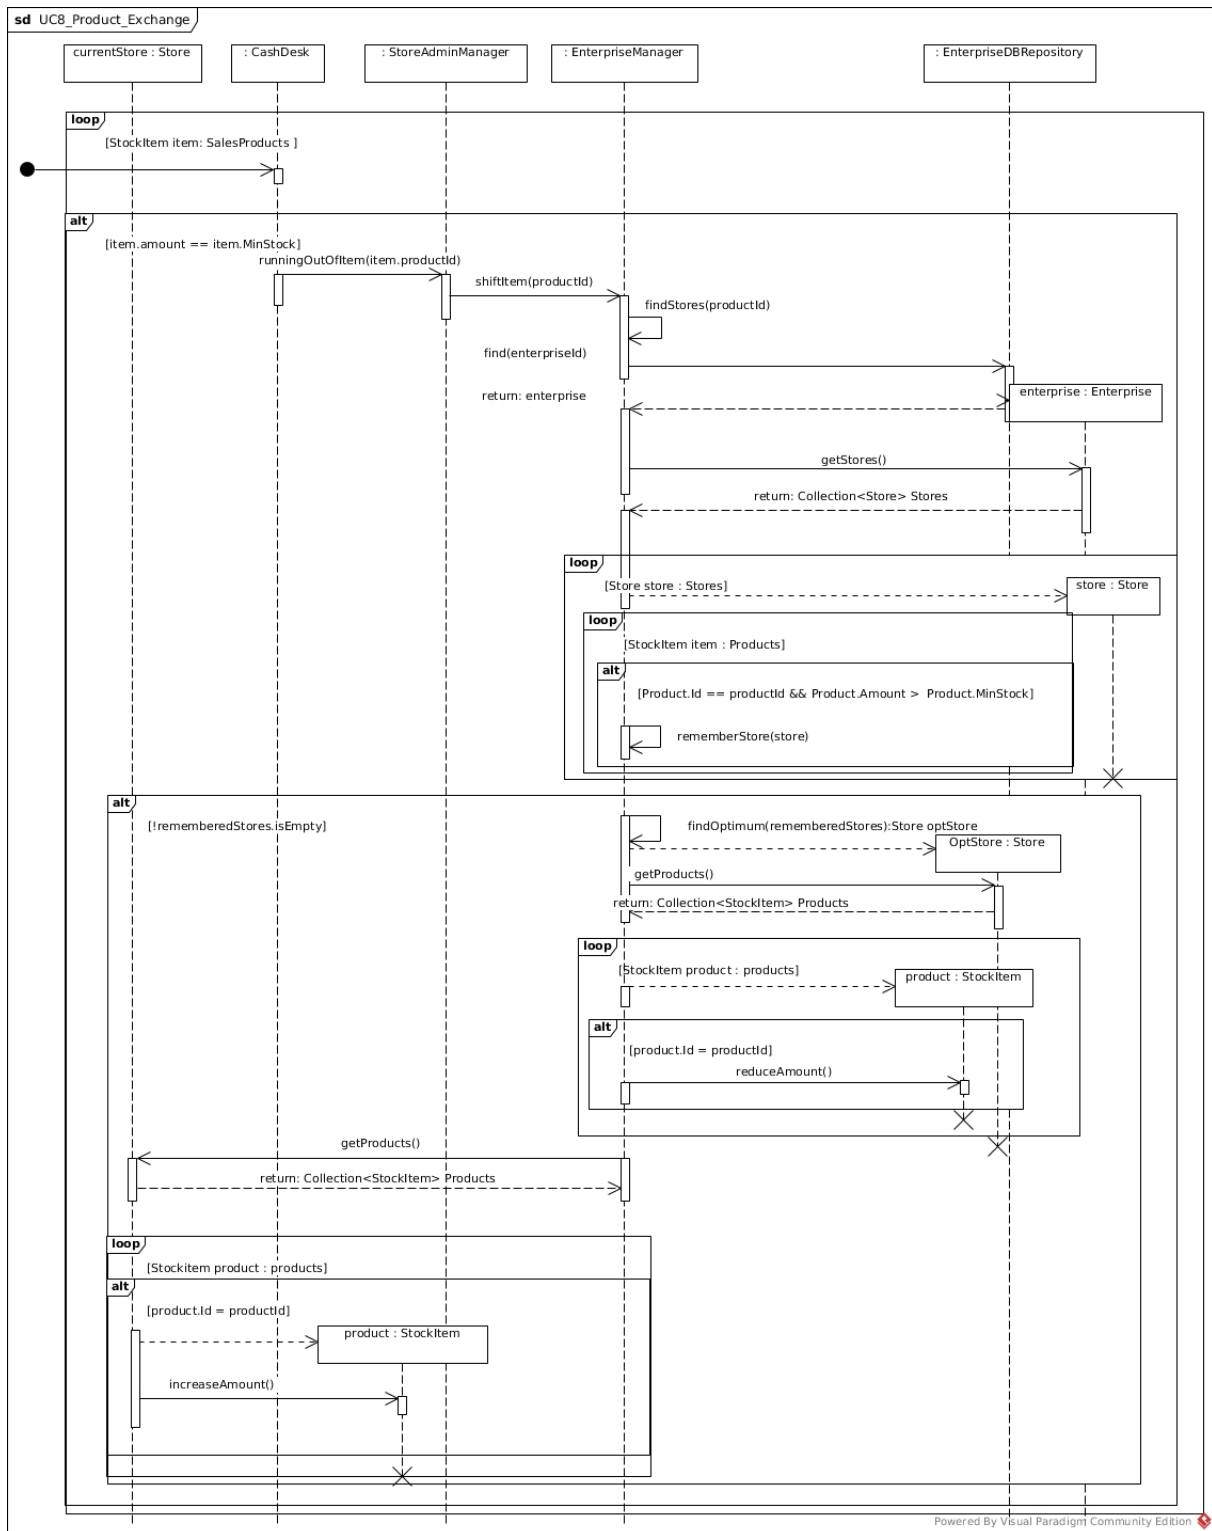


Figure 3.13: Usecase 8 product exchange

### 3.3.3 Reports

This section describes the design of the *Reports* microservice, which provides the functionality of the usecases 5 and 6.

#### Behavioural View on UC 5 and Uc 6 - Show Stock Report and Show Delivery Report

In the following, the realization of usecase 5 and 6 are described. Usecase 5 is described in figure 3.14 and usecase 6 in figure 3.15. In both cases, this microservice performs an rest call to receive informations from the microservice which contains the requested informations. This informations are returned on that request and are modified to represent the information in an proper format. That format is passed back to the calling frontend.

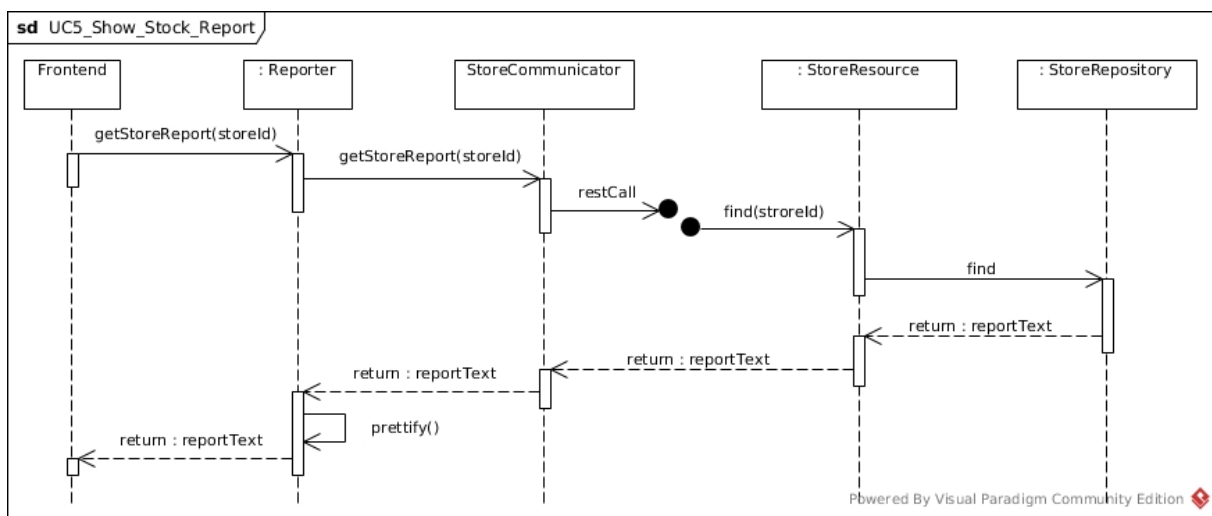


Figure 3.14: Usecase 5 show stock report

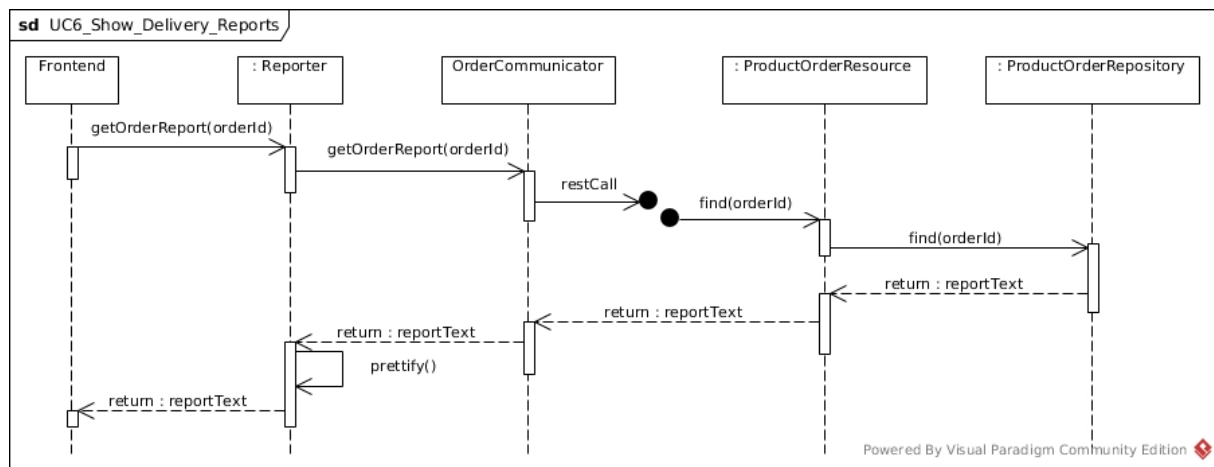


Figure 3.15: Usecase 6 show delivery report

### 3.3.4 Architectural overview

This section describes the architectural design of the microservices. As can be seen in figure 3.16, there are the four microservices *Orders*, *Reports stores* and *Produkts*. The microservices provides its own user interface pages, which can be loaded dynamically.

Each of the microservices provides functionality which primary works on the database, located in that microservice. More detailed, these are for the Orders microservice functionality like creating new orders, delivering orders and showing those. The reports microservice does not possess an own database. Instead this one collects informations by rest request to the other microservices. The stores service provides functionality, needed by enterprisemanagers or storemanagers for example creating new stores or changing the sales prices for goods. Further, this one also contains the functionality for the sale process. In detail, the cash desk with its accessories is implemented here. In microservice products functionality for creating new supplier or products is provided, but also for ordering them.

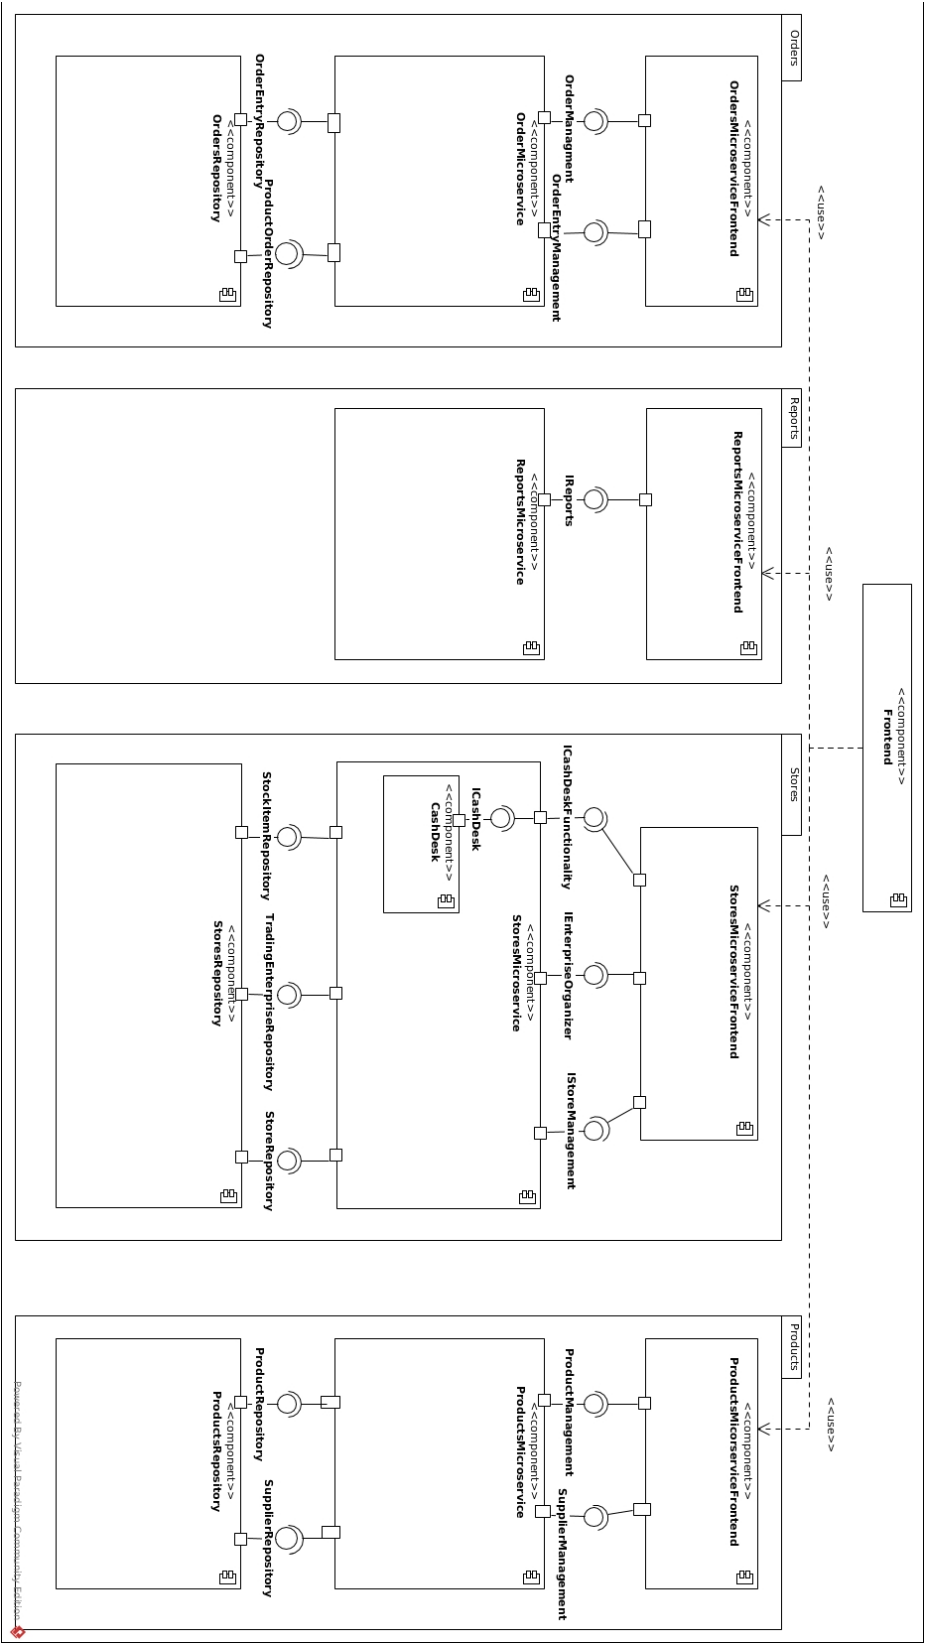


Figure 3.16: Microservice architecture



## 4 Implementation of Evolution Scenarios

This chapter describes implementation details for realizing the Docker environment 4.1, the Mobile App Client for the existing hybrid cloud-based variant of CoCoME (4.2) and the Microservice-based variant (4.3).

### 4.1 Using a Docker Environment

As shown in Fig. 4.1, the docker Container contains five different Glassfish servers. In particular they are called *WEB*, *ENTERPRISE*, *STORE*, *REGISTRY* and *ADAPTER*. By default, Glassfish provides a Derby DB that is connected to the Service Adapter using Java Database Conectivity (JDBS) interface. The deployment assignment within the Docker environment is identical to the one specified in CoCoME deployment guide. This means the maven generated archive files *cloud-web-frontend*, *enterprise-logic-ear*, *store-logic-ear*, *cloud-registry-sevice* and *service-adapter-ear* are deployed on the servers by using the following assignment:

Server	Deployment file
WEB	cloud-web-frontend
ENTERPRISE	enterprise-logic-ear
STORE	store-logic-ear
REGISTRY	cloud-registry-service
ADAPTER	service-adapter-ear

Figure 4.2: Assignment of archive files to Servers

As mentioned earlier, there are two versions of this Docker project. The fast version can be extended by the Pick-Up shop<sup>1</sup>. This Pick-Up shop runs inside a separate Docker container which is shown in figure 4.3. As shown in figure 4.3, this container provides only one Glassfish server.

Server	Deployment file
PICKUP_SHOP	cocome-pickup-war

Figure 4.4: Assignment archive files to Servers

<sup>1</sup><https://github.com/cocome-community-case-study/cocome-cloud-jee-web-shop>

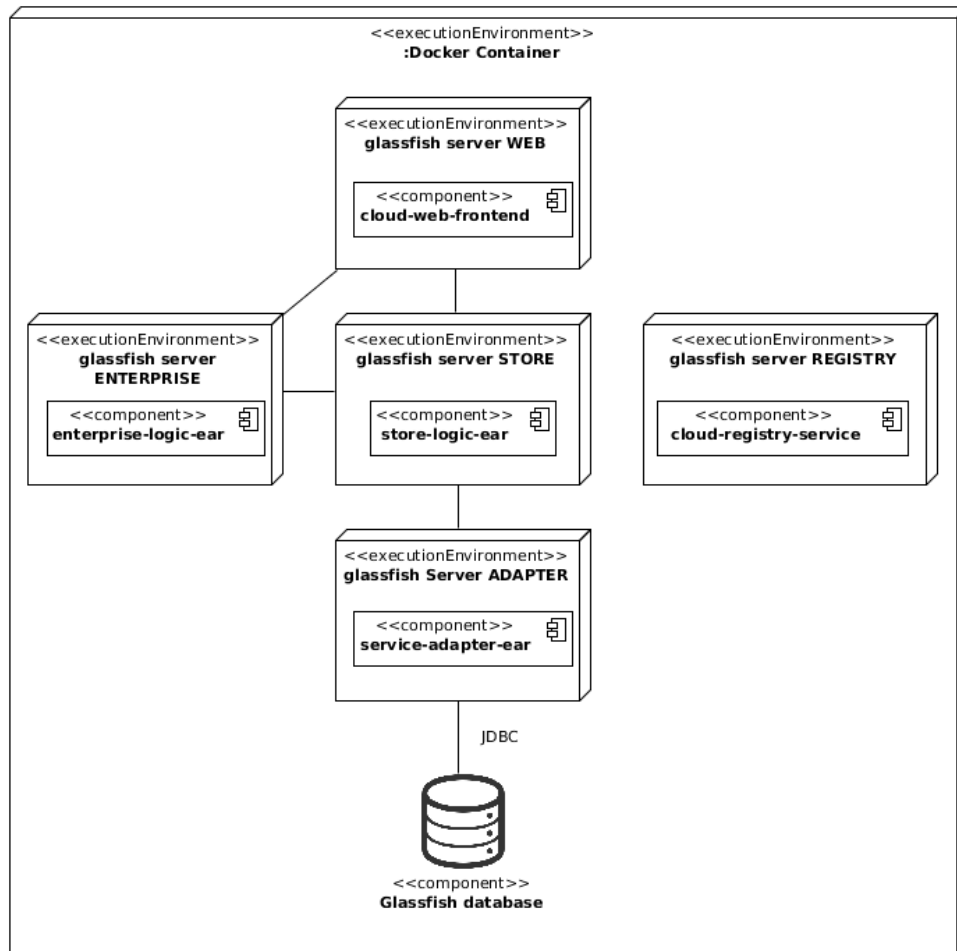


Figure 4.1: Deployment diagram CoCoME

To control the start of both containers, precisely the CoCoME and the Pick-Up Shop, another specific file is needed: the Docker Compose file. It ensures that the CoCoME Container is active, before the Pick-Up Shop container starts. This is necessary as the Pickup Shop requires a running instance of CoCoME to register itself.

Whereas CoCOME does not require the Pick-Up Shop, the inversion is not correct. Both containers need to communicate with each other. By default, docker prohibits any outgoing and ingoing communication from and in a container. This is solved by opening specific ports through which the communication is possible. Which ports the containers can use is specified in the Docker Compose file as well.

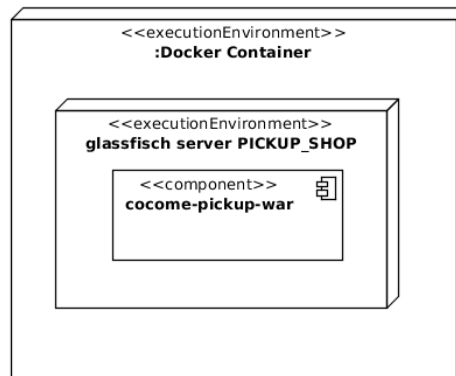


Figure 4.3: Deployment diagram CoCoME Pickup Shop

## 4.2 Adding a Mobile App Client

Adding a Mobile App Client did not require a modification within the hybrid cloud-based variant of CoCoME. The implementation was done using the Cordova framework and OnsenUI to provide a multi OS compatible backend and UI [4]. The App itself is written in Typescript/Javascript. Fig. 4.5 shows the principal classes and their relationships.

The *Navigator* is the primary class that manages the pages. The pages consist of two components: The *Page* itself and its *PageState*. The *PageState* is used to store and transfer the current status of a page. There are currently six different pages available: *IndexPage*, *SearchPage*, *ItemPage*, *CheckoutPage*, *CartPage* and *LoginPage*. For the sake of clarity, they are subsumed under the generic terms *ConcretePage* and *ConcretePageState*.

Pages use components. Such components are i.e. the *Navbar* or the *Searchbar*. These components are abstract descriptions of UI elements that are connected to the actual *HTML-elements* via Knockout.js. By using Knockout.js, changing values of a component results in an immediate change of the UI. Besides, the App Client retrieves information of the CoCoME system. As mentioned in 3.1.2, the Client is not able to access the CoCoME system directly. Therefore, the pages use *Services* provided by a *ServiceHolder* to call the *AppController*' Rest-API. The *AppController* is written in Java using the SpringBoot framework and converts the Rest-requests of the App Client to SOAP-Requests in order to match the CoCoME-API.



### Figure 4.5: Primary Classes of the App

### 4.3 Using Microservice Technology

The CoCoME microservice evolution scenario transfers the functionality of original CoCoME Plain Java variant into microservices by implementing an microservice architecture and using rest communication. The implementation was done using Eclipse for Java and Glassfish to deploy the applications. Further, the Java Persistence API is used for persisting and mapping Java classes to structures of relational databases. JAX-RS offers functionality for recourse oriented WEB-APIs based on REST-Architectural style. JAXB defines an interface for serialize and deserialize of JAVA-classes to XML- or JSON-files.

As can be seen in figure 4.6 each service project contains three sub-projects, namely *name-service-ejb*, *name-service-rest* and *name-service-ear*. The first one contains the logical implementation of these projects as well as the functionality for persisting the second provides the rest implementation. Also it has via injections access to the database. The last one is used for packaging the projects to ear files.

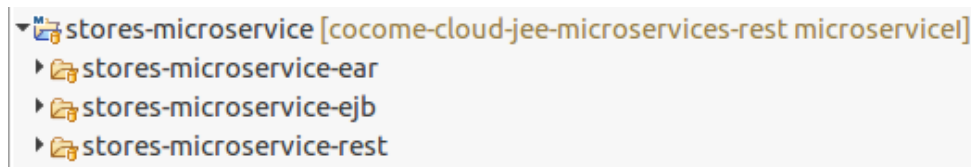


Figure 4.6: Project structure microservices

[The structure shown in in this figure is implemeted in the same way for the other microservices.]

## **5 Conclusion**

# Bibliography

- [1] R. Heinrich, K. Rostami, and R. Reussner. The cocome platform for collaborative empirical research on information system evolution. Technical Report 2, 2016.
- [2] S. Herold et al. CoCoME – the common component modeling example. In *The Common Component Modeling Example*, pages 16–53. Springer, 2008.
- [3] H. H. Olsson, H. Alahyari, and J. Bosch. Climbing the" stairway to heaven"–a multiple-case study exploring barriers in the transition from agile development towards continuous deployment of software. In *Software Engineering and Advanced Applications (SEAA), 2012 38th EUROMICRO Conference on*, pages 392–399. IEEE, 2012.
- [4] J. Schnabel. Mobile application client for a cloud based software system.  
[https://github.com/cocome-community-case-study/cocome-cloud-jee-app-shop/blob/master/doc/SQEE1617\\_MobileApp\\_Schnabel.pdf](https://github.com/cocome-community-case-study/cocome-cloud-jee-app-shop/blob/master/doc/SQEE1617_MobileApp_Schnabel.pdf).